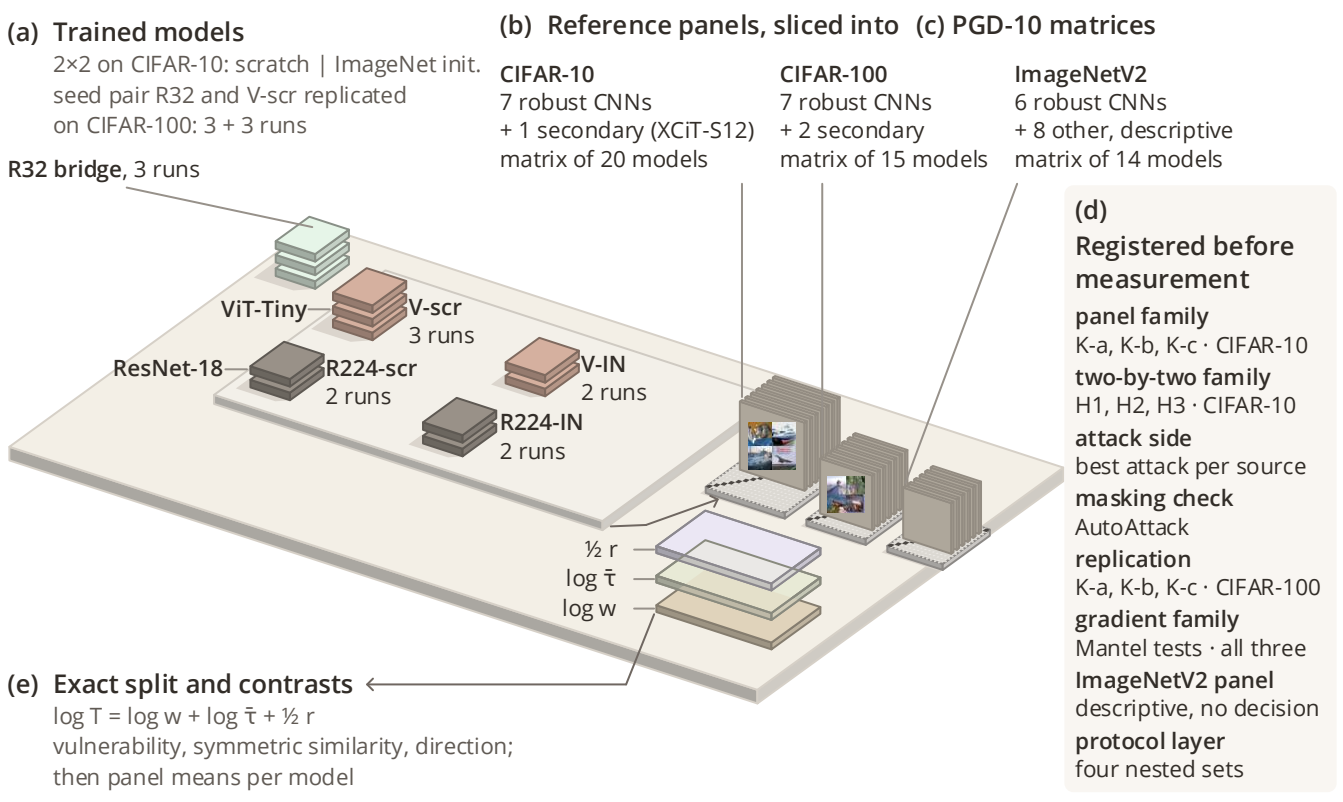

(a) Trained models
2×2 on CIFAR-10: scratch | ImageNet init.
seed pair R32 and V-scr replicated
on CIFAR-100: 3 + 3 runs
R32 bridge, 3 runs
ViT-Tiny
V-scr
3 runs
ResNet-18
R224-scr
2 runs
V-IN
2 runs
R224-IN
2 runs
(b) Reference panels, sliced into (c) PGD-10 matrices
CIFAR-10
7 robust CNNs
+ 1 secondary (XCiT-S12)
matrix of 20 models
CIFAR-100
7 robust CNNs
+ 2 secondary
matrix of 15 models
ImageNetV2
6 robust CNNs
+ 8 other, descriptive
matrix of 14 models
½ r
log τ̄
log w
(d)
Registered before measurement
panel family
K-a, K-b, K-c · CIFAR-10
two-by-two family
H1, H2, H3 · CIFAR-10
attack side
best attack per source
masking check
AutoAttack
replication
K-a, K-b, K-c · CIFAR-100
gradient family
Mantel tests · all three
ImageNetV2 panel
descriptive, no decision
protocol layer
four nested sets
(e) Exact split and contrasts
log T = log w + log τ̄ + ½ r
vulnerability, symmetric similarity, direction;
then panel means per model