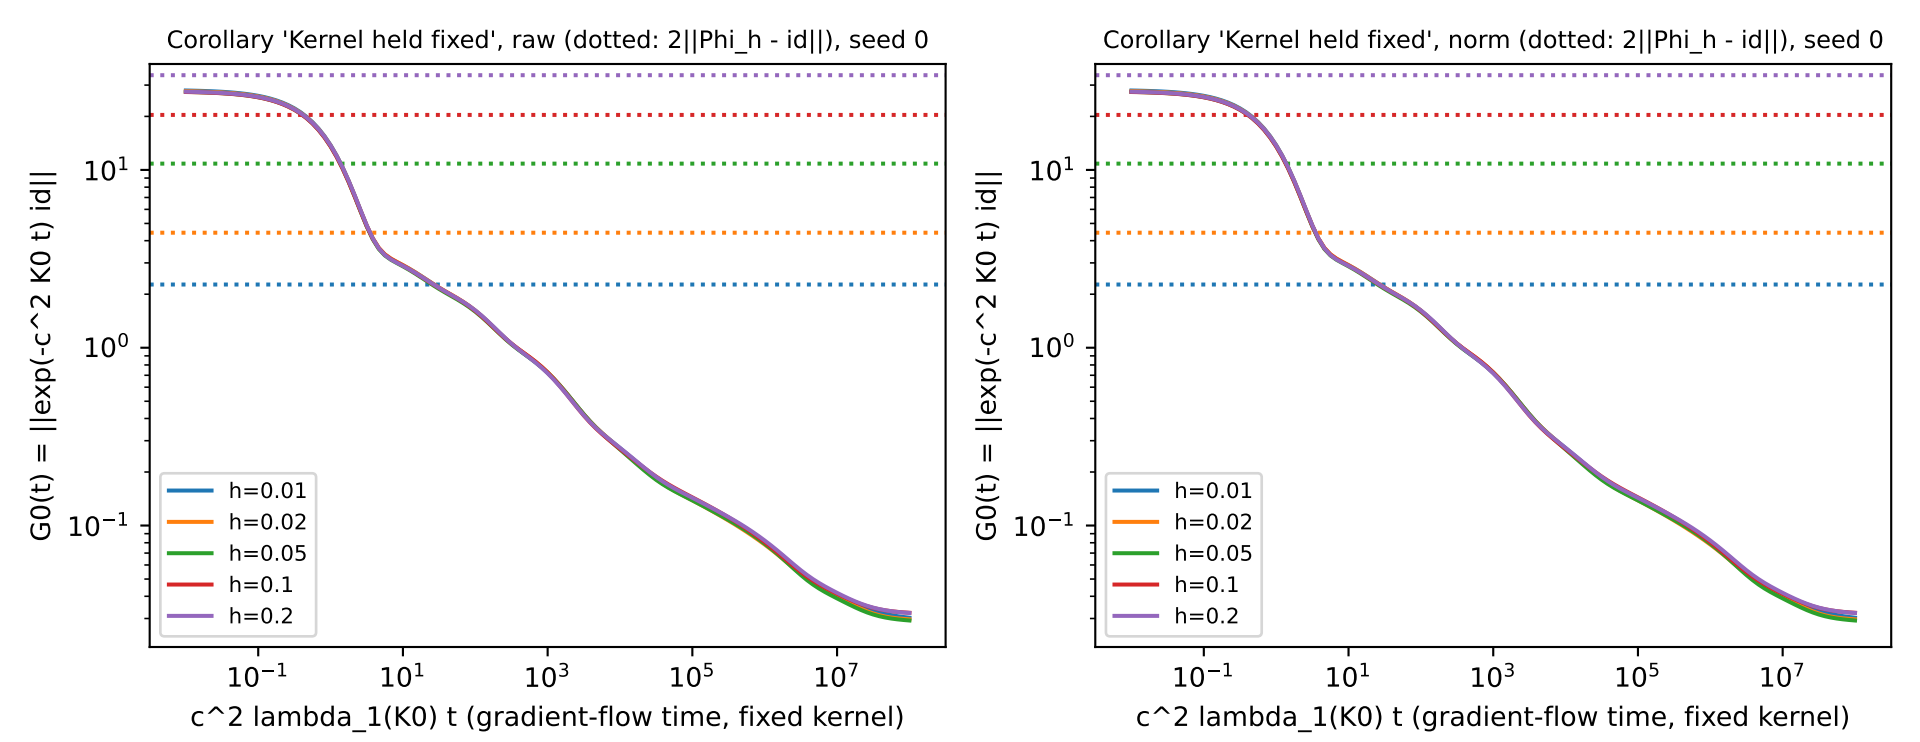
Corollary 'Kernel held fixed', raw (dotted: 2||Phi_h - id||), seed 0
Corollary 'Kernel held fixed', norm (dotted: 2||Phi_h - id||), seed 0
G0(t) = ||exp(-c^2 K0 t) id||
c^2 lambda_1(K0) t (gradient-flow time, fixed kernel)
h=0.01
h=0.02
h=0.05
h=0.1
h=0.2