



Clinical Data Acquisition Standards Harmonization Implementation Guide for Human Clinical Trials

Version 2.3 (Final)

Prepared by the
CDISC CDASH Team

Notes to Readers

- This is version 2.3 of the Clinical Data Acquisition Standards Harmonization Implementation Guide for Human Clinical Trials.
- This document is intended to be paired with CDASH Model v1.3.

Revision History

Date	Version
2023-09-28	2.3 Final
2021-09-28	2.2 Final
2019-11-01	2.1 Final
2017-09-20	2.0 Final
2012-04-12	1.0 Final

See [Appendix D](#) for representations and warranties, limitations of liability, and disclaimers.

CONTENTS

1	INTRODUCTION TO CDASHIG.....	4
1.1	PURPOSE.....	4
1.2	ORGANIZATION OF THIS DOCUMENT	5
1.2.1	General Notes.....	5
1.2.2	Known Issue.....	5
2	HOW TO USE THE CDASH STANDARD.....	7
2.1	COMPONENTS OF THE CDASH STANDARD	7
2.2	CDASHIG METADATA TABLE ATTRIBUTES.....	7
2.3	CRF DEVELOPMENT OVERVIEW	8
2.3.1	Overview of Example CRFs.....	10
2.4	DISCLAIMER ON "SUBJECTS"	11
3	GENERAL ASSUMPTIONS FOR IMPLEMENTING CDASH	12
3.1	How CDASH AND SDTM WORK TOGETHER.....	12
3.2	CORE DESIGNATIONS FOR BASIC DATA COLLECTION FIELDS	13
3.3	FORM-LEVEL CRF INSTRUCTIONS	13
3.4	HOW TO CREATE NEW DATA COLLECTION FIELDS WHEN NO CDASHIG FIELD HAS BEEN DEFINED	14
3.5	EXPLANATION OF TABLE HEADERS IN THE CDASH MODEL AND CDASHIG METADATA TABLES	15
3.5.1	CDASH Model.....	15
3.5.2	CDASHIG Metadata Table	16
3.6	TIMING VARIABLES: COLLECTION, CONVERSION, AND IMPUTATION OF DATES.....	17
3.7	MAPPING RELATIVE TIMES FROM COLLECTION TO SUBMISSIONS	19
3.8	CDISC CONTROLLED TERMINOLOGY	20
4	BEST PRACTICE RECOMMENDATIONS	22
4.1	BEST PRACTICES FOR CREATING DATA COLLECTION INSTRUMENTS	22
4.2	CRF DESIGN BEST PRACTICES	25
4.3	ORGANIZATIONAL BEST PRACTICES TO SUPPORT DATA COLLECTION	25
4.4	GENERAL RECOMMENDATIONS ON SCREEN FAILURES.....	27
5	CONFORMANCE TO THE CDASH STANDARD	28
5.1	CONFORMANCE RULES.....	28
6	OTHER RECOMMENDATIONS.....	30
6.1	STANDARDIZED CODING OF COLLECTED DATA.....	30
7	SPECIAL-PURPOSE DOMAINS.....	31
7.1	GENERAL CDASH ASSUMPTIONS FOR SPECIAL-PURPOSE DOMAINS	31
7.2	CO - COMMENTS	31
7.3	DM - DEMOGRAPHICS	34
8	GENERAL OBSERVATION CLASSES	62
8.1	INTERVENTIONS CLASS DOMAINS	62
8.1.1	General CDASH Assumptions for Interventions Domains	62
8.1.2	AG - Procedure Agents	64
8.1.3	CM - Prior and Concomitant Medications	75
8.1.4	EC - Exposure as Collected and EX - Exposure.....	93
8.1.5	ML - Meal Data.....	119
8.1.6	PR - Procedures.....	129
8.1.7	SU - Substance Use	145

8.2	EVENTS CLASS DOMAINS	156
8.2.1	General CDASH Assumptions for Events Domains	156
8.2.2	AE - Adverse Events	157
8.2.3	CE - Clinical Events	176
8.2.4	DS - Disposition	194
8.2.5	DV - Protocol Deviations	207
8.2.6	HO - Healthcare Encounters.....	212
8.2.7	MH - Medical History	224
8.2.8	SA - Serious Adverse Events	235
8.3	FINDINGS CLASS DOMAINS	238
8.3.1	General CDASH Assumptions for Findings Domains	238
8.3.2	CP - Cell Phenotype Findings	240
8.3.3	CV - Cardiovascular Systems Findings.....	247
8.3.4	DA - Product Accountability.....	256
8.3.5	DD - Death Details	267
8.3.6	EG - ECG Test Results.....	273
8.3.7	GF - Genomic Findings.....	291
8.3.8	IE - Inclusion/Exclusion Criteria Not Met	301
8.3.9	LB - Laboratory Test Results	306
8.3.10	MB - Microbiology Specimen.....	325
8.3.11	MI - Microscopic Findings.....	337
8.3.12	MK - Musculoskeletal System Findings	351
8.3.13	MS - Microbiology Susceptibility	361
8.3.14	NV - Nervous System Findings.....	371
8.3.15	OE - Ophthalmic Examinations.....	382
8.3.16	PC - Pharmacokinetics Concentrations (Sampling)	394
8.3.17	PE - Physical Examination	406
8.3.18	QRS - Questionnaires, Ratings, and Scales.....	416
8.3.19	RE - Respiratory System Findings	417
8.3.20	RP - Reproductive System Findings.....	431
8.3.21	RS - Disease Response and Clin Classification.....	436
8.3.22	SC - Subject Characteristics	449
8.3.23	TR - Tumor/Lesion Results	456
8.3.24	TU - Tumor/Lesion Identification	466
8.3.25	UR - Urinary System Findings	477
8.3.26	VS - Vital Signs.....	486
8.4	FINDINGS ABOUT EVENTS AND INTERVENTIONS DOMAIN.....	506
8.4.1	FA - Findings About Events or Interventions.....	506
8.4.2	SR - Skin Response (Findings About Interventions).....	519
8.5	ASSOCIATED PERSONS DOMAINS	532

APPENDICES	542
APPENDIX A: CDASH MODEL AND CDASHIG TEAM CONTRIBUTORS	542
APPENDIX B: GLOSSARY AND ABBREVIATIONS	543
APPENDIX C: REVISION HISTORY – CHANGES FROM PREVIOUS VERSION OF CDASHIG AND CDASH MODEL	546
APPENDIX D: REPRESENTATIONS AND WARRANTIES, LIMITATIONS OF LIABILITY, AND DISCLAIMERS	547

1 Introduction to CDASHIG

This implementation guide has been developed to assist in the following activities associated with the collection and compilation of data in a clinical trial.

There is arguably no more important document than the instrument that is used to acquire the data from the clinical trial, with the exception of the protocol, which specifies the conduct of that trial. The quality of the data collected relies first and foremost on the quality of that instrument. No matter how much time and effort go into conducting the trial, if the correct data points were not collected, a meaningful analysis may not be possible. It follows, therefore, that the design, development and quality assurance of such an instrument must be given the utmost attention.

— Good Clinical Data Management Practices, Version 4, October 2005,
Society for Clinical Data Management

1.1 Purpose

Clinical Data Acquisition Standards Harmonization (CDASH) establishes a standard way to collect data across studies. The CDASH Model, the CDASH Implementation Guide (CDASHIG), and the CDASHIG metadata tables define basic standards for the collection of clinical trial data and how to implement the standard for specific case report forms (CRFs). Although the CDASH standard was originally developed for use in regulatory submissions, it can be used by any organization or individual involved in the collection, preparation, and analysis of clinical research data that may also be used for other purposes, including publication, warehousing, and meta-analyses. Data collection formats and structures provide clear traceability of submission data into the Study Data Tabulation Model (SDTM), delivering more transparency to regulators and others who conduct data review. The CDASH standard directly supports the production of clinical data collection instruments. Through this support, the standard also contributes to:

- Consistency and detail in representations of research protocol concepts
- Streamlined processes within medical research
- Development of a corporate library of standardized CRFs
- Use of metadata repositories
- Reporting and regulatory submission
- Data warehouse population
- Data archiving
- Post-marketing studies/safety surveillance

There is growing global recognition that industry standards promote data interchange, which is essential to effective partnering and information exchange between and among clinicians and researchers. Clinical care can more easily reap benefits through medical research findings, and more clinicians will be interested in conducting research if the research process can be integrated into their clinical care workflow. CDISC encourages the adoption of its global standards for clinical research, which should continue to be harmonized with healthcare standards, to provide a means for interoperability among healthcare and research systems such that medical research can support informed healthcare decisions and improve patient safety.

This document is intended to be used by persons involved in the planning, collection, management, and analysis of clinical trials and clinical data, including clinical investigators; medical monitors; clinical research associates (monitors); clinical research study coordinators; clinical data standards subject matter experts (SMEs); clinical data managers; clinical data and statistical programmers; biostatisticians; drug safety monitors; CRF designers; and others tasked with the responsibility to collect, clean, and ensure the integrity of clinical trial data. Although much of the language in this standard addresses development of (e)CRFs, the CDASH standard can also be leveraged for other data sources. The principles and the metadata presented can be applied to eSource (also known as "non-CRF")

data such as vendors' electronic data transfer standards, ePRO data structures, and direct data acquisition from electronic healthcare record (EHR) systems.

1.2 Organization of this Document

This document has been organized into the following sections:

- Section 1, [Introduction to CDASHIG](#)
- Section 2, [How to Use the CDASH Standard](#)
- Section 3, [General Assumptions for Implementing CDASH](#)
- Section 4, [Best Practice Recommendations](#)
- Section 5, [Conformance to the CDASH Standard](#)
- Section 6, [Other Recommendations](#)
- Section 7, [Special-purpose Domains](#)
- Section 8, [General Observation Classes](#)
- [Appendices](#)

1.2.1 General Notes

Throughout this document, a deliberate decision was made to use a variety of synonyms for various terms in order to reflect the fact that sponsors also use a variety of terms.

- **Paper CRFs vs. electronic CRFs:** The term "CRF" used throughout this document refers to both paper and electronic formats, unless otherwise specified.
- **Fields vs. variables:** Data collection *fields* refers to terms that are commonly on the CRF. Data collection *variables* refers to what is in a clinical database.
- **Study treatment:** The phrase "study treatment" is intended to include all types of study designs and products (e.g., investigational/medicinal products, study drugs, test articles, vaccines, study products, medical devices).
- **Mechanisms for data collection:** Different data-collection mechanisms can be used to control how data are collected (e.g., tick boxes, checkboxes, radio buttons, drop-down lists). For the purposes of this document, these terms are used interchangeably.

1.2.2 Known Issue

Non-Standard Variables (NSVs)

CDISC has implemented the [Non-Standard Variables \(NSVs\) Registry](#) for using or creating NSVs to drive consistency in implementing CDISC Standards. The NSVs Registry is a great place to locate a variable to represent a concept not covered with the currently available standard variables. Using NSVs from the NSVs Registry ensures consistent use of NSVs. This version of the CDASHIG provides the original NSV names developed by the CDASH Team prior to the development of the NSV Registry. It is anticipated that these NSV names may be revised once they have been included in the new Registry. It is recommended that users review the NSVs Registry for any updates to the CDASH NSVs included in this document.

The CDASHIG v2.3 Non-Standard Variables (NSVs)/SUPPQUALs will be changing in a future version of the CDASHIG. The NSVs incorporated within this document are the same as previous versions.

The following variables will change:

Old		New	
Variable Name	Variable Label	Variable Name	Variable Label
FLRT	Infusion Rate	INFRT	Infusion Rate
FLTU	Infusion Rate Unit	INFRTU	Infusion Rate Unit
TRPRS	Reason Intervention Interrupted	RSIVIP	Reason Intervention Interrupted
CINTD	Interruption Duration	CIRPD	Collected Interruption Duration
CINTDU	Interruption Duration Unit	CIRPDU	Collected Interruption Duration Unit
TRTCMP	Completed Treatment	CMPTRT	Completed Treatment
INGRD	Active Ingredients	ACIGRD	Active Ingredients
DIS	Caused Study Discontinuation	CSTDIS	Caused Study Discontinuation
CTRL	Disease or Symptom Under Control	DZCTRL	Disease, Symptom or Event Under Control
REAS	REAS	REASEV	Reason for the Event

2 How to Use the CDASH Standard

2.1 Components of the CDASH Standard

The CDASH standard includes the CDASH Model and the CDASHIG, with its associated CDASHIG metadata tables. A *domain* is a collection of data points related by a common topic, such as adverse events or demographics. CDASHIG domains are aligned with SDTMIG domains for beginning-to-end traceability.

CDASH Model

CDASH Model v1.3 provides a general framework for creating fields to collect information on CRFs and includes the model metadata, which shows the standard variables in the model.

CDASH Model v1.3 provides root-naming conventions for CDASHIG variables, intended to facilitate mapping to SDTM Implementation Guide (SDTMIG) variables. The variables defined in the CDASH Model follow the same "--XXXX" naming convention as in the SDTM. The 2 dashes are replaced by the domain code when applied to create the CDASHIG variable. For example, --DOSFRQ is the CDASH Model variable name for Dosing Frequency per Interval in the Interventions class. When a domain abbreviation is applied (e.g., "CM"), CMDOSFRQ is the CDASHIG variable for the frequency of the concomitant medication use. The CDASH Model includes metadata for variables used in each of the SDTM General Observation classes, Timing variables, Identifier variables, variables for special-purpose domains, and domain-specific variables. See Section 3.5.1, [CDASH Model](#), for specific information on this content.

CDASHIG

The CDASHIG provides general information on the implementation of the CDASH Model and includes the CDASHIG metadata tables, which detail additional specifications for data collection variables within each domain. The informative content of the CDASHIG and the normative-content metadata tables comprise the CDASHIG and must be referenced together.

CDASHIG Metadata Tables

The CDASHIG metadata tables include only those variables commonly implemented by a significant number of the organizations/companies that provided information/examples (e.g., Medical History, Adverse Events). Implementers can add appropriate variables to their CDASHIG domain using the associated General Observation class within the CDASH Model. The CDASHIG domain metadata illustrates the use of Question Text and Prompts employed by many sponsors. Implementers should reference the CDASH Model to see all available options for Question Text and Prompts for parameters and verb tenses that may be substituted.

2.2 CDASHIG Metadata Table Attributes

CDASHIG metadata table attributes provide building blocks for the development of a CRF and the underlying database or other data-collection structure.

CRF and Data Management System Design Metadata

Certain metadata attributes are essential to CDASH conformance. Combined with the variable naming conventions discussed in Section 5.1, [Conformance Rules](#), these metadata attributes will assist the designer of the CRF(s) and the underlying database structure in remaining in conformance with the standard:

- Question Text (full sentence/question forms to prompt for data) **OR** Prompts (short phrases, often suitable as column headers, to prompt for data)
- CDISC Controlled Terminology lists and subsets of list values, when applicable
- DRAFT CDASH Definition (to assist in understanding the purpose of each variable, which ensures proper usage and simplifies subsequent pooled data analyses)
- CDASHIG Core Designations and Implementation Notes (which, when used together, can assist a designer in determining the complete set of data to be collected on a form)

SDTMIG Programming Metadata

Columns in the CDASHIG metadata tables that will assist in developing programs to generate SDTM domain datasets from CDASHIG-compliant data include:

- Domain
- CDASHIG Variable
- Data Type
- SDTMIG Target
- Mapping Instructions
- Controlled Terminology Codelist Name
- Subset Controlled Terminology/CDASH Codelist Name
- Implementation Notes

Additional Metadata

Clear and consistent completion instructions for sites help to ensure collection of quality, reliable data, a critical factor in the development of high-quality pooled/submission data. The CDASHIG metadata tables include the Case Report Form Completion Instructions column to assist authors in creating this study-level documentation for instructing sites how to complete CRF fields.

2.3 CRF Development Overview

The key steps to developing CRFs using CDASH are:

1. Each organization may maintain a corporate library of standardized CRFs. Determine the requirements for data domains from these (if applicable) or from the study protocol's data collection requirements.
2. Review the domains published in the CDASHIG to determine which of the data collection domains and fields are already specified in the published domains. As much as possible, the standard domains should be used to collect data in a manner that will be effective for data collection. Develop the data collection tools using these published, standard domains first.
3. During the development of CDASH-conformant collection instruments (e.g., CRFs, eCOA screens), the SDTMIG domain to which the collected data is to be mapped must be determined. The choice of the SDTMIG domain to use does *not* depend upon the mode of transmission, the methodology used to generate the data, the medium used to store the data, the person who recorded the data, or the subject described by the data. The SDTMIG domain to be used affects what CDASH variable names, question texts, prompts, controlled terminology, and so on, to use. CDASH suggests a format to be presented to those entering the data, but it does not dictate any data structure in which to store the collected data (often referred to as a "data management operational database").

Example 1: A study has meal-consumption diary data captured via a subject-completed PRO. Another study also captures meal-consumption data, but the subject takes a photo of the food prior to and after the meal, and sends the photos to a third party, which determines food consumption. Even though captured in different ways, the data from both studies will map into the SDTMIG Meal Data (ML) domain.

Example 2: A study has subjects' blood samples sent to a central lab, which analyzes the samples and sends results to the sponsor via electronic data transfer. In a second study, the samples are analyzed locally and results are captured on a CRF. The laboratory results from both studies are stored in the SDTMIG Laboratory Test Results (LB) domain.

CDASH recommends that dates be collected in an unambiguous format and suggests using the DD-MON-YYYY format. This defines the format to be presented to those entering the data, but does not define the electronic format in which to store the data. One system may store each date as a character field; another may store them as numeric values (e.g., an SAS date); and yet another as 3 separate fields formatted as day, month, and year. Each of these is a legitimate way to store the data collected.

4. Using the root variables and other CDASH metadata in the CDASH Model, add any additional variables that are needed to meet the requirements of data collection. Follow CDISC variable naming fragment (see Appendix B, [Glossary and Abbreviations](#)) conventions, and CDASH root variable-naming conventions where they exist (e.g., --DAT for dates, --TIM for times, --YN for prompts, as described in the CDASH Model).

Example: Replace "--" with the 2-character domain code that matches the other variables in the same domain. For example, to add the --LOC variable to a Medical History CRF, the domain code is MH, so the variable would become **MHLOC** in that domain.

5. The Question Text and Prompt columns in the CDASH Model metadata provide different variations in the recommended text for asking the question on a CRF. For each question, the sponsor may elect to either use the Question Text or the Prompt on the CRF. Some text is presented using brackets [], parentheses (), and/or incorporating forward slashes. These different formats are used to indicate how the Question Text or Prompt may be modified by the sponsor.
 - a. The text inside the brackets provides an option on the verb tense of the question, or text that can be replaced with protocol-specific verbiage.
 - b. The text inside the parentheses provides options (e.g., singular/plural), or text that may be eliminated.
 - c. Text separated with a forward slash provides optional words that the sponsor may choose.

Example: The CDASH variable --PERF, from the CDASH Model, has the following Question Text and Prompt.

Question Text: [Were any/Was the] [--TEST/ topic]
[measurement(s)/test(s)/examination(s)/specimen(s)/sample(s)] [performed/collected]?

Prompt: [--TEST/Topic] [Measurement(s)/Test(s)/Examination(s)/Specimen(s)/Sample(s)]
[Performed/Collected]?

The sponsor wants to add a question to a CRF that asks whether a lab specimen was collected, using a Yes/No response.

The sponsor selects the CDASH variable --PERF and adds the appropriate domain code. **LBPERF**

Use either the Prompt or the Question Text on the CRF.

Question Text: Was the laboratory specimen collected?

- In the first set of brackets, the text option "Was the" is selected, as the study required only 1 lab test to be performed. [*Were any/***Was the**]
- In the second set of brackets, the text used is "laboratory," which is the topic of interest. [*--TEST/***Topic (laboratory)**]
- In the third set of brackets, the text option "specimen," without the optional "s," is selected. [*measurement(s)/test(s)/examination(s)/***specimen**(s)/sample(s)]
- In the fourth set of brackets, the text option "collected" is selected. [*performed/***collected**]

Prompt: Laboratory Specimen Collected

- In the first set of brackets, the text used is the topic of interest (i.e., laboratory). [*--TEST/***Topic (Laboratory)**]
- In the second set of brackets, the text option "specimen," without the optional "s," is selected. [*Measurement(s)/Test(s)/Examination(s)/***Specimen**(s)/Sample(s)]
- In the third set of brackets, the text option "collected" is selected. [*Performed/***Collected**]

6. Create custom domains based on 1 of the General Observation Classes in the CDASH Model. See Section 3.4, [How to Create New Data Collection Fields When No CDASHIG Field Has Been Defined](#), for more information.

CDASHIG metadata table attributes provide building blocks for the development of a CRF and the underlying database or other data-collection structure.

Additional information on developing CRFs can be found in Section 2.3.1, [Overview of Example CRFs](#).

2.3.1 Overview of Example CRFs

Example CRFs are provided to illustrate data collection instruments. These CRFs are only examples and are not meant to imply that any particular layout or collection plan is preferable over another. These CRFs are annotated with the suggested mapping to a target SDTMIG variable. The sample CRFs do not include the Highly Recommended header variables. The population of these values are usually determined by each sponsor's data management system.


Annotated CRFs are created by first selecting applicable rows from the CDASHIG domain and/or CDASH Model metadata tables. The selected metadata are then modified (following CDASH principles) as needed to produce the example CRF. The selected data are referred to as the "CRF metadata," and used to visually render each example CRF. The CRF metadata also includes operational columns (Permissible Values, Pre-populated Value, Query Display, List Style, Hidden) that are used by the tool (CRF Maker) to produce the CRF. Further documentation for CRF Maker can be found at <https://wiki.cdisc.org/x/4odvAg>.

CDASH domain metadata tables include an Order Number column that provides a logical ordering of the fields on a CRF. However, sponsors should order the fields as needed for each study CRF. For many of the optional fields, the appropriate order is best determined by the specific study needs, and the ordering in the domain metadata tables is somewhat arbitrary. CDISC Controlled Terminology was used when appropriate. However, sponsors are responsible for understanding and implementing CDISC Controlled Terminology where applicable.

CDASHIG variables that are annotated as "NOT SUBMITTED" may be used to contribute toward the population of other appropriate variables when creating SDTM-based datasets. Where applicable, the CDASHIG metadata provides information on how to use these non-submitted variables to populate other applicable SDTMIG variables. CDASH variables may also be mapped to or used to populate other SDTMIG variables that are not shown. Sponsors must ensure that compliant SDTM-based datasets are created.

CRFs are annotated to show the CDASH variable name and the target SDTMIG variable. Data that are collected using the same variable name as defined in the SDTMIG are in **RED**. If the CDASHIG variable differs from the one defined in the SDTMIG, the CDASHIG variable is in **GREY**. Data collected but not submitted in SDTM-based datasets are denoted as **NOT SUBMITTED**. The CDASH variables ----NO (e.g., --AENO, --PRNO) are generically annotated as **ASSOCIATE WITH RELATED RECORD VIA RELREC**. These RELREC relationships are sponsor-defined and depend on the actual study and the procedures used by the sponsor to create the RELREC dataset.

The following diagram illustrates how to interpret the annotations.

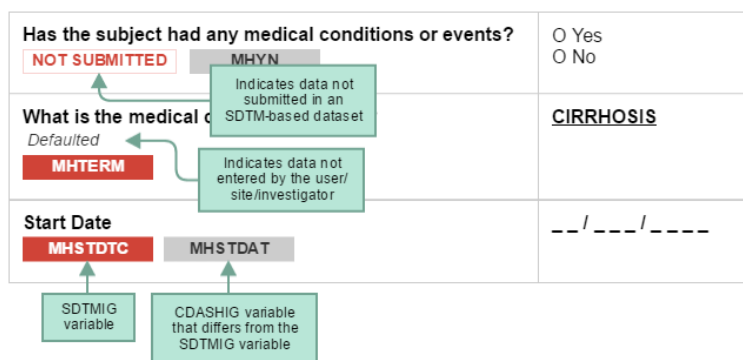

When implementing CDASH in a denormalized structure, denormalized CDASH variable names are created by the sponsor, when needed. Denormalized CDASH variable names generally use the following naming convention:

<Topic Variable values> _<Qualifier(s)> _<SDTMIG Target>. Sponsors may define their own conventions for creating denormalized CDASH variable names.

Examples:

- DIABP_VSORRES where DIABP is the value for VSTESTCD (topic variable) and VSORRES is the SDTMIG target
- DIABP_ARM_RIGHT_VSORRES where DIABP is the value for VSTESTCD (topic variable); ARM and RIGHT are values of the SDTM Qualifier variables VSLOC and VSLAT; VSORRES is the SDTMIG target
- DEPRESSION_MHOCCUR where DEPRESSION is the value of MHTERM (topic variable); MHOCCUR is the SDTMIG target

When viewing sample aCRFs, bear in mind that:

- Example CRFs are provided to illustrate data collection instruments. These are only examples and are not meant to recommend any particular layout over another.
- Example CRFs include instructions for the clinical site regarding how to enter collected information on the CRF.
- Most example CRFs do not include the Highly Recommended header variables. The population of these values is usually determined by the sponsor's data management system.
- Sponsors are responsible for understanding and implementing CDISC Controlled Terminology where applicable.
- CDASH variable names for denormalized variables are examples. Sponsors may use other conventions for creating denormalized CDASH variable names.
- CDASH variable names that are annotated as "NOT SUBMITTED" may be used to contribute toward the population of other appropriate variables when creating SDTM-based datasets.
- CDASH variables may also be mapped to or used to populate other SDTMIG variables that are not shown.
- Although a CDASH variable usually maps to a single SDTM-based domain, some CRFs may illustrate mapping to multiple variables (as indicated by SDTM annotations such as **TUDTC AND TRDTC**). Also, some CRFs have SDTM variable names separated by "/" indicate that either SDTMIG variable may be used when creating SDTM datasets.

When viewing the CRF metadata below the aCRF, bear in mind that:

- Some CDASH metadata items are not included. Please refer to the CDASH Model or CDASH domain metadata tables for complete details.

2.4 Disclaimer on "Subjects"

Throughout this document, clinical trial participants are called "subjects." This includes patients; healthy subjects; and, where applicable, persons other than the subject under study for whom data are being collected. Where needed, question text and prompts may be updated to indicate reference to the clinical trial participant or the associated person.

3 General Assumptions for Implementing CDASH

3.1 How CDASH and SDTM Work Together

1. The SDTM and the SDTMIG provide a standard for the submission of data. CDASH is earlier in the data flow and defines a basic set of data collection fields that are expected to be present on the majority of CRFs. SDTM and CDASH are clearly related. The use of CDASH data collection fields and variables is intended to facilitate mapping to the SDTM structure. When submitted data can be collected as represented in an SDTM dataset, with no transformations or derivations, the SDTMIG variable names are presented in the CDASHIG metadata table and should be used to collect the data. In cases where the collected data must be transformed or reformatted prior to inclusion in an SDTM dataset, or where a corresponding SDTMIG variable does not exist, CDASH has created standardized data collection variable names.
2. CDASHIG Version 2.3 content is based on SDTMIG Versions 3.3 and 3.4. Please note that SDTMIG v3.3 is associated with SDTM v1.7. SDTMIG v3.4 is associated with SDTM v2.0.
3. All SDTMIG Required variables have been addressed either directly through data collection or by determining what needs to be collected to derive the SDTMIG variable. In some cases, SDTMIG variable values can be obtained from data sources other than the CRF or are populated during the preparation of the submission datasets (e.g., --SEQ values).
4. CDASHIG domains contain variables that may be used in the creation of the RELREC submission dataset. RELREC is an SDTM dataset that describes relationships between records for a subject within or across domains, and relationships of records across datasets. The specific set of identifiers necessary to properly identify each type of relationship is collected in each dataset to support merging the data. Collected data may be across records within a domain, records in separate domains, and/or in sponsor-defined variables. For example, the CDASHIG variable CMAENO—having a question text of "What [is/was] the identifier for the adverse event(s) related to this (concomitant) [medication/therapy]?"—may be used to collect data that identifies a relationship between records in the CM dataset and records in the AE dataset.
5. The CDASH standard includes some data collection fields that are not in the SDTMIG (e.g., "Were any adverse events experienced?", "Were any medication(s) taken?", "Was the medication taken prior to study start?", "Was the medication ongoing?"). These fields support site-friendly data collection and help with data cleaning/data monitoring by providing verification that other fields on the CRF were deliberately left blank. For use of a field with this intent in an EDC system, a CDASH variable name is provided in the CDASHIG metadata table (e.g., AEYN, CMYN, CMPRIOR, CMONGO). When the CDASHIG field is confirming that data collection is not expected in other records (e.g., AEYN, CMYN), the corresponding SDTMIG Variable Name column indicates "N/A" and the Mapping Instruction column indicates that "this field is NOT SUBMITTED." When the CDASHIG field is confirming that data collection is not expected in another date field (e.g., CMPRIOR, CMONGO), the SDTMIG Variable Name lists the applicable SDTM timing variables and mapping instructions.
6. CDASHIG Findings domain (e.g., Drug Accountability (DA), ECG Test Results (EG), Vital Signs (VS)) tables are presented in a structure that is similar to the SDTMIG, which is to list the variable names and some examples of the tests. Implementers are expected to include protocol-specific tests in a CRF presentation layout, using the appropriate values from the relevant CDISC Controlled Terminology codelists. For example, VSTEST values are used to name the test on the CRF, and the corresponding test code is determined from the VSTESTCD codelist. Implementers may use synonyms when the xxTEST values are long or not commonly recognized (e.g., ALT in place of Alanine Aminotransferase). Implementers should use the CDASHIG recommendations to identify the types of data to collect while referring to SDTMIG and CDISC Controlled Terminology for additional metadata (e.g., labels, data type, controlled terminology).

7. The CDASH standard has intentionally not reproduced other sections of the SDTM; implementers should refer to the SDTM and SDTMIG for additional information (both available on the CDISC website at <http://www.cdisc.org/sdtm>).
8. The CDASHIG data collection fields included in the CDASHIG metadata tables are those most commonly used and should be easily identified by most implementers. Additional data collection fields may be necessary to capture therapeutic area-specific data points as well as other data specified in the clinical study protocol or for local regulatory requirements. See the CDASH Model and relevant CDISC therapeutic area user guide(s) (available at <https://www.cdisc.org/standards/therapeutic-areas>) for additional information.
9. Use the CDASH recommendations to develop company standards, taking into consideration the stage of clinical development and individual therapeutic-area requirements. To gain the greatest benefit from using the CDASH standard, CRFs should not be developed on a trial-by-trial basis within the implementer organization, but rather be brought into a study from a library of approved CRFs based on the CDASH Model and the CDASHIG, whenever practicable.
10. The CDASHIG is divided into sections of similar types of data. The CDASHIG metadata tables are arranged in alphabetical order (by domain abbreviation) within the respective general observation class. CRF layout was not within the original scope of the CDASH project; however, to assist with standardization of CRF layout, data collection fields are presented within the CDASHIG metadata tables in a logical order, and annotated example CRFs have been provided (if available). See Section 4.1, [Best Practices for Creating Data Collection Instruments](#), for a discussion on best practices for ordering fields on a CRF.

3.2 Core Designations for Basic Data Collection Fields

The CDASH Team initially considered utilizing the SDTMIG Core Designations of Required, Expected, and Permissible to capitalize on prior understanding of these descriptive designations as well as to enable a consistent categorization across the CDASH and SDTM standards. However, when the CDASHIG metadata table was constructed, it quickly became apparent that CDASHIG core designations would often differ from SDTMIG core designations due to the inherent differences in the manner in which data are collected (to ensure the most accurate data) and the structure in which data are reported and submitted. For example, a variable categorized as Required in the SDTMIG may not be required in the CDASHIG if it can be derived in the SDTM datasets (rather than be a field captured explicitly on a CRF). Also, the SDTMIG core designation of Required imposes a rule that the variable cannot be null. CDASHIG core designations are not intended to impose any rules that require a field to be populated with data; they are only intended to designate which fields should be present on the CRF.

In order to facilitate classification of the different types of data collection fields, the following categories were used:

- **Highly Recommended (HR):** A data collection field that should always be on the CRF (e.g., the data are needed to meet a regulatory requirement or are required to create a meaningful dataset).
- **Recommended/Conditional (R/C):** A data collection field that should be on a CRF based on certain conditions (e.g., complete date of birth is preferred, but may not be allowed in some regions; time of an adverse event should be captured only if there is another data point with which to compare it). For any R/C fields, the "condition" is described in the Implementation Notes column of the CDASHIG metadata table.
- **Optional (O):** A data collection field that is available for use.

3.3 Form-level CRF Instructions

General Design Considerations for Completion Instructions

Whenever possible, details related to the completion of a single field should be placed with the field itself on the CRF. If this is not possible due to the medium and/or system being used to create CRFs, then it is permissible to include the field-level instructions at the top of the form, in what is generally considered the form-level instruction area. In some cases (e.g., form-level instructions are very lengthy or include graphics or flowcharts), a separate CRF completion instruction guideline may be required.

General Content Considerations for Completion Instructions

When creating form-level instructions for a CRF, the following points should be considered:

- The instructions should include clear references to the time period for which data are to be reported for the study, or to specific time windows that are allowed.
- The instructions should provide references to protocol sections for the specifics of and/or limitations on the data to be reported.
- The instructions should include any special instructions for additional reporting or actions required beyond what is collected on the CRF.
- The instructions should include considerations on how data collected on one CRF might have an impact on data that are reported on a different CRF.
- The instructions should refer to any other forms that are related to the CRF being completed.

3.4 How to Create New Data Collection Fields When No CDASHIG Field Has Been Defined

Adding new sponsor-defined collection fields is often constrained by business rules, as well as by clinical data standards SMEs, clinical data management processes, and EDC systems. The naming conventions and other variable creation recommendations in the CDASHIG are designed to allow collection of data regardless of subsequent inclusion in the SDTM, as well as to consistently facilitate transforming the collected data into submission datasets.

Prior to adding any new fields to a sponsor's study CRF, the CDASH Model should be reviewed to see if there is a root field that will work for the data collection need.

New data collection fields (not already defined in the CDASH Model) will fall under 1 of following categories.

- **Fields used for data cleaning purposes only and not submitted in SDTM datasets (e.g., --YN).** The field --YN with Question Text "Were there any [interventions/events/findings]?" can be added to a domain for this purpose. Replace the 2 dashes (--) with the 2-character domain code, and create the Question Text or Prompt using generic Question Text or Prompt from the CDASH Model as a base. Always create custom data-cleaning/operational variables using consistent naming conventions.
- **Fields with a direct mapping to an SDTMIG variable.** If a value can be collected exactly as it will be reported in the SDTM dataset (i.e., same value, same data type, same meaning, same controlled terminology), the SDTMIG variable name should be used as the data collection variable name in the operational database to streamline the mapping process. Extensions may be appended if needed to create a unique variable name in the collection database. Any collection variable with the same meaning as an SDTMIG variable should be a copy of the SDTMIG variable, and the meaning should not be modified for data collection.
- **Fields without a direct one-to-one mapping to SDTM datasets.**
 - If a study requires a field that is not identical to an SDTMIG field (e.g., collected data type is different from the data type in the corresponding SDTMIG variable), or the SDTMIG variable is derived from collected data, the operational database should use a variable with a different name from the SDTMIG variable into which it will be mapped.
 - Example 1: A study collects findings data in a denormalized format and then maps the data to the normalized SDTM structure. The --TESTCD values can be used as the CDASHIG variable names, and the corresponding --TEST value can be used as the prompt on the CRF. (See Section 8.3.1, [General CDASH Assumptions for Findings Domains](#), for more information.)
 - Example 2: Dates and times are collected in a local format, familiar to the CRF users, and then reported in the SDTM-specified ISO 8601 format. In the operational database, the CDASH variables --DAT and --TIM (if collected) map into the single SDTM variable (--DTC).
 - Example 3: If the mapping to SDTM is similar but not direct, "C" can be included before the root variable name to indicate a "collected" version of the variable to which that data will map. For

example, if an injection is to be administered to a subject's left thigh, right thigh, left arm, or right arm, the sponsor may create the variable EXCLOC. The SDTM mapping would split these into EXLOC and EXLAT, which would avoid having to split the collection of the data into 2 fields on the CRF.

- An SDTM variable that is not defined in the SDTM version being used by the sponsor can be included as an NSV/supplemental qualifier.
- If a study requires a field that is not defined in the CDASH and the SDTM with the same meaning or intent (e.g., would map to SDTM SUPP--), a unique name should be assigned based on sponsor business rules using CDASH naming fragments (e.g., --DAT, --TIM) as appropriate and CDISC variable naming fragments where possible. See SDTMIG Appendix D.

CDISC has implemented the [Non-Standard Variables Registry](#) for using or creating NSVs, to drive consistency in implementing CDISC standards. The NSVs Registry is a great place to locate a variable to represent a concept not covered with the currently available standard variables. Using NSVs from the NSVs Registry ensures consistent use of NSVs. This version of the CDASHIG provides the **original** NSV names developed by the CDASH Team **prior** to the development of the NSVs Registry. It is anticipated that these NSV names may be revised once they have been included in the Registry. It is recommended that users review the Registry for any updates to the CDASH NSVs included in this document.

3.5 Explanation of Table Headers in the CDASH Model and CDASHIG Metadata Tables

3.5.1 CDASH Model

This section provides an explanation of the columns used in the CDASH Model.

Heading	Explanation
Observation Class	This column contains the SDTM class for the domain.
Domain	This column contains the 2-letter domain code.
Order Number	The values in this column are used to help sequence the variables as they appear in the metadata table. There is no implied meaning, significance, or conformance expectations. The values increase by 1 for each variable within a unique grouping of Observation Class plus domain.
CDASHIG Variable	This column provides the CDASH root variable name (e.g., --ONGO, --DAT).
CDASHIG Variable Label	This column contains a suggested root variable label that may be used for the CDASHIG variable.
DRAFT CDASHIG Definition	This column provides a draft definition of the root variable. This text may or may not mirror text in the SDTM. The new CDASH/SDTM team is currently creating variable definitions. Once these definitions are finalized, the CDASH definitions will be updated to harmonize with them.
Question Text	This column contains the recommended question text for the data collection field. Question Text is a complete sentence. Some text is presented inside brackets [] or parentheses (.). Text inside brackets should be replaced with protocol-specified verbiage; text inside parentheses is optional. Text separated with a forward slash / indicates optional wording from which the sponsor may choose.
Prompt	This column contains the recommended prompt text for the data collection field. The Prompt is a short version of the question. Some text is presented inside brackets [] or parentheses (.). The text inside brackets should be replaced with protocol-specific verbiage; text inside parentheses is optional. Text separated with a forward slash / indicates optional wording from which the sponsor may choose.
Data Type	This column contains the simple data type of the CDASH variable (i.e., Char, Num, Date, Time).
SDTMIG Target	This column provides the suggested mapping to the SDTM root variable. When no direct mapping to an SDTM root variable is available, the column contains "N/A." When the column contains "SUPP--.QNAM", it means that the value represented in the CDASH variable shall be mapped to an SDTM Supplemental Qualifier.

Heading	Explanation
	Note: CDASH variables noted as not having a direct map to SDTM variables (i.e., NSVs) may have SDTM variable equivalents in future versions.
Mapping Instructions	This column contains information on the suggested mapping of the root variable to the SDTM variable.
Controlled Terminology Codelist Name	This column contains the Controlled Terminology (CT) codelist name (e.g., "LOC") that is associated with the field. Certain variables (e.g., dates) use ISO formats as CT; however, in CDASH these variables are generally not collected using ISO CT, but rather converted to the ISO format when the SDTM-based submission datasets are created. Whereas the SDTM Model provides the NCI C Code for each variable, the CDASH Model includes the CT codelist name. However, when individual codelist names are used for each domain, the CDASH model does not include any codelist name. For example, the CDASH model variable --TEST includes no CT codelist name. However, the CDASH metadata table for each Findings domain provides it (e.g., VSTEST).
Implementation Notes	This column contains further information, such as rationale and implementation instructions, regarding how to implement the CRF data collection fields and how to map CDASHIG variables to SDTMIG variables.

Note: When multiple options are contained in a single cell, the options are separated by a semicolon.

3.5.2 CDASHIG Metadata Table

This section provides an explanation of the columns used in the CDASHIG metadata tables.

Heading	Explanation
Observation Class	This column contains the SDTM class for the domain.
Domain	This column contains the 2-letter domain code.
Data Collection Scenario	This column identifies the different data collection options in CDASH for the same domain and is best used for filtering the table. The information in this column provides the context for the CDASHIG Core Designations (e.g., denoting which fields should be present on the CRF). When only 1 data collection scenario is provided for the domain, the column contains "N/A."
Implementation Options	When this column contains "Horizontal-Generic," a sampling of the CDASHIG metadata is provided as a template for the metadata of the CRF in a denormalized structure.
Order Number	The values in this column are used to help sequence the variables as they appear in the metadata table and provide a suggested order of CDASHIG variables to be displayed on a CRF. There is no implied meaning, significance, or conformance expectations. The values increase by 1 for each variable within a unique grouping of Observation Class plus Domain plus Implementation Options.
CDASHIG Variable	This column provides the CDASHIG variable names (e.g., CMONGO, AEDAT).
CDASHIG Variable Label	This column provides the CDASHIG variable label.
DRAFT CDASHIG Definition	This column provides a draft definition of the CDASHIG variable. This text may or may not mirror text in the SDTMIG. Currently, there is a new CDASH/SDTM team creating variable definitions. Once these definitions are finalized, the CDASH definitions will be updated to harmonize with them.
Question Text	This column provides suggested text for the specific domain. Implementers should refer to the CDASH Model to create alternative question text that may be used that meets CDASH conformance rules. Question Text is a complete sentence. Some text is presented inside brackets [] or parentheses (). Text inside brackets should be replaced with protocol-specified verbiage; text inside parentheses is optional. Text separated with a forward slash / indicates optional wording from which the sponsor may choose.
Prompt	This column provides suggested text for the specific domain. Implementers should refer to the CDASH Model to create alternative prompt text that may be used that meets CDASH conformance rules. Prompt is a short version of the question. Some text is presented inside brackets [] or parentheses (). Text inside brackets should be replaced with protocol-specified verbiage. [NULL] in this column indicates that populating a prompt is not required on a CRF screen/page if not needed.
Data Type	This column contains the simple data type of the CDASH variable (i.e., Char, Num, Date, Time).
CDASHIG Core	This column contains the CDASHIG core designations for basic data collection fields (i.e., Highly Recommended (HR), Recommended/Conditional (R/C), Optional (O)). See Section 3.2, Core Designations for Basic Data Collection Fields .

Heading	Explanation
Case Report Form Completion Instructions	This column contains recommended example instructions for the clinical site on how to enter collected information on the CRF.
SDTMIG Target	This column provides the suggested mapping to the SDTMIG variable name. It may help facilitate the creation of the SDTMIG variables needed for submission. When no direct mapping to an SDTMIG variable is available, the column contains "N/A". When the column contains "SUPP--.QNAM", it means that the value represented in the CDASH field shall be mapped to an SDTM Supplemental Qualifier. Note: CDASHIG variables noted as not having a direct map to SDTMIG variables (i.e., NSVs) may have SDTM variable equivalents in future versions.
Mapping Instructions	This column contains information on the suggested mapping of the CDASHIG variable to the SDTMIG variable. Mapping instructions in the CDASHIG metadata tables provide more complete guidance than that in the CDASH Model. When domain-level metadata are not available, consult the CDASH Model for SDTM mapping instructions.
Controlled Terminology Codelist Name	This column contains the CT codelist name (e.g., "LOC") that is associated with the field. The SDTMIG indicates that certain variables (e.g., dates) use ISO formats as CT. However, in CDASH these variables are generally not collected using ISO CT, but rather are converted to the ISO format when the SDTM-based submission datasets are created.
Subset Controlled Terminology/CDASH Codelist Name:	This column contains the CDISC CT or CDASH subset codelist name that may be used for that specific variable (e.g., EXDOSFRM).
Implementation Notes	This column contains further information, such as rationale and implementation instructions, regarding how to implement the CRF data collection fields and how to map CDASHIG variables to SDTMIG variables.

Note: When multiple options are contained in a single cell, the options are separated by a semicolon.

3.6 Timing Variables: Collection, Conversion, and Imputation of Dates

Timing Variables

Timing variables (e.g., dates) are included in CDASH; they are used to indicate when a particular observation occurred or a period of time when something happened.

The timing variables included in CDASH Model Section 2.7, Timing (<https://www.cdisc.org/standards/foundational/cdash>), are available for use in any CRF based on 1 of the 3 general observation classes, except where specific domain restrictions are noted in the SDTMIG. In general, all domains based on the 3 general observation classes should have at least 1 timing variable. In the Events or Interventions general observation class, this could be the start date of the event or intervention. In Findings domains, the collected timing variables generally refer to the date of the test result itself. However, in Findings domains where the result is based on a specimen—such as Laboratory Test Results (LB), Microbiology Susceptibility (MS), Microbiology Specimen (MB), Microscopic Findings (MI), or Pharmacokinetics Concentrations (PC) (Sampling)—the date of the specimen collection associated with the test result is used.

The CDASH Model defines Death Date (DTHDAT) as a timing variable; this is not included as a timing variable in the SDTMIG. It was included as a timing variable in CDASH, as it may be collected on any CRF deemed appropriate by the sponsor, but should only be collected once.

Visits

Protocols define visits in order to describe assessments and procedures that are to be performed. Visits are typically described using the timing variables VISIT and VISITNUM. The date of the visit is typically collected in the CDASH timing variable VISDAT, which is the date the visit occurred (or started).

Collection of Dates

Collect dates in such a way as to allow sites to record only the precision they know. The system should also store only the collected precision. Any incomplete dates must remain incomplete with no imputation and no “zero-filling” of missing components.


Data collection and database processes should allow for the possibility of partial dates and times, because a partial date may be the most precise information that can be collected for some data. (For an example of when it may be necessary or appropriate to collect partial dates, see Section 7.3, [DM - Demographics](#).) In some countries, collection of a complete date of birth is restricted under privacy rules, so only a year (or year and month) of birth might be collected. Other examples of commonly collected partial dates occur in the Concomitant Medications (CM) and Medical History (MH) domains, where subjects might not remember the complete date of when they started to take a medication or when a significant medical history condition began.

If a full date is collected (or expected), the CDASH variable --DAT or all 3 date components (i.e., --DATYY, --DATMO, --DATDD) should be included on the collection tool. If a partial date can be collected in a single field, the CDASH --DAT should be used. If a partial date must be collected as separate database fields to collect year, month, and day, refer to the CDASH Model for examples of standard naming fragments (--YY, --MO, --DD, --TIM). The capabilities of individual software systems (e.g., EDC) will determine which variable names are needed. CDASH uses separate data collection fields for dates and times. If times are collected, it is expected that these will be used with the appropriate collected date to derive the related SDTM date variable in ISO 8601 format.

Conversion of Dates for Submission

CDASH date variables (e.g., --DAT, --STDAT, --ENDAT) are concatenated with CDASH time variables (e.g., --TIM, --STTIM, --ENTIM), if time is applicable, into the appropriate SDTM --DTC variables (e.g., --DTC, --STDTC, --ENDTC) using ISO 8601 format.

See the SDTMIG for detailed information about converting dates and times from the collection format to the submission format using ISO 8601. A specific example of mapping birth date is shown here.

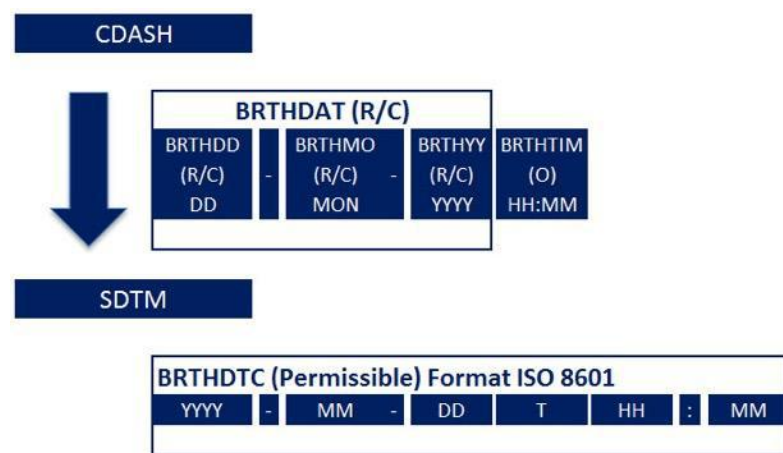

The SDTM date format allows a partial date to be submitted so that reviewers can see what was actually collected.

Imputation of Dates

The visit date variable (VISDAT) can be applied to all observations for a given visit (if appropriate), or specific date and timing fields may be included for a specific observation in the body of the CRF. When the visit date is used to reflect the timing of an observation, the appropriate timing variable for that submission dataset may be populated with the CDASH Visit Date.

If missing parts of the date are imputed for analysis purposes, the imputed dates will be generated in the Analysis Data Model (ADaM) but not in the SDTM submission datasets.

Disease Milestones

The special-purpose domain Subject Disease Milestones (SM) provides subject-level summaries of milestones (i.e., events or activities that are expected to happen before the study, or anticipated to happen during the study). The definitions of these milestones are provided in the SDTMIG Trial Disease Milestones domain (TM). Because information in SM is generally collected in other domains (e.g., MH, CE) and the definitions of the trial milestones are provided in the protocol and not collected, they are not included in the CDASH Model or the CDASHIG.

3.7 Mapping Relative Times from Collection to Submissions


Relative timing variables are sets of variables that provide information about how the timing of the record relates to either the study reference period or another fixed point in time. CDASH relative timing variables are collected for observations where a date either is not collected or is not available. The CDASH set of variables serve as an indicator (or *flag*) that the observation's "start" was prior to the study reference period or prior to another fixed point in time *or* that the observation's "end" was after or ongoing as of the study reference period or another fixed point in time. The CDASH variables of --PRIOR and --ONGO serve this purpose. How these CDASH flags are translated to the SDTM (according to controlled terminology) depends on whether the comparison is against the protocol-defined study reference period or against another fixed point in time serving as the "reference" for the timing of the record.



Note: Collection of these CDASH relative timing variables is always dependent on the actual date either being prospectively not collected or not available. For more information, see Section 8.1.1, [General CDASH Assumptions for Interventions Domains](#), and Section 8.2.1, [General CDASH Assumptions for Events Domains](#).

For all SDTM submissions, there is a defined timeframe (the *study reference period*). According to SDTMIG, the start and end dates of the study reference period are submitted in the variables RFSTDTC and RFENDTC. The defined period may be protocol-specific or set by company policy, standard operating procedures, or other documented procedures. The study reference period might be defined as being from the date/time of informed consent through the date/time of subject's completion of the study, or it might be from the date/time of first dose to the date/time of last dose. Regardless of how the study reference period is defined, the dates (and optionally times) of the start and end of that period must be collected.

If there is a need to collect information about whether an observation of interest occurred prior to a reference point or milestone other than the beginning of the study reference period, or was ongoing or continuing at some reference point or milestone in the study other than the end of the defined study reference period, the date/time of that reference point or milestone should also be collected. If this date/time has been collected, reasonable comparisons can be made to that date/time with "prior", "coincident", "continuing", or "ongoing" questions.

The following steps should be taken to ensure observations of interest that occur over time can be related to the study reference period or to a fixed point in time/milestone in a meaningful way. Figure 1 provides a representation of an intervention as it relates to the study reference period, and Figures 2 and 3 provide a representation of comparisons related to other fixed points in time or a milestone.

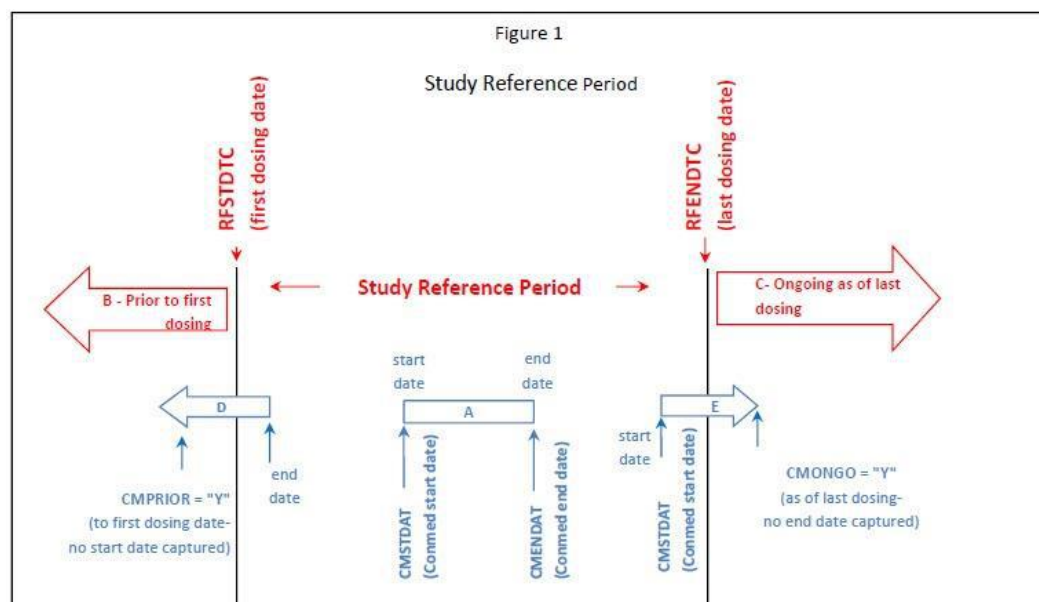

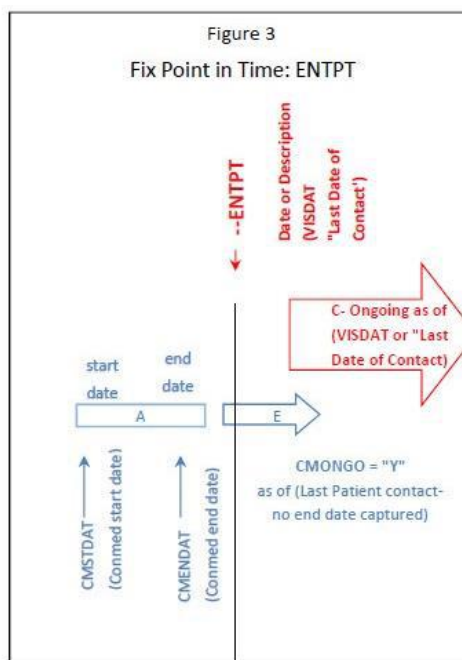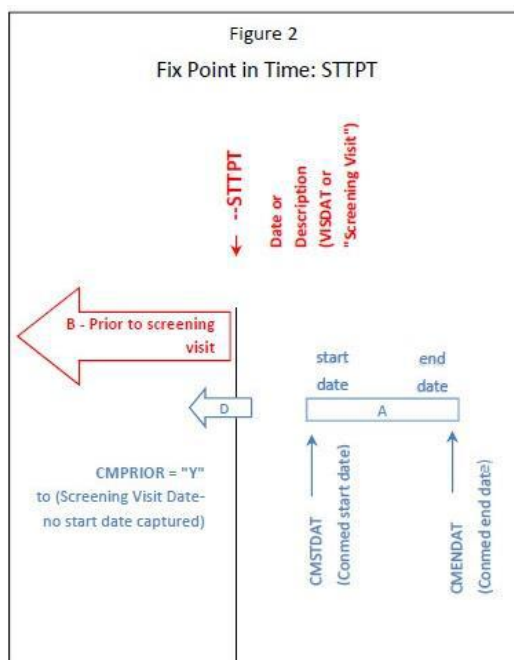

Study Reference Period

1. Define the “on-study” period (B-C). Once the overall on-study period has been defined (B-C), collect the dates/times of the start of the study reference period (e.g., date of informed consent, date of first dose) and end of the study reference period (e.g., date of last contact, date of last dose), as part of the clinical data with their respective domains (e.g., Disposition (DS), Exposure (EX)). These dates will map into the RFSTDTC (B; start of Study Reference Period) and RFENDTC (C; end of Study Reference Period) variables in the SDTMIG Demographics (DM) dataset.
2. Collected comparisons (D, E) use CDASHIG variables (e.g., “prior”, “ongoing”) for when something started or ended, in relation to the on-study reference period (i.e., RFSTDTC-RFENDTC: B-C). These CDASH variables are used to populate the SDTMIG variables--STRF and --ENRF when the SDTM-based datasets are created.

Note: These relative timing variables are only populated in the SDTM-based datasets when a date is not collected.

Fixed Point in Time/Milestone

1. Define the fixed point in time or milestone (B or C). The fixed point in time or milestone can be a date or a description. This will map into the SDTMIG variables --STTPT or --ENTPT when the SDTM-based datasets are created.
2. Collected comparisons (D or E) use CDASHIG variables (e.g., “prior”, “ongoing”) for when something started or ended, in relation to the fixed point in time or milestone (B or C). These CDASH variables are used to populate the SDTMIG variables--STRTPT or --ENRTPT when the SDTM-based datasets are created.

Note: These relative timing variables are only populated in the SDTM-based datasets when a date is not collected.

For information about mapping what is collected in “prior”, “ongoing”, and “continuing” fields into the appropriate SDTMIG variables, see the SDTMIG.

3.8 CDISC Controlled Terminology

Submission data standards are required by some global regulators, and controlled terminology (CT) is part of the requirement. Using CT from the start during data collection builds in traceability and transparency, and reduces the

problems associated with trying to convert legacy codelists and variables to the submission standards. CT can be used in the following ways during data collection:

1. To collect data using a standardized list of values (e.g., Mild, Moderate, Severe)
2. To ask a specific question on the CRF (e.g., Temperature)
3. To create a variable name in the database (e.g., TEMP for the collection of vital sign data when a unique variable name must be created for each vital sign result)

Terminology applicable to CDASH data collection fields is either in production or under development by the CDISC CT Team. Production terminology is published by the National Cancer Institute's Enterprise Vocabulary Services (NCI EVS; <https://datascience.cancer.gov/resources/cancer-vocabulary/>). The examples in this document use CDISC Controlled Terminology where possible, but some values that seem to be CT may still be under development at the time of publication, or even especially plausible "best-guess" placeholder values. Do not rely on any source other than the CDISC value set in the NCI Thesaurus for CT.

In some cases it is more appropriate to use a subset of a published SDTM terminology list rather than the entire list. To begin with an established subset of the SDTM terminology, reference the CDASH terminology as per NCI EVS. These CDASH codelists have been subsetted from the complete SDTM terminology lists and are available to implementers as a way to quickly set up codelists for data collection. However, most implementers will also need to review the SDTM terminology to determine which other values are needed for their particular implementation. The CDASH terminology subset names are provided in the CDASHIG metadata tables for easy reference.

Some codelists, such as Laboratory Test Codes (LBTESTCD), are *extensible*. This means that values that are not already represented in that list (either as a CDISC Submission Value, a synonym, or an NCI preferred term) may be added as needed. Other codelists, such as AE Action Taken with Study Treatment, are non-extensible and must be used without adding any terms to the list. Where no CDISC CT exists, implementers should develop sponsor-defined terminology to ensure consistency and transparency. If gaps are identified, sponsors should submit requests to add values to CDISC CT by using the Term Suggestion form (available at <http://ncitermform.nci.nih.gov/ncitermform/?version=cdisc>).

In cases where a CDASH/CDASHIG variable has associated CT, the codelist is referenced in the Controlled Terminology column in the CDASH Model and CDASHIG metadata table in this format: (*codelist name*).

The terms within CT codelists may have relationships to other terms within other codelists. For instance, (1) a single TEST in the EGTEST codelist may have a finite set of responses located in the EGSTRESC codelist that constitutes a subset of the EGSTRESC codelist, or (2) a single VSTEST value may have a constrained set of units of measure that are valid for the numeric responses to that VSTEST. These relationships are not readily apparent in the CT publication files. The Controlled Terminology Teams have created Codetable Mapping Files based on published terminology, which show relationships between terms in different CT codelists. These supplemental files (available at <https://www.cdisc.org/standards/terminology/controlled-terminology>) provide human- and machine-readable linkages between published terms across multiple codelists and may be helpful for data quality assurance/quality control, CRF building, and data mapping.

4 Best Practice Recommendations

CDASH best practices describe operational recommendations to support data collection, suggested CRF development workflow, and methods for creating data-collection instruments. Adherence to Section 4.1, [Best Practices for Creating Data Collection Instruments](#), is an important part of conformance to the CDASH standard. The best practices in this section provide an overview of key data collection methodologies to expedite the clinical data flow from CDASH to the SDTM. For additional guidance, see the Society for Clinical Data Management's (SCDM) Good Clinical Data Management Practices (GCDMP) standard at <https://scdm.org/gcdmp/>.

4.1 Best Practices for Creating Data Collection Instruments

Num	Best Practice Recommendation	Rationale
1	When a binary response is expected, "Yes/No" responses are preferred over "Check all that apply," because a missing response could lead to a misinterpretation of critical data. For example, if adverse events (AEs) are determined to be "serious" based only upon checking the applicable criterion (e.g., Hospitalization, Congenital Anomaly), failure to check a criterion could potentially delay identification of a serious adverse event (SAE). If an assessment has composite responses (e.g., presence or absence of 2 or more symptoms), "Yes/No" questions for each component response (e.g., symptom) are preferred to "Check all that apply" questions. Exceptions to this recommendation include: - Assessments where the majority of options would be answered "No," such as in the collection of electrocardiogram (ECG) abnormality data where approximately 45 abnormalities may be listed but only a few will apply. - When a validated instrument contains checkboxes. In this case, they should remain checkboxes in the CRF or eCRF. - When controlled terminology governs the values being collected. For example, if collecting RACE using the "Check all that apply" option, the RACE values defined by controlled terminology should be collected as individual check boxes, and not as a "Yes/No" response. In cases where the sponsor chooses to use "Check all that apply", additional quality checks should be considered (e.g., source data verification, SDV) to ensure the data collected in the CRF are correct and complete.	"Yes/No" questions provide a definite answer. The absence of a response is ambiguous as it can mean "no," "none," or that the response is missing. In situations where there is no other dependent or related field by which to gauge the completeness of the field in question, a "Yes/No" response ensures that the data are complete. For example, when an AE End Date is blank, a "Yes" response to the question "Is the AE ongoing?" ensures that the data are complete. When the end date is provided, it is not necessary to answer the question "No".
2	The database should contain an indication that a planned exam/assessment was not performed. The mechanism for this may be different from system to system or from paper to EDC. For example, the data collection instrument/CRF could contain a field that allows the site to record an indication that a vital signs assessment was not performed (e.g., VSPERF="N", TEMP_VSSTAT="NOT DONE") A "Yes/No – assessment completed" question is preferred over a "Check if not done" box, unless the "Check if not done" field can be compared to a completed data field using a validation check to confirm that one or the other has data. - In situations where there is no other dependent or related field to gauge the completeness of the field in question, a "Yes/No" response format should be used to eliminate ambiguity. - When another related field is present, the "Yes/No" response is optional. For example, when a value for temperature is missing, a simple "Not Done" box may be checked. It is not necessary to respond "Done" when a temperature value is present.	This will provide a definitive indicator that a data field has missing data and has not been overlooked. This will prevent unnecessary data queries to clarify whether an assessment has been performed. The use of the "Yes/No" format helps to eliminate ambiguity about whether an assessment has been completed.
3	Data-cleaning prompts should be used to confirm that blank CRFs are intentionally blank. Usually this will be a "Yes/No" question (e.g., AEYN) but it may be a "Check if blank" box, if a validation check can be used to confirm that either the "Check if blank" box is checked or that there are data recorded in the CRF.	This will provide a definitive indicator that a CRF is blank on purpose and has not been overlooked. This will prevent unnecessary data queries.

Num	Best Practice Recommendation	Rationale
4	The same data (i.e., the same information at the same time) should not be collected more than once.	Collecting the same data more than once: - Creates the opportunity for discrepancies between the entered values. For example, subject's birthdate or age is collected on the Demographics page; it is not necessary to collect age on the Lab CRF at every visit. - Requires extra reconciliation. - May affect frequency counts and analysis results.
5	A "Check if ongoing" question is recommended to confirm ongoing against an end date. This is a special-use case of "Yes/No," where the data entry field may be presented as a single possible response of "Yes" in conjunction with an End Date variable. If the box is checked, the operational variable may contain "Yes". If the box is not checked and the End Date is populated, the value of the variable may be set to "No". For some EDC systems, it may be better to display the possible responses to the "Check if ongoing" question as radio buttons. Conditional logic can then be used to solicit the collection of the end date only if the answer to the "Ongoing" question is "N" (No).	For the use case of "Check if ongoing," for the data to be considered "clean," 1 of the 2 responses must be present and the other response must be blank. So, the presence of the end date provides confirmation that the event is not ongoing.
6	CRFs should use a consistent order of responses (e.g., "Yes/No") from question to question, for questions with response boxes or other standardized lists of values. Exceptions to this would be cases where a validated instrument (e.g., a standardized assessment questionnaire) is used.	A consistent order of response boxes promotes ease of use of the CRF to help reduce data-entry errors and to avoid introducing bias or leading the investigator to a desired response.
7	CRF questions and completion instructions should be unambiguous, and should not "lead" the site to answer the question in a particular way.	Data should be collected in a way that does not introduce bias or errors into the study data. Questions should be clear and unambiguous. This includes making sure that the options for answering the question are complete, such as providing options for "Other" and "None" when applicable.
8	CRF questions should be as self-explanatory as possible, thereby reducing the need for separate instructions. If required, short instructions may be placed on the CRF page, especially if the Prompt is not specific enough. More detailed instructions may be presented in a CRF completion guideline. All instructions should be concise. Instructions should be standardized as much as possible.	Putting short instructions and prompts on the CRF increases the probability that they will be read and followed, and can reduce the number of queries and the overall data cleaning costs. Having standard instructions supports all sites using the same conventions for completing the fields. Providing short instructions and prompts on the CRF and moving long instructions to a separate instruction booklet, facing page, or checklist will decrease the number of CRF pages, with the following benefits: - Decreased clinical data management (CDM) costs (e.g., decreased data entry costs) - Allows CRF to be formatted so that the reader can easily identify the fields to be completed - Format of the page is less cluttered, making it easier for site personnel and monitors to identify fields with missing responses
9	Collection of dates should use an unambiguous format, such as DD-MON-YYYY, where each part of the date is a unique format: "DD" is the day as a 2-digit numeric value; "MON" is the month as a 3-character letter abbreviation in English, or similar character abbreviation or representation in the local language; and "YYYY" is the year as a 4-digit numeric value. For EDC, the user may be able to select a date from a calendar, and this would also meet the recommendation for an unambiguous date. If the recommended approach is not adaptable to the local language, a similarly unambiguous format should be used. The method for capturing date values should allow the collection of partial dates, and should use a consistent method or convention for collecting the known date parts to facilitate standard mapping to the SDTM. See the CDASH Model for standard date variable names.	Using this data collection format (i.e., DD-MON-YYYY) will provide unambiguous dates. For example, the date "06/08/02" is ambiguous because it can be interpreted as June 8, 2002, or August 6, 2002. If subject-completed CRF pages are translated into a local language, the CDASH recommended date format for collection may make translation of the documents easier. Dates are collected in this format, but reformatted and submitted in ISO 8601 format. See Section 3.6, Timing Variables: Collection, Conversion, and Imputation of Dates , and the SDTMIG for more information about the ISO 8601 format.
10	To eliminate ambiguity, times should be collected with the use of a 24-hour clock, using the hh:mm:ss format for recording times. Use only as many of the hh:mm:ss elements as are needed for a particular field. Sites should be cautioned not to "zero-fill" time components if these are not known (for example 21:00:00 means	SDTM-based datasets use ISO 8601 date/time formats. Collecting times using a 24-hour clock eliminates both ambiguity and the need to convert values from 12-hour to 24-hour clock time.

Num	Best Practice Recommendation	Rationale
	"exactly 9 pm", but if the site does not know how many seconds after 9 PM, they should not record the seconds). Subject-completed times may be recorded using a 12-hour clock and an "am" or "pm" designation. The time should then be transformed to a 24-hour clock in the database.	
11	Manually calculated fields should not typically be recorded within the CRF when the raw data on which the calculation is based are recorded in the CRF. An exception is when a treatment and/or study conduct decision should be made based on those calculations. In such cases it may be useful for the calculated field to be recorded within the CRF. It may also be useful to provide the site a step-by-step worksheet to calculate this data.	Data items that can be calculated from other data captured within the CRF are more accurately reported if they are calculated programmatically using validated algorithms. The noted exception may be in cases where it is important to show how an investigator determined a protocol-defined endpoint from collected raw data.
12	Questions with free-text responses should be limited to cases of specific safety or therapeutic need in reporting or analysis, such as adverse events, concomitant medications, or medical history—generally in cases where the data will be subsequently coded. Questions should be specific and clear rather than open-ended. Instead of free-text comment fields, a thorough review of the CRF by the protocol development team should be performed to maximize the use of predefined lists of responses. See Section 7.2, CO - Comments , for additional recommendations.	The collection and processing of free text requires significant resources for data entry: It requires clinical data management (CDM) resources to review the text for safety information and for inconsistencies with other recorded data and is of limited use when analyzing and reporting clinical data. Another risk is that sites may enter data into free-text fields that should be recorded elsewhere.
13	Subject-specific data should be collected and recorded by the site and should not be prepopulated in the CRF/eCRF.	The CRF is a tool to collect subject-level data. However, prepopulation of some identifying (e.g., investigator name, site identification, protocol number) or timing (e.g., Visit Name) information prevents errors and reduces data entry time. Fields on the CRF or in the database that are known to be the same for all subjects may be prepopulated (e.g., measurements for which there is only 1 possible unit, such as respiratory rate or blood pressure). The units can be displayed on the CRF and populated in the database
14	The anatomical location of a measurement, position of subject, or method of measurement should be collected only if the protocol specifies the allowable options, or if the parameter is relevant to the consistency or meaning of the resulting data.	When a parameter such as location, position, or method is specified in a protocol and is part of the analysis, the CRF may include the common options for these parameters to ensure the site can report what actually happened and protocol deviations can be identified. If the parameter is prepopulated on the CRF and other options are not available, then the site should be directed to not record data that was not collected per protocol specifications. Taking measurements in multiple anatomical locations may affect the value of the measurement and/or the ability to analyze the data in a meaningful way (e.g., when data obtained from different locations may bias or skew the analysis). In this case, collecting the location may be necessary to ensure consistent readings. For example, temperature obtained from the ear, mouth, or skin may yield different results. If there is no such rationale for collecting location, position, method, or any other value, it would be considered unnecessary data. See Section 4.3, Organizational Best Practices to Support Data Collection , Num 1.
15	Sites should record verbatim terms for nonsolicited adverse event (AE), concomitant medications, or medical history-reported terms. Sites should not be asked to select a preferred term from a coding dictionary as a mechanism for recording data.	When the site records information about spontaneously reported AEs or medical history, recording responses verbatim ensures that no information is omitted. Site personnel are not expected to be coding experts and may not be familiar with the coding dictionaries used in clinical research. Having sites record AEs from a standardized list is the same as having them code these events. Having multiple sites "coding" data, on the other hand, will likely result in inconsistencies in coding across sites. See Section 6, Other Recommendations , for more information about collecting data for coding purposes.
16	An SDTMIG variable name should only be used as a data collection/operational variable name if the collected value will directly populate the SDTMIG variable with no transformation (other than changing case). Otherwise, create a "collected"	This practice provides clearer traceability from data collection to submission, and facilitates a more automated process of transforming collected data to the standardized data tabulations for submission.

Num	Best Practice Recommendation	Rationale
	version of the variable and write a standard mapping to the SDTMIG variable.	

4.2 CRF Design Best Practices

The following recommendations are general principles that may be implemented during CRF form design and/or database set-up in different ways, depending on the systems used.

Providing the clinical site with a consistent and clinically logical order of these fields will reduce data entry time and result in more reliable data. The CRF should be quick and easy for site personnel to complete.

Clinical operations staff should review the CRF for compatibility with common site workflow and procedures.

Num	Best Practice Recommendation
1	Place fields that routinely appear on multiple forms at the top of the form. For example, if the collection date and time are both asked, they should appear first and second, respectively, on each form where they are used.
2	Fields should be placed on the form in the order that they are expected to be collected during the clinical assessment. It is acceptable to include fields from different domains on the same form if consistent with the clinical flow.
3	Group related fields for a single clinical encounter together, although multiple time points or visits may appear together on one form. For example, if heart rate and temperature are taken every hour for 4 hours on study day 1, the form can collect the data for hour 1 (e.g., heart rate result and unit, temperature result and unit), followed by the data for hour 2, hour 3, and hour 4. In this scenario, there would be labels indicating each time point within study day 1.
4	Group related fields together. Test results and their associated units should always appear next to each other. For example, the results of "TEMP" should be followed by its allowable units of "F" and "C". In some cases, the result might have only 1 applicable unit. For example, the only applicable unit for "PULSE" is "beats/min". The unit should be displayed on the CRF and database.
5	Data fields that are dependent on other data fields should be placed in the CRF in such a way that this dependence is obvious. For example, if there is a question in a paper CRF where "Other, specify" is an option, the text box used to collect what is being specified should be placed in proximity to the "Other" question to indicate that it is a subpart of the "Other" question. Example: An EDC system that requires a specific response in order to render 1 or more additional, related questions.
6	Lists of values that have a logical order should be provided on the CRF in that logical order. For example, the values of "Low", "Medium", and "High" are logically placed in this order. Do not list "Medium" first, "Low" second, and "High" third.

4.3 Organizational Best Practices to Support Data Collection

Num	Best Practice Recommendation	Rationale
1	Collect necessary data only. CRFs should focus on collecting only the data that support protocol objectives and endpoints. The protocol should clearly state which data will be collected in the study	Usually, only data that will be used for efficacy analysis and to assess safety of the investigational product should be collected on the CRF, due to the cost and time associated with collecting and fully processing the data. However, some fields on a CRF may be present to support EDC functionality and/or review and cleaning of data through automated edit checks. The protocol—and statistical analysis plan (SAP), when it is prepared in conjunction with the protocol—should be reviewed to ensure that the parameters needed for analysis are collected and can be easily analyzed. The statistician is responsible for confirming that the CRF collects all of the data necessary to support the analysis.
2	CRF development should be a controlled, documented process that incorporates (as applicable): • Design • Review • Approval • Versioning • Printing • Distributing CRFs • Accounting for unused CRFs CRF development should be controlled by standard operating procedures (SOPs) covering these topics, as well as site training.	A controlled process for developing CRFs will help ensure that CRFs comply with company standards and processes.

Num	Best Practice Recommendation	Rationale
3	The CRF design process should include adequate review and approval steps, and each reviewer should be informed on the scope of the review they are expected to provide. The team that designs the data collection instruments for a study should be involved in the development of the protocol and should have appropriate expertise represented on the CRF design team, including the following: • Medical and scientific experts should provide sufficient information to ensure clinical data standards staff, subject matter experts, and clinical data management staff understand the background, context, and medical relevance of the efficacy and/or safety data. • Clinical data management, standards subject matter experts, and CRF designers should review the protocol to ensure that proposed data can be collected, and should ensure that appropriate standards are used to develop the CRF. • Statisticians should review the CRF against their planned analyses to make sure all required data will be collected in an appropriate form for those analyses. • Clinical operations staff should review the CRF to make sure the questions are unambiguous and that requested data can be collected. • Programmers should review the CRF to ensure that the manner in which the data are collected on the CRF is consistent with relevant metadata standards. • Regulatory experts should review the CRF for compliance with all applicable regulations. • Data entry staff should review the CRF to ensure that the data are collected in a form that can be entered accurately. • Pharmacovigilance personnel should review to ensure appropriate data capture and process to support expedited reporting. Ideally, the CRF should be developed in conjunction with the protocol (and the SAP, if available). All research-related data on the CRF should be addressed in the protocol to specify how and when it will be collected.	Reviewers from different functions increase the probability that the CRF will be easier to complete and support the assessment of safety and efficacy as defined in the protocol and SAP. The CRF design team should ensure that the data can be collected in a manner that is consistent with the implementer's processes and easy for the site to complete.
4	Translations of CRFs into other languages should be done under a controlled process by experts who understand both the study questions and the language and culture for which the CRF is being translated. The translation should be a parallel process following the same set of steps with separate reviews and approvals by the appropriate experts. Translations may require author approval and a separate validation of the translated instrument. CRFs that are translated into other languages should follow the same development process as the original CRF to ensure the integrity of the data collected. Consideration of translation should be part of the CRF development process. Avoid the use of slang or other wording that would complicate or compromise translation into other languages.	Cultural and language issues should be addressed appropriately during the process of translating CRFs to ensure the CRF questions have consistent meaning across languages.
5	Data that are collected on CRFs should be databased. For some fields, such as "Were there any Adverse Events?", the response—in this case "Yes/No"—may need to be databased, but will not be included in the submission data. Some fields, such as Investigator's Signature, can be verified by the data entry staff, but an actual signature may not be databased unless there is an e-signature.	If certain data are not required in the CRF but are needed to aid the investigator or monitor, those data should be recorded on a site worksheet (e.g., entry criteria worksheet, dose titration worksheet). All such site worksheets should be considered source documents or monitoring tools, and should be maintained at the site with the study files.
6	Establish and use standardized CRFs.	Using data collection standards across compounds and therapeutic areas saves time and money at every step of drug and device development. Using standards: • Reduces production time for CRF design and reduces review and approval time • Reduces site retraining and queries and improves compliance and data quality at first collection • Facilitates efficient monitoring, reducing queries • Improves the speed and quality of data entry due to familiarity with standards and reduces the training burden in-house

Num	Best Practice Recommendation	Rationale
		• Enables easy reuse and integration of data across studies and facilitates data mining and the production of integrated summaries • Reduces the need for new clinical and statistical programming with each new study

4.4 General Recommendations on Screen Failures

Sponsors may choose to collect screen-failure data for individuals who fail screening and who are not subsequently enrolled in the study. Section 10.1 of ICH E3 (*Structure and Content of Clinical Study Reports*, available at <https://www.fda.gov/regulatory-information/>) describes the reporting of subject disposition in the clinical study report. This section states that it may be “relevant to provide the number of patients screened for inclusion and a breakdown of the reasons for excluding patients during screening, if this could help clarify the appropriate patient population for eventual drug use.” Although screen-failure data may not be relevant for all studies, it is recommended it be collected based on the needs of the protocol and drug development programs. Timely collection of screen-failure data may also be used to identify eligibility criteria that contribute to enrollment challenges.

Using CDASH, the minimum data to be collected should include a subject identifier and reason(s) for screen failure. Typically, there is a reason on the End of Study form indicating “Screen Failure”. This information allows overall summarization of all subjects screened/enrolled and, when captured, provides easy subject accountability for the clinical study report. Other data may be considered for collection (e.g., date of informed consent, sex, race, date of birth or age) to further describe the reason for ineligibility (e.g., lab value out of range).

The SDTMIG does not provide a separate domain specifically for screen-failure data and does not require that such data be included in the SDTM. Data for screen-failure subjects, if submitted, should be included in the appropriate SDTMIG domains. See the SDTMIG for further guidance on submitting screen-failure data.

5 Conformance to the CDASH Standard

5.1 Conformance Rules

Conformance means that:

1. **Core designations must be followed.** All Highly Recommended and applicable Recommended/Conditional fields must be present in the CRF and/or operational database.
2. **CDISC Controlled Terminology must be used.** The CDISC Controlled Terminology that is included in the CDASHIG metadata tables must be used to collect the data in the CRF. All codelists displayed in the CRF must use or directly map to the current published CDISC CT submission values, when it is available. Subsets of published CT, such as those provided in CDASH terminology, can be used.
 - a. In Findings domains, values from the relevant CDISC CT lists must also be used to create appropriate Question Text, Prompts, and/or variable names. For example, if the question is about the subject's height, incorporate the value of "Height" from the VSTEST codelist as the prompt on the CRF, and incorporate "HEIGHT" from VSTESTCD in the variable name.
3. **Best practices must be followed.** The design of the CRF must follow guidance in Section 4.1, [Best Practices for Creating Data Collection Instruments](#), and Section 4.2, [CRF Design Best Practices](#).
4. **The wording of CRF questions should be standardized; CDASH Question Text or Prompt must be used to ask the question.**
 - a. In cases where the data collection is done in a denormalized presentation on the CRF, the relevant CDISC CT should be used in the question text or prompt as much as possible. It is acceptable to use synonym text that will directly map to a CDISC submission value (including an NCI Preferred Term), if the CDISC submission value is not appropriate for data collection. For example, "ALT" may be better than "Alanine Aminotransferase" as the prompt for this lab test. If there is no CDISC CT available, the question text or prompt must be standardized by the implementing organization and used consistently. One of the basic purposes of CDASH is to reduce unnecessary variability between CRFs and to encourage the consistent use of variables to support semantic interoperability; therefore, Question Text and Prompt must be used verbatim.
 - b. Similarly, where SDTMIG variables exist in the operational database and the value conforms to controlled terminology, it is permissible to use a familiar synonym on the CRF without affecting conformance. For example, on the Demographics page, SEX may be displayed as "Male" or "Female", whereas in the operational database the controlled terminology values of "M" and "F" would be used.
 - c. In some cases, CDASH Question Text and Prompt allow for flexibility while still being considered conformant. See Section 2.3, [CRF Development Overview](#), for further details on the usage of Question Text and Prompt.
 - d. CDASH Model Question Text may contain options for the tense; if the option is not provided, the tense of the Question Text may be modified to reflect the needs of the study.
 - e. In cases where the CDASH Question Text or Prompt cannot be used due to culture or language, or a CRF must be translated for language or cultural reasons, the implementer must ensure the translation is semantically consistent with the CDASH Question Text and Prompt in the CDASHIG metadata table.
 - f. In cases where a more specific question needs to be asked than that provided by Question Text or Prompt, CDASH recommends the use of a brief CRF Completion Instruction, as long as the instruction clarifies the data required by the study without altering the meaning of variable as defined by the standard. For example, "Sex at birth" is not the same question as "Sex" (which is loosely defined as "reported sex").
5. **CDASHIG variable naming conventions should be used in the operational database.** Use a consistent syntax that includes the root variable name and/or controlled terminology, and any other standardized concepts that are needed to support efficient mapping of the collected value to SDTM datasets. The goals

are to have beginning-to-end traceability of the variable name from the data capture system to the SDTM datasets, and to support automating EDC set-up and downstream processes.

- a. It is recognized (particularly in an EDC system) that the variable name of a data collection field, as well as the name in the underlying database, may have various “system” components that become part of the item’s identifier. EDC systems, prior to exporting data in a defined format, may require the variable name to include such database “references” as the EDC page name, the item “group” name, or perhaps a combination.
- b. In cases where the data collection is done in a denormalized way, appropriate CDISC CT must be used when it is available.
 - i. For example, when collecting vital signs results in a denormalized eCRF, the variable names can be created by using terms from the Vital Signs Test Code codelist. For example, temperature result can be collected in a variable called TEMP or TEMP_VSORRES; systolic blood pressure result can be collected in a variable called SYSBP or SYSBP_VSORRES. When a particular system’s constraints limit the variable name to 8 characters, a similar, consistent implementation that preserves either the normalized root variable (e.g., ORRES) or the controlled terminology (e.g., --TESTCD value) should be implemented.
 - ii. Other variable patterns that intentionally connect the data collection variable to the target SDTMIG variable are also acceptable. For example, targetDataset_targetVariable[_optionalTopic] is acceptable. Examples of this pattern include DM_AGE, DM_AGEU, VS_VSORRES_TEMP, VS_VSORRESU_TEMP, SUPPAE_QVAL_AEDIS.
- c. Whereas all CDASHIG-defined variable names are 8 characters or fewer to accommodate SDTM limits on variable names, QNAMs, and --TESTCDs, the maximum length of a variable name that may be implemented is determined by the data management system used, not by CDASH.
- d. When collecting data in a horizontal manner, to facilitate transformation to SDTM datasets it is recommended to create denormalized CDASH variables in the data collection system by incorporating the SDTMIG variable name target and/or the controlled terminology (e.g., --TESTCD) as part of the CDASH variable names. The domain-level metadata labeled as "Horizontal-Generic" in the Implementation Options column of the CDASHIG metadata tables are examples of how to implement this. There is no conformance requirement implied by these examples.
6. **Data output by the operational database into an SDTMIG variable should require no additional processing if the CDASHIG and SDTMIG variable names are the same.** An SDTM data programmer should be able to assume that data in an SDTMIG variable is SDTMIG-compliant. Minimal processing (e.g., changing case) does not affect conformance. This helps to ensure a quality deliverable, even if the programmer is unfamiliar with data capture practices.
7. **Validated questionnaires, ratings, or scales must present the questions and reply choices in the manner in which these were validated.** This must be followed to maintain the validity of a validated instrument. (See Section 8.3.12, [QRS - Questionnaires, Ratings, and Scales](#)).
- a. In some cases, this may result in CRFs that do not conform to CDASH best practices; however, restructuring these questionnaires should not be done because it could invalidate them.
- b. The use of such questionnaires in their native format should not be considered to affect conformance to CDASH.

Implementers must determine what additional data fields to add to address study-specific and therapeutic-area requirements, and applicable regulatory and business practices. See Section 3.4, [How to Create New Data Collection Fields When No CDASHIG Field Has Been Defined](#), for more information on how to create data collection fields that have not already been described in this implementation guide.

6 Other Recommendations

6.1 Standardized Coding of Collected Data

Data Collection to Facilitate Coding

Adverse events, medical history, and prior and concomitant medications are often coded to standard dictionaries (thesauri). There are many coding dictionaries; this section will focus on the Medical Dictionary for Regulatory Activities (MedDRA) and the World Health Organization Drug Dictionary (WHO-DD) as examples, because these are common coding dictionaries.

The SDTMIG variable AEDECOD is the dictionary-derived text description of AETERM (the reported term for the adverse event) or AEMODIFY (the modified reported term). When coding with MedDRA, the AEDECOD is the Preferred Term and is a required variable. Corresponding SDTMIG variables CMDECOD (for medications) and MHDECOD (for medical history items) are permissible SDTMIG variables. These are the equivalent of the preferred term in the dictionary used for coding, and when data are coded these SDTMIG variables should be provided.

These --DECOD variables are not necessarily collected on CRFs. They are often determined from other collected variables (e.g., AETERM, CMTRT, MHTERM). Conventions adopted in the collection of these reported terms can have an effect on the resulting --DECOD variables. If collected on a CRF, --DECOD values would be selected from sponsor-defined or CDISC Controlled Terminology.

CRF designers should consult with medical coders, review relevant documentation, and ensure that all elements needed to facilitate the coding process are collected.

Coding Adverse Events and Medical History Items

Data managers are encouraged to collaborate with coding specialists and medical staff to develop guidance for sites in accordance with applicable coding conventions and other company/project agreements and requirements.

Reported terms are often coded without other information for the subject. Therefore, sites should be advised that nothing can be assumed, and that the reported term should include all information relevant to the event being reported. For example, if “Congestion” is reported as an adverse event for a particular subject, together with several other pulmonary events, the coder cannot assume that the congestion is lung congestion rather than congestion of some other organ (e.g., nose, ear). The reported term “Congestion” will need to be queried before it can be coded.

Medications

With regard to medications, the CDASH standard offers some guidance on the recording of medication names and on the use of additional Recommended/Conditional data collection fields (e.g., CMROUTE, CMINDC) to facilitate coding. See Section 8.1.1, [General CDASH Assumptions for Interventions Domains](#).

The purpose of coding medications is usually to provide a standardized medication name (CMDECOD) and a medication class (CMCLAS). Most dictionaries facilitate the derivation of the standardized medication name on identification of the medication that was taken and the reason taken.

Although it would be preferable to collect all active ingredients of a particular medication, in a clinical trial this is impractical. There are numerous CRF design possibilities. When designing a collection tool, it is critical to include details appropriate to the trial and the sponsor’s coding requirements. For example, betamethasone dipropionate is used topically; however, if the site records only betamethasone (which can be administered orally, as drops, or inhaled), the topical route of the drug will be lost. In this case, collecting route of administration (CMROUTE) or the indication (CMINDC) would provide the additional information needed to code this medication.

In summary, when medications are to be coded, the indication (CMINDC) and route (CMROUTE) or anatomical location (CMLOC) should be collected along with the medication name.

7 Special-purpose Domains

The SDTMIG includes special-purpose datasets:

- Domain datasets—Demographics (DM), Comments (CO)
- Subject summary domains—(SE), Subject Visits (SV), and Subject Disease Milestones (SM)—which contain summary subject-level data

Subject summary domains are described in the SDTM and the SDTMIG. CDASH standards are for collection of subject-level data; the subject summary domains are out of the scope for CDASH and CDASH does not contain metadata information on the SDTM SE, SV, and SM domains. These domains are commonly derived/created during the SDTM dataset creation process. Implementers should determine the best practice within their organization for creating visits, collecting information on any unplanned visits, and creating subject milestones. Information in SM is generally collected in other domains (e.g., MH, CE). See the SDTMIG for more information on these domains.

The CDASHIG contains information on the CO and DM special-purpose domains.

7.1 General CDASH Assumptions for Special-purpose Domains

1. Each study must include the Demographics (DM) domain.
2. CDASH does not currently contain metadata information on the SDTM special-purpose domains Subject Elements (SE) and Subjects Visits (SV). The SDTM SE and SV domains are commonly derived/created during the SDTM dataset creation process. Implementers should determine the best practice within their organization for creating these datasets.

7.2 CO - Comments

Description/Overview for the CDASHIG CO - Comments Domain

The CDASHIG Comments (CO) domain describes free text collected alongside other data on typical CRF pages (e.g., Adverse Events) when there is not a specified variable for the free text. The CDASHIG CO domain has no mandatory data elements for inclusion in a separate Comments CRF, and the recommendation is to avoid creating a General Comments CRF.

Specification for the CDASHIG CO - Comments Domain

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Special-Purpose	CO	N/A	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or the EDC system. This field can be included in the database or populated during SDTM-based dataset creation before submission.
Special-Purpose	CO	N/A	N/A	2	SITEID	Study Site Identifier	A unique identifier for	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
							a site within a study.							the SDTMIG Target column.			site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted on CRFs that are shipped to each site. EDC: This should be pre-populated.
Special-Purpose	CO	N/A	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What [is/was] the (study) [subject/participant] identifier?	[Subject/Participant] (Identifier)	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system-generated. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Special-Purpose	CO	N/A	N/A	4	COVAL	Comment	A free-text comment.	[Protocol-specified targeted question]	[Abbreviated version of the protocol-specified targeted question]	Char	O	[protocol specific]	CO.COVAL	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. RDOMAIN contains the domain to which the comment is related.	N/A	N/A	If an additional free-text field is needed to provide more information about a particular record, use the COVAL variable to collect the free text, and associate the free text (comment) with the original record using RDOMAIN, IDVAR, IDVARVAL.

Assumptions for the CDASHIG CO - Comments Domain

Solicited Comments vs. Unsolicited Comments

Solicited comments are comments entered in free-text data collection fields (e.g., “Please comment”) that are intentionally included on the CRF. These data collection fields provide the site with a predefined space to further explain or clarify an associated record within the CRF. For example, the Vital Signs CRF may include a solicited comment data collection field that enables recording of free text, such as “Reason for performing assessment out of window”.

Unsolicited comments are those entered outside of predefined data collection fields (also referred to as "marginal comments," as they are sometimes written in the margins of paper CRFs). These may include marginal CRF comments written by site staff, notes written by the subject on paper diaries, or additional information collected through an EDC system function which collects comments that are not included as data collection fields on the eCRF. Although such comments may be intended to reduce queries, in practice they often lead to clinical data not being entered into the correct data collection field and may cause additional work in the data management process. The collection of unsolicited comments should be discouraged. If allowed, unsolicited comments should be reviewed and resolved during the conduct of the study.

Some unsolicited comments may be intended to avoid queries (e.g., “Subject visit was delayed due to his holidays”) and may not be regarded as clinical data. When these comments are permitted during data collection, the sponsor should have a procedure for reviewing and processing them, including a method to query and move relevant data to the appropriate form.

Personnel at the investigative site should be trained to enter clinical data in the appropriate data collection fields rather than making marginal notes on the CRF, and to use appropriate methods and tools to communicate to the monitor any information that should not be included in the clinical data.

Free Text vs. Value List Fields

Clinical data must be entered in appropriate data collection fields; otherwise, there is a potential for data that should be entered on other CRFs to be hidden within the comment. For example, if a general comment of “Subject visit was delayed as he had the flu” was captured, this would necessitate that someone review the data and query the site to enter “flu” in an AE CRF and not leave it as a comment. An additional concern with free-text comments is the potential for inappropriate or sensitive information (e.g., subject's name, unblinding information) to be included within general comments data collection fields.

Free-text comments are also inefficient for processing due to their variable and unstructured nature; they offer limited or no value for statistical analysis, as they cannot be tabulated.

CRF development teams are encouraged to strive for data collection methods that maximize the use of predefined lists of responses rather than relying solely on free-text comment fields. The recommendation is that CRF development teams consider what additional questions may be needed within a specific CRF, and what the typical responses would be. They can then create a standardized list of responses for those questions, and make the data collected more useful for analysis.

Considerations Regarding General Comments CRFs

Solicited comments often used to be collected on a General Comments CRF. In recent years, though, most organizations have discontinued this practice.

The CDASHIG CO domain has no mandatory data elements and is not intended to encourage the creation of a General Comments CRF. The CDASHIG recommends against the use of a General Comments CRF. This recommendation is not meant to discourage investigators from providing unsolicited comments where they are appropriate, nor to discourage solicited free-text comment data collection fields that may appear within any CRF. Free-text comment fields should be used to solicit comments where they are needed. When comments are collected, this should be done through a variable naming convention that conforms to CDASH (e.g., COVAL may be used in any CRF because it is part of the SDTMIG specification).

Example CRF for the CDASHIG CO - Comments Domain

Example 1

This CRF shows the use of a targeted comment to collect the reason a pharmacokinetics (PK) sample was drawn more than 5 minutes late.

Title: Pharmacokinetic Sample Collection with Comments

CRF Completion Instructions		
- Record the actual collection times - If the sample was drawn more than 5 minutes late, provide an explanation in the appropriate comment area.		
Indicate whether any blood samples in this group were collected.	Were blood samples drawn? PCPERF If PCPERF = "N", then PCSTAT = "NOT DONE" and PCTESTCD = "PCALL". If PCPERF = "Y" then NOT SUBMITTED.	☐ Yes ☐ No <NY codelist>
Record the date of the blood sample collection, using this format (DD-MON-YYYY).	Collection Date PCDAT PCDTC	
Select the appropriate time point	What was the planned time point? PCTPT	☐ Pre-Dose ☐ 30 Minutes Post Dose ☐ 90 Minutes Post Dose
Record the [start] time of the pre-dose blood sample collection (as complete as possible).	What was the (start) time of the blood sample collection? PCTIM PCDTC	
If the collection did not occur at the planned time point, please comment.	If the sample was drawn more than 5 minutes late, why? COVAL CO.COVAL	

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
PCPERF	1	Were blood samples drawn?	Collected	Indicate whether any blood samples in this group were collected.	Text	PCSTAT	If PCPERF = "N", then PCSTAT = "NOT DONE" and PCTESTCD = "PCALL". If PCPERF = "Y" then NOT SUBMITTED.	(NY)	Yes; No		Qtext		
PCDAT	2	What was the date of the blood sample collection?	Collection Date	Record the date of the blood sample collection, using this format (DD-MON-YYYY).	Date	PCDTC							
PCTPT	3	What was the planned time point?	Planned Time Point Name	Select the appropriate time point	Text	PCTPT			Pre-Dose; 30 Minutes Post Dose; 90 Minutes Post Dose		Qtext		
PCTIM	4	What was the (start) time of the blood sample collection?	Collection Time	Record the [start] time of the pre-dose blood sample collection (as complete as possible).	Time	PCDTC					Qtext		
COVAL	5	If the sample was drawn more than 5 minutes late, why?	Collection Comment	If the collection did not occur at the planned time point, please comment.	Text	CO.COVAL					Qtext		

7.3 DM - Demographics

Description/Overview for the CDASHIG DM - Demographics Domain

The CDASHIG Demographics (DM) domain includes essential data collection fields that describe each subject in a clinical study. The collection of some demographics data is useful to perform simple analyses based upon population stratification.

Privacy concerns surrounding the DM and Subject Characteristics (SC) data were taken into account when these domains were created. For example, there are optional CDASHIG variables to collect the components of birthdate (e.g., BRTHDD, BRTHMO, BRTHYY); therefore, limited elements of birth day may be collected and later mapped to the SDTMIG variable BRTHDTC. This approach provides flexibility in categorizing some variables to facilitate compliance with local privacy issues.

Collection of Age vs. Date of Birth

It is recognized that sponsors may collect the age or date of birth of the subject. In multiregional studies, sponsors may need to enable the collection of either in order to comply with local regulations. But only one or the other should be collected for any given subject. When only age is collected, the sponsor is left with a window of uncertainty of, at most, 365 days. Although knowing the precise date of birth provides the ability to calculate accurately an age for any date, a precise (and complete) date of birth may be considered personally identifying information for some privacy oversight boards or government regulators.

Collect the date of birth to the extent that the local regulatory authorities will allow.

- The best method is to collect a complete date of birth, and derive age.
- When there are privacy concerns with collecting the complete date of birth, the recommendation is to collect year of birth at a minimum.
- In cases when neither of the above can be implemented (e.g., cultural or regional considerations) then age and age unit should be collected, and date of collection should be collected or derived from the visit date.
- Use the AGETXT/CAGETXT variable in very rare cases, when only an age range or age description can be determined.

Date of birth should be implemented such that incomplete dates may be entered, as allowed by the EDC system.

See Section 3.6, [Timing Variables: Collection, Conversion, and Imputation of Dates](#), for more information.

Collection of Sex

The collection of some demographics data is useful to perform simple analyses based upon population stratification.

Collection of Ethnicity and Race

The US Food and Drug Administration (FDA) requirement is to collect ethnicity before race. A secondary analysis is often made using the phenotypic race of the subject. Collect race if required for the protocol and not prohibited by local laws and regulations.

In 2016, the US Office of Management and Budget (OMB) revised its recommendations for the collection and use of race and ethnicity data by Federal agencies. The FDA follows this directive and

recommends the use of the standardized OMB race and ethnicity categories for data collection in clinical trials for two reasons. The use of the recommended OMB categories will help ensure consistency in demographic subset analyses across studies used to support certain marketing applications to FDA and across data collected by other government agencies.

The Race values listed in the FDA guidance *Collection of Race and Ethnicity Data in Clinical Trials* (available at <https://www.fda.gov/>) are:

- American Indian or Alaska Native
- Asian
- Black or African American
- Native Hawaiian or Other Pacific Islander
- White

Note: For studies where data are collected outside the US, the recommended categories are the same, except for Black instead of Black or African American.

CDASH provides only 1 variable for Race. Sponsors wishing to capture more than 1 race will need to create NSVs to store the collection of the multiple races and map appropriately to the SDTMIG DM domain.

Race Other has been included as a free-text field to capture responses. The use of this variable is optional and should be used with caution. When submitting data to the FDA, all races must be mapped to the 5 values recognized by the FDA; providing an Other, Specify field might lead to mapping errors or difficulties. RACE is Recommended/Conditional (R/C) because some sponsors prefer to derive values that are compliant with the codelist RACE (e.g., as derived from values collected in CRACE).

The category of ethnicity is similar to race. *Ethnicity*, per the CDISC Glossary, "Denotes social groups with a shared history, sense of identity, geography, and cultural roots." In a fairly heterogeneous country such as the United States, ethnicity data (e.g., "Hispanic or Latino" and "Not Hispanic or Latino") might be useful to confirm that ethnic groups are not being discriminated against by being unfairly excluded from clinical research. In other countries, regulatory bodies (e.g., Japanese Ministry of Health, Labour and Welfare (MHLW)) may expect the reporting of ethnicity values which appropriately reflect the population of their areas. This information may be collected using the CETHNIC variable with its corresponding codelist, ETHNICC.

If more detailed information on race or ethnicity is required to further characterize study subjects, it is recommended that the presented choices be “collapsible” up to 1 of the 5 FDA designations for race, as well as the 2 categories for representing ethnicity, as needed for reporting to FDA. If more detailed categorizations are desired, the recommendation is to use the HL7 Reference Information Model's race and ethnicity vocabulary tables (available at <https://www.hl7.org/>), which are designed to collapse up in this manner. For the collection of such added detail or granularity, as the sponsor may require, CDASH provides the variables CRACE and CETHNIC, respectively.

Collection of Special Optional Fields in Demographics

CDASHIG allows for collection of the Date of Informed Consent using the variable RFICDAT. (If a sponsor chooses to collect informed consent using this variable, the data should not also be collected using DSSTDAT from the Disposition (DS) Domain.) The data from RFICDAT would then be mapped to the SDTMIG variable DSSTDTC and the companion variables (e.g., DSTERM, DSDECOD) must be populated accordingly.

The CDASH Model also defines a field for death date (DTHDAT) as a timing variable. It may be collected on any CRF deemed appropriate by the sponsor. The SDTMIG variables DTHDTC and DTHFL are mapped to the DM domain during the SDTM submission dataset creation process. The CDASH field Death Date may be mapped to other SDTMIG domains (e.g., DS), as deemed appropriate by the sponsor.

See Section 4.1, [Best Practices for Creating Data Collection Instruments](#), Num 4 for additional guidance recommending that the same data not be collected more than 1 time per subject.

Data Collection Scenarios

This section describes 2 different data collection scenarios for the demographics domain. It is up to the sponsor to determine which data collection scenario best meets the study needs:

- **Scenario 1: Birth date collection using 3 date fields.** This scenario includes date of birth collected as 3 fields (i.e., month, day, year).
- **Scenario 2: Birth date collection using a single date field.** This scenario includes date of birth collected as a full date, in a single date field. An example CRF is not shown for this scenario.

Specification for the CDASHIG DM - Demographics Domain

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Special-Purpose	DM	Birth date collection using three date fields	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included in the database or populated during SDTM-based dataset creation before submission.
Special-Purpose	DM	Birth date collection using three date fields	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted on the CRFs that are shipped to each site. EDC: This should be prepopulated.
Special-Purpose	DM	Birth date collection using three date fields	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What [is/was] the (study) [subject/participant] identifier?	[Subject/Participant] (Identifier)	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system-generated. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Special-Purpose	DM	Birth date collection using three date fields	N/A	4	BRTHDD	Birth Day	Day of birth of the subject, in an unambiguous date format (e.g., DD).	What is the subject's day of birth?	Birth Day	Char	R/C	Record the subject's day of birth (e.g., 01 or 31).	BRTHDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable BRTHDTC in ISO 8601 format.	N/A	N/A	Day of Birth is the collected variable used for recording the day component of the Date of Birth. The sponsor may choose to database the date of birth as a single variable (BRTHDAT), or as

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	separate variables for each component of the date/time (BRTHYY, BRTHMO, BRTHDD, BRHTTIM). The sponsor may choose a method based on database considerations, or for regulatory reasons. It is expected that what is collected for BRTHDAT (e.g., complete date, components) is reported in the SDTMIG variable BRTHDTC in the ISO 8601 format. If data are collected in a manner resulting in a reduced precision level, then AGE (SDTM expected variable), if not collected on the CRF, should be derived using a documented algorithm that describes how the age was derived and/or imputed for those birth dates collected with reduced precision.
Special-Purpose	DM	Birth date collection using three date fields	N/A	5	BRTHMO	Birth Month	Month of birth of the subject, in an unambiguous date format (e.g., MMM).	What is the subject's month of birth?	Birth Month	Char	R/C	Record the subject's month of birth [e.g., (in local language short month format) (JAN-DEC) or (ENE-DIE) or (JAN-DEZ)].	BRTHDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable BRTHDTC in ISO 8601 format.	N/A	N/A	Month of Birth is the collected variable used for recording the month component of the Date of Birth. The sponsor may choose to database the date of birth as a single variable (BRTHDAT), or as separate variables for each component of the date/time (BRTHYY, BRTHMO, BRTHDD, BRHTTIM). The sponsor may choose a method based on database

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	considerations, or for regulatory reasons. It is expected that what is collected for BRTHDAT (e.g., complete date, components) is reported in the SDTMIG variable BRTHDTC in the ISO 8601 format. If data are collected in a manner resulting in a reduced precision level, then AGE (SDTM expected variable), if not collected on the CRF, should be derived using a documented algorithm that describes how the age was derived and/or imputed for those birth dates collected with reduced precision.
Special-Purpose	DM	Birth date collection using three date fields	N/A	6	BRTHYY	Birth Year	The year of birth of the subject, in an unambiguous date format (e.g., YYYY).	What is the subject's year of birth?	Birth Year	Char	R/C	Record the subject's year of birth (e.g., YYYY, a four-digit year).	BRTHDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable BRTHDTC in ISO 8601 format.	N/A	N/A	Year of Birth is the collected variable used for recording the year component of the Date of Birth. The sponsor may choose to database the date of birth as a single variable (BRTHDAT), or as separate variables for each component of the date/time (BRTHYY, BRTHMO, BRTHDD, BRHTTIM). The sponsor may choose a method based on database considerations, or for regulatory reasons. It is expected that what is collected for BRTHDAT (e.g., complete date, components) is reported in the SDTMIG variable BRTHDTC in the

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	ISO 8601 format. If data are collected in a manner resulting in a reduced precision level, then AGE (SDTM expected variable), if not collected on the CRF, should be derived using a documented algorithm that describes how the age was derived and/or imputed for those birth dates collected with reduced precision.
Special-Purpose	DM	Birth date collection using three date fields	N/A	7	BRHTIM	Birth Time	The time of birth of the subject, in an unambiguous time format (e.g., hh:mm).	What is the subject's time of birth?	Birth Time	Char	O	Record the time of birth (as completely as possible).	BRTHDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable BRTHDTC in ISO 8601 format.	N/A	N/A	The level of detail collected by Time of Birth may be necessary for analysis for some pediatric, natal, or neonatal studies. The sponsor may choose to database the date of birth as a single variable (BRTHDAT), or as separate variables for each component of the date/time (BRTHYY, BRTHMO, BRTHDD, BRHTIM). The sponsor may choose a method based on database considerations, or for regulatory reasons. It is expected that what is collected for BRTHDAT (e.g., complete date, components) is reported in the SDTMIG variable BRTHDTC in the ISO 8601 format. If data are collected in a manner resulting in a reduced precision level, then AGE (SDTMIG expected variable), if not collected on the CRF, should be

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	derived using a documented algorithm that describes how the age was derived and/or imputed for those birth dates collected with reduced precision.
Special-Purpose	DM	Birth date collection using three date fields	N/A	8	AGE	Age	The age of the subject, expressed in AGEU.	What is the subject's age?	Age	Num	O	Record age of the subject.	AGE	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	If age is collected, it should be collected as a number and, to be correctly interpreted, the age value should be associated to a variable for the age unit. It may be necessary to know when the age was collected, as age may need to be recalculated for analysis, such as deriving age at a reference start time (RFSTDTC for SDTM). BRTHDTC may not be available in all cases (due to subject privacy concerns). If AGE is collected, then it is recommended that the date of collection also be recorded, either separately or by association to the date of the visit.
Special-Purpose	DM	Birth date collection using three date fields	N/A	9	AGEU	Age Units	Units of time routinely used to express the age of a person.	What is the age unit used?	Age Unit	Char	O	Record the appropriate age unit (e.g., YEARS, MONTHS, WEEKS, etc.).	AGEU	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(AGEU)	N/A	If age is captured on the CRF, the age unit must be known to make the age value meaningful. The age unit might be collected on the CRF, in those cases where the protocol allows for any age group, or it may be preprinted on the CRF (typically with the unit of "years").
Special-Purpose	DM	Birth date collection using three date fields	N/A	10	DMDAT	Demographics Collection Date	The date of collection, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What is the date of collection?	Collection Date	Char	R/C	Record the date of collection using this format (DD-MON-YYYY).	DMDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate	N/A	N/A	The date of collection may be determined from the date of visit; if so, a separate date field is not needed.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
														the SDTMIG variable DMDTC in ISO 8601 format.			
Special-Purpose	DM	Birth date collection using three date fields	N/A	11	SEX	Sex	Sex of the subject, as determined by the investigator.	What is the sex of the subject?	Sex	Char	R/C	Record the appropriate sex (e.g., F (female), M (male)).	SEX	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(SEX)	N/A	Collect the subject's sex or gender, as reported by the investigator. This is a phenotypic assessment and not a genotypic assessment.
Special-Purpose	DM	Birth date collection using three date fields	N/A	12	ETHNIC	Ethnicity	A social group characterized by a distinctive social and cultural tradition maintained from generation to generation, a common history and origin, and a sense of identification with the group; members of the group have distinctive features in their way of life, shared experiences and often a common genetic heritage; these features may be reflected in their experience of health and disease.	Do you consider yourself Hispanic/Latino or not Hispanic/Latino?	Ethnicity	Char	O	Study participants should self-report ethnicity, with ethnicity being asked about before race.	ETHNIC	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(ETHNIC)	N/A	For use when values are being collected using the exact non-extensible ETHNIC codelist (C66790) values. Sponsors should refer to the FDA guidelines for collecting race and ethnicity data in clinical trials. ^a
Special-Purpose	DM	Birth date collection using three date fields	N/A	13	CETHNIC	Collected Ethnicity	A social group characterized by a distinctive social and cultural tradition maintained from generation to generation, a common history and origin, and a sense of identification with the group; members of the group have distinctive features in their way of life, shared experiences and often a common genetic heritage; these features may be reflected in their experience of health and disease.	What is the ethnicity of the subject?	Ethnicity	Char	O	Study participants should self-report ethnicity, with ethnicity being asked about before race.	SUPPDM.QVAL	This does not map directly to an SDTMIG variable. This information could be submitted in a SUPPDM dataset as the value of SUPPDM.QVAL where SUPPDM.QNAM = "CETHNIC" and SUPPDM.QLABEL = "Collected Ethnicity". See SDTMIG DM Domain. Refer to the current SDTM and SDTMIG for instructions on placement of non-standard variables in SDTM domains.	(ETHNICC)	N/A	Use when values are collected using the NCI Thesaurus codelist for Ethnicity As Collected (C128690), the extended HL7 hierarchy of codelist values, or other regulatory agency-specific controlled terminology for ethnic group. Sponsors may append a suffix to denote multiple collected ethnicities (e.g. CETHNIC1, CETHNIC2).

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Special-Purpose	DM	Birth date collection using three date fields	N/A	14	RACE	Race	An arbitrary classification based on physical characteristics; a group of persons related by common descent or heredity (US Center for Disease Control).	Which of the following five racial designations best describes you? (More than one choice is acceptable.)	Race	Char	R/C	Study participants should self-report race, with race being asked about after ethnicity.	RACE	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(RACE)	N/A	In the US, use RACE when collecting the 5 FDA designations for race (i.e., American Indian or Alaska Native, Asian, Black or African American, Native Hawaiian or Other Pacific Islander, White. ^a See also the SDTMIG DM domain. For studies where data are collected outside the US, the recommended categories are the same except for Black instead of Black or African American. If multiple races are collected, an alternate sponsor-defined variable structure would be required. Sponsors may record multiple self-reported races for a subject by appending a suffix to denote multiple collected races (e.g., RACE1, RACE2) and populate RACE with the value MULTIPLE.
Special-Purpose	DM	Birth date collection using three date fields	N/A	15	CRACE	Collected Race	An arbitrary classification based on physical characteristics; a group of persons related by common descent or heredity (US Centers for Disease Control).	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Char	R/C	Study participants should self-report race, with race being asked about after ethnicity. (The FDA guidance suggests that individuals be permitted to designate a multiracial identity. Check all that apply at the time of collection).	SUPPDM.QVAL	This does not map directly to an SDTMIG variable. This information could be submitted in a SUPPDM dataset as the value of SUPPDM.QVAL when SUPPDM.QNAM = "CRACE" and SUPPDM.QLABEL="Collected Race". See the SDTMIG DM domain.	(RACEC)	N/A	Use CRACE when more detailed race categorizations are desired (e.g., more than the 5 FDA). The HL7 Reference Information Model Structural Vocabulary Tables are designed to collapse up to the SDTM variable RACE with CT (e.g., American Indian or Alaska Native Asian, Black or African American, Native Hawaiian or Other Pacific Islander, White). If sponsors choose to map the

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	extended Race codelist values to RACE CT (e.g., Japanese to Asian), then this mapped variable would be reported using the SDTMIG variable RACE. Sponsors should refer to the FDA guidance. ^a For studies where data are collected outside the US, the recommended categories are the same except for Black instead of Black or African American. If multiple races are collected, an alternate sponsor-defined variable structure would be required. Sponsors may record multiple self-reported races for a subject by appending a suffix to denote multiple collected races (e.g. CRACE1, CRACE2) and populate CRACE with the value MULTIPLE.
Special-Purpose	DM	Birth date collection using three date fields	N/A	16	RACEOTH	Race Other	A free-text field to be used when none of the preprinted values for RACE are applicable or if another, unprinted selection should be added to those preprinted values.	What was the other race?	Specify Other Race	Char	O	If none of the preprinted values for RACE are applicable or if another, unprinted selection should be added to those preprinted values, record the value in this free text field.	SUPPDM.QVAL	This does not map directly to an SDTMIG variable. This information could be submitted in a SUPPDM dataset as the value of SUPPDM.QVAL where SUPPDM.QNAM = "RACEOTH" and SUPP.QLABEL="RACE OTHER". See SDTMIG DM Domain. Refer to the current SDTM and SDTMIG for instructions on placement of non-standard variables in SDTM domains.	N/A	N/A	When creating the DM form, it is suggested that the 5 standard race categories be included. Sponsors may choose to include another value ("Specify, Other") with a free-text field for extending the list of values. The RACEOTH variable contains the free text added by the site. The value(s) added in the optional variable might or might not collapse up into 1 of the 5 FDA categories. See SDTMIG DM domain examples

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	for reporting this implementation.
Special-Purpose	DM	Birth date collection using a single date field	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included in the database or populated during SDTM-based dataset creation before submission.
Special-Purpose	DM	Birth date collection using a single date field	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted on the CRFs that are shipped to each site. EDC: This should be pre-populated.
Special-Purpose	DM	Birth date collection using a single date field	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What [is/was] the (study) [subject/participant] identifier?	[Subject/Participant] (Identifier)	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system-generated. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Special-Purpose	DM	Birth date collection using a single date field	N/A	4	BRTHDAT	Birth Date	A subject's date of birth (with or without the time of birth). The complete Date of Birth is made from the temporal components of Birth Year, Birth Month, Birth Day, and Birth Time..	What is the subject's date of birth?	Birth Date	Char	R/C	Record the date of birth to the level of precision known (e.g., day/month/year, year, month/year) in this format (DD-MON-YYYY).	BRTHDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable BRTHDTC in ISO 8601 format.	N/A	N/A	BRTHDAT is the collected field used for recording the full birth date. The sponsor may choose to database the date of birth as a single variable (BRTHDAT), or as separate variables for each

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	component of the date/time (BRTHYY, BRTHMO, BRTHDD, BRHTTIM). The sponsor may choose a method based on database considerations, or for regulatory reasons. It is expected that what is collected for BRTHDAT (e.g., complete date, selected components) is reported in the SDTMIG variable BRTHDTC in ISO 8601 format. If data are collected in a manner resulting in a reduced precision level, then AGE (SDTM expected variable), if not collected on the CRF, should be derived using a documented algorithm that describes how age was determined and/or imputed for those birth dates collected with reduced precision.
Special-Purpose	DM	Birth date collection using a single date field	N/A	5	BRHTTIM	Birth Time	The time of birth of the subject, in an unambiguous time format (e.g., hh:mm).	What is the subject's time of birth?	Birth Time	Char	O	Record the time of birth (as completely as possible).	BRTHDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable BRTHDTC in ISO 8601 format.	N/A	N/A	The level of detail collected by Time of Birth may be necessary for analysis for some pediatric, natal, or neonatal studies. Sponsors may choose to database the date of birth as a single variable (BRTHDAT), or as separate variables for each component of the date/time (BRTHYY, BRTHMO, BRTHDD, BRHTTIM). The sponsor may choose a method based on database considerations, or

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	for regulatory reasons. It is expected that what is collected for BRTHDAT (e.g., complete date, components) is reported in the SDTMIG variable BRTHDTC in the ISO 8601 format. If data are collected in a manner resulting in a reduced precision level, then AGE (SDTMIG expected variable), if not collected on the CRF, should be derived using a documented algorithm that describes how the age was derived and/or imputed for those birth dates collected with reduced precision.
Special-Purpose	DM	Birth date collection using a single date field	N/A	6	AGE	Age	The age of the subject, expressed in AGEU.	What is the subject's age?	Age	Num	O	Record age of the subject.	AGE	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	If age is collected, it should be collected as a number and, to be correctly interpreted, the age value should be associated to a variable for the age unit. It may be necessary to know when the age was collected, as age may need to be recalculated for analysis, such as deriving age at a reference start time (RFSTDTC for SDTM). BRTHDTC may not be available in all cases (due to subject privacy concerns). If AGE is collected, then it is recommended that the date of collection also be recorded, either separately or by association to the date of the visit.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Special-Purpose	DM	Birth date collection using a single date field	N/A	7	AGEU	Age Units	Units of time that are routinely used to express the age of a person	What is the age unit used?	Age Unit	Char	O	Record the appropriate age unit (e.g., YEARS, MONTHS, WEEKS, etc.).	AGEU	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(AGEU)	N/A	If age is captured on the CRF, the age unit must be known to make the age value meaningful. The age unit might be collected on the CRF, in those cases where the protocol allows for any age group, or it may be preprinted on the CRF (typically with the unit of "years").
Special-Purpose	DM	Birth date collection using a single date field	N/A	8	DMDAT	Demographics Collection Date	The date of collection, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What is the date of collection?	Collection Date	Char	R/C	Record the date of collection using this format (DD-MON-YYYY).	DMDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable DMDTC in ISO 8601 format.	N/A	N/A	The date of collection may be determined from the date of visit; if so, a separate date field is not needed.
Special-Purpose	DM	Birth date collection using a single date field	N/A	9	SEX	Sex	Sex of the subject, as determined by the investigator.	What is the sex of the subject?	Sex	Char	R/C	Record the appropriate sex (e.g., F (female), M (male).	SEX	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(SEX)	N/A	Collect the subject's sex or gender, as reported by the investigator. This is a phenotypic assessment and not a genotypic assessment.
Special-Purpose	DM	Birth date collection using a single date field	N/A	10	ETHNIC	Ethnicity	A social group characterized by a distinctive social and cultural tradition maintained from generation to generation, a common history and origin and a sense of identification with the group; members of the group have distinctive features in their way of life, shared experiences and often a common genetic heritage; these features may be reflected in their experience of health and disease..	Do you consider yourself Hispanic/Latino or not Hispanic/Latino?	Ethnicity	Char	O	Study participants should self-report ethnicity, with ethnicity being asked about before race.	ETHNIC	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(ETHNIC)	N/A	For use when values are being collected using the exact non-extensible ETHNIC codelist (C66790) values. Sponsors should refer to the FDA guidance on collecting race and ethnicity data in clinical trials. ^a
Special-Purpose	DM	Birth date collection using a single date field	N/A	11	CETHNIC	Collected Ethnicity	A social group characterized by a distinctive social and cultural tradition	What is the ethnicity of the subject?	Ethnicity	Char	O	Study participants should self-report ethnicity, with ethnicity being	SUPPDM.QVAL	This does not map directly to an SDTMIG variable. This information could be submitted in a SUPPDM dataset as the value of SUPPDM.QVAL where	(ETHNICC)	N/A	Use when values are collected using the NCI Thesaurus codelist for Ethnicity As

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
							maintained from generation to generation, a common history and origin and a sense of identification with the group; members of the group have distinctive features in their way of life, shared experiences, and often a common genetic heritage; these features may be reflected in their experience of health and disease.					asked about before race.		SUPPDM.QNAM = "CETHNIC" and SUPPDM.QLABEL= "Collected Ethnicity". See SDTMIG DM domain. Refer to the current SDTM and SDTMIG for instructions on placement of non-standard variables in SDTM domains.			Collected (C128690), the extended HL7 hierarchy of codelist values, or other regulatory agency-specific controlled terminology for ethnic group. Sponsors may append a suffix to denote multiple collected ethnicities (e.g. CETHNIC1, CETHNIC2).
Special-Purpose	DM	Birth date collection using a single date field	N/A	12	RACE	Race	An arbitrary classification based on physical characteristics; a group of persons related by common descent or heredity (US Center for Disease Control).	Which of the following five racial designations best describes you? (More than one choice is acceptable.)	Race	Char	R/C	Study participants should self-report race, with race being asked about after ethnicity.	RACE	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(RACE)	N/A	In the US, use RACE when collecting the 5 FDA designations for race (i.e., American Indian or Alaska Native, Asian, Black or African American, Native Hawaiian or Other Pacific Islander, White). ^a See also the SDTMIG DM domain. For studies where data are collected outside the US, the recommended categories are the same except for Black instead of Black or African American. If multiple races are collected, an alternate sponsor-defined variable structure would be required. Sponsors may record multiple self-reported races for a subject by appending a suffix to denote multiple collected races (e.g., RACE1, RACE2) and populate RACE with the value MULTIPLE.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Special-Purpose	DM	Birth date collection using a single date field	N/A	13	CRACE	Collected Race	An arbitrary classification based on physical characteristics; a group of persons related by common descent or heredity (US Centers for Disease Control).	Which of the following racial designations best describes you? (More than one choice is acceptable.)	Race	Char	R/C	Study participants should self-report race, with race being asked about after ethnicity. (The FDA guidance suggests that individuals be permitted to designate a multiracial identity. Check all that apply at the time of collection).	SUPPDM.QVAL	This does not map directly to an SDTMIG variable. This information could be submitted in a SUPPDM dataset as the value of SUPPDM.QVAL when SUPPDM.QNAM = "CRACE" and SUPPDM.QLABEL="Collected Race". See SDTMIG DM Domain.	(RACEC)	N/A	Use CRACE when more detailed race categorizations are desired (e.g., more than the 5 FDA). The HL7 Reference Information Model Structural Vocabulary Tables are designed to collapse up to the SDTM variable RACE with CT (e.g., American Indian or Alaska Native Asian, Black or African American, Native Hawaiian or Other Pacific Islander, White). If sponsors choose to map the extended Race codelist values to RACE CT (e.g., Japanese to Asian), then this mapped variable would be reported using the SDTMIG variable RACE. Sponsors should refer to the FDA guidance. ^a For studies where data are collected outside the US, the recommended categories are the same except for Black instead of Black or African American. If multiple races are collected, an alternate sponsor-defined variable structure would be required. Sponsors may record multiple self-reported races for a subject by appending a suffix to denote multiple collected races (e.g. CRACE1, CRACE2) and populate CRACE with the value MULTIPLE.
Special-Purpose	DM	Birth date collection using a	N/A	14	RACEOTH	Race Other	A free-text field to be used when none of the	What was the other race?	Specify Other Race	Char	O	If none of the preprinted values for RACE are	SUPPDM.QVAL	This does not map directly to an SDTMIG variable. This information could be submitted in	N/A	N/A	When creating the DM form, it is suggested that the

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
		single date field					preprinted values for RACE are applicable or if another, unprinted selection should be added to those preprinted values.					applicable or if another, unprinted selection should be added to those preprinted values, record the value in this free-text field.		a SUPPDM dataset as the value of SUPPDM.QVAL where SUPPDM.QNAM = "RACEOTH" and SUPP.QLABEL="RACE OTHER". See SDTMIG DM Domain. Refer to the current SDTM and SDTMIG for instructions on placement of non-standard variables in SDTM domains.			5 standard FDA race categories be included. Sponsors may choose to include another value ("Specify, Other") with a free-text field for extending the list of values. The RACEOTH variable contains the free text added by the site. The value(s) added in the optional variable might or might not collapse up into one of the 5 FDA categories. See SDTMIG DM domain examples for reporting this implementation.

^aCollection of Race and Ethnicity Data in Clinical Trials. Guidance for Industry and Food and Drug Administration Staff. 2016; US Department of Human Health and Services, Food and Drug Administration. Accessed December 21, 2020. <https://www.fda.gov/media/75453/download>

Assumptions for the CDASHIG DM - Demographics Domain

The CDASHIG DM domain is a special-purpose domain that collects specific data elements that are mapped to the SDTMIG DM domain. Additional data elements that are not within the scope of the demographics must be mapped to other domains.

Example CRFs for the CDASHIG DM - Demographics Domain

Example 1

Title: Demographics

Record the date of birth to the level of precision known (e.g., day/month/year, year, month/year) in this format (DD-MON-YYYY).

Record the appropriate sex (e.g., Female, Male).

Study participants should self-report ethnicity, with ethnicity being asked about before race.

Study participants should self-report race, with race being asked about after ethnicity.

Birth Date

BRTHDATBRTHDTC

What is the sex of the subject?
SEX

Do you consider yourself Hispanic/Latino or not Hispanic/Latino?
ETHNIC

Which of the following 5 racial designations best describes you? (More than one choice is acceptable.)
RACE

☐ Male

☐ Female

☐ Unknown

☐ Undifferentiated

<SEX codelist>

☐ Hispanic or Latino

☐ Not Hispanic or Latino

☐ Not Reported

<ETHNIC codelist>

☐ American Indian or Alaska Native

☐ Asian

☐ Black or African American

☐ Native Hawaiian or Other Pacific Islander

☐ White

<RACE codelist>

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTM Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
BRTHDAT	1	What is the subject's date of birth?	Birth Date	Record the date of birth to the level of precision known (e.g., day/month/year, year, month/year) in this format (DD-MON-YYYY).	Date	BRTHDTC							
SEX	2	What is the sex of the subject?	Sex	Record the appropriate sex (e.g., Female, Male).	Text	SEX		(SEX)	Male; Female; Unknown; Undifferentiated			radio	
ETHNIC	3	Do you consider yourself Hispanic/Latino or not Hispanic/Latino?	Ethnicity	Study participants should self-report ethnicity, with ethnicity being asked about before race.	Text	ETHNIC		(ETHNIC)	Hispanic or Latino; Not Hispanic or Latino; Not Reported			radio	
RACE	4	Which of the following 5 racial designations best describes you? (More than one choice is acceptable.)	Race	Study participants should self-report race, with race being asked about after ethnicity.	Text	RACE		(RACE)	American Indian or Alaska Native; Asian; Black or African American; Native Hawaiian or Other Pacific Islander; White			check	

Sponsors may append a suffix to denote multiple collected races and ethnicities (e.g. RACE1, RACE2, CRACE1, CRACE2, CETHNIC1, CETHNIC2). The appended suffixes shown for the CDASH variables QNAM and QLABEL in this aCRF are only examples and are not indicative of any prescribed values that must be followed.

Title: Demographics with Additional Granularity for Ethnicity and Race

Record the subject's year of birth (e.g., YYYY, a 4-digit year).	What is the subject's year of birth? BRTHDAT BRTHDTG	
Record the appropriate sex (e.g., Female, Male).	What is the sex of the subject? SEX	☐ Male ☐ Female ☐ Unknown ☐ Undifferentiated <SEX codelist>
Study participants should self-report ethnicity, with ethnicity being asked about before race.	Do you consider yourself Hispanic/Latino or not Hispanic/Latino? ETHNIC	☐ Hispanic or Latino ☐ Not Hispanic or Latino ☐ Not Reported <ETHNIC codelist>
Select each value that applies if the subject answered "Hispanic or Latino".	What is the ethnicity of the subject? CETHNIC1 SUPPDM.QVAL where SUPPDM.QNAM = ETHNIC1 and SUPPDM.QLABEL = Collected Ethnicity 1.	☐ CENTRAL AMERICAN <ETHNICC codelist>
Select each value that applies if the subject answered "Hispanic or Latino".	What is the ethnicity of the subject? CETHNIC2 SUPPDM.QVAL where SUPPDM.QNAM = ETHNIC2 and SUPPDM.QLABEL = Collected Ethnicity 2.	☐ CUBAN <ETHNICC codelist>
Select each value that applies if the subject answered "Hispanic or Latino".	What is the ethnicity of the subject? CETHNIC3 SUPPDM.QVAL where SUPPDM.QNAM = ETHNIC3 and SUPPDM.QLABEL = Collected Ethnicity 3.	☐ CUBAN AMERICAN <ETHNICC codelist>
Select each value that applies if the subject answered "Hispanic or Latino".	What is the ethnicity of the subject? CETHNIC4 SUPPDM.QVAL where SUPPDM.QNAM = ETHNIC4 and SUPPDM.QLABEL = Collected Ethnicity 4.	☐ LATIN AMERICAN <ETHNICC codelist>
Select each value that applies if the subject answered "Hispanic or Latino".	What is the ethnicity of the subject? CETHNIC5 SUPPDM.QVAL where SUPPDM.QNAM = ETHNIC5 and SUPPDM.QLABEL = Collected Ethnicity 5.	☐ MEXICAN <ETHNICC codelist>
Select each value that applies if the subject answered "Hispanic or Latino".	What is the ethnicity of the subject? CETHNIC6 SUPPDM.QVAL where SUPPDM.QNAM = ETHNIC6 and SUPPDM.QLABEL = Collected Ethnicity 6.	☐ MEXICAN AMERICAN <ETHNICC codelist>
Select each value that applies if the subject answered "Hispanic or Latino".	What is the ethnicity of the subject? CETHNIC7 SUPPDM.QVAL where SUPPDM.QNAM = ETHNIC7 and SUPPDM.QLABEL = Collected Ethnicity 7.	☐ PUERTO RICAN <ETHNICC codelist>
Select each value that applies if the subject answered "Hispanic or Latino".	What is the ethnicity of the subject? CETHNIC8 SUPPDM.QVAL where SUPPDM.QNAM = ETHNIC8 and SUPPDM.QLABEL = Collected Ethnicity 8.	☐ SOUTH AMERICAN <ETHNICC codelist>
Select each value that applies if the subject answered "HISPANIC OR LATINO".	What is the ethnicity of the subject? CETHNIC9 SUPPDM.QVAL where SUPPDM.QNAM = ETHNIC9 and SUPPDM.QLABEL = Collected Ethnicity 9.	☐ SPANISH <ETHNICC codelist>
Study participants should self-report race, with race being asked about after ethnicity.	Which of the following racial designations best describes you? (More than 1 choice is acceptable.) RACE1 RACE	☐ AMERICAN INDIAN OR ALASKA NATIVE <RACE codelist>
Study participants should self-report race, with race being asked about after ethnicity.	Which of the following racial designations best describes you? (More than 1 choice is acceptable.) RACE2 RACE	☐ ASIAN <RACE codelist>
Study participants should self-report race, with race being asked about after ethnicity.	Which of the following racial designations best describes you? (More than 1 choice is acceptable.) RACE3 RACE	☐ BLACK OR AFRICAN AMERICAN <RACE codelist>
Study participants should self-report race, with race being asked about after ethnicity.	Which of the following racial designations best describes you? (More than 1 choice is acceptable.) RACE4 RACE	☐ NATIVE HAWAIIAN OR OTHER PACIFIC ISLANDER <RACE codelist>
Study participants should self-report race, with race being asked about after ethnicity.	Which of the following racial designations best describes you? (More than 1 choice is acceptable.) RACE5 RACE	☐ WHITE <RACE codelist>
Study participants should self-report race, with race being asked about after ethnicity.	Which of the following racial designations best describes you? (More than 1 choice is acceptable.) RACE6 RACE	☐ NOT REPORTED <RACE codelist>
Study participants should self-report race, with race being asked about after ethnicity.	Which of the following racial designations best describes you? (More than 1 choice is acceptable.) RACE7 RACE	☐ UNKNOWN <RACE codelist>
Select each value that applies if the subject answered "AMERICAN INDIAN OR ALASKA NATIVE".	Which of the following racial designations best describes you? (More than 1 choice is acceptable.) CRACE1 SUPPDM.QVAL where SUPPDM.QNAM = CRACE1 and SUPPDM.QLABEL = Collected Race 1.	☐ ALASKA NATIVE <RACEC codelist>
Select each value that applies if the subject answered "AMERICAN INDIAN OR ALASKA NATIVE".	Which of the following racial designations best describes you? (More than 1 choice is acceptable.) CRACE2 SUPPDM.QVAL where SUPPDM.QNAM = CRACE2 and SUPPDM.QLABEL = Collected Race 2.	☐ AMERICAN INDIAN <RACEC codelist>
Select each value that applies if the subject answered "AMERICAN INDIAN OR ALASKA NATIVE".	Which of the following racial designations best describes you? (More than 1 choice is acceptable.) CRACE3 SUPPDM.QVAL where SUPPDM.QNAM = CRACE3 and SUPPDM.QLABEL = Collected Race 3.	☐ CARIBBEAN INDIAN <RACEC codelist>
Select each value that applies if the subject answered "AMERICAN INDIAN OR ALASKA NATIVE".	Which of the following racial designations best describes you? (More than 1 choice is acceptable.) CRACE4 SUPPDM.QVAL where SUPPDM.QNAM = CRACE4 and SUPPDM.QLABEL = Collected Race 4.	☐ CENTRAL AMERICAN INDIAN <RACEC codelist>
Select each value that applies if the subject answered "AMERICAN INDIAN OR ALASKA NATIVE".	Which of the following racial designations best describes you? (More than 1 choice is acceptable.) CRACE5 SUPPDM.QVAL where SUPPDM.QNAM = CRACE5 and SUPPDM.QLABEL = Collected Race 5.	☐ GREENLAND INUIT <RACEC codelist>
Select each value that applies if the subject answered "AMERICAN INDIAN OR ALASKA NATIVE".	Which of the following racial designations best describes you? (More than 1 choice is acceptable.) CRACE6 SUPPDM.QVAL where SUPPDM.QNAM = CRACE6 and SUPPDM.QLABEL = Collected Race 6.	☐ INUPIAT INUIT <RACEC codelist>

© 2023 Clinical Data Interchange Standards Consortium, Inc. All rights reserved
2023-09-28

Page 54

© 2023 Clinical Data Interchange Standards Consortium, Inc. All rights reserved
2023-09-28

Select each value that applies if the subject answered "WHITE".	Which of the following racial designations best describes you? (More than 1 choice is acceptable.) CRACE64 SUPPDM.QVAL where SUPPDM.QNAM = CRACE64 and SUPPDM.QLABEL = Collected Race 64.	☐ ARAB <RACEC codelist>
Select each value that applies if the subject answered "WHITE".	Which of the following racial designations best describes you? (More than 1 choice is acceptable.) CRACE65 SUPPDM.QVAL where SUPPDM.QNAM = CRACE65 and SUPPDM.QLABEL = Collected Race 65.	☐ EASTERN EUROPEAN <RACEC codelist>
Select each value that applies if the subject answered "WHITE".	Which of the following racial designations best describes you? (More than 1 choice is acceptable.) CRACE66 SUPPDM.QVAL where SUPPDM.QNAM = CRACE66 and SUPPDM.QLABEL = Collected Race 66.	☐ EUROPEAN <RACEC codelist>
Select each value that applies if the subject answered "WHITE".	Which of the following racial designations best describes you? (More than 1 choice is acceptable.) CRACE67 SUPPDM.QVAL where SUPPDM.QNAM = CRACE67 and SUPPDM.QLABEL = Collected Race 67.	☐ MEDITERRANEAN <RACEC codelist>
Select each value that applies if the subject answered "WHITE".	Which of the following racial designations best describes you? (More than 1 choice is acceptable.) CRACE68 SUPPDM.QVAL where SUPPDM.QNAM = CRACE68 and SUPPDM.QLABEL = Collected Race 68.	☐ MIDDLE EASTERN <RACEC codelist>
Select each value that applies if the subject answered "WHITE".	Which of the following racial designations best describes you? (More than 1 choice is acceptable.) CRACE69 SUPPDM.QVAL where SUPPDM.QNAM = CRACE69 and SUPPDM.QLABEL = Collected Race 69.	☐ NORTH AFRICAN <RACEC codelist>
Select each value that applies if the subject answered "WHITE".	Which of the following racial designations best describes you? (More than 1 choice is acceptable.) CRACE70 SUPPDM.QVAL where SUPPDM.QNAM = CRACE70 and SUPPDM.QLABEL = Collected Race 70.	☐ NORTHERN EUROPEAN <RACEC codelist>
Select each value that applies if the subject answered "WHITE".	Which of the following racial designations best describes you? (More than 1 choice is acceptable.) CRACE71 SUPPDM.QVAL where SUPPDM.QNAM = CRACE71 and SUPPDM.QLABEL = Collected Race 71.	☐ RUSSIAN <RACEC codelist>
Select each value that applies if the subject answered "WHITE".	Which of the following racial designations best describes you? (More than 1 choice is acceptable.) CRACE72 SUPPDM.QVAL where SUPPDM.QNAM = CRACE72 and SUPPDM.QLABEL = Collected Race 72.	☐ WESTERN EUROPEAN <RACEC codelist>
Select each value that applies if the subject answered "WHITE".	Which of the following racial designations best describes you? (More than 1 choice is acceptable.) CRACE73 SUPPDM.QVAL where SUPPDM.QNAM = CRACE73 and SUPPDM.QLABEL = Collected Race 73.	☐ WHITE CARIBBEAN <RACEC codelist>
Select each value that applies if the subject answered "WHITE".	Which of the following racial designations best describes you? (More than 1 choice is acceptable.) CRACE74 SUPPDM.QVAL where SUPPDM.QNAM = CRACE74 and SUPPDM.QLABEL = Collected Race 74.	☐ WHITE CENTRAL AMERICAN <RACEC codelist>
Select each value that applies if the subject answered "WHITE".	Which of the following racial designations best describes you? (More than 1 choice is acceptable.) CRACE75 SUPPDM.QVAL where SUPPDM.QNAM = CRACE75 and SUPPDM.QLABEL = Collected Race 75.	☐ WHITE SOUTH AMERICAN <RACEC codelist>

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTM Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-specified Value	Query Display	List Style	Hidden
BRTHDAT	1	What is the subject's year of birth?	Birth Date	Record the subject's year of birth (e.g., YYYY, a 4-digit year).	Text	BRTHDTC							
SEX	2	What is the sex of the subject?	Sex	Record the appropriate sex (e.g., Female, Male).	Text	SEX		(SEX)	Male; Female; Unknown; Undifferentiated			radio	
ETHNIC	3	Do you consider yourself Hispanic/Latino or not Hispanic/Latino?	Ethnicity	Study participants should self-report ethnicity, with ethnicity being asked about before race.	Text	ETHNIC		(ETHNIC)	Hispanic or Latino; Not Hispanic or Latino; Not Reported			radio	
CETHNIC1	4	What is the ethnicity of the subject?	Ethnicity	Select each value that applies if the subject answered "Hispanic or Latino".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = ETHNIC1 and SUPPDM.QLABEL = Collected Ethnicity 1.	(ETHNICC)	CENTRAL AMERICAN			checkbox	
CETHNIC2	5	What is the ethnicity of the subject?	Ethnicity	Select each value that applies if the subject answered "Hispanic or Latino".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = ETHNIC2 and SUPPDM.QLABEL = Collected Ethnicity 2.	(ETHNICC)	CUBAN			checkbox	
CETHNIC3	6	What is the ethnicity of the subject?	Ethnicity	Select each value that applies if the subject answered "Hispanic or Latino".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = ETHNIC3 and SUPPDM.QLABEL = Collected Ethnicity 3.	(ETHNICC)	CUBAN AMERICAN			checkbox	
CETHNIC4	8	What is the ethnicity of the subject?	Ethnicity	Select each value that applies if the subject answered "Hispanic or Latino".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = ETHNIC4 and SUPPDM.QLABEL = Collected Ethnicity 4.	(ETHNICC)	LATIN AMERICAN			checkbox	
CETHNIC5	9	What is the ethnicity of the subject?	Ethnicity	Select each value that applies if the subject answered "Hispanic or Latino".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = ETHNIC5 and SUPPDM.QLABEL = Collected Ethnicity 5.	(ETHNICC)	MEXICAN			checkbox	

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTM Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-specified Value	Query Display	List Style	Hidden
CETHNIC6	10	What is the ethnicity of the subject?	Ethnicity	Select each value that applies if the subject answered "Hispanic or Latino".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = ETHNIC6 and SUPPDM.QLABEL = Collected Ethnicity 6.	(ETHNICC)	MEXICAN AMERICAN			checkbox	
CETHNIC7	11	What is the ethnicity of the subject?	Ethnicity	Select each value that applies if the subject answered "Hispanic or Latino".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = ETHNIC7 and SUPPDM.QLABEL = Collected Ethnicity 7.	(ETHNICC)	PUERTO RICAN			checkbox	
CETHNIC8	12	What is the ethnicity of the subject?	Ethnicity	Select each value that applies if the subject answered "Hispanic or Latino".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = ETHNIC8 and SUPPDM.QLABEL = Collected Ethnicity 8.	(ETHNICC)	SOUTH AMERICAN			checkbox	
CETHNIC9	13	What is the ethnicity of the subject?	Ethnicity	Select each value that applies if the subject answered "HISPANIC OR LATINO".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = ETHNIC9 and SUPPDM.QLABEL = Collected Ethnicity 9.	(ETHNICC)	SPANISH			checkbox	
RACE1	14	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Study participants should self-report race, with race being asked about after ethnicity.	Text	RACE		(RACE)	AMERICAN INDIAN OR ALASKA NATIVE			checkbox	
RACE2	15	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Study participants should self-report race, with race being asked about after ethnicity.	Text	RACE		(RACE)	ASIAN			checkbox	
RACE3	16	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Study participants should self-report race, with race being asked about after ethnicity.	Text	RACE		(RACE)	BLACK OR AFRICAN AMERICAN			checkbox	
RACE4	17	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Study participants should self-report race, with race being asked about after ethnicity.	Text	RACE		(RACE)	NATIVE HAWAIIAN OR OTHER PACIFIC ISLANDER			checkbox	
RACE5	18	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Study participants should self-report race, with race being asked about after ethnicity.	Text	RACE		(RACE)	WHITE			checkbox	
RACE6	19	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Study participants should self-report race, with race being asked about after ethnicity.	Text	RACE		(RACE)	NOT REPORTED			checkbox	
RACE7	20	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Study participants should self-report race, with race being asked about after ethnicity.	Text	RACE		(RACE)	UNKNOWN			checkbox	
CRACE1	21	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "AMERICAN INDIAN OR ALASKA NATIVE".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE1 and SUPPDM.QLABEL = Collected Race 1.	(RACEC)	ALASKA NATIVE			checkbox	
CRACE2	22	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "AMERICAN INDIAN OR ALASKA NATIVE".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE2 and SUPPDM.QLABEL = Collected Race 2.	(RACEC)	AMERICAN INDIAN			checkbox	
CRACE3	23	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "AMERICAN INDIAN OR ALASKA NATIVE".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE3 and SUPPDM.QLABEL = Collected Race 3.	(RACEC)	CARIBBEAN INDIAN			checkbox	
CRACE4	24	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "AMERICAN INDIAN OR ALASKA NATIVE".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE4 and SUPPDM.QLABEL = Collected Race 4.	(RACEC)	CENTRAL AMERICAN INDIAN			checkbox	
CRACE5	25	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "AMERICAN INDIAN OR ALASKA NATIVE".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE5 and SUPPDM.QLABEL = Collected Race 5.	(RACEC)	GREENLAND INUIT			checkbox	
CRACE6	26	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "AMERICAN INDIAN OR ALASKA NATIVE".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE6 and SUPPDM.QLABEL = Collected Race 6.	(RACEC)	INUPIAT INUIT			checkbox	
CRACE7	27	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "AMERICAN INDIAN OR ALASKA NATIVE".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE7 and SUPPDM.QLABEL = Collected Race 7.	(RACEC)	SIBERIAN ESKIMO			checkbox	
CRACE8	28	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "AMERICAN INDIAN OR ALASKA NATIVE".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE8 and SUPPDM.QLABEL = Collected Race 8.	(RACEC)	SOUTH AMERICAN INDIAN			checkbox	

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTM Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-specified Value	Query Display	List Style	Hidden
CRACE9	29	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "AMERICAN INDIAN OR ALASKA NATIVE".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE9 and SUPPDM.QLABEL = Collected Race 9.	(RACEC)	YUPIK ESKIMO			checkbox	
CRACE10	30	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "ASIAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE10 and SUPPDM.QLABEL = Collected Race 10.	(RACEC)	ASIAN AMERICAN			checkbox	
CRACE11	31	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "ASIAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE11 and SUPPDM.QLABEL = Collected Race 11.	(RACEC)	ASIAN INDIAN			checkbox	
CRACE12	32	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "ASIAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE12 and SUPPDM.QLABEL = Collected Race 12.	(RACEC)	BANGLADESHI			checkbox	
CRACE13	33	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "ASIAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE13 and SUPPDM.QLABEL = Collected Race 13.	(RACEC)	BHUTANESE			checkbox	
CRACE14	34	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "ASIAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE14 and SUPPDM.QLABEL = Collected Race 14.	(RACEC)	BURMESE			checkbox	
CRACE15	35	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "ASIAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE15 and SUPPDM.QLABEL = Collected Race 15.	(RACEC)	CAMBODIAN			checkbox	
CRACE16	36	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "ASIAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE16 and SUPPDM.QLABEL = Collected Race 16.	(RACEC)	CHINESE			checkbox	
CRACE17	37	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "ASIAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE17 and SUPPDM.QLABEL = Collected Race 17.	(RACEC)	FILIPINO			checkbox	
CRACE18	38	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "ASIAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE18 and SUPPDM.QLABEL = Collected Race 18.	(RACEC)	HMONG			checkbox	
CRACE19	39	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "ASIAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE19 and SUPPDM.QLABEL = Collected Race 19.	(RACEC)	INDONESIAN			checkbox	
CRACE20	40	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "ASIAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE20 and SUPPDM.QLABEL = Collected Race 20.	(RACEC)	IWO JIMAN			checkbox	
CRACE21	41	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "ASIAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE21 and SUPPDM.QLABEL = Collected Race 21.	(RACEC)	JAPANESE			checkbox	
CRACE22	42	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "ASIAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE22 and SUPPDM.QLABEL = Collected Race 22.	(RACEC)	KOREAN			checkbox	
CRACE23	43	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "ASIAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE23 and SUPPDM.QLABEL = Collected Race 23.	(RACEC)	LAOTIAN			checkbox	
CRACE24	44	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "ASIAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE24 and SUPPDM.QLABEL = Collected Race 24.	(RACEC)	MALAGASY			checkbox	
CRACE25	45	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "ASIAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE25 and SUPPDM.QLABEL = Collected Race 25.	(RACEC)	MALAYSIAN			checkbox	
CRACE26	46	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "ASIAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE26 and SUPPDM.QLABEL = Collected Race 26.	(RACEC)	MALDIVIAN			checkbox	
CRACE27	47	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "ASIAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE27 and SUPPDM.QLABEL = Collected Race 27.	(RACEC)	MONGOLIAN			checkbox	

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTM Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-specified Value	Query Display	List Style	Hidden
CRACE28	48	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "ASIAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE28 and SUPPDM.QLABEL = Collected Race 28.	(RACEC)	NEPALESE			checkbox	
CRACE29	49	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "ASIAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE29 and SUPPDM.QLABEL = Collected Race 29.	(RACEC)	OKINAWAN			checkbox	
CRACE30	50	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "ASIAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE30 and SUPPDM.QLABEL = Collected Race 30.	(RACEC)	PAKISTANI			checkbox	
CRACE31	51	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "ASIAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE31 and SUPPDM.QLABEL = Collected Race 31.	(RACEC)	SINGAPOREAN			checkbox	
CRACE32	52	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "ASIAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE32 and SUPPDM.QLABEL = Collected Race 32.	(RACEC)	SRI LANKAN			checkbox	
CRACE33	53	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "ASIAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE33 and SUPPDM.QLABEL = Collected Race 33.	(RACEC)	TAIWANESE			checkbox	
CRACE34	54	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "ASIAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE34 and SUPPDM.QLABEL = Collected Race 34.	(RACEC)	THAI			checkbox	
CRACE35	55	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "ASIAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE35 and SUPPDM.QLABEL = Collected Race 35.	(RACEC)	VIETNAMESE			checkbox	
CRACE36	56	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "BLACK OR AFRICAN AMERICAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE36 and SUPPDM.QLABEL = Collected Race 36.	(RACEC)	AFRICAN			checkbox	
CRACE37	57	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "BLACK OR AFRICAN AMERICAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE37 and SUPPDM.QLABEL = Collected Race 37.	(RACEC)	AFRICAN AMERICAN			checkbox	
CRACE38	58	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "BLACK OR AFRICAN AMERICAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE38 and SUPPDM.QLABEL = Collected Race 38.	(RACEC)	AFRICAN CARIBBEAN			checkbox	
CRACE39	59	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "BLACK OR AFRICAN AMERICAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE39 and SUPPDM.QLABEL = Collected Race 39.	(RACEC)	BAHAMIAN			checkbox	
CRACE40	60	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "BLACK OR AFRICAN AMERICAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE40 and SUPPDM.QLABEL = Collected Race 40.	(RACEC)	BARBADIAN			checkbox	
CRACE41	61	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "BLACK OR AFRICAN AMERICAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE41 and SUPPDM.QLABEL = Collected Race 41.	(RACEC)	BLACK			checkbox	
CRACE42	62	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "BLACK OR AFRICAN AMERICAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE42 and SUPPDM.QLABEL = Collected Race 42.	(RACEC)	BLACK CENTRAL AMERICAN			checkbox	
CRACE43	63	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "BLACK OR AFRICAN AMERICAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE43 and SUPPDM.QLABEL = Collected Race 43.	(RACEC)	BLACK SOUTH AMERICAN			checkbox	
CRACE44	64	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "BLACK OR AFRICAN AMERICAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE44 and SUPPDM.QLABEL = Collected Race 44.	(RACEC)	BOTSWANAN			checkbox	
CRACE45	65	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "BLACK OR AFRICAN AMERICAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE45 and SUPPDM.QLABEL = Collected Race 45.	(RACEC)	DOMINICA ISLANDER			checkbox	
CRACE46	66	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "BLACK OR AFRICAN AMERICAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE46 and SUPPDM.QLABEL = Collected Race 46.	(RACEC)	DOMINICAN			checkbox	

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTM Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-specified Value	Query Display	List Style	Hidden
CRACE47	67	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "BLACK OR AFRICAN AMERICAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE47 and SUPPDM.QLABEL = Collected Race 47.	(RACEC)	ETHIOPIAN			checkbox	
CRACE48	68	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "BLACK OR AFRICAN AMERICAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE48 and SUPPDM.QLABEL = Collected Race 48.	(RACEC)	HAITIAN			checkbox	
CRACE49	69	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "BLACK OR AFRICAN AMERICAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE49 and SUPPDM.QLABEL = Collected Race 49.	(RACEC)	JAMAICAN			checkbox	
CRACE50	70	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "BLACK OR AFRICAN AMERICAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE50 and SUPPDM.QLABEL = Collected Race 50.	(RACEC)	LIBERIAN			checkbox	
CRACE51	71	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "BLACK OR AFRICAN AMERICAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE51 and SUPPDM.QLABEL = Collected Race 51.	(RACEC)	MALAGASY			checkbox	
CRACE52	72	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "BLACK OR AFRICAN AMERICAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE52 and SUPPDM.QLABEL = Collected Race 52.	(RACEC)	NAMIBIAN			checkbox	
CRACE53	73	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "BLACK OR AFRICAN AMERICAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE53 and SUPPDM.QLABEL = Collected Race 53.	(RACEC)	NIGERIAN			checkbox	
CRACE54	74	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "BLACK OR AFRICAN AMERICAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE54 and SUPPDM.QLABEL = Collected Race 54.	(RACEC)	TOBAGOAN			checkbox	
CRACE55	75	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "BLACK OR AFRICAN AMERICAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE55 and SUPPDM.QLABEL = Collected Race 55.	(RACEC)	TRINIDADIAN			checkbox	
CRACE56	76	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "BLACK OR AFRICAN AMERICAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE56 and SUPPDM.QLABEL = Collected Race 56.	(RACEC)	WEST INDIAN			checkbox	
CRACE57	77	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "BLACK OR AFRICAN AMERICAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE57 and SUPPDM.QLABEL = Collected Race 57.	(RACEC)	ZAIREAN			checkbox	
CRACE58	78	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "BLACK OR AFRICAN AMERICAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE58 and SUPPDM.QLABEL = Collected Race 58.	(RACEC)	SOUTHERN AFRICAN COLOURED			checkbox	
CRACE59	79	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "BLACK OR AFRICAN AMERICAN".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE59 and SUPPDM.QLABEL = Collected Race 59.	(RACEC)	KHOISAN			checkbox	
CRACE60	80	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "NATIVE HAWAIIAN OR OTHER PACIFIC ISLANDER".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE60 and SUPPDM.QLABEL = Collected Race 60.	(RACEC)	MELANESIAN			checkbox	
CRACE61	81	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "NATIVE HAWAIIAN OR OTHER PACIFIC ISLANDER".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE61 and SUPPDM.QLABEL = Collected Race 61.	(RACEC)	MICRONESIAN			checkbox	
CRACE62	82	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "NATIVE HAWAIIAN OR OTHER PACIFIC ISLANDER".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE62 and SUPPDM.QLABEL = Collected Race 62.	(RACEC)	POLYNESIAN			checkbox	
CRACE63	83	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "NATIVE HAWAIIAN OR OTHER PACIFIC ISLANDER".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE63 and SUPPDM.QLABEL = Collected Race 63.	(RACEC)	ABORIGINAL AUSTRALIAN			checkbox	
CRACE64	84	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "WHITE".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE64 and SUPPDM.QLABEL = Collected Race 64.	(RACEC)	ARAB			checkbox	
CRACE65	85	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "WHITE".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE65 and SUPPDM.QLABEL = Collected Race 65.	(RACEC)	EASTERN EUROPEAN			checkbox	

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTM Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-specified Value	Query Display	List Style	Hidden
CRACE66	86	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "WHITE".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE66 and SUPPDM.QLABEL = Collected Race 66.	(RACEC)	EUROPEAN			checkbox	
CRACE67	87	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "WHITE".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE67 and SUPPDM.QLABEL = Collected Race 67.	(RACEC)	MEDITERRANEAN			checkbox	
CRACE68	88	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "WHITE".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE68 and SUPPDM.QLABEL = Collected Race 68.	(RACEC)	MIDDLE EASTERN			checkbox	
CRACE69	89	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "WHITE".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE69 and SUPPDM.QLABEL = Collected Race 69.	(RACEC)	NORTH AFRICAN			checkbox	
CRACE70	90	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "WHITE".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE70 and SUPPDM.QLABEL = Collected Race 70.	(RACEC)	NORTHERN EUROPEAN			checkbox	
CRACE71	91	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "WHITE".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE71 and SUPPDM.QLABEL = Collected Race 71.	(RACEC)	RUSSIAN			checkbox	
CRACE72	92	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "WHITE".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE72 and SUPPDM.QLABEL = Collected Race 72.	(RACEC)	WESTERN EUROPEAN			checkbox	
CRACE73	93	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "WHITE".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE73 and SUPPDM.QLABEL = Collected Race 73.	(RACEC)	WHITE CARIBBEAN			checkbox	
CRACE74	94	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "WHITE".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE74 and SUPPDM.QLABEL = Collected Race 74.	(RACEC)	WHITE CENTRAL AMERICAN			checkbox	
CRACE75	95	Which of the following racial designations best describes you? (More than 1 choice is acceptable.)	Race	Select each value that applies if the subject answered "WHITE".	Text	SUPPDM.QVAL	SUPPDM.QVAL where SUPPDM.QNAM = CRACE75 and SUPPDM.QLABEL = Collected Race 75.	(RACEC)	WHITE SOUTH AMERICAN			checkbox	

8 General Observation Classes

This section reflects common practices implemented by a significant number of the organizations/companies that provided information and examples. Most subject-level data collected during a study are represented using 1 of the 3 SDTM general observation classes (Interventions, Events, and Findings). Section 8.1 describes the CDASH Intervention domains, Section 8.2 the CDASH Events domains, and Section 8.3 the CDASH Findings domains.

Within each class, domains are presented in alphabetical order. (See SDTMIG Section 6 for additional information on these classes.) Within each domain, a link is provided to the CDASHIG domain metadata table; these tables include the variables that are commonly used by a significant number of the organizations/companies that provided information and examples.

There are many new SDTM domain-specific variables that have been added to the Cell Phenotype Findings (CP) and Genetic Findings (GF) domains. It is anticipated that these new SDTM Permissible variables would be provided by the testing laboratory and not directly collected by an investigator. The CDASH Team has decided not to include these new domain variables in CP and GF at this time. See Section 3.4, [How to Create New Data Collection Fields When No CDASHIG Field Has Been Defined](#), for information on extending the CDASH Model as needed. Users should also consult the appropriate SDTMIG for more information on the use of these domain-specific variables.

Implementers may add other variables from the CDASH Model as needed, following the instructions in Section 3.4, [How to Create New Data Collection Fields When No CDASHIG Field Has Been Defined](#).

8.1 Interventions Class Domains

The Interventions class includes CDASH domains that define collection standards for investigational treatments; therapeutic treatments; and procedures that are intentionally administered to the subject either as specified by the study protocol (e.g., exposure), coincident with the study assessment period (e.g., concomitant medications), or self-administered by the subject (e.g., alcohol, tobacco, caffeine).

8.1.1 General CDASH Assumptions for Interventions Domains

1. CDASH --YN variables with the question text "Were there any interventions?" (e.g., "Were there any procedures?", "Were there any concomitant medications?") are intended to assist in the cleaning of data and in confirming that there are no missing values. These variables are not included as part of the SDTM Intervention domains for submission and are annotated as NOT SUBMITTED on the CRF.
2. CDASH --CAT and/or --SCAT are generally not entered on the CRF by the site. Implementers may prepopulate and display these category values to help the site understand what data should be recorded on the CRF. Implementers may also prepopulate hidden variables with the values assigned within their operational database. Categories and subcategories are determined per protocol design, and could be populated during SDTM submission dataset creation.
3. Date and Time Variables
 - a. CDASH date variables (e.g., --DAT, --STDAT, --ENDAT) are concatenated with CDASH time variables (e.g., --TIM, --STTIM, --ENTIM, if time is applicable) into the appropriate SDTM --DTC variables (e.g., --DTC, --STDTC, --ENDTC) using ISO 8601 format.
 - b. Collecting the time an intervention was started is only appropriate if it can be realistically determined and if there is a scientific reason for needing to know this level of detail. An example is where the subject is under the direct care of the site at the time the intervention was started, and the study design is such that it is important to know the intervention start time with respect to dosing.
4. The CDASH variable -- REASND is used with SDTM variable --STAT only. The value "NOT DONE" in --STAT indicates that the subject was not questioned about the intervention or that data were not collected; it does not mean that the subject had no interventions.

5. The CDASH --SPID variable may be populated by the sponsor's data collection system. If collected, it can be beneficial to use an identifier in a data query to communicate clearly to the site the specific record in question. This field may be populated by the sponsor's data collection system.
6. Coding
 - a. When free-text intervention treatments are recorded, the location may be included in the --TRT variable to facilitate coding (e.g., liver biopsy). Location may be collected when the sponsor needs to identify the specific anatomical location of the intervention. This location information does not need to be removed from the verbatim --TRT when creating SDTMIG submission datasets.
 - b. The non-standard (or SUPPQUAL) variables --ATC1 through --ATC5 and --ATC1CD through --ATC5CD are used only when the intervention is coded using the WHO Anatomical Therapeutic Chemical (ATC) classification system (<https://www.who.int/medicines/regulation/>): 1 = the anatomical main group, 2 = the therapeutic main group, 3 = the therapeutic/pharmacological subgroup, 4 = chemical/therapeutic/pharmacological subgroup, 5 = chemical substance.
 - c. The implementer may also add MedDRA coding elements as NSVs to the Interventions domain if that dictionary is used for coding.
7. Location (--LOC) and related variables (--LAT, --DIR, --PORTOT)
 - a. Because the complete lists of controlled terminology for these variables may be too extensive to be relevant for a particular study CRF, sponsors may choose to include only subsets of the controlled terminology on the CRF.
 - b. --LOC could be a defaulted or hidden field on the CRF for prespecified [--TRT]/Intervention Topic].
8. Relative Timing Variables (see the SDTMIG for more information and details)
 - a. For each study, the sponsor defines the study reference period in the Demographics (DM) domain using SDTMIG variables RFSTDTC and RFENDTC. Other sponsor-specified reference time points can be defined for other data collection situations. The CDASH variables --PRIOR and --ONGO may be collected in lieu of start date or end date.
 - b. The CDASH variable --PRIOR is used to indicate if the --TRT (the topic item) started prior to either the study reference period or another sponsor-defined reference time point. When the study reference period is used as the anchor, --PRIOR may be used to derive a value (from the Controlled Terminology codelist STENRF) into the SDTM relative timing variable --STRF. When populating --STRF, if the value of --PRIOR is "Y", the value of "BEFORE" may be mapped to --STRF. The value in DM.RFSTDTC serves as the anchor for --STRF.
 - c. When a reference time point is used instead of the study reference period, --PRIOR may be used to derive a value into the SDTM relative timing variable --STRTPT. If the value of --PRIOR is "Y", the value of "BEFORE" may be derived into --STRTPT. **Note:** --STRTPT must refer to the "time point anchor" as described in --STTPT. The value in --STTPT can be either text (e.g., "VISIT 1") or a date (in ISO 8601 format).
 - d. The CDASH variable --ONGO is used to indicate if the value in --TRT is continuing beyond the study reference period or beyond another sponsor-defined reference time point. When the study reference period is used as the anchor, --ONGO may be used to derive a value into the SDTM relative timing variable --ENRF. If the value of --ONGO = "Y", the value of "AFTER" may be mapped to --ENRF.
 - e. When a reference time point is used instead of the study reference period, --ONGO may be used to derive a value into the SDTM relative timing variable --ENRTPT. If the value of --ONGO is "Y", the value of "ONGOING" may be mapped to --ENRTPT. **Note:** --ENRTPT must refer to the "time point anchor" as described in --ENTPT. The value in --ENTPT can be either text (e.g., "TRIAL EXIT") or a date (in ISO 8601 format).

8.1.2 AG - Procedure Agents

Description/Overview for the CDASHIG AG - Procedure Agents Domain

The CDASHIG AG domain is used to collect details regarding a substance that may be administered to a study subject to facilitate or enable a study procedure to take place. Typically, such substances would not be applicable to the Concomitant Medications (CM) or other potential Interventions domains because they are not of any therapeutic value (e.g., contrast agent administered to a subject to facilitate a type of diagnostic or imaging procedure, glucose-laden cola administered to a subject as part of a glucose tolerance test in support of a possible diabetes diagnosis).

Specification for the CDASHIG AG - Procedure Agents Domain

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Interventions	AG	N/A	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included into the database or populated during SDTM-based dataset creation before submission.
Interventions	AG	N/A	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted on CRFs that are shipped to each site. EDC: This should be prepopulated.
Interventions	AG	N/A	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What [is/was] the (study) [subject/participant] identifier?	[Subject/Participant] (Identifier)	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system generated. This CDASH variable is typically collected in all CDASH domains.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	However, this CDASH variable is populated only in the SDTM DM domain. For more information, refer to the SDTMIG.
Interventions	AG	N/A	N/A	4	AGCAT	Category for Agent	A grouping of topic-variable values based on user-defined characteristics.	What is the category for the [procedure/assessment agent]?	Procedure Agent Category; NULL	Char	O	Record the procedure agent category, if not preprinted on the CRF.	AGCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Category" can be included as the column header.
Interventions	AG	N/A	N/A	5	AGSCAT	Subcategory for Agent	A sub-division of the AGCAT values based on user-defined characteristics.	What is the subcategory for the [procedure/assessment agent]?	Procedure Agent Subcategory; NULL	Char	O	Record the procedure agent subcategory, if not preprinted on the CRF.	AGSCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be preprinted on the CRF or screen and prepopulated in the data management system. This is not typically a question to which the site would provide an answer.
Interventions	AG	N/A	N/A	6	AGYN	Any Procedure Agent Taken	An indication of whether any procedure/assessment agent(s) were administered.	[Were/Was] there any [procedure/assessment agent(s)] taken/administered?	Any procedure agents	Char	O	Indicate if the subject was administered any procedure agents. If Yes, include the appropriate details where indicated on the CRF.	N/A	Does not map to an SDTMIG variable. The SDTM annotated CRF indicates that this field is NOT SUBMITTED.	(NY)	N/A	The intent/purpose of collecting this field is to help with data cleaning and monitoring. It provides verification that all other fields on the CRF were deliberately left blank.
Interventions	AG	N/A	N/A	7	AGSPID	AG Sponsor-Defined Identifier	A sponsor-defined identifier. In CDASH, this is typically used for preprinted or auto-generated numbers on the	[Sponsor defined question]	[Sponsor defined]	Char	O	If collected on the CRF, sponsor may insert instructions to ensure each record	AGSPID	Maps directly to the SDTMIG variable listed in the SDTMIG Target	N/A	N/A	Because SPID is a sponsor-defined identifier, conformance to

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
							CRF, or any other type of identifier that does not already have a defined CDASH identifier field.					has a unique identifier.		column. May be used to create RELREC to link this record with a record in another domain.			Question Text or Item Prompt is not applicable. Typically used as an identifier in a data query to communicate clearly to the site the specific record in question or to reconcile procedure agent records with AEs and/or MH. May be used to record preprinted number (e.g., line number, record number) on the CRF. This field may be populated by the sponsor's data collection system.
Interventions	AG	N/A	N/A	8	AGTRT	Reported Agent Name	Verbatim name of procedure/assessment agent administered.	What was the [procedure/assessment agent] [name/term]?	[Procedure/Assessment Agent]	Char	HR	Record only 1 procedure agent per line. Provide the full trade or proprietary name of the procedure agent; otherwise the generic name may be recorded.	AGTRT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	In most cases, the verbatim drug names or treatment will be coded to a standard dictionary (e.g., WHODrug) after the data have been collected on the CRF. For the collection of verbatim procedure agents, the recommendation is to ask sites to provide the full trade or proprietary name since it is more exact than the generic. The full trade name provides the base generic and the appropriate salt for that particular drug. In addition, for coding purposes it helps with ATC classification system code selection. For example, Tylenol with codeine #1 has a different ATC code than

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	Tylenol with codeine #3.
Interventions	AG	N/A	N/A	9	AGPRESP	AG Prespecified	An indication that a specific procedure/assessment agent or group of agents is prespecified on a CRF.	N/A	N/A	Char	O	N/A	AGPRESP	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(NY)	N/A	For prespecified interventions, a hidden field on a CRF defaulted to "Y", or added during the SDTM dataset creation. If a study collects both prespecified and free-text interventions, the value of AGPRESP should be "Y" for all prespecified interventions and null for interventions reported as free text.
Interventions	AG	N/A	N/A	10	AGOCCUR	AG Occurrence	An indication whether the given procedure/assessment agent or group of agents was administered when information about the occurrence of a specific procedure/assessment agent is solicited.	[Has/Was] the subject (been) administered the [procedure/assessment agent]?	[AGTRT]	Char	O	Indicate if the procedure agent was administered, by checking Yes or No.	AGOCCUR	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. If the response was not asked or answered, populate the SDTMIG variable AGSTAT with "NOT DONE".	(NY)	N/A	AGOCCUR is used to report the occurrence of a prespecified procedure agent. AGOCCUR is not used for spontaneously free-text reported procedure agent(s). The site should be able to indicate that the response was not asked or answered.
Interventions	AG	N/A	N/A	11	AGDOSE	AG Dose per Administration	The dose of procedure/assessment agent (e.g., -TRT) given at one time represented as a numeric value.	What was the individual dose per administration of the [procedure/assessment agent]?	[Dose/Amount] (per administration)	Num	O	Record the dose of the [procedure agent] taken per administration (e.g., 200).	AGDOSE	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Used when the dose/amount administered has only numeric entries. If non-numeric entries are possible, use the CDASH field AGDSTXT.
Interventions	AG	N/A	N/A	12	AGDSTXT	Procedure Agents Dose Description	The dose of procedure/assessment agent administered per instance.	What was the individual dose of the [procedure/assessment agent]?	Dose	Char	O	Record the dose of [procedure agent] taken per administration (e.g., 200).	AGDOSE; AGDOSTXT	This does not map directly to an SDTMIG variable. Numeric values map to AGDOSE in SDTM. Non-numeric values (e.g., 200-400) map to AGDOSTXT in SDTM.	N/A	N/A	Defining this data collection field as a dose text field allows for flexibility in capturing dose entries as numbers, text or ranges. The data collected in this dose text-format field should be separated or mapped to either SDTMIG AGDOSE (if

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	numeric) or AGDOSTXT (if text).
Interventions	AG	N/A	N/A	13	AGDOSU	AG Dose Units	The unit associated with the procedure/assessment agent.	What is the unit (for the dose of the [procedure/assessment agent])?	(Dose) Unit	Char	R/C	Record the dose unit of the [procedure agent] administered (e.g., mg).	AGDOSU	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(UNIT)	(CMDOSU)	When sponsors collect data for amount of dose administered (i.e., Dose, Total Daily Dose), the unit must be collected as well (if applicable).
Interventions	AG	N/A	N/A	14	AGDOSFRM	AG Dose Form	The pharmaceutical dosage form in which the AGTRT is physically presented.	What was the dose form of the [procedure/assessment agent]?	Dose Form	Char	O	Record the pharmaceutical dosage form (e.g., TABLET CAPSULE SYRUP) for the [procedure agent] [administered].	AGDOSFRM	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(FRM)	(CMDOSFRM)	Some drugs have multiple forms and this field may be needed to code the drug to an ATC level. However, in general, this level of detail should not be necessary except for procedure agents of interest.
Interventions	AG	N/A	N/A	15	AGDOSFRQ	AG Dosing Frequency per Interval	The number of doses administered during a specific interval.	What was the frequency of the [procedure/assessment agent]?	Frequency	Char	O	Record how often the [procedure agent] was administered (e.g., ONCE).	AGDOSFRQ	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(FREQ)	(CMDOSFRQ)	The frequency of the procedure agent. When collected, the recommendation is to collect dosing information in separate fields (e.g., AGDOSE, AGDOSEU, AGDOSFRQ) for specific and consistent data collection and to enable programmatically utilizing these data.
Interventions	AG	N/A	N/A	16	AGROUTE	AG Route of Administration	The route of administration of the procedure/assessment agent.	What was the route of administration of the [procedure/assessment agent]?	Route	Char	R/C	Provide the route of administration for the [procedure agent].	AGROUTE	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(ROUTE)	(CMROUTE)	This additional information may be important to collect on the CRF when the sponsor wants to capture a procedure agent's route of administration, for purposes such as coding, and the procedure agent may have more than 1 route. Some companies may use route in coding procedure agents to be able

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	to choose a precise preferred name and ATC code.
Interventions	AG	N/A	N/A	17	AGSTDAT	Procedure Agent Start Date	The start date when the procedure/assessment agent was first administered, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the procedure/assessment agent] start date?	Start Date	Char	R/C	Record the date the procedure agent was first administered using this format (DD-MON-YYYY). Procedure agent(s) administered during the study are expected to have a complete start date.	AGSTDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH START DATE and TIME components and populate the SDTMIG variable AGSTDTC in ISO 8601 format.	N/A	N/A	The assumption is that sponsors should either have a start date or will indicate that the procedure agent was started before, during or after the study period. The preferred method is to collect a complete start date. Partial dates (e.g., providing year only) for procedure agent started a considerable amount of time prior to the start of study are acceptable.
Interventions	AG	N/A	N/A	18	AGSTTIM	Procedure Agent Start Time	The time the procedure/assessment agent was started, represented in an ambiguous time format (e.g., h:mm:ss).	What was the [procedure/assessment agent] start time?	Start Time	Char	R/C	Record the time (as complete as possible) that the [procedure agent] was started.	AGSTDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH START DATE and TIME components and populate the SDTMIG variable AGSTDTC in ISO 8601 format.	N/A	N/A	Recommend collecting the time a procedure agent was started only when a protocol or data collection scenarios supports it. Typically, a start time is not collected unless the subject is under the direct care of the site at the time a procedure agent administered or the subject records the start time in a diary. See Section 3.7, Mapping Relative Times from Submissions , and the SDTMIG for more information.
Interventions	AG	N/A	N/A	19	AGPRIOR	Prior Procedure Agents	Indication the procedure/assessment agent was administered prior to [AGSTTPT] or prior to the date in DM.RFSTDTC.	Was the [procedure/assessment agent] administered prior to AGSTTPT? Was the procedure/assessment	Prior to [AGSTTPT]; prior to study	Char	O	Check if the [procedure agent] was started before the study.	AGSTRF; AGSTRTPT	This does not map directly to an SDTMIG variable. May be used to populate a value into an SDTMIG relative timing	(NY)	N/A	Sponsors may collect this information rather than start dates. See Section 3.7, Mapping Relative Times from

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
								agent given prior to study start?						variable such as AGSTRF or AGSTRTP. When populating AGSTRF or AGSTRTP, if the value of the CDASH field AGPRIOR is "Y", a value from the CDISC CT (STENRF) may be used. When AGPRIOR refers to the Study Reference Period (defined in DM.RFSTDTC to DM.RFENDTC), the SDTMIG variable AGSTRF should be populated. When AGPRIOR is compared to another time point, the SDTMIG variables AGSTRTP and AGSTTP should be used. Note: AGSTRTP must be in reference to the time-point anchor described in AGSTTP.			Collection to Submissions , and the SDTMIG for more information.
Interventions	AG	N/A	N/A	20	AGONGO	Ongoing Procedure Agents	Indication the procedure/assessment agent is ongoing when no end date is provided.	Was the [procedure/assessment agent] ongoing (as of the [study-specific time point or period])?	Ongoing (as of [the study-specific time point or period])	Char	R/C	Record the [procedure agent] as ongoing if the subject has not stopped taking the procedure agent at [the time point defined by the study]. If the procedure agent is ongoing, the end date should be left blank.	AGENRF; AGENRTPT	This does not map directly to an SDTMIG variable. May be used to populate a value into an SDTMIG relative timing variable such as AGENRF or AGENRTPT. When populating AGENRF, if the value of AGONGO is "Y", the values of "DURING", "AFTER" or "DURING/AFTER" may be used. When populating AGENRTPT, if the value of AGONGO is "Y", the value of "ONGOING" may be used. When AGONGO refers to the Study Reference Period	(NY)	N/A	This box should be checked to indicate that the procedure agent has not stopped at the time of data collection. It is expected that every recorded procedure agent should have either an end date or be checked as ongoing, but not both. However, in cases where ongoing procedure agents are not permitted, it may not be necessary to include an Ongoing field in the CRF. See Section 3.7, Mapping Relative Times from

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
														(defined in DM.RFSTDTC to DM.RFENDTC), the SDTMIG variable AGENRF should be populated. When AGONGO is used in conjunction with another time point, the SDTMIG variables AGENRTPT and AGENTPT should be used. Note: AGENRTPT must be in reference to the time-point anchor described in AGENTPT.			Collection to Submissions , for more information about collecting relative date/time; see the SDTMIG for information about mapping relative times.
Interventions	AG	N/A	N/A	21	AGENDAT	Procedure Agents End Date	The date the procedure/assessment agent was stopped/ended, represented in an unambiguous date format (e.g. DD-MON-YYYY).	What was the [procedure/assessment agent's] end date?	End Date	Char	R/C	Record the date the procedure agent was topped using this format (DD-MM-YYYY). If the subject has not stopped [administering/being administered] the procedure agent leave this field blank.	AGENDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH END DATE and TIME components and populate the SDTMIG variable CMENDTC in ISO 8601 format.	N/A	N/A	The assumption is that sponsors should either have an end date or will indicate that the procedure agent was ongoing at the time of collection or at the end of the study. However, in cases where the end date can be determined from dates collected elsewhere in the CRF it is not necessary to include an end date in the CRF. For example, if all procedure agents are administered only once during a trial, the end date will be the same as the start date.
Interventions	AG	N/A	N/A	22	AGENTIM	Procedure Agents End Time	The time the concomitant medication/treatment/therapy was started, represented in an unambiguous time format (e.g., hh:mm:ss).	What was the [procedure/assessment agent's] end time?	End Time	Char	R/C	Record the time (as complete as possible) that the procedure agent was stopped.	AGENDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH END DATE and TIME components and populate the SDTMIG variable	N/A	N/A	Recommend collecting the time a procedure agent was ended only when a protocol or data collection scenarios require it or the subject records the end time in a diary. Typically, an end time is not

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
														AGENDTC in ISO 8601 format.			collected unless the subject is under the direct care of the site at the time a procedure agent is stopped.
Interventions	AG	N/A	N/A	23	AGDECOD	Standardized Agent Name	The dictionary or sponsor-defined standardized text description of the topic variable (AGTRT) or the modified topic variable (AGMODIFY), if applicable.	N/A	N/A	Char	O	N/A	AGDECOD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	This is typically not a data collection field that will appear on the CRF. If the sponsor chooses to code the procedure, the sponsor will populate this through the coding process. If PRPRES is used, and the information about a specific standardized procedure name is being solicited, the data from AGTRT may map directly to the SDTMIG AGDECOD variable.
Interventions	AG	N/A	N/A	24	AGCLAS	AG Agent Class	The class for the agent, often obtained from a coding dictionary.	N/A	N/A	Char	O	N/A	AGCLAS	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	This field does not typically appear on the CRF. Sponsors will populate this through the coding process. This would generally be the class used for analysis.
Interventions	AG	N/A	N/A	25	AGCLASCD	AG Agent Class Code	The assigned dictionary code for the class of agent.	N/A	N/A	Num	O	N/A	AGCLASCD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	This field does not typically appear on the CRF. Sponsors will populate this through the coding process. This would generally be the class code used for analysis.

Assumptions for the CDASHIG AG - Procedure Agents Domain

- The purpose of the AG domain is to provide a place to collect and record substances that are administered to a subject as part of a test or assessment or as part of a procedure. Other Interventions class domains such as CM and Exposure (EX/EC) collect information on medications administered with a degree of therapeutic intent, whether concomitant medications or study treatment. The AG domain collects interventions that facilitate or prepare a subject for a protocol-defined assessment, such as:
 - Puffs from a bronchodilator (e.g., albuterol) that are administered as part of a "reversibility" assessment (see also the Asthma TAUG; CDISC TAUGs are available at <https://www.cdisc.org/standards/therapeutic-areas>)
 - A contrast agent used to facilitate a multigated acquisition (MUGA) scan as part of a subject's heart-failure assessment (see also the Heart Failure TAUG)
 - A meal (e.g., breakfast, lunch, dinner) given to a subject as part of a meal tolerance test for diabetes (see also the Diabetes TAUG)
- Information about the procedure itself (e.g., start date/time, end date/time) would still be represented in the Procedures (PR) domain.
- The structure of the AG domain is 1 record per agent per intervention episode, or prespecified agent assessment, per subject.
- The topic variable would be the name of the agent (AGTRT) administered and is thus "Highly Recommended" to be collected on the CRF.
- Although a variable in the Interventions observation class in the CDASH Model, --INDC would not generally be collected in AG as a procedure agent is not administered with any therapeutic intent.

Example CRFs for the CDASHIG AG - Procedure Agents Domain

Example 1

This example CRF illustrates the use of AG for the standardized meal given as part of a mixed meal tolerance test.

Title: Mixed Meal Tolerance Test

Indicate whether or not the meal for the mixed meal tolerance test was administered.	Was the meal administered as part of the Mixed Meal Tolerance Test? AGYN Not Submitted	☐ Yes ☐ No <NY codelist>
	AGTRT Hidden/pre-populated	STANDARDIZED MEAL
Record the meal date using this format (DD-MMM-YYYY).	Meal Date AGSTDAT AGSTDTC	
Record the meal start time.	Meal Start Time AGSTTIM AGSTDTC	
Record the meal end time.	Meal End Time AGENTIM AGENDTC	
Record the amount of the meal consumed.	What was the amount of the meal consumed? AGDSTXT AGDOSTXT	☐ 0 ☐ >0 to <25% ☐ =>25% to <50% ☐ =>50% to <75% ☐ =>75% to <100% ☐ 100%
	Unit AGDOSU Hidden/pre-populated	%<UNIT codelist>

CRF Metadata

Order	CDASH Variable	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target	SDTMIG Target Mapping	Controlled Terminology Codelist Name	Permissible values	Pre-Populated Value	Query Display	List Style	Hidden
1	AGYN	Was the meal administered as part of the Mixed Meal Tolerance Test?	Meal Administered	Indicate whether or not the meal for the mixed meal tolerance test was administered.	Text			(NY)	Yes; No				
2	AGTRT	N/A	N/A	N/A	text	AGTRT				STANDARDIZED MEAL			Y
3	AGSTDAT	Meal Date	Meal Date	Record the meal date using this format (DD-MMM-YYYY).	text	AGSTDTC							
4	AGSTTIM	Meal Start Time	Start Time	Record the meal start time).	text	AGSTDTC							
5	AGENTIM	Meal End Time	End Time	Record the meal end time.	text	AGENDTC							
6	AGDSTXT	What was the amount of the meal consumed?	Meal Amount Consumed	Record the amount of the meal consumed.	text	AGDOSTXT			0; >0 to <25%; =>25% to <50%; =>50% to <75%; =>75% to <100%; 100%				
7	AGDOSU	What was the unit?	Unit		text	AGDOSU		(UNIT)		%			Y

Example 2

This example illustrates the use of AG to capture the name of the contrast agent administered in preparation for an MRI.

Title: Contrast Agents

Indicate whether or not a contrast agent was administered as part of the MRI procedure.	Was the contrast agent administered as part of the MRI procedure.? ☐ Yes ☐ No <NY codelist>
	AGYN Not Submitted
	What is the contrast agent? AGTRT
Record the contrast agent start date using this format (DD-MMM-YYYY).	What is the contrast agent start date? AGSTDAT AGSTDTC
Record the contrast agent start time.	What is the contrast agent start time? AGSTTIM AGSTDTC
Record the contrast agent end time.	What is the contrast agent end time? AGENTIM AGENDTC

CRF Metadata

Order	CDASH Variable	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible values	Pre-Populated Value	Query Display	List Style	Hidden
1	AGYN	Was the contrast agent administered as part of the MRI procedure.?	Contrast Agent Administered?	Indicate whether or not a contrast agent was administered as part of the MRI procedure.	Text			(NY)	Yes; No				
2	AGTRT	What is the contrast agent?	Contrast Agent	N/A	text	AGTRT							
3	AGSTDAT	What is the contrast agent start date?	Start Date	Record the contrast agent start date using this format (DD-MMM-YYYY).	text	AGSTDTC							
4	AGSTTIM	What is the contrast agent start time?	Start Time	Record the contrast agent start time.	text	AGSTDTC;							
5	AGENTIM	What is the contrast agent end time?	End Time	Record the contrast agent end time.	text	AGENDTC							

8.1.3 CM - Prior and Concomitant Medications

Description/Overview for the CDASHIG CM - Prior and Concomitant Medications Domain

The CDASHIG CM domain contains data relating to concomitant and prior medications used by the subject, such as those given on an as-needed basis or condition-appropriate medications. The same basic data collection variables should be collected for all medications, treatments, and therapies (prior, general concomitant medications, and medications of interest). If additional fields are needed to collect other data about a medication of interest, those should be added as non-standard fields.

Note:

- Sponsors may use terms like *concomitant medications*, *treatments*, or *therapies*, as appropriate for the study. The following text may use one of these terms, but sponsors can always use the term most appropriate for their study.
- The term *prior* refers to medications/treatments that were started before study participation, because limited information may be available on prior medications taken by a subject; the core requirements were constrained to reflect this limitation.
- Sponsors should define the appropriate collection period for prior and concomitant medications/treatments in the study protocol.

Specification for the CDASHIG CM - Prior and Concomitant Medications Domain

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology / CDASH Codelist Name	Implementation Notes
Interventions	CM	N/A	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or the EDC system. This field can be included into the database or populated during SDTM-based dataset creation before submission.
Interventions	CM	N/A	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: For single-site studies, this is typically preprinted in the header of each CRF page. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted on CRFs that are shipped to each site. EDC: This should be prepopulated.
Interventions	CM	N/A	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What [is/was] the (study) [subject/participant] identifier?	[Subject/Participant] (Identifier)	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system-generated. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Interventions	CM	N/A	N/A	4	CMCAT	Category for Medication	A grouping of topic-variable values based on user-defined characteristics.	What is the category for the (concomitant) [medication/treatment/therapy]?	(Concomitant) [Medication/Treatment/Therapy Category]; NULL	Char	O	Record the (concomitant) [medication/treatment/therapy] category, if not preprinted on the CRF.	CMCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Category" can be included in the column heading.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology / CDASH Codelist Name	Implementation Notes
Interventions	CM	N/A	N/A	5	CMSCAT	Subcategory for Medication	A sub-division of the CMCAT values based on user-defined characteristics.	What is the subcategory for the (concomitant) [medication/treatment/therapy]?	(Concomitant) [Medication/Treatment/Therapy subcategory]; NULL	Char	O	Record (concomitant) [medication/treatment/therapy] subcategory, if not preprinted on the CRF.	CMSCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be preprinted on the CRF or screen and prepopulated in the data management system. This is not typically a question to which the site would provide an answer.
Interventions	CM	N/A	N/A	6	CMYN	Any Concomitant Medications Taken	An indication of whether any (concomitant) medications/treatments/therapies were taken/given.	Were/Was any (concomitant) [medication(s)/treatment(s)/therapy(ies)] taken?	Any (Concomitant) [Medication(s)/Treatment(s)/Therapy(ies)]	Char	O	Indicate if the subject took any (concomitant) [medications/treatments]. If Yes, include the appropriate details where indicated on the CRF.	N/A	Does not map to an SDTMIG variable. The SDTM annotated CRF indicates that this field is NOT SUBMITTED.	(NY)	N/A	The intent/purpose of collecting this field is to help with data cleaning and monitoring. It provides verification that all other fields on the CRF were deliberately left blank.
Interventions	CM	N/A	N/A	7	CMSPID	CM Sponsor-Defined Identifier	A sponsor-defined identifier. In CDASH, this is typically used for preprinted or auto-generated numbers on the CRF, or any other type of identifier that does not already have a defined CDASH identifier field.	[Sponsor-defined question]	[Sponsor defined]	Char	O	If collected on the CRF, sponsor may insert instructions to ensure each record has a unique identifier.	CMSPID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. May be used to create RELREC to link this record with a record in another domain.	N/A	N/A	Because SPID is a sponsor-defined identifier, conformance to Question Text or Item Prompt is not applicable. Typically used as an identifier in a data query to communicate clearly to the site the specific record in question or to reconcile concomitant medication/treatment records with AEs and/or MH. May be used to record preprinted number (e.g. line number, record number) on the CRF. This field may be populated by the sponsor's data collection system.
Interventions	CM	N/A	N/A	8	CMTRT	Reported Name of Drug, Med, or Therapy	Verbatim medication name or treatments (include only treatments with data collection characteristics similar to medications).	What was the (concomitant) [medication/treatment/therapy] (name/term)?	(Concomitant) [Medication/Treatment/Therapy]	Char	HR	Record only 1 [medication/treatment/therapy] per line. Provide the full trade or proprietary name of the [medication/treatment/therapy]; otherwise the generic name may be recorded.	CMTRT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	In most cases, the verbatim drug names or treatment will be coded to a standard dictionary (e.g., WHODrug) after data have been collected on the CRF. For the collection of verbatim drug name or treatments, the recommendation is for sites to provide the full trade or proprietary name, which is more exact than the generic. The full trade name

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology / CDASH Codelist Name	Implementation Notes
																	provides the base generic and the appropriate salt for that particular drug. In addition, for coding purposes, it helps with ATC selection (e.g., Tylenol with codeine #1 has a different ATC code than Tylenol with codeine #3). This field can be used for either prior or concomitant medication/treatments.
Interventions	CM	N/A	N/A	9	CMPRESP	CM Prespecified	An indication that a specific intervention or a group of interventions is prespecified on a CRF.	N/A	N/A	Char	O	N/A	CMPRESP	Maps directly to the SDTMIG variable listed in the SDTM Target column.	(NY)	N/A	For prespecified interventions, this is a hidden field on a CRF defaulted to "Y", or added during the SDTM dataset creation. If a study collects both prespecified and free-text interventions, the value of CMPRESP should be "Y" for all prespecified interventions and null for interventions reported as free text.
Interventions	CM	N/A	N/A	10	CMOCCUR	CM Occurrence	An indication whether the prespecified medication/treatment/therapy (CMTRT) or the group of medications/treatments/therapies was administered when information about the occurrence of a specific intervention was solicited.	Did the subject take [prespecified (concomitant) medication/treatment/therapy/dose]?; Has the subject taken [prespecified (concomitant) medication/treatment/therapy/dose]?	[Specific (Concomitant) Medication/Treatment/Therapy]	Char	O	Indicate if [specific medication/treatment] was taken by checking Yes or No.	CMOCCUR	Maps directly to the SDTMIG variable listed in the SDTM Target column. If the question was not asked or answered, populate the SDTMIG variable CMSTAT with "NOT DONE".	(NY)	N/A	CMOCCUR is used to report the occurrence of a prespecified medication/treatment. CMOCCUR is not used for spontaneously free-text reported concomitant medication/treatments. The site should be able to indicate that the question was not asked or answered.
Interventions	CM	N/A	N/A	11	CMINGRD	Concomitant Meds Active Ingredients	Medication ingredients.	What were the active ingredients?	Active Ingredients	Char	O	Prior to a subject's clinical visit, remind all subjects to bring all medications bottles, packs etc. they are taking with them to their clinical visit. Record all active ingredient(s) off the medication label and separate each ingredient with a comma for the name of drug medication or	N/A	Does not map to an SDTMIG variable. The SDTM annotated CRF indicates that this field is NOT SUBMITTED.	N/A	N/A	This may be collected in addition to the medication/treatment name. Collecting this provides more detailed information when coding to a medication dictionary like WHODrug Dictionary Enhanced Format C, which codes to the ingredient level for many trade-name medications. For

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology / CDASH Codelist Name	Implementation Notes
												treatment taken. For example, the medication Dolmen, if manufactured in Spain, the active ingredients should be collected as noted below: Active Ingredient: Acetylsalicylic Acid, Ascorbic acid, codeine phosphate.					example, depending on the country where it is manufactured, the active ingredients in the medication dolmen may be different: In Spain, acetylsalicylic acid, ascorbic acid, codeine phosphate; in Italy and Czech Republic, tenoxicam; in Estonia and Latvia, dextetopfen trometamol.
Interventions	CM	N/A	N/A	12	CMINDC	CM Indication	The condition, disease, symptom, or disorder that the concomitant (non-study) medication/treatment/therapy was used to address or investigate (e.g., why the medication/treatment/therapy was taken or administered).	For what indication was the (concomitant) [medication/treatment/therapy] taken?	Indication	Char	R/C	Record the reason the medication was taken based on clinical investigator's evaluation. If taken to treat a condition, and a diagnosis was made, the indication should be the diagnosis. If taken to treat a condition, and no diagnosis was made, the indication should be the signs and symptoms. If taken as prophylaxis, report as "Prophylaxis for" and include a description of the condition(s).	CMINDC	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	This is not the pharmacological/therapeutic classification of an agent (e.g., antibiotic, analgesic), but rather the reason for its administration to the subject. This additional information is collected on the CRF when sponsors want to capture the reason(s) a subject took a medication/treatment. This information could be used as deemed appropriate for coding; analysis (e.g., in the classification of medications); reconciling medications/treatments taken by a subject with provided medical history; and/or AEs/SAEs, as part of the data clean-up and monitoring process.
Interventions	CM	N/A	N/A	13	CMAENO	Related Adverse Event ID	Identifier for the adverse event that is the indication for this medication/treatment/therapy.	What was the identifier for the adverse event(s) for which the (concomitant) [medication/treatment/therapy] was taken?	Adverse Event Identifier	Char	O	Record the identifier of the Adverse Event for which this (concomitant) [medication/treatment/therapy] was taken.	N/A	This does not map directly to an SDTMIG variable. For SDTM submission datasets, may be used to create RELREC to link this record with a record in the AE domain.	N/A	N/A	The intent is to establish a link between the medication/treatment and the AE that was reported. CMAENO can be used to identify a relationship between records in CM dataset and records in the AE dataset. See the SDTMIG for information on RELREC.
Interventions	CM	N/A	N/A	14	CMMHNO	Related Medical History Event ID	Identifier for the medical history condition that is the indication for this	What was the identifier for the medical history event(s) for which the (concomitant) [medication/treatment/therapy] was taken?	Medical History Event Identifier	Char	O	Record the identifier of the medical history event for which this (concomitant)	N/A	This does not map directly to an SDTMIG variable. For SDTM	N/A	N/A	The intent is to establish a link between the medical history condition and the

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology / CDASH Codelist Name	Implementation Notes
							medication/treatment/therapy.					[medication/treatment/therapy] was taken.		submission datasets, may be used to create RELREC to link this record with a record in the MH domain.			medication/treatment taken for the condition. CMMHNO can be used to identify a relationship between records in the CM dataset and records in the MH dataset. See the SDTMIG for information on RELREC.
Interventions	CM	N/A	N/A	15	CMDOSE	CM Dose per Administration	The dose of medication/treatment (e.g., --TRT) given at one time, represented as a numeric value.	What was the individual dose (of the concomitant [medication/treatment/therapy] per administration)?	[Dose/Amount] (per administration)	Num	O	Record the dose of (concomitant) [medication/treatment] taken per administration (e.g., 200).	CMDOSE	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Used when the dose/amount taken/administered/consumed has only numeric entries. If non-numeric entries are possible, use the CDASH field CMDSTXT.
Interventions	CM	N/A	N/A	16	CMDSTXT	Concomitant Meds Dose Description	The dose of medication/treatment taken per administration.	What was the individual dose of the (concomitant) [medication/treatment/therapy]?	Dose	Char	O	Record the dose of (concomitant) [medication/treatment] taken per administration (e.g., 200).	CMDOSTXT ; CMDOSE	This does not map directly to an SDTMIG variable. Numeric values map to CMDOSE in SDTM. Non-numeric values (e.g., "200-400") map to CMDOSTXT in SDTM.	N/A	N/A	Defining this data collection field as a dose text field allows for flexibility in capturing dose entries as numbers, text, or ranges. The data collected in this text-format field should be separated or mapped to either SDTMIG CMDOSE if numeric or CMDOSTXT if text.
Interventions	CM	N/A	N/A	17	CMDOSTOT	CM Total Daily Dose	The total amount of CMTRT taken over a day, using the units in CMDOSU.	What was the total daily dose of the (concomitant) [medication/treatment/therapy]?	Total Daily Dose	Num	O	Record the total dose of (concomitant) [medication/treatment/therapy] taken daily.	CMDOSTOT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	For use when only total daily dose is collected on the CRF. For general medications/treatments, it is not recommended to use Total Daily Dose. Instead, this can be calculated from other fields (e.g., Units, Dose, Frequency).
Interventions	CM	N/A	N/A	18	CMDOSU	CM Dose Units	The unit associated with the concomitant medication/treatment/therapy taken (e.g., mg in "2 mg 3 times per day").	What is the unit (for the dose of concomitant [medication/treatment/therapy])?	(Dose) Unit	Char	R/C	Record the dose unit of the dose of concomitant [medication/treatment/therapy] taken (e.g., mg.).	CMDOSU	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(UNIT)	(CMDOSU)	When sponsors collect data for amount of dose taken (i.e., Dose, Total Daily Dose), Unit must be collected as well (if applicable).
Interventions	CM	N/A	N/A	19	CMDOSFRM	CM Dose Form	The pharmaceutical dosage form in which the CMTRT is physically presented.	What was the dose form of the (concomitant) [medication/treatment/therapy]?	Dose Form	Char	O	Record the pharmaceutical dosage form (e.g., TABLET CAPSULE, SYRUP) of delivery for the concomitant [medication/treatment/therapy] taken.	CMDOSFRM	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(FRM)	(CMDOSFRM)	Some drugs have multiple forms; this field may be needed to code the drug to an ATC level. However, in general, this level of detail should not be necessary except for

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology / CDASH Codelist Name	Implementation Notes
																	medications/treatments of interest.
Interventions	CM	N/A	N/A	20	CMDOSFRQ	CM Dosing Frequency per Interval	The number of doses given/ administered/ taken during a specific interval.	What was the frequency of the (concomitant) [medication/treatment/therapy]?	Frequency	Char	O	Record how often the (concomitant) [medication/treatment/therapy] was taken (e.g., BID, PRN).	CMDOSFRQ	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(FREQ)	(CMDOSFRQ)	The frequency of the concomitant medication/treatment. When collected, the recommendation is to collect dosing information in separate fields (e.g., CMDOSE, CMDOSEU, CMDOSFRQ) for specific and consistent data collection and to enable programmatically using these data.
Interventions	CM	N/A	N/A	21	CMROUTE	CM Route of Administration	The route of administration of the concomitant medication/ treatment/ therapy.	What was the route of administration of the (concomitant) [medication/treatment/therapy]?	Route	Char	R/C	Provide the route of administration for the (concomitant) [medication/treatment/therapy].	CMROUTE	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(ROUTE)	(CMROUTE)	This additional information may be important to collect on the CRF when the sponsor wants to capture a medication's/treatment's route of administration, for purposes such as coding; also, the medication/treatment may have more than 1 route. Some companies may use route in coding medications/treatments, to be able to choose a precise preferred name and ATC code.
Interventions	CM	N/A	N/A	22	CMSTDAT	Concomitant Meds Start Date	The start date is when the concomitant medication/ treatment/ therapy was first taken, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the (concomitant) [medication/treatment/therapy /dose] start date?	Start Date	Char	R/C	Record the date the concomitant [medication/treatment] was first taken using this format (DD-MON-YYYY). If the subject has been taking the concomitant [medication/treatment] for a considerable amount of time prior to the start of the study, it is acceptable to have an incomplete date. Concomitant [medication/treatment] taken during the study are expected to have a complete start date. Prior concomitant [medication/treatment] that are exclusionary should have both a start and end date.	CMSTDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH START DATE and TIME components and populate the SDTMIG variable CMSTDTC in ISO 8601 format.	N/A	N/A	The assumption is that sponsors should either have a Start Date or will indicate that the medication or therapy was started before, during, or after the study period. The preferred method is to collect a complete Start Date. Partial dates (e.g., providing year only) for medications/treatment started a considerable amount of time prior to the start of study are acceptable.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology / CDASH Codelist Name	Implementation Notes
Interventions	CM	N/A	N/A	23	CMSTTIM	Concomitant Meds Start Time	The time the concomitant medication/treatment/therapy was started, represented in an unambiguous time format (e.g., hh:mm:ss).	What was the (concomitant) [medication/treatment/therapy /dose] start time?	Start Time	Char	R/C	Record the time (as complete as possible) that the concomitant [medication/treatment] was started.	CMSTDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH START DATE and TIME components and populate the SDTMIG variable CMSTDTC in ISO 8601 format.	N/A	N/A	Recommend collecting the time a concomitant medication/treatment was started only when a protocol or data collection scenarios supports it. Typically, a start time is not collected unless the subject is under the direct care of the site at the time a concomitant medication/treatment administered or the subject records the start time in a diary.
Interventions	CM	N/A	N/A	24	CMPRIOR	Prior Concomitant Meds	Indication the concomitant medication/treatment/therapy was given or taken prior to [CMSTTPT] or prior to the date in DM.RFSTDTC.	Was the (concomitant) [medication/treatment/therapy] given/taken prior to [CMSTTPT]?; Was the (concomitant) [medication/treatment/therapy] given/taken prior to study start?	Prior to [CMSTTPT]; Prior to Study	Char	O	Check if the concomitant [medication/treatment/therapy] was started before the study.	CMSTRF; CMSTRTPPT	This does not map directly to an SDTMIG variable. May be used to populate a value into an SDTM relative timing variable such as CMSTRF or CMSTRTPPT. When populating CMSTRF, or CMSTRTPPT, if the value of the CDASH field CMPRIOR is "Y" a value from the CDISC CT (STENRF) may be used. When CMPRIOR refers to the Study Reference Period (defined in DM.RFSTDTC to DM.RFENDTC), the SDTM variable CMSTRF should be populated. When CMPRIOR is	(NY)	N/A	Sponsors may collect this information rather than start dates. See Section 3.7, Mapping Relative Times from Submissions , and the SDTMIG for more information.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology / CDASH Codelist Name	Implementation Notes
														compared to another time point, the SDTM variables CMSTRTPPT and CMSTTPPT should be used. Note: CMSTRTPPT must refer to the time-point anchor described in CMSTTPPT.			
Interventions	CM	N/A	N/A	25	CMONGO	Ongoing Concomitant Meds	Indication the concomitant medication/ treatment/ therapy is ongoing when no end date is provided.	Was the (concomitant) [medication/treatment/ therapy] ongoing (as of [the study-specific time point or period])?	Ongoing (as of [the study-specific time point or period])	Char	R/C	Record the concomitant [medication/treatment/ therapy] as ongoing if the subject has not stopped taking the concomitant [medication/treatment/ therapy] at [the timepoint defined by the study]. If the concomitant medication is ongoing, the end date should be left blank	CMENRF; CMENRTPT	This does not map directly to an SDTM variable. May be used to populate a value into an SDTMIG relative timing variable (e.g., CMENRF, CMENRTPT). When populating CMENRF, if the value of CMONGO is "Y", the values of "DURING", "AFTER", or "DURING/AFTER" may be used. When populating CMENRTPT, if the value of CMONGO is "Y", the value of "ONGOING" may be used. When CMONGO refers to the Study Reference Period (defined in DM.RFSTDTC to DM.RFENDTC) the SDTM variable CMENRF should be	(NY)	N/A	This box should be checked to indicate that the concomitant medication/treatment has not stopped at the time of data collection. It is expected that every recorded medication/treatment should have either an end date or be checked as ongoing, but not both. However, in cases where ongoing concomitant medications/treatments are not permitted, it may not be necessary to include an Ongoing field in the CRF. See Section 3.7, Mapping Relative Times from Collection to Submission , for more information about collecting relative date/time; see the SDTMIG for information about mapping relative times.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology / CDASH Codelist Name	Implementation Notes
														populated. When CMONGO is used in conjunction with another time point, the SDTM variables CMENRTPT and CMENTPT should be used. Note: CMENRTPT must refer to a time-point anchor described in CMENTPT.			
Interventions	CM	N/A	N/A	26	CMENDAT	Concomitant Meds End Date	The date that the subject ended/stopped taking the concomitant medication/treatment/therapy, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the (concomitant) [medication/treatment/therapy /dose] end date?	End Date	Char	R/C	Record the date the concomitant [medication/treatment] was stopped using this format (DD-MON-YYYY). If the subject has not stopped taking the concomitant [medication/treatment] leave this field blank.	CMENDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH END DATE and TIME components and populate the SDTMIG variable CMENDTC in ISO 8601 format.	N/A	N/A	The assumption is that sponsors should either have an End Date or will indicate that the medication or therapy was ongoing at the time of collection or at the end of the study. However, in cases where the end date can be determined from dates collected elsewhere in the CRF it is not necessary to include an End Date field on the CRF. For example, if all concomitant medications/treatments are administered only once during a trial, the end date will be the same as the start date.
Interventions	CM	N/A	N/A	27	CMENTIM	Concomitant Meds End Time	The time when the subject ended/stopped taking the concomitant medication/treatment/therapy, represented in an unambiguous time format (e.g., hh:mm:ss).	What was the [medication/treatment/therapy /dose] end time?	End Time	Char	R/C	Record the time (as complete as possible) that the concomitant medication/treatment was stopped.	CMENDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH END DATE and TIME components and populate the SDTMIG variable CMENDTC in	N/A	N/A	Recommend collecting the time a concomitant medication or treatment was ended only when a protocol or data collection scenario requires it or the subject records the end time in a diary. Typically, an end time is not collected unless the subject is under the direct care of the site at the time a concomitant medication/treatment is stopped.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology / CDASH Codelist Name	Implementation Notes
														ISO 8601 format.			
Interventions	CM	N/A	N/A	28	CMRSDISC	Reason for Treatment Discontinuation	The reason the treatment was discontinued.	What was the reason the (concomitant) [medication/treatment/therapy/ –TRT] was [discontinued/stopped/ended]?	Reason for discontinuation of concomitant medication/treatment	Char	O	Record the reason the concomitant medication/treatment was stopped.	CMRSDISC	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although frequently used for prior meds, this can be used for any intervention at any timepoint. When the dosing of a treatment is recorded over multiple successive records, this variable is applicable only for the (chronologically) last record for the treatment.
Interventions	CM	N/A	N/A	29	CMDECOD	Standardized Medication Name	The dictionary or sponsor-defined standardized text description of the topic variable, CMTRT, or the modified topic variable (CMMODIFY), if applicable.	N/A	N/A	Char	O	N/A	CMDECOD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	This field does not typically appear on the CRF. Sponsors will populate this through the coding process. Equivalent to the generic drug name in published (e.g., WHODrug, SNOMED, ICD9) or sponsor-defined dictionaries.
Interventions	CM	N/A	N/A	30	CMCLAS	CM Medication Class	The class for the intervention (often obtained from a coding dictionary).	N/A	N/A	Char	O	N/A	CMCLAS	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	This field does not typically appear on the CRF. Sponsors will populate this through the coding process. This would generally be the class used for analysis.
Interventions	CM	N/A	N/A	31	CMCLASCD	CM Medication Class Code	The assigned dictionary code for the class for the intervention.	N/A	N/A	Num	O	N/A	CMCLASCD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	This field does not typically appear on the CRF. Sponsors will populate this through the coding process. This would generally be the class code used for analysis.
Interventions	CM	N/A	N/A	32	CMATC1	ATC Level 1 Description	Dictionary text description of the first level of hierarchy within the Anatomical Therapeutic Chemical (ATC) classification system; indicates the anatomical main group.	N/A	N/A	Char	O	N/A	SUPPCM.QVAL	This does not map directly to an SDTMIG variable. This information could be submitted in a SUPPCM dataset as the value of SUPPCM.QVAL where SUPPCM.QNAM="CMATC1" and SUPPCM.QLABEL="ATC	N/A	N/A	This field does not typically appear on the CRF. This is populated through the sponsor's coding process.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology / CDASH Codelist Name	Implementation Notes
														Level 1 Description". Sponsors should include an Origin column in the SUPPQ dataset to indicate that the data was "ASSIGNED". Refer to the current SDTM and SDTMIG for instructions on placement of non-standard variables (NSVs) in SDTM domains.			
Interventions	CM	N/A	N/A	33	CMATC1CD	ATC Level 1 Code	Dictionary code denoting the first level of hierarchy within the ATC classification system; indicates the anatomical main group.	N/A	N/A	Num	O	N/A	SUPPCM.Q VAL	This does not map directly to an SDTMIG variable. This information could be submitted in a SUPPCM dataset as the value of SUPPCM.QVAL where SUPPCM.QNAME="CMATC1CD" and SUPPCM.QLABEL="ATC Level 1 Code". Sponsors should include an Origin column in the SUPPQ dataset to indicate that the data was "ASSIGNED".	N/A	N/A	This field does not typically appear on the CRF. This is populated through the sponsor's coding process.
Interventions	CM	N/A	N/A	34	CMATC2	ATC Level 2 Description	Dictionary text description for the second level of hierarchy within the ATC classification system; indicates the therapeutic main group.	N/A	N/A	Char	O	N/A	SUPPCM.Q VAL	This does not map directly to an SDTMIG variable. This information could be submitted in a SUPPCM dataset as the value of SUPPCM.QV	N/A	N/A	This field does not typically appear on the CRF. This is populated through the sponsor's coding process.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology / CDASH Codelist Name	Implementation Notes
														AL where SUPPCM.QN AM="CMATC 2" and SUPPCM.QL ABEL="ATC Level 2 Description". Sponsors should include an Origin column in the SUPPQ dataset to indicate that the data was "ASSIGNED". Refer to the current SDTM and SDTMIG for instructions on placement of NSVs in SDTM domains.			
Interventions	CM	N/A	N/A	35	CMATC2CD	ATC Level 2 Code	Dictionary code denoting the second level of hierarchy within the ATC classification system; indicates the therapeutic main group.	N/A	N/A	Num	O	N/A	SUPPCM.Q VAL	This does not map directly to an SDTMIG variable. This information could be submitted in a SUPPCM dataset as the value of SUPPCM.QV AL where SUPPCM.QN AM="CMATC 2CD" and SUPPCM.QL ABEL="ATC Level 2 Code". Sponsors should include an Origin column in the SUPPQ dataset to indicate that the data was "ASSIGNED".	N/A	N/A	This field does not typically appear on the CRF. This is populated through the sponsor's coding process.
Interventions	CM	N/A	N/A	36	CMATC3	ATC Level 3 Description	Dictionary text description of the third level of hierarchy within the ATC classification system; indicates the therapeutic/	N/A	N/A	Char	O	N/A	SUPPCM.Q VAL	This does not map directly to an SDTMIG variable. This information could be submitted in a SUPPCM dataset as the	N/A	N/A	This field does not typically appear on the CRF. This is populated through the sponsor's coding process.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology / CDASH Codelist Name	Implementation Notes
							pharmacological subgroup.							value of SUPPCM.QV AL where SUPPCM.QN AM="CMATC 3" and SUPPCM.QL ABEL="ATC Level 3 Description". Sponsors should include an Origin column in the SUPPQ dataset to indicate that the data was "ASSIGNED". Refer to the current SDTM and SDTMIG for instructions on placement of NSVs in SDTM domains.			
Interventions	CM	N/A	N/A	37	CMATC3CD	ATC Level 3 Code	Dictionary code denoting the third level of hierarchy within the ATC classification system; indicates the therapeutic/ pharmacological subgroup.	N/A	N/A	Num	O	N/A	SUPPCM.Q VAL	This does not map directly to an SDTMIG variable. This information could be submitted in a SUPPCM dataset as the value of SUPPCM.QV AL where SUPPCM.QN AM="CMATC 3CD" and SUPPCM.QL ABEL="ATC Level 3 Code". Sponsors should include an Origin column in the SUPPQ dataset to indicate that the data was "ASSIGNED".	N/A	N/A	This field does not typically appear on the CRF. This is populated through the sponsor's coding process.
Interventions	CM	N/A	N/A	38	CMATC4	ATC Level 4 Description	Dictionary text description of the fourth level of hierarchy within the ATC classification system;	N/A	N/A	Char	O	N/A	SUPPCM.Q VAL	This does not map directly to an SDTMIG variable. This information could be submitted in a	N/A	N/A	This field does not typically appear on the CRF. This is populated through the sponsor's coding process.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology / CDASH Codelist Name	Implementation Notes
							indicates the chemical/ therapeutic/ pharmacological subgroup.							SUPPCM dataset as the value of SUPPCM.QV AL where SUPPCM.QN AM="CMATC 4" and SUPPCM.QL ABEL="ATC Level 4 Description". Sponsors should include an Origin column in the SUPPQ dataset to indicate that the data was "ASSIGNED". Refer to the current SDTM and SDTMIG for instructions on placement of NSVs in SDTM domains.			
Interventions	CM	N/A	N/A	39	CMATC4C D	ATC Level 4 Code	Dictionary code denoting the fourth level of hierarchy within the ATC classification system; indicates the chemical/ therapeutic/ pharmacological subgroup.	N/A	N/A	Num	O	N/A	SUPPCM.Q VAL	This does not map directly to an SDTMIG variable. This information could be submitted in a SUPPCM dataset as the value of SUPPCM.QV AL where SUPPCM.QN AM="CMATC 4CD" and SUPPCM.QL ABEL="ATC Level 4 Code". Sponsors should include an Origin column in the SUPPQ dataset to indicate that the data was "ASSIGNED".	N/A	N/A	This field does not typically appear on the CRF. This is populated through the sponsor's coding process.
Interventions	CM	N/A	N/A	40	CMATC5	ATC Level 5 Description	Dictionary text description of the fifth level of hierarchy within the ATC	N/A	N/A	Char	O	N/A	SUPPCM.Q VAL	This does not map directly to an SDTMIG variable. This information	N/A	N/A	This field does not typically appear on the CRF. This is populated through the sponsor's coding process.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology / CDASH Codelist Name	Implementation Notes
							classification system; indicates the chemical substance.							could be submitted in a SUPPCM dataset as the value of SUPPCM.QV AL where SUPPCM.QN AM="CMATC 5" and SUPPCM.QL ABEL="ATC Level 5 Description". Sponsors should include an Origin column in the SUPPQ dataset to indicate that the data was "ASSIGNED". Refer to the current SDTM and SDTMIG for instructions on placement of NSVs in SDTM domains.			
Interventions	CM	N/A	N/A	41	CMATC5CD	ATC Level 5 Code	Dictionary code denoting the fifth level of hierarchy within the ATC classification system; indicates the chemical substance.	N/A	N/A	Num	O	N/A	SUPPCM.QVAL	This does not map directly to an SDTMIG variable. This information could be submitted in a SUPPCM dataset as the value of SUPPCM.QV AL where SUPPCM.QN AM="CMATC 5CD" and SUPPCM.QL ABEL="ATC Level 5 Code". Sponsors should include an Origin column in the SUPPQ dataset to indicate that the data was "ASSIGNED".	N/A	N/A	This field does not typically appear on the CRF. This is populated through the sponsor's coding process.

Assumptions for the CDASHIG CM - Prior and Concomitant Medications Domain

1. *General* medications/treatments are defined as any medications/treatments reported by a subject when asked if they have taken any medications in an open-ended way that does not ask about any specific drug. Additional information might be sourced by referring to a subject's medical record.
2. *Medications of interest* are defined as any medications or classes of drugs specifically mentioned in the protocol and which were not the primary focus for determining the CDASHIG Core designations for the domain (e.g., excluded medications, drugs requiring a washout period prior to dosing in study, rescue medications).
3. As with all the data collection variables recommended in the CDASH standard, it is assumed that sponsors will add other data variables as needed to meet protocol-specific and other data collection requirements (e.g., therapeutic area-specific data elements and others as required per protocol, business practice, and operating procedures).
4. The CMOCCUR field provides a structure for capturing the occurrence of specific medications of interest.
5. Sponsors wishing to capture nonpharmacological therapies (e.g., surgery procedures, aromatherapy, massage, acupuncture) can use the Procedures (PR) domain.

Example CRF for the CDASHIG CM - Prior and Concomitant Medications Domain

Example 1

Title: Concomitant Medications

	Concomitant Medication Category CMCAT <i>Hidden/pre-populated</i>	GENERAL
Indicate if the subject took any concomitant medications/treatments. If Yes, include the appropriate details where indicated on the CRF.	Were any concomitant medications taken? CMYN <i>Not Submitted</i>	☐ Yes ☐ No <NY codelist>
If collected on the CRF, sponsor may insert instructions to ensure each record has a unique identifier.	CM Number CMSPID	
Record only one treatment per line. Provide the full trade or proprietary name of the medication/treatment; otherwise, record the generic name.	What was the medication? CMTRT	
Record the reason the medication was taken based on clinical investigator's evaluation. If taken to treat a condition, and a diagnosis was made, the indication should be the diagnosis. If taken to treat a condition, and no diagnosis was made, the indication should be the signs and symptoms. If taken as prophylaxis, report as "Prophylaxis for " and include a description of the condition(s).	For what indication was the medication taken? CMINDC	
Record the dose of medication/treatment per administration (e.g., 200).	Dose CMDSTXT CMDOSTXT/ CMDOSE	
Record the dose unit of the dose of concomitant medication/treatment taken (e.g., mg).	Unit CMDOSU	Select... <UNIT codelist>
Record the pharmaceutical dosage form (e.g., TABLET CAPSULE, SYRUP) of delivery for the concomitant [medication/treatment/therapy] taken.	Dose Form CMDOSFRM	Select... <FRM codelist>
Record how often the medication was taken (e.g., BID, PRN).	Frequency CMDOSFRQ	Select... <FREQ codelist>
Provide the route of administration for the medication.	Route CMROUTE	Select... <ROUTE codelist>

Record the date the concomitant medication/treatment was first taken using this format (DD-MON-YYYY). If the subject has been taking the concomitant medication/treatment for a considerable amount of time prior to the start of the study, it is acceptable to have an incomplete date. Concomitant medications taken during the study are expected to have a complete start date. Prior concomitant medications that are exclusionary should have both a start date and an end date.

Record the concomitant medication/treatment as ongoing if the subject has not stopped taking the concomitant medication/treatment at the time of data collection and the end date should be left blank.

Record the date the concomitant medication/treatment was stopped using this format (DD-MON-YYYY). If the subject has not stopped taking the concomitant medication/treatment leave this field blank.

Start Date CMSTDAT CMSTDTC	
Is the medication ongoing? CMONGO CMENRF or CMENRTPT ☐ Yes <NY codelist>	
End Date CMENDAT CMENDTC	

CRF Metadata

Order	CDASH Variable	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
1	CMCAT	What is the category for the medication?	Concomitant Medication Category	Record the medication category, if not pre-printed on the CRF.	Text	CMCAT				GENERAL			Yes
2	CMYN	Were any concomitant medications taken?	Any Concomitant Medications	Indicate if the subject took any concomitant medications/treatments. If Yes, include the appropriate details where indicated on the CRF.	Text	N/A		(NY)	Yes; No				
3	CMSPID	What is the medication identifier?	CM Number	If collected on the CRF, sponsor may insert instructions to ensure each record has a unique identifier.	Text	CMSPID					prompt		
4	CMTRT	What was the medication?	Concomitant Medication	Record only one treatment per line. Provide the full trade or proprietary name of the medication/treatment; otherwise, record the generic name .	Text	CMTRT							
6	CMINDC	For what indication was the medication taken?	Indication	Record the reason the medication was taken based on clinical investigator's evaluation. If taken to treat a condition, and a diagnosis was made, the indication should be the diagnosis. If taken to treat a condition, and no diagnosis was made, the indication should be the signs and symptoms. If taken as prophylaxis, report as "Prophylaxis for " and include a description of the condition(s).	Text	CMINDC							
7	CMDSTXT	What was the individual dose of the medication?	Dose	Record the dose of medication/treatment per administration (e.g., 200).	Text	CMDOSTXT; CMDOSE	CMDOSTXT/ CMDOSE				prompt		
8	CMDOSU	What is the unit?	Unit	Record the dose unit of the dose of concomitant medication/treatment taken (e.g., mg).	Text	CMDOSU		(UNIT)	CAPSULE; g; IU; mg; mL; PUFF; TABLET; ug		prompt		
9	CMDOSFRM	What was the dose form of the medication?	Dose Form	Record the pharmaceutical dosage form (e.g., TABLET CAPSULE, SYRUP) of delivery for the concomitant [medication/treatment/therapy] taken.	Text	CMDOSFRM		(FRM)	AEROSOL; CAPSULE; CREAM; GAS; GEL; OINTMENT; PATCH; POWDER; SPRAY; SUPPOSITORY; SUSPENSION; TABLET		prompt		

Order	CDASH Variable	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
10	CMDOSFRQ	What was the frequency of the medication?	Frequency	Record how often the medication was taken (e.g., BID, PRN).	Text	CMDOSFRQ		(FREQ)	BID; PRN; QD; QID; QM; QOD; TID		prompt		
11	CMROUTE	What was the route of administration of the medication?	Route	Provide the route of administration for the medication.	Text	CMROUTE		(ROUTE)	INTRALESIONAL; INTRAMUSCULAR; INTRAOCULAR; INTRAPERITONEAL; NASAL; ORAL; RECTAL; RESPIRATORY (INHALATION); SUBCUTANEOUS; TOPICAL; TRANSDERMAL; VAGINAL		prompt		
12	CMSTDAT	What was the start date?	Start Date	Record the date the concomitant medication/treatment was first taken using this format (DD-MON-YYYY). If the subject has been taking the concomitant medication/treatment for a considerable amount of time prior to the start of the study, it is acceptable to have an incomplete date. Concomitant medications taken during the study are expected to have a complete start date. Prior concomitant medications that are exclusionary should have both a start date and an end date.	Date	CMSTDTC					prompt		
13	CMONGO	Is the medication ongoing?	Ongoing	Record the concomitant medication/treatment as ongoing if the subject has not stopped taking the concomitant medication/treatment at the time of data collection and the end date should be left blank.	Text	CMENRF; CMENRTPT	CMENRF or CMENRTPT	(NY)	Yes			checkbox	
14	CMENDAT	What was the end date?	End Date	Record the date the concomitant medication/treatment was stopped using this format (DD-MON-YYYY). If the subject has not stopped taking the concomitant medication/treatment leave this field blank.	Date	CMENDTC					prompt		

8.1.4 EC - Exposure as Collected and EX - Exposure

Description/Overview for the CDASHIG EC - Exposure as Collected and CDASHIG EX - Exposure Domains

In the SDTMIG, the Exposure (EX) domain is used to represent exposure to study treatment as described in the protocol. The CDASHIG EC domain is used to represent data as collected on the CRF, and is used in a study when the SDTMIG EX domain cannot be directly populated with the data collected on the CRF.

CDASHIG EC is used when:

- 1. An alias for the actual treatment name is used (e.g., the study is masked) rather than the actual treatment name (e.g., the study is open label).
- 2. Exposure data are collected in non-protocol-specified units (e.g., tablets).
- 3. Scheduled and/or missed doses are collected.
- 4. Planned doses (e.g., a calculation based on body weight) are collected in addition to actual doses given.

A sponsor may choose to always collect exposure data using the CDASHIG EC domain.

Extensive discussion of the use of the EC and EX domains, including examples of data collection, is available in the SDTMIG.

Specification for the CDASHIG EC - Exposure as Collected and EX - Exposure Domains

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/ CDASH Codelist Name	Implementation Notes
Interventions	EC	N/A	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/ CDASH Codelist Name	Implementation Notes
																	displayed clearly on the CRF and/or in the EDC system. This field can be included in the database or populated during SDTM-based dataset creation before submission.
Interventions	EC	N/A	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted on the CRFs that are shipped to each site. EDC: This should be prepopulated.
Interventions	EC	N/A	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What [is/was] the (study) [subject/participant] identifier?	[Subject/Participant] (Identifier)	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system generated. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Interventions	EC	N/A	N/A	4	EPOCH	Epoch	Name of the trial epoch with which this element of the arm is associated.	What is the trial epoch?	[Epoch](Period/Phase/Sponsor-defined phrase)	Char	R/C	[protocol specific]	EPOCH	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(EPOCH)	N/A	If the same information is collected more than once in different periods/parts of a study (e.g., Disposition), EPOCH may be needed to differentiate them. Typically, the trial epoch will be preprinted on the CRF as the title of the page. See SDTMIG for further information regarding EPOCH.
Interventions	EC	N/A	N/A	5	ECYN	Any Study Treatment Taken	An indication of whether the subject took the study medication/ treatment.	Were any[study treatment/dose] taken?	Any Study Treatments	Char	O	Indicate if the subject took any study medications. If Yes, include the appropriate details where indicated.	N/A	Does not map to an SDTMIG variable. The SDTM annotated CRF indicates that this field is NOT SUBMITTED.	(NY)	N/A	The intent/purpose of collecting this field is to help with data cleaning and monitoring. It provides verification that all other fields on the CRF were deliberately left blank. The ECYN is meant to indicate that the exposure as

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/ CDASH Codelist Name	Implementation Notes
																	collected form should be completed or inserted into the case book. ECOCCUR would be used when the actual drug name is preprinted on the CRF. While these might be equivalent in a single-drug study, there are differences in how they would be used in most trials. Therefore, it does not map into the SDTM variable ECOCCUR; ECOCCUR indicates whether the subject was actually administered treatment/medication. If actual treatment data is available (ECYN ="Y"), ECOCCUR may be populated based on whether subject was actually administered treatment/medication.
Interventions	EC	N/A	N/A	6	ECCAT	Category of Treatment	A grouping of topic-variable values based on user-defined characteristics.	What is the category of the [study treatment/dose]?	[Study Treatment Category]; NULL	Char	O	Record the study treatment category, if not preprinted on the CRF.	ECCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, and not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Category" can be included as the column heading.
Interventions	EC	N/A	N/A	7	ECSCAT	Subcategory of Treatment	A sub-division of the ECCAT values based on user-defined characteristics.	What is the subcategory of the [study treatment/dose]?	[Study Treatment Subcategory]; NULL	Char	O	Record the study treatment subcategory, if not preprinted on the CRF.	ECSCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be preprinted on the CRF or screen and prepopulated in the data management system. This is not typically a question to which the site would provide an answer. ECSCAT can only be used if there is an ECCAT and it must be a subcategorization of ECCAT.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/ CDASH Codelist Name	Implementation Notes
Interventions	EC	N/A	N/A	8	ECTRT	Treatment	Name of the intervention or treatment known to the subject and/or administrator.	What was the [study treatment/investigational product] name?	[Study Treatment/Investigational Product Name]	Char	R/C	Record the name of study treatment.	ECTRT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	ECTRT is the name of the intervention or treatment known to the subject and/or administrator and it is the SDTM topic variable. It is a required variable in SDTM and must have a value in CDASH or a plan to populate it in the SDTM submission datasets (i.e., collected or populated from other sources). If, in a masked study, treatment is collected and known as tablet A to the subject or administrator, then ECTRT="TABLET A". If, in a masked study, the treatment is not known by a synonym and the data are to be exchanged between sponsors, partners, and/or regulatory agency(s), then assign ECTRT the value of "MASKED".
Interventions	EC	N/A	N/A	9	ECPRESP	Exposure as Collected Prespecified	An indication that a specific intervention or a group of interventions is prespecified on a CRF.	N/A	N/A	Char	O	N/A	ECPRESP	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(NY)	N/A	For prespecified interventions, a hidden field on a CRF defaulted to "Y", or added during the SDTM dataset creation. If a study collects both prespecified and free-text interventions, the value of ECPRESP should be "Y" for all prespecified interventions and null for interventions reported as free text.
Interventions	EC	N/A	N/A	10	ECOCUR	Exposure as Collected Occurrence	An indication whether the study treatment was administered when information about the occurrence of a specific intervention was solicited.	Was [study treatment/dose] administered?. Has the subject taken [study treatment/dose]?	[Study Medication/Treatment]	Char	O	Indicate if the subject took study treatment. If Yes, include the appropriate details where indicated.	ECOCUR	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. Not applicable when ECMOOD is "Scheduled".	(NY)	N/A	ECOCUR is used to indicate whether the subject was actually administered treatment/medication. ECOCUR should not be used to indicate that the question was not asked or answered.
Interventions	EC	N/A	N/A	11	ECREASOC	Exposure Reason for Occur Value	An explanation for why a scheduled study treatment administration did or did not occur.	What was the reason that the [study treatment/dose] was (not) taken?	Reason (Not) Taken	Char	O	Indicate why the study treatment was or was not taken.	SUPPEC.QVAL	This information could be submitted in a SUPPEC dataset as the value of SUPPEC.QVAL where SUPPEC.QNAM="ECREASOC" and SUPPEC.QLABEL="Reason for Occur Value". Refer to the current SDTM and SDTMIG for instructions on placement of non-standard	N/A	N/A	The reason the study treatment was or was not taken may be chosen from a sponsor-defined codelist (e.g., SUBJECT MISTAKE, SUBJECT REFUSED) or entered as free text. When --REASOC

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/ CDASH Codelist Name	Implementation Notes
														variables (NSVs) in SDTM domains.			is used, --OCCUR must also be populated in the SDTM dataset with a value of "Y" or "N".
Interventions	EC	N/A	N/A	12	ECMOOD	Exposure as Collected Mood	Mode or condition of the record specifying whether the intervention (activity) is intended to happen or has happened.	Does this record describe scheduled [study treatment/dose] or performed [study treatment/dose]?	Scheduled/Performed	Char	O	Indicate if this record has happened or is intended to happen.	ECMOOD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. When implemented, ECMOOD must be populated for all records.	(BRDGMOOD)	N/A	"SCHEDULED" is for collected subject-level intended dose records. "PERFORMED" is for collected subject-level actual dose records. "Planned" or "Scheduled" can be preprinted as the CRF name or section header, as applicable. If collecting both the scheduled and performed dosing in the same horizontal record, the sponsor may choose to append " _SCHEDULED" to the ECDOSE/ECDOSTXT variable name to delineate the scheduled dose from the performed dose. The performed dose would just be collected with ECDOSE/ECDOSTXT and ECDOSU.
Interventions	EC	N/A	N/A	13	ECREFID	Exposure as Collected Reference ID	An internal or external identifier (e.g., kit number, bottle label, vial identifier).	What is the[study treatment/dose] label identifier?	[Study Treatment] Label Identifier	Char	O	Record treatment label identifier.	ECREFID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	This packaging identifier (e.g., kit number, bottle label, vial identifier) may be collected in different ways (e.g., affixing label onto CRF, scanning a bar code). For some study dosing regimens that require greater granularity for treatment identifiers, sponsors may need to use additional variables.
Interventions	EC	N/A	N/A	14	ECLOT	Lot Number	Lot number of the ECTRT product.	What was the lot number of the[study treatment/dose] used?	Lot Number	Char	R/C	Record the lot number that appears on the container holding the study treatment.	ECLOT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The lot number identifies the manufacturing batch of the study treatment. In open-label studies, the reference number on the study treatment container may represent an actual lot number and should be submitted using ECLOT. This variable may be populated during the process of creating the SDTM

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/ CDASH Codelist Name	Implementation Notes
																	submission datasets. Do not collect other identification variables in this field.
Interventions	EC	N/A	N/A	15	ECFAST	Exposure as Collected Fasting Status	An indication that the subject has abstained from food/water for the specified amount of time.	Was the subject fasting?	Fasting	Char	O	Record whether the subject was fasting prior to the study treatment being taken.	ECFAST	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. Would only be populated when ECMOOD="PERFORMED".	(NY)	N/A	Because some study treatments may have a food effect, it is important to know whether the dose was taken after the subject had fasted.
Interventions	EC	N/A	N/A	16	ECDOSFRM	Exposure as Collected Dose Form	The dosage form in which the ECTRT is physically presented.	What was the dose form of the [study treatment/dose]?	Dose Form	Char	R/C	Record the dose form (e.g., SOLUTION, TABLET, LOTION) or enter the appropriate code from the code list.	ECDOSFRM	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(FRM)	(EXDOSFRM)	This must be collected if it cannot be determined from other sources or if there are multiple options for the same study treatment.
Interventions	EC	N/A	N/A	17	ECSTDAT	Exposure as Collected Start Date	The start date of study treatment, intended or actual, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the ([intended/planned/actual]) ([study treatment/dose]) (start) date?	(Start) Date	Char	HR	Record the start date of the study treatment administration using this format (DD-MON-YYYY).	ECSTDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH START DATE and TIME components and populate the SDTMIG variable ECSTDTC in ISO 8601 format.	N/A	N/A	Date when constant dosing interval of the study treatment started or single administration occurred. When collecting the date for an individual dose, the word "start" may be omitted from the Question Text and Prompt. When ECMOOD is collected and ECMOOD is "SCHEDULED", use "intended" in the question text and prompt. When ECMOOD is collected and ECMOOD is "PERFORMED", use "actual" in the question text and prompt.
Interventions	EC	N/A	N/A	18	ECSTTIM	Exposure as Collected Start Time	The start time of study treatment, represented in an unambiguous time format (e.g., hh:mm:ss).	What was the ([intended/planned/actual]) ([study treatment/dose]) (start) time?	(Start) Time	Char	R/C	Record the start time (as complete as possible) when administration of study treatment started.	ECSTDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH START DATE and TIME components and populate the SDTMIG variable ECSTDTC in ISO 8601 format.	N/A	N/A	Recommend collecting the time a medication was started only when a protocol or data collection scenarios requires it. When collecting the time for an individual dose, the word "start" may be omitted from the question text and prompt.
Interventions	EC	N/A	N/A	19	ECENDAT	Exposure as Collected End Date	The end date of study treatment, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the ([intended/planned/actual]) ([study treatment/dose]) (end) date?	(End) Date	Char	R/C	Record the end date of the study treatment administration using this format (DD-MON-YYYY).	ECENDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH END DATE and TIME components and populate the SDTMIG variable ECENDTC in ISO 8601 format.	N/A	N/A	Date when study treatment period stopped.If start date and end date are not expected to be the same date, the collection of the end date is required. If the study design indicates that the start and end are on the same day, the collection of the

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/ CDASH Codelist Name	Implementation Notes
																	end date is not required because it can be assigned to be equal to the start date.
Interventions	EC	N/A	N/A	20	ECENTIM	Exposure as Collected End Time	The end time of study treatment, represented in an unambiguous time format (e.g., hh:mm:ss).	What was the ((Intended/planned/actual)) ([study treatment/dose]) (end) time?	(End) Time	Char	R/C	Record the time, (as complete as possible) when study treatment administration stopped (e.g., for infusions this is the time when the infusion ended).	ECENDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH END DATE and TIME components and populate the SDTMIG variable ECENDTC in ISO 8601 format.	N/A	N/A	Recommend collecting the time a medication was ended when a protocol or data collection scenarios requires it. For infusions, the end time of the infusion is typically needed.
Interventions	EC	N/A	N/A	21	ECDSTXT	Exposure as Collected Dose Description	The dose of study medication taken (per administration).	What was the dose (per administration) (of [study treatment/dose])?	Dose	Char	R/C	Record the dose or amount of study treatment that was administered to/taken by the subject in the period recorded; from the start date/time to the end date/time inclusive.	ECDOSTXT; ECDOSE	This does not map directly to an SDTMIG variable. The data collected in this dose text-format field should be mapped to either ECDOSE if numeric or ECDOSTXT if text.	N/A	N/A	Dose or amount taken for single administration of study treatment or per constant dosing interval recorded. Dose must be collected if it cannot be determined via other methods (e.g., from diary data, drug accountability data, protocol). Care should be taken when mapping ECDSTXT. The data collected in this dose text-format field should be separated or mapped to either ECDOSE if numeric or ECDOSTXT if text.
Interventions	EC	N/A	N/A	22	ECDOSU	Exposure as Collected Dose Units	The unit for intended dose (per administration) for ECDOSE, ECDOSTOT, or ECDOSTXT.	What were the units for the dose?	Units	Char	R/C	Record the unit of dose or amount taken per period recorded (e.g., ng, mg, mg/kg).	ECDOSU	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(UNIT)	(EXDOSU)	Unit of dose or amount taken per constant dosing interval recorded. Dose unit must be collected if it cannot be determined via other methods (e.g., from protocol, randomization data). The unit should be preprinted on the CRF or a field provided on the CRF to capture it. A CDASH Subset Controlled Terminology Codelist Name is available for dose and volume units. In blinded trials, the collected unit may be tablet, capsule, etc., since the actual unit is also blinded.
Interventions	EC	N/A	N/A	23	ECDOSFRQ	EC Dosing Frequency per Interval	The number of doses given/administered/taken during a specific interval.	What was the frequency of [study treatment/dose] dosing?	Frequency	Char	R/C	Record the frequency the study treatment was administered for a defined period of time (e.g., BID, QID, TID).	ECDOSFRQ	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(FREQ)	(EXDOSFRQ)	This may be collected if it cannot be determined from other sources or if there are multiple options. When possible, the options for dose/amount

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/ CDASH Codelist Name	Implementation Notes
																	frequency are preprinted on the CRF. When collected, the recommendation is to collect dosing information in separate fields (e.g., ECDOSE, ECDOSEU, ECDOSEFRQ) for specific and consistent data collection and to enable programmatically using these data.
Interventions	EC	N/A	N/A	24	ECROUTE	EC Route of Administration	The route of administration of the study treatment.	What was the route of administration (of the [study treatment/dose])?	Route	Char	R/C	Record the route of administration (e.g., IV, ORAL, TRANSDERMAL) or enter the appropriate code from the code list.	ECROUTE	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(ROUTE)	(EXROUTE)	This may be collected if it cannot be determined via other methods (e.g., from protocol) or if there are multiple options.
Interventions	EC	N/A	N/A	25	ECDOSRGM	Intended Dose Regimen	Text description of the intended schedule or regimen for the Intervention.	What was the intended dose regimen?	Intended Dose Regimen	Char	O	Record the regimen for the study medication.	ECDOSRGM	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The regimen information (e.g., TWO WEEKS ON, TWO WEEKS OFF) may further clarify the dose administration and dose frequency. This may be preprinted or collected. The sponsor may wish to create a codelist to collect this data consistently.
Interventions	EC	N/A	N/A	26	ECDOSADJ	Dose Adjusted	An indication of whether the dose was adjusted.	Was the dose adjusted?	(Dose) Adjusted	Char	O	Select either Yes or No to indicate whether there was a change in dosing.	N/A	When ECADJ is collected, does not map to an SDTMIG variable. The SDTM annotated CRF indicates that this field is NOT SUBMITTED. When ECADJ is not collected, the sponsor may submit this variable in SUPPEC.	(NY)	N/A	Typically, the intent/purpose of collecting this field is to help with data cleaning and monitoring, as it provides a definitive response regarding any dose changes. It provides verification that the associated field on the CRF (ECADJ) was deliberately left blank. However, the sponsor may collect whether the dose was adjusted, without collecting the reason for the change. When using ECMOOD, this field should not be used.
Interventions	EC	N/A	N/A	27	ECADJ	Reason for Dose Adjustment	Description of or explanation for why a dose of the study treatment was adjusted.	What was the reason the dose was adjusted?	Reason Adjusted	Char	O	If there was a change in dosing, record the reason for change.	ECADJ	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Captures the reason the dose was changed or modified. The reason may be chosen from a sponsor-defined list (e.g., adverse event,

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/ CDASH Codelist Name	Implementation Notes
																	insufficient response) or entered as free text. May be used for variations from protocol-specified doses, or changes from expected doses. Used only when an adjustment is represented in EX dataset.
Interventions	EC	N/A	N/A	28	ECITRPYN	EC Exposure Interrupted	An indication of whether the exposure was interrupted.	Was the [(study) treatment/dose] interrupted?	[(Study) Treatment / Dose] Interrupted	Char	O	Record if there was an interruption in the study treatment or dosing.	N/A	Does not map to an SDTMIG variable. The SDTM annotated CRF indicates that this field is NOT SUBMITTED..	(NY)	N/A	The intent/purpose of collecting this field is to help with data cleaning and monitoring when the actual duration of the exposure is collected using the CDASH field ECCINTD. In some situations, if the actual duration of the interruption is not collected or not derived, this information could be submitted in a SUPPEC.QVAL dataset where SUPPEC.QNAM = "ECITRPYN" and SUPPEC.QLABEL = "Exposure Interrupted".
Interventions	EC	N/A	N/A	29	ECCINTD	EC Interruption Duration	The collected duration of the treatment interruption.	What was the duration of the treatment interruption?	(Interruption) Duration	Char	O	Record the duration of treatment interruption.	SUPPEC.QVAL	This does not map directly to an SDTMIG variable. This information could be submitted in a SUPPEC dataset as the value of SUPPEC.QVAL where SUPPEC.QNAM="ECITRPD" and SUPPEC.QLABEL="Interruption Duration". Concatenate the collected treatment interruption duration and the duration unit components and create ECITRPD using ISO 8601 Period format. Refer to the current SDTM and SDTMIG for instructions on placement of NSVs in SDTM domains.	N/A	N/A	This field is used to collect the duration of treatment interruption. In some situations, the duration of the interruption may not be collected but calculated from the treatment start and end times recorded elsewhere in the CRF.
Interventions	EC	N/A	N/A	30	ECCINTDU	EC Interruption Duration Units	The unit for the collected duration of treatment interruption.	What was the interruption duration unit?	(Interruption Duration) Unit	Char	O	Record the unit (e.g., MINUTES, HOURS, DAYS) for the duration of treatment interruption.	SUPPEC.QVAL	This does not map directly to an SDTMIG variable. This information could be submitted in a SUPPEC dataset as the value of SUPPEC.QVAL where SUPPEC.QNAM = "ECITRPD" and SUPPEC.QLABEL="Interruption Duration". Concatenate the collected treatment interruption duration and the duration unit components and create ECITRPD using ISO 8601 Period format. Refer to the current SDTM and SDTMIG for	(UNIT)	(EXCINTPU)	The unit should be collected as a qualifier to the number for duration.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/ CDASH Codelist Name	Implementation Notes
														instructions on placement of NSVs in SDTM domains.			
Interventions	EC	N/A	N/A	31	ECLOC	EC Location of Dose Administration	A description of the anatomical location of administration.	What was the anatomical location of the ([study treatment/dose]) administration?	Anatomical Location	Char	O	Record the body location where the study treatment was administered (e.g., SHOULDER, HIP, ARM).	ECLOC	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(LOC)	N/A	Collected or preprinted when the sponsor needs to identify the specific anatomical location where the study treatment was administered. LAT, DIR, PORTOT are used to further describe the anatomical location.
Interventions	EC	N/A	N/A	32	ECLAT	Exposure as Collected Laterality	Qualifier for anatomical location, further detailing side of the body for the study treatment administration.	What was the side of the anatomical location of the ([study treatment/dose]) administration?	Side	Char	O	Record the side of the body location where the study treatment was administered (e.g., Left, Right).	ECLAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(LAT)	N/A	Further details the laterality of the location where the study treatment was administered. This may be preprinted or collected. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Interventions	EC	N/A	N/A	33	ECDIR	Exposure as Collected Directionality	Qualifier further detailing the position of the anatomical location relative to the center of the body, organ, or specimen.	What was the directionality of the anatomical location of the ([study treatment/dose]) administration?	Directionality	Char	O	Record the directionality of the body location where the study treatment was administered (e.g., Anterior, Lower, Proximal, Upper).	ECDIR	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(DIR)	N/A	May be preprinted or collected when the sponsor needs to identify the directionality of the anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Interventions	EC	N/A	N/A	34	ECVAMT	EC Vehicle Amount	The amount of the prepared product (treatment + vehicle) administered or given.	What was the total amount (Drug + Vehicle) (of [study treatment/dose]) administered?	Total Amount (Drug + Vehicle)	Num	O	Record the total amount (treatment +vehicle) that was administered/given to the subject.	ECVAMT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The SDTM variable ECTRTV may also be populated during the process of creating the SDTM submission datasets.	N/A	N/A	Administration amount that was given to the subject. Note: Should not be the diluent amount alone. The ECTRTV field may be collected if it cannot be determined from other sources.
Interventions	EC	N/A	N/A	35	ECVAMTU	EC Vehicle Amount Units	The unit of measurement for the prepared product (treatment + vehicle).	What was the unit for the amount (of [study treatment/dose]) administered?	Unit	Char	O	Record the unit of total amount (treatment +vehicle) administered/given to the subject (e.g., mL).	ECVAMTU	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(UNIT)	N/A	Unit of the administration amount
Interventions	EC	N/A	N/A	36	ECFLRT	Exposure as Collected Infusion Rate	The flow rate for the total amount of drug + vehicle administered to the subject.	What was the [study treatment/dose] infusion rate?	Infusion Rate	Num	O	Record the Rate of Infusion (e.g., if rate is 10 mL/min. Record 10 as the infusion rate).	SUPPEC.QVAL	This does not map directly to an SDTMIG variable. This information could be submitted in a SUPPEC dataset as the value of SUPPEC.QVAL where SUPPEC.QNAM="ECFLRT" and SUPPEC.QLABEL= "Infusion Rate". Refer to the current SDTM and SDTMIG for instructions on placement of NSVs in SDTM domains.	N/A	N/A	The infusion rate can be used to derive dose.
Interventions	EC	N/A	N/A	37	ECFLRTU	Exposure as Collected	The unit of measure for the flow rate for the total amount of drug + vehicle	What was the unit for the ([study treatment/dose]) infusion rate?	Infusion Rate Unit	Char	O	Record the unit for the infusion rate (e.g., mL/min).	SUPPEC.QVAL	This does not map directly to an SDTMIG variable. This information could be submitted	(UNIT)	(EXFLRTU)	Unit of the infusion rate

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/ CDASH Codelist Name	Implementation Notes
						Infusion Rate Unit	administered to the subject.							in a SUPPEC dataset as the value of SUPPEC.QVAL where SUPPEC.QNAM="ECFLRTU" and SUPPEC.QLABEL="Infusion Rate Unit". Refer to the current SDTM and SDTMIG for instructions on placement of NSVs in SDTM domains.			
Interventions	EC	N/A	N/A	38	ECTPT	EC Planned Time Point Name	A text description of the planned time point when measurements should be taken, as defined in the protocol.	What was the planned time point for [study treatment/dose]?	[Planned Time Point Name]	Char	R/C	Record the planned time point of study treatment administration if not preprinted on the CRF.	ECTPT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. See the SDTMIG for additional information on representing time points. The SDTMIG time-point anchors ECTPTREF (text description) and ECRFTDTC (date/time) may be needed, as well as SDTMIG variables ECTPTNUM, ECELTM.	N/A	N/A	Planned time points are needed to differentiate multiple sequential assessments. It is recommended that time points should be preprinted on the CRF rather than collected in a field that requires the site to enter text. If the form is laid out as a grid, then words such as "Planned Time Point" can be included as the column heading.
Interventions	EC	N/A	N/A	39	ECTRTCMP	Completed Treatment	An indication of whether the subject completed the intended regimen.	Did the subject complete the full course of [study treatment/dose]?	Completed Treatment	Char	O	Select either Yes or No to indicate whether subject has completed the full course of treatment.	SUPPEC.QVAL	This does not map directly to an SDTMIG variable. This information could be submitted in a SUPPEC dataset as the value of SUPPEC.QVAL where SUPPEC.QNAM = "ECTRTCMP" and SUPPEC.QLABEL ="Completed Treatment". Refer to the current SDTM and SDTMIG for instructions on placement of NSVs in SDTM domains.	(NY)	N/A	Depending on how the study treatment details are collected on the CRF/eCRF, it may be possible to derive those data if the regimen data are collected.

Exposure Metadata Table

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/ CDASH Codelist Name	Implementation Notes
Interventions	EX	N/A	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included into the database or populated during SDTM-based dataset creation before submission.
Interventions	EX	N/A	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/ CDASH Codelist Name	Implementation Notes
																	For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted on the CRFs that are shipped to each site. EDC: This should be prepopulated.
Interventions	EX	N/A	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What [is/was] the (study) [subject/participant] identifier?	[Subject/Participant] (Identifier)	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system-generated. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Interventions	EX	N/A	N/A	4	EPOCH	Epoch	Name of the trial epoch with which this element of the arm is associated.	What is the trial epoch?	[Epoch](Period/Phase/Sponsor-defined phrase)	Char	R/C	[protocol specific]	EPOCH	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(EPOCH)	N/A	If the same information is collected more than once in different periods/parts of a study (e.g., Disposition), EPOCH may be needed to differentiate them. Typically, the trial epoch will be preprinted on the CRF as the title of the page. See the SDTMIG for further information regarding EPOCH.
Interventions	EX	N/A	N/A	5	EXYN	Any Study Treatment Taken	An indication of whether the subject took study medication/treatment.	Were any[study treatment/dose] taken?	Any Study Treatments	Char	O	Indicate if the subject took any study medications. If Yes, include the appropriate details where indicated.	N/A	Does not map to an SDTMIG variable. The SDTM annotated CRF indicates that this field is NOT SUBMITTED.	(NY)	N/A	The intent/purpose of collecting this field is to help with data cleaning and monitoring. It provides verification that all other fields on the CRF were deliberately left blank. The EXYN variable is a cleaning or EDC convention meant

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/ CDASH Codelist Name	Implementation Notes
																	to indicate that the exposure form should be completed or inserted into the case book.
Interventions	EX	N/A	N/A	6	EXCAT	Category of Treatment	A grouping of topic-variable values based on user-defined characteristics.	What is the category of the [study treatment/dose] ?	[Study Treatment Category]; NULL	Char	O	Record the study treatment category, if not preprinted on the CRF.	EXCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, and not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Category" can be included as the column header.
Interventions	EX	N/A	N/A	7	EXSCAT	Subcategory of Treatment	A sub-division of the EXCAT values based on user-defined characteristics.	What is the subcategory of the [study treatment/dose] ?	[Study Treatment Subcategory]; NULL	Char	O	Record the study treatment subcategory, if not preprinted on the CRF.	EXSCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be preprinted on the CRF or screen and prepopulated in the data management system. This is not typically a question to which the site would provide an answer. EXSCAT can only be used if there is an EXCAT and it must be a subcategorization of EXCAT.
Interventions	EX	N/A	N/A	8	EXTRT	Name of Treatment	Name of the study treatment or intervention given per single administration or during the constant dosing interval for the observation.	What was the [study treatment/investigational product] name?	[Study Treatment/Investigational Product Name]	Char	R/C	Record the name of study treatment.	EXTRT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	EXTRT captures the name of the investigational treatment. This is typically collected for open label studies and populated for blinded studies during the SDTM-based dataset creation. Because EXTRT is the SDTMIG topic variable, it is a required variable

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/ CDASH Codelist Name	Implementation Notes
																	in SDTM and must have a value in CDASH or a plan to populate it in the SDTM submission datasets (i.e., collected or populated from other sources).
Interventions	EX	N/A	N/A	9	EXREFID	Exposure Reference ID	An internal or external identifier (e.g., kit number, bottle label, vial identifier).	What is the [study treatment/dose] label identifier?	Treatment Label Identifier	Char	R/C	Record treatment label identifier.	EXREFID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	This packaging identifier (e.g., kit number, bottle label, vial identifier) may be collected in different ways (e.g., affixing label onto CRF, scanning a bar code). For some study dosing regimens, greater granularity for treatment identifiers may be needed.
Interventions	EX	N/A	N/A	10	EXLOT	Lot Number	Lot number of the EXTRT product.	What was the lot number of the[study treatment/dose] used?	Lot Number	Char	R/C	Record the lot number that appears on the container holding the study treatment.	EXLOT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The lot number identifies the manufacturing batch of the study treatment. In open-label studies, the reference number on the study treatment container may represent an actual lot number and is submitted using EXLOT. This variable may be populated during the process of creating the SDTM submission datasets. Do not collect other identification variables in this field.
Interventions	EX	N/A	N/A	11	EXFAST	Exposure Fasting Status	An indication that the subject has abstained from food/water for the specified amount of time.	Was the subject fasting?	Fasting	Char	O	Record whether the subject was fasting prior to the study treatment being taken.	EXFAST	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(NY)	N/A	Because some study treatments may have a food effect, it is important to know whether the dose was taken after the subject had fasted.
Interventions	EX	N/A	N/A	12	EXDOSFRM	Exposure Dose Form	The dosage form in which the EXTRT is physically presented.	What was the dose form of the [study treatment/dose] ?	Dose Form	Char	R/C	Record the dose form (e.g., SOLUTION, TABLET, LOTION) or enter the appropriate code from the code list.	EXDOSFRM	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(FRM)	(EXDOSFRM)	This must be collected if it cannot be determined from other sources or if there are multiple options.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/ CDASH Codelist Name	Implementation Notes
Interventions	EX	N/A	N/A	13	EXSTDAT	Exposure Start Date	The start date of study treatment, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the ([intended/planned/actual]) ([study treatment/dose]) (start) date?	(Start) Date	Char	HR	Record the start date of the study treatment administration using this format (DD-MON-YYYY).	EXSTDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH START DATE and TIME components and populate the SDTMIG variable EXSTDTC in ISO 8601 format.	N/A	N/A	Date when the constant dosing interval of the study treatment started or single administration occurred. When collecting the date for an individual dose, the word "start" may be omitted from the question text and prompt.
Interventions	EX	N/A	N/A	14	EXSTTIM	Exposure Start Time	The start time of the study treatment, represented in an unambiguous time format (e.g., hh:mm:ss).	What was the ([intended/planned/actual]) ([study treatment/dose]) (start) time?	(Start) Time	Char	R/C	Record the start time (as complete as possible) when administration of study treatment started.	EXSTDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH START DATE and TIME components and populate the SDTMIG variable EXSTDTC in ISO 8601 format.	N/A	N/A	Recommend collecting the time a medication was started only when a protocol or data collection scenario requires it.
Interventions	EX	N/A	N/A	15	EXENDAT	Exposure End Date	The end date of study treatment, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the ([intended/planned/actual]) ([study treatment/dose]) (end) date?	(End) Date	Char	R/C	Record the end date or last date of administration of study treatment using this format (DD-MON-YYYY).	EXENDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH END DATE and TIME components and populate the SDTMIG variable EXENDTC in ISO 8601 format.	N/A	N/A	If start date and end date are not expected to be on the same date, the end date is required. If the study design indicates that the start and end date are on the same day, the end date is not required because it can be assigned to be equal to the start date.
Interventions	EX	N/A	N/A	16	EXENTIM	Exposure End Time	The end time of treatment, represented in an unambiguous time format (e.g., hh:mm:ss).	What was the ([intended/planned/actual]) ([study treatment/dose]) (end) time?	(End) Time	Char	R/C	Record the time, (as complete as possible) when study treatment administration stopped (e.g., for infusions this is the time when the infusion ended).	EXENDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH END DATE and TIME components and populate the SDTMIG variable EXENDTC in ISO 8601 format.	N/A	N/A	Recommend collecting the time a medication was ended when a protocol or data collection scenario requires it. For infusions, the end time of the infusion is typically needed.
Interventions	EX	N/A	N/A	17	EXDSTXT	Exposure Dose Description	Dose (per administration).	What was the dose [per administration] (of [study treatment/dose]) ?	Dose	Char	R/C	Record the dose or amount of study treatment that was administered to/taken by the subject in the period recorded; from the start date/time to the end date/time inclusive.	EXDOSTXT; EXDOSE	This does not map directly to an SDTMIG variable. Numeric values map to EXDOSE in SDTM. Non-numeric values (e.g., 200-400) map to EXDOSTXT in SDTM.	N/A	N/A	Dose or amount taken for single administration of study treatment or per constant dosing interval recorded. Dose must be collected if it cannot be determined via other methods (e.g., from diary data, drug accountability data, protocol). The data collected in this dose text-format field should be mapped to

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/ CDASH Codelist Name	Implementation Notes
																	either SDTMIG variable EXDOSE (if numeric) or EXDOSTXT (if text).
Interventions	EX	N/A	N/A	18	EXDOSU	Exposure Dose Unit	The unit for intended dose (per administration) for EXDOSE, EXDOSTOT, or EXDOSTXT.	What was the unit for the dose?	Unit	Char	R/C	Record the unit of dose or amount taken per period recorded (e.g., ng, mg, mg/kg).	EXDOSU	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(UNIT)	N/A	Unit of dose or amount taken per constant dosing interval recorded. Dose unit must be collected if it cannot be determined via other methods (e.g., from protocol, randomization data). The unit should be preprinted on the CRF or a field provided on the CRF to capture it. A CDASH Subset Controlled Terminology Codelist Name is available for general dose and volume units.
Interventions	EX	N/A	N/A	19	EXDOSFRQ	Exposure Dosing Frequency per Interval	The number of doses given/administered/taken during a specific interval.	What was the frequency of [study treatment/dose] dosing?	Frequency	Char	R/C	Record the frequency the study treatment was administered for a defined period of time.	EXDOSFRQ	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(FREQ)	N/A	This may be collected if it cannot be determined from other sources or if there are multiple options. When possible, the options for dose/amount frequency are preprinted on the CRF. When collected, the recommendation is to collect dosing information in separate fields (e.g., ECDOSE, ECDOSEU, ECDOSFRQ) for specific and consistent data collection and to enable programmatically using these data.
Interventions	EX	N/A	N/A	20	EXROUTE	Exposure Route of Administration	The route of administration of the study treatment.	What was the route of administration (of the [study treatment/dose])?	Route	Char	R/C	Record the route of administration (e.g., IV, ORAL, TRANSDERMAL) or enter the appropriate code from the code list.	EXROUTE	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(ROUTE)	(EXROUTE)	This may be collected if it cannot be determined via other methods (e.g., from protocol) or if there are multiple options.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/ CDASH Codelist Name	Implementation Notes
Interventions	EX	N/A	N/A	21	EXDOSRGM	Intended Dose Regimen	The text description of the intended schedule or regimen for the Intervention.	What was the intended dose regimen (of the [study treatment/dose])?	Intended Dose Regimen	Char	O	Record the regimen for the study medication.	EXDOSRGM	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The regimen information may further clarify the dose administration and dose frequency (e.g., TWO WEEKS ON, TWO WEEKS OFF). This may be preprinted or collected. The sponsor may wish to create a codelist to collect this data consistently.
Interventions	EX	N/A	N/A	22	EXDOSADJ	Dose Adjusted	An indication of whether the dose was adjusted.	Was the dose adjusted?	(Dose) Adjusted	Char	O	Select either Yes or No to indicate whether there was a change in dosing.	N/A	When EXADJ is collected, does not map to an SDTMIG variable. The SDTM annotated CRF indicates that this field is NOT SUBMITTED. When EXADJ is not collected, the sponsor may submit this variable as a SUPPQ.	(NY)	N/A	Typically, the intent/purpose of collecting this field is to help with data cleaning and monitoring, as it provides a definitive response regarding any dose changes. It provides verification that the associate field on the CRF (EXADJ) was deliberately left blank. However, the sponsor may collect whether the dose was adjusted, without collecting the reason for the change.
Interventions	EX	N/A	N/A	23	EXADJ	Reason for Dose Adjustment	Description of or explanation for why a dose of the study treatment was adjusted.	What was the reason the dose was adjusted (from planned)?	Reason Adjusted	Char	O	If there was a change in dosing, record the reason for change.	EXADJ	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Captures the reason the dose was changed or modified. The reason may be chosen from a sponsor-defined list (e.g., adverse event, insufficient response) or entered as free text. May be used for variations from protocol-specified doses or changes from expected doses.
Interventions	EX	N/A	N/A	24	EXITRPYN	EX Exposure Interrupted	An indication of whether the exposure was interrupted.	Was the [(study) treatment/dose] interrupted?	[(Study) Treatment / Dose] Interrupted	Char	O	Record if there was an interruption in the study treatment or dosing.	N/A	Does not map to an SDTMIG variable. The SDTM annotated CRF indicates that this field is NOT SUBMITTED.	(NY)	N/A	The intent/purpose of collecting this field is to help with data cleaning and monitoring when the actual duration of the exposure is

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/ CDASH Codelist Name	Implementation Notes
																	collected using the CDASH field EXCINTD. In some situations, if the actual duration of the interruption is not collected, or not derived, this information could be submitted in a SUPPEX.QVAL dataset where SUPPEX.QNAM = "EXITRPN" and SUPPEX.QLABEL = "Exposure Interrupted".
Interventions	EX	N/A	N/A	25	EXCINTD	Exposure Interruption Duration	The collected duration of the treatment interruption.	If the dose was interrupted, how long was the interruption?	(Interruption) Duration	Char	O	Record the duration of treatment interruption.	SUPPEX.QVAL	This does not map directly to an SDTMIG variable. This information could be submitted in a SUPPEX dataset as the value of SUPPEX.QVAL where SUPPEX.QNAM="EXITRPD" and SUPPEX.QLABEL="Interruption Duration". Concatenate the collected treatment interruption duration and the duration unit components and create EXITRPD using ISO 8601 Period format. Refer to the current SDTM and SDTMIG for instructions on placement of NSVs in SDTM domains.	N/A	N/A	In some situations, the duration of the interruption may be calculated from the administration start and end times recorded elsewhere in the CRF.
Interventions	EX	N/A	N/A	26	EXCINTDU	Exposure Interruption Duration Units	The unit for the collected duration of treatment interruption.	If the dose was interrupted, what were the units for the interruption duration?	(Interruption Duration) Unit	Char	O	Record the unit (e.g., MINUTES, HOURS, DAYS) for the duration of treatment interruption.	SUPPEX.QVAL	This does not map directly to an SDTMIG variable. This information could be submitted in a SUPPEX dataset as the value of SUPPEX.QVAL where SUPPEX.QNAM = "EXITRPD" and SUPPEX.QLABEL="Interruption Duration". Concatenate the collected treatment interruption duration and the duration unit components and create EXITRPD using ISO 8601 Period format. Refer to the current SDTM and SDTMIG for instructions on placement of NSVs in SDTM domains.	(UNIT)	(EXCINTPU)	The unit should be collected and converted into ISO 8601 period format.
Interventions	EX	N/A	N/A	27	EXLOC	Exposure Location of Dose Administration	A description of the anatomical location of administration.	What was the anatomical location of the ([study treatment/dose]) administration?	Anatomical Location	Char	O	Record the body location where the study treatment was administered (e.g., SHOULDER, HIP, ARM).	EXLOC	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(LOC)	N/A	Collected or preprinted when the sponsor needs to identify the specific anatomical location where the study treatment was administered. LAT, DIR, PORTOT are used to further describe the anatomical location.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/ CDASH Codelist Name	Implementation Notes
Interventions	EX	N/A	N/A	28	EXVAMT	Exposure Vehicle Amount	The amount of the prepared product (treatment + vehicle) administered or given.	What was the total amount (Drug + Vehicle)(of [study treatment/dose]) administered?	Total Amount	Num	O	Record the total amount (treatment +vehicle) that was administered/given to the subject.	EXVAMT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The SDTM variable ECTRTV may also be populated during the process of creating the SDTM submission datasets.	N/A	N/A	Administration amount that was given to the subject. Note: should not be the diluent amount alone. The ECTRTV field may be collected if it cannot be determined from other sources.
Interventions	EX	N/A	N/A	29	EXVAMTU	Exposure Vehicle Amount Units	The unit of measure for the prepared product (treatment + vehicle).	What was the unit for the amount (of [study treatment/dose]) administered?	Unit	Char	O	Record the unit of total amount (treatment +vehicle) administered/given to the subject (e.g., mL).	EXVAMTU	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(UNIT)	(EXVOLTU)	Unit of the administration amount. A CDASH Subset Controlled Terminology Codelist Name is available for dose and volume units.
Interventions	EX	N/A	N/A	30	EXFLRT	Exposure Infusion Rate	The flow rate for the total amount of drug + vehicle administered to the subject.	What was the [study treatment/dose] infusion rate?	Infusion Rate	Num	O	Record the Rate of Infusion (e.g., if rate is 10 mL/min. Record 10 as the infusion rate).	SUPPEX.QVAL	This does not map directly to an SDTMIG variable. This information could be submitted in a SUPPEX dataset as the value of SUPPEX.QVAL where SUPPEX.QNAM = "EXFLRT" and SUPPEX.QLABEL= "Infusion Rate". Refer to the current SDTM and SDTMIG for instructions on placement of NSVs in SDTM domains.	N/A	N/A	The infusion rate can be used to derive dose.
Interventions	EX	N/A	N/A	31	EXFLRTU	Exposure Infusion Rate Unit	The unit of measure for the flow rate for the total amount of drug + vehicle administered to the subject.	What were the units for the [study treatment/dose] infusion rate?	(Infusion Rate) Unit	Char	O	Record the unit for the infusion rate (e.g., mL/min).	SUPPEX.QVAL	This does not map directly to an SDTMIG variable. This information could be submitted in a SUPPEX dataset as the value of SUPPEX.QVAL where SUPPEX.QNAM ="EXFLRTU" and SUPPEX.QLABEL="Infusion Rate Unit". Refer to the current SDTM and SDTMIG for instructions on placement of NSVs in SDTM domains.	(UNIT)	(EXFLRTU)	Unit of the infusion rate
Interventions	EX	N/A	N/A	32	EXTPT	Exposure Planned Time Point Name	A text description of the planned time point when measurements should be taken, as defined in the protocol.	What was the planned time point for [study treatment/dose] ?	[Planned Time Point Name]	Char	R/C	Record the planned time point of study treatment administration if not preprinted on the CRF.	EXTPT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. See the SDTMIG for additional information on representing time points. The SDTMIG time-point anchors EXTPTREF (text description) and EXRFTDTC (date/time) may be needed, as well as SDTMIG variables EXTPTNUM, EXELTM.	N/A	N/A	Planned time points are needed to differentiate multiple sequential assessments. It is recommended that time points should be preprinted on the CRF rather than collected in a field that requires the site to enter text. If the form is laid out as a grid, then words such as "Planned Time Point" can be included in the column heading.
Interventions	EX	N/A	N/A	33	EXTRTCMP	Completed Treatment	Indication of whether the subject completed the intended regimen.	Did the subject complete the full course of [study treatment/dose] ?	Completed Treatment	Char	O	Select either Yes or No to indicate whether subject	SUPPEX.QVAL	This does not map directly to an SDTMIG variable. This information could be submitted	(NY)	N/A	Depending on how the study treatment details

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/ CDASH Codelist Name	Implementation Notes
												has completed the full course of treatment.		in a SUPPEX dataset as the value of SUPPEX.QVAL where SUPPEX.QNAM = "EXTRTCMP" and SUPPEX.QLABEL="Completed Treatment". Refer to the current SDTM and SDTMIG for instructions on placement of NSVs in SDTM domains.			are collected via the CRF/eCRF, it may be possible to derive those data if the regimen data are collected.
Interventions	EX	N/A	N/A	34	EXLAT	Exposure Laterality	Qualifier for anatomical location, further detailing side of the body for the study treatment administration.	What was the side of the anatomical location of the ([study treatment/dose]) administration?	Side	Char	O	Record the side of the body location where the study treatment was administered (e.g., Left, Right).	EXLAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(LAT)	N/A	Further details the laterality of the location where the study treatment was administered. This may be preprinted or collected. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Interventions	EX	N/A	N/A	35	EXDIR	Exposure Directionality	Qualifier further detailing the position of the anatomical location, relative to the center of the body, organ, or specimen.	What was the directionality of the anatomical location of the ([study treatment/dose]) administration?	Directionality	Char	O	Record the directionality of the body location where the study treatment was administered (e.g., Anterior, Lower, Proximal, Upper).	EXDIR	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(DIR)	N/A	May be preprinted or collected when the sponsor needs to identify the directionality of the anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF.

Assumptions for the CDASHIG EC - Exposure as Collected and EX - Exposure Domains

1. If the SDTMIG EC dataset would be an exact duplicate of the SDTMIG EX dataset, then the sponsor may choose to collect data using either the CDASHIG EC or EX domain. (See the SDTMIG for additional information on submission.)
2. The collected --TRT value is the name of the study treatment that is known to the subject or investigative site (e.g., ECTRT="TABLET A" when EXTRT=<treatment name>).
3. If dosing data are collected in non-protocol-specified units, the data are collected in CDASHIG EC dataset, then programmatically converted to the protocol-specified units when the data are mapped to the SDTMIG EX domain.

Dosing units specified in the protocol	Dosing information as collected on the CRF and represented in EC	Representation in EX
200 mg tablet	2 tablets	400 mg
100 mg capsule	1 capsule	100 mg
5 mg/kg	99 mL	5 mg/kg

4. If a treatment is such that start and stop times are not required, and only 1 dosing date is collected, then the collected dosing date will map to both the start date (--STDTC) and end date (--ENDTC) in the submitted exposure dataset(s).
5. If scheduled dosing is collected, the ECMOOD variable may be used to distinguish between "SCHEDULED" and "PERFORMED" dosing records. The sponsor may choose to use this variable to capture multiple scheduled dosing records, if needed.
6. ECOCCUR:
 - a. ECOCCUR value of "N" indicates a dose was not taken, not given, or missed.
 - b. ECOCCUR is generally not applicable for Scheduled records.
 - c. ECOCCUR = "N" is the standard representation of the collected doses not taken, not given, or missed.
7. Dose amount variables (e.g., ECDOSE, ECDOSTXT) must not be set to zero (0) as an alternative method for indicating doses not taken, not given, or missed.

Example CRFs for the CDASHIG EC- Exposure as Collected and CDASHIG EX - Exposure Domains

Example 1

Title: Exposure as Collected

	Trial epoch EPOCH <i>Hidden/pre-populated</i>	TREATMENT <EPOCH codelist>
	Study Treatment Name ECTRT <i>Hidden/pre-populated</i>	DRUG A
Record the treatment label identifier.	Study Treatment Label Identifier ECREFID	
Record the lot number that appears on the container holding the study treatment.	Lot Number ECLOT	
Record whether the subject was fasting prior to the study treatment being taken.	Was the subject fasting? ECFAST	☐ Yes ☐ No <NY codelist>
Record the start date of the study treatment administration using this format (DD-MON-YYYY).	Start Date ECSDAT ECSTDTC	
Record the start time (as complete as possible) when administration of study treatment started.	Start Time ECSTTIM ECSTDTC	
Record the end date of the study treatment administration using this format (DD-MON-YYYY).	End Date ECENDAT ECENDTC	
Record the time (as complete as possible) when study treatment administration stopped.	End Time ECENTIM ECENDTC	
Record the dose or amount of study treatment that was administered to/taken by the subject in the period recorded; from the start date/time to the end date/time inclusive.	Dose ECDSTXT ECDOSTXT / ECDOSE	
Record the unit of dose or amount taken per period recorded (e.g., tablet, capsule).	Units ECDOSU	☐ TABLET ☐ CAPSULE <UNIT codelist>

Record the frequency the study treatment was administered for a defined period of time (e.g., QD, BID, TID).	Frequency ECDOSFRQ	☐ QD ☐ BID ☐ TID <FREQ codelist>
Record the route of administration (e.g., Oral, Sublingual).	Route ECROUTE	☐ ORAL ☐ SUBLINGUAL <ROUTE codelist>
Select either Yes or No to indicate whether there was a change in dosing.	Was the dose adjusted? ECDOSADJ Not Submitted	☐ Yes ☐ No <NY codelist>
If there was a change in dosing, record the reason for change.	What was the reason the dose was adjusted? ECADJ	

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
EPOCH	1	What is the trial epoch?	Trial epoch	[protocol specific]	Text	EPOCH		(EPOCH)		TREATMENT	Prompt		Y
ECTRT	2	What was the study treatment name?	Study Treatment Name	Record the name of study treatment.	Text	ECTRT				DRUG A	Prompt		Y
ECREFID	3	What is the study treatment label identifier?	Study Treatment Label Identifier	Record the treatment label identifier.	Text	ECREFID					Prompt		
ECLOT	4	What was the lot number of the study treatment used?	Lot Number	Record the lot number that appears on the container holding the study treatment.	Text	ECLOT					Prompt		
ECFAST	5	Was the subject fasting?	Fasting	Record whether the subject was fasting prior to the study treatment being taken.	Text	ECFAST		(NY)	Yes; No			Radio	
ECSTDAT	6	What was the study treatment start date?	Start Date	Record the start date of the study treatment administration using this format (DD-MON-YYYY).	Date	ECSTDTC					Prompt		
ECSTTIM	7	What was the study treatment start time?	Start Time	Record the start time (as complete as possible) when administration of study treatment started.	Time	ECSTDTC					Prompt		
ECENDAT	8	What was the study treatment end date?	End Date	Record the end date of the study treatment administration using this format (DD-MON-YYYY).	Date	ECENDTC					Prompt		

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
ECENTIM	9	What was the study treatment end time?	End Time	Record the time (as complete as possible) when study treatment administration stopped.	Time	ECENDTC					Prompt		
ECDSTXT	10	What was the dose per administration of study treatment?	Dose	Record the dose or amount of study treatment that was administered to/taken by the subject in the period recorded; from the start date/time to the end date/time inclusive.	Text	ECDOSTXT; ECDDOSE	ECDOSTXT / ECDDOSE				Prompt		
ECDOSU	11	What were the units for the dose?	Units	Record the unit of dose or amount taken per period recorded (e.g., tablet, capsule).	Text	ECDOSU		(UNIT)	TABLET; CAPSULE		Prompt	Radio	
ECDOSFRQ	12	What was the frequency of study treatment dosing?	Frequency	Record the frequency the study treatment was administered for a defined period of time (e.g., QD, BID, TID).	Text	ECDOSFRQ		(FREQ)	QD; BID; TID		Prompt	Radio	
ECROUTE	13	What was the route of administration of the study treatment?	Route	Record the route of administration (e.g., Oral, Sublingual).	Text	ECROUTE		(ROUTE)	ORAL; SUBLINGUAL		Prompt	Radio	
ECDOSADJ	14	Was the dose adjusted?	Dose Adjusted	Select either Yes or No to indicate whether there was a change in dosing.	Text	N/A		(NY)	Yes; No			Radio	
ECADJ	15	What was the reason the dose was adjusted?	Reason Adjusted	If there was a change in dosing, record the reason for change.	Text	ECADJ							

Example 2**Title: Exposure as Collected – Missed Dose**

Study Treatment ECOCUR <i>Hidden/pre-populated</i>	No<NY codelist>
Study Treatment Category ECCAT <i>Hidden/pre-populated</i>	MISSED DOSE
Study Treatment Name ECTRT <i>Hidden/pre-populated</i>	DRUG Z
Line Number ECSPID <i>Pre-populated</i>	001
Record the intended start date of the study treatment administration using this format (DD-MON-YYYY). ECSTDAT ECSTDTC	
Indicate why the study treatment was not taken. ECREASOC SUPPEC.QVAL where SUPPEC.QNAM = "ECREASOC" and SUPPEC.QLABEL = "Reason for Occur Value"	

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
ECOCUR	1	Was study treatment administered?	Study Treatment	Indicate if the subject took study treatment. If Yes, include the appropriate details where indicated.	Text	ECOCUR		(NY)		No			Y
ECCAT	2	What is the category of the study treatment?	Study Treatment Category	Record the study treatment category, if not pre-printed on the CRF.	Text	ECCAT				MISSED DOSE	Prompt		Y
ECTRT	3	What was the study treatment name?	Study Treatment Name	Record the name of study treatment.	Text	ECTRT				DRUG Z	Prompt		Y
ECSPID	4	What is the observation identifier?	Line Number	If collected on the CRF, sponsor may insert instructions to ensure each record has a unique identifier.	Text	ECSPID				001	Prompt		
ECSTDAT	5	What was the intended dose date?	Date	Record the intended start date of the study treatment administration using this format (DD-MON-YYYY).	Date	ECSTDTC					QText		
ECREASOC	6	What was the reason that the study treatment was not taken?	Reason Not Taken	Indicate why the study treatment was not taken.	Text	SUPPEC.QVAL	SUPPEC.QVAL where SUPPEC.QNAM = "ECREASOC" and SUPPEC.QLABEL = "Reason for Occur Value"						

Example 3

Title: Exposure as Collected - Scheduled vs Performed

Record the scheduled start date of the study treatment administration using this format (DD-MON-YYYY).

Record the dose or amount of study treatment that is scheduled to be administered to/taken by the subject in the period recorded.

Date ECSTDAT ECSTDTC where ECMOOD = SCHEDULED	
Intended Dose ECDOSE_SCHEDULED ECDOSE where ECMOOD = SCHEDULED	
Units ECDOSU_SCHEDULED ECDOSU where ECMOOD = SCHEDULED <i>Pre-populated</i>	mg/kg <UNIT codelist>

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target	SDTM Variable Target	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
ECSTDAT	1	What was the intended dose date?	Date	Record the scheduled start date of the study treatment administration using this format (DD-MON-YYYY).	Date	ECSTDTC	ECSTDTC where ECMOOD = SCHEDULED						
ECDOSE_SCHEDULED	2	What was the intended dose per administration of study treatment?	Intended Dose	Record the dose or amount of study treatment that is scheduled to be administered to/taken by the subject in the period recorded.	Float	ECDOSE	ECDOSE where ECMOOD = SCHEDULED				prompt		
ECDOSU_SCHEDULED	3	What were the units for the dose?	Units	Record the unit of dose or amount taken per period recorded (e.g., ng, mg, mg/kg).	Text	ECDOSU	ECDOSU where ECMOOD = SCHEDULED	(UNIT)		mg/kg	prompt		

Title: Exposure as Collected

Indicate if the subject took study treatment. If Yes, include the appropriate details where indicated.

Was the dose administered?

ECOCCUR

ECOCCUR where ECMOOD = "PERFORMED"

☐ Yes

☐ No

<NY codelist>

Indicate why the study treatment was not taken.

Reason Not Taken

ECREASOC

SUPPEC.QVAL

Record the start date of the study treatment administration using this format (DD-MON-YYYY).

Start Date

ECSTDAT

ECSTDTC where ECMOOD = "PERFORMED"

Record the start time (as complete as possible) when administration of study treatment started.

Start Time

ECSTTIM

ECSTDTC where ECMOOD = "PERFORMED"

Record the end date of the study treatment administration using this format (DD-MON-YYYY).

End Date

ECENDAT

ECENDTC where ECMOOD = "PERFORMED"

Record the time (as complete as possible) when study treatment administration stopped (e.g., for infusions this is the time when the infusion ended).

End Time

ECENTIM

ECENDTC where ECMOOD = "PERFORMED"

Record the dose or amount of study treatment that was administered to/taken by the subject in the period recorded, from the start date/time to the end date/time inclusive.

Amount

ECDOSE

ECDOSE where ECMOOD = "PERFORMED"

Record the pharmaceutical strength or concentration of the study treatment that was administered to/taken by the subject in the period recorded.

Unit

ECDOSU

ECDOSU where ECMOOD = PERFORMED

Pre-populated

What was the pharmaceutical strength of the study treatment?

ECPSTRG

ECPSTRG where ECMOOD = "PERFORMED"

Unit

ECPSTRGU

ECPSTRGU where ECMOOD = "PERFORMED"

Pre-populated

mL

<UNIT codelist>

mg/mL

<UNIT codelist>

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTM Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
ECOCUR	3	Was the dose administered?	Dose Administered	Indicate if the subject took study treatment. If Yes, include the appropriate details where indicated.	Text	ECOCUR	ECOCUR where ECMOOD = "PERFORMED"	(NY)	Yes; No		qtext		
ECREASOC	4	What was the reason that the study treatment was not taken?	Reason Not Taken	Indicate why the study treatment was not taken.	Text	SUPPEC.QVAL					prompt		
ECSTDAT	5	What was the start date?	Start Date	Record the start date of the study treatment administration using this format (DD-MON-YYYY).	Date	ECSTDTC	ECSTDTC where ECMOOD = "PERFORMED"				prompt		
ECSTTIM	6	What was the start time?	Start Time	Record the start time (as complete as possible) when administration of study treatment started.	Time	ECSTDTC	ECSTDTC where ECMOOD = "PERFORMED"				prompt		
ECENDAT	7	What was the end date?	End Date	Record the end date of the study treatment administration using this format (DD-MON-YYYY).	Date	ECENDTC	ECENDTC where ECMOOD = "PERFORMED"				prompt		
ECENTIM	8	What was the end time?	End Time	Record the time (as complete as possible) when study treatment administration stopped (e.g., for infusions this is the time when the infusion ended).	Time	ECENDTC	ECENDTC where ECMOOD = "PERFORMED"				prompt		
ECDOSE	11	What was the amount of study treatment administered?	Amount	Record the dose or amount of study treatment that was administered to/taken by the subject in the period recorded, from the start date/time to the end date/time inclusive.	Float	ECDOSE	ECDOSE where ECMOOD = "PERFORMED"				prompt		
ECDOSU	12	What was the unit for the dose?	Unit	Record the unit of dose or amount taken per period recorded (e.g., ng, mg, mg/kg).	Text	ECDOSU	ECDOSU where ECMOOD = "PERFORMED"	(UNIT)		mL	prompt		
ECPSTRG	13	What was the pharmaceutical strength of the study treatment?	Pharmaceutical Strength	Record the pharmaceutical strength or concentration of the study treatment that was administered to/taken by the subject in the period recorded.	Float	ECPSTRG	ECPSTRG where ECMOOD = "PERFORMED"						
ECPSTRGU	14	What was the unit of the pharmaceutical strength of the study treatment?	Unit	Record the unit of concentration or strength of the study treatment per period recorded (e.g., ng, mg, mg/kg).	Text	ECPSTRGU	ECPSTRGU where ECMOOD = "PERFORMED"	(UNIT)		mg/mL			

© 2023 Clinical Data Interchange Standards Consortium, Inc. All rights reserved
2023-09-28

Page 118

Example 4

Title: Exposure Start and Stop Dates

Record the start date of the study treatment administration using this format (DD-MON-YYYY).

Record the start time (as complete as possible) when administration of study treatment started.

Record the end date or last date of administration of study treatment using this format (DD-MON-YYYY).

Record the time (as complete as possible) when study treatment administration stopped (e.g., for infusions this is the time when the infusion ended).

Trial Period

EPOCHHidden/pre-populated

TREATMENT<EPOCH codelist>

Study Treatment Name

EXTRTHidden/pre-populated

Sponsor Defined

Start Date

EXSTDATEXSTDTC

Start Time

EXSTTIMEXSTDTC

End Date

EXENDATXENDTDC

End Time

EXENTIMEXENDTC

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Value	SDTM Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
EPOCH	1	What is the trial period?	Trial Period	[protocol specific]	Text	EPOCH		(EPOCH)		TREATMENT	Prompt		Y
EXTRT	2	What was the study treatment?	Study Treatment Name	Record the name of the study treatment.	Text	EXTRT				Sponsor Defined	Prompt		Y
EXSTDAT	3	What was the study treatment start date?	Start Date	Record the start date of the study treatment administration using this format (DD-MON-YYYY).	Date	EXSTDTC					Prompt		
EXSTTIM	4	What was the study treatment start time?	Start Time	Record the start time (as complete as possible) when administration of study treatment started.	Time	EXSTDTC					Prompt		
EXENDAT	5	What was the study treatment end date?	End Date	Record the end date or last date of administration of study treatment using this format (DD-MON-YYYY).	Date	EXENDTC					Prompt		
EXENTIM	6	What was the study treatment end time?	End Time	Record the time (as complete as possible) when study treatment administration stopped (e.g., for infusions this is the time when the infusion ended).	Time	EXENDTC					Prompt		

8.1.5 ML - Meal Data

Description/Overview for the CDASHIG ML - Meal Data Domain

The CDASHIG ML domain is used to collect details regarding any food and beverage consumed to provide nutritional support. Sponsors may collect the name of a food or beverage or the name of the combination of food and beverage consumed at a certain time (e.g., breakfast bar, water, low-fat meal, breakfast).

Specification for the CDASHIG ML - Meal Data Domain

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/ CDASH Codelist Name	Implementation Notes
Interventions	ML	N/A	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included into the database or populated during SDTM-based dataset creation before submission.
Interventions	ML	N/A	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted on CRFs that are shipped to each site. EDC: This should be prepopulated.
Interventions	ML	N/A	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What [is/was] the (study) [subject/participant] identifier?	[Subject/Participant] (Identifier)	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system generated. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG
Interventions	ML	N/A	N/A	4	MLCAT	Category for Meal	A grouping of topic-variable values based on user-defined characteristics.	What is the category for the [meal/food product]?	[Meal/Food Product] Category]; NULL	Char	O	Record the [meal/food product] category, if not preprinted on the CRF.	MLCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading, or a preprinted category value on the CRF and not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Category" can be included as the column header.
Interventions	ML	N/A	N/A	5	MLSCAT	Subcategory for Meal	A sub-division of the MLCAT values based on user-defined characteristics.	What is the subcategory for the [meal/food product]?	[Meal/Food Product] Subcategory]; NULL	Char	O	Record the [meal/food product] subcategory, if not preprinted on the CRF.	MLSCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be preprinted on the CRF or screen and prepopulated in the data management system. This is not typically a question to which the site would provide an answer.
Interventions	ML	N/A	N/A	6	MLYN	Any Meal Taken	An indication of whether any meal or food product were consumed or administered.	[Were/Was] any [meal/food product] [taken/consumed/ administered] ?	Any [meal/food product] [taken/consumed/ administered] ?	Char	O	Indicate if the subject consumed any [meal/food product]. If Yes, include the appropriate details	N/A	Does not map to an SDTMIG variable. The SDTM annotated CRF indicates that this field is	(NY)	N/A	The intent/purpose of collecting this field is to help with data cleaning and monitoring. It provides verification that all other

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/ CDASH Codelist Name	Implementation Notes
												where indicated on the CRF.		NOT SUBMITTED.			fields on the CRF were deliberately left blank.
Interventions	ML	N/A	N/A	7	MLSPID	ML Sponsor-Defined Identifier	A sponsor-defined identifier. In CDASH, this is typically used for preprinted or auto-generated numbers on the CRF, or any other type of identifier that does not already have a defined CDASH identifier field.	[Sponsor-defined question]	[Sponsor defined]	Char	O	If collected on the CRF, the sponsor may insert instructions to ensure each record has a unique identifier.	MLSPID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. May be used to create RELREC to link this record with a record in another domain.	N/A	N/A	Because SPID is a sponsor-defined identifier, conformance to Question Text or Item Prompt is not applicable. Typically used as an identifier in a data query to communicate clearly to the site the specific record in question or to reconcile meal/food product records with AEs and/or MH. May be used to record preprinted number (e.g. line number, record number) on the CRF. This field may be populated by the sponsor's data collection system.
Interventions	ML	N/A	N/A	8	MLTRT	Name of Meal or Food Product	The reported name of the food, beverage or combination of food or beverage consumed at one time.	What was the [meal/food product/sponsor-defined] (name)?	[Meal]	Char	HR	Record only 1 [meal/food product name] per line.	MLTRT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsors may use the name of a food or the name of the combination of foods (e.g., breakfast, low-fat meal, breakfast bar, water).
Interventions	ML	N/A	N/A	9	MLPRES	ML Prespecified	An indication that a specific intervention or a group of interventions is prespecified on a CRF.	N/A	N/A	Char	O	N/A	MLPRES	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(NY)	N/A	For prespecified interventions, a hidden field on a CRF defaulted to "Y", or added during the SDTM dataset creation. If a study collects both prespecified and free-text interventions, the value of MLPRES should be "Y" for all prespecified interventions and null for interventions reported as free text.
Interventions	ML	N/A	N/A	10	MLOCCUR	ML Occurrence	An indication of whether the prespecified meal or food product were taken/consumed/ administered when information about the occurrence of the specific intervention was solicited.	Did the subject take [MLTRT]? Has the subject [taken/consumed/ administered] [MLTRT]?	[MLTRT]	Char	O	Indicate if [MLTRT] was [taken/consumed/ administered] by checking Yes or No.	MLOCCUR	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. If the question was not asked or answered, populate the SDTMIG variable MLSTAT with "NOT DONE".	(NY)	N/A	MLOCCUR is used to report the occurrence of a prespecified meal/ food product. MLOCCUR is not used for spontaneously reported free-text meals/food products. The site should be able to indicate that the response was not asked or answered.
Interventions	ML	N/A	N/A	11	MLREASOC	Reason for Occur Value	An explanation for why the scheduled intervention did or did not occur.	What was the reason that the [MLTRT] was (not) consumed/taken/done/ administered?	Reason for Occur Value	Char	O	Reason [MLTRT] (Not) [Performed/Taken/Done/ Administered]	SUPPML.QVAL	This information could be submitted in a SUPPML dataset as the value of SUPPML.QVAL where SUPPML.QNAM = "MLREASOC" and SUPPML.QLABEL = "Reason for Occur Value". Refer to the	N/A	N/A	The reason MLTRT occurred may be chosen from a sponsor-defined codelist or entered as free text. When --REASOC is used, --OCCUR must also be populated in the SDTM dataset. This variable should not be used to represent that the item was not answered, not done, not completed, or unknown. The variables MLSTAT

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/ CDASH Codelist Name	Implementation Notes
														current SDTM and SDTMIG for instructions on placement of NSVs in SDTM domains.			/MLREASND should be used instead.
Interventions	ML	N/A	N/A	12	MLREAS	ML Reason	The reason that the meal/food product was used.	What was the reason for the [meal/food product] [[taken/consumed/ administered]?	Reason	Char	O	Record the reason the meal/product was taken.	SUPPML.QVAL	This information could be submitted in a SUPPML dataset as the value of SUPPML.QVAL where SUPPML.QNAM = "MLREAS" and SUPPML.QLABEL = "Reason for the Intervention". Refer to the current SDTM and SDTMIG for instructions on placement of NSVs in SDTM domains.	N/A	N/A	This is the condition, disease, symptom, or disorder for which the meal or food product is taken, consumed, or administered. This additional information is collected on the CRF when sponsors want to capture the reason(s) why a subject took a meal/product.
Interventions	ML	N/A	N/A	13	MLCENO	Related Clinical Event ID	Identifier for the clinical event that is the indication for this meal or food product.	What was the identifier for the clinical event (s) for which the [meal/food product] was [taken/consumed/ administered]?	Clinical Event Identifier	Char	O	Record the identifier of the Clinical Event for which this [meal/food product] was taken/consumed/ administered.	N/A	This does not map directly to an SDTMIG variable. For the SDTM submission datasets, may be used to create RELREC to link this record with a record in the CE domain.	N/A	N/A	The intent is to establish a link between the meal/food product and a clinical event that was reported. MLCENO can be used to identify a relationship between records in ML dataset and records in the CE dataset. See the SDTMIG for information on RELREC.
Interventions	ML	N/A	N/A	14	MLDOSE	Dose	The quantity/amount of the meal or food product (e.g., --TRT) taken/consumed/ administered represented as a numeric value.	What was the quantity/amount (of the) ([meal/food product]) [taken/consumed/ administered]?	[Quantity/Amount] (given at one time)	Num	O	Record the quantity/amount of the meal/food product (e.g., --TRT) given at one time represented as a numeric value.	MLDOSE	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Used when the quantity taken/administered/consumed has only numeric entries. If non-numeric entries are possible, use the CDASH field MLDSTXT.
Interventions	ML	N/A	N/A	15	MLDSTXT	Dose Description	The quantity/amount of the meal or food product (e.g., --TRT) taken/consumed/ administered represented as a numeric or text value.	What was quantity/amount (of the) ([meal/food product]) [taken/consumed/ administered]?	Dose	Char	O	Record the quantity/amount of the [meal/food product] taken/consumed/ administered at one time.	MLDOSTXT; MLDOSE	This does not map directly to an SDTMIG variable. Numeric values map to MLDOSE in SDTM. Non-numeric values (e.g., 200-400) map to MLDOSTXT in SDTM.	N/A	N/A	Defining this data collection field as a text field allows for flexibility in capturing entries as numbers, text, or ranges. The data collected in this text-format field should be separated or mapped to either SDTMIG MLDOSE (if numeric) or MLDOSTXT (if text).
Interventions	ML	N/A	N/A	16	MLDOSU	Dose Units	The unit associated with the quantity/amount of the meal /food product taken/consumed/ administered.	What is the unit for the quantity/amount of the [meal/food product]?	(Quantity/Amount) Unit	Char	R/C	Record the unit for the quantity/amount of the [meal/food product] taken/consumed/ administered.	MLDOSU	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(UNIT)	(CMDOSU)	When sponsors collect data for amount /quantity of meal/food product taken (i.e., Dose, Total Daily Dose), the unit must be collected as well (if applicable).

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/ CDASH Codelist Name	Implementation Notes
Interventions	ML	N/A	N/A	17	MLSTDAT	Meal Start Date	The start date when the meal or food product was first taken/consumed/ administered, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the (start) date the [meal/food product] was first [taken/consumed/ administered]?	(Start) Date	Char	R/C	Record the date the [meal/food product] was first taken/consumed/ administered using this format (DD-MON-YYYY).	MLSTDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH START DATE and TIME components and populate the SDTMIG variable MLSTDTC in ISO 8601 format.	N/A	N/A	The assumption is that sponsors should either have a start date or will indicate that the meal or food product was started before, during, or after the study period. The preferred method is to collect a complete start date. Partial dates (e.g., providing year only) for meal/food product started a considerable amount of time prior to the start of study are acceptable.
Interventions	ML	N/A	N/A	18	MLSTTIM	Meal Start Time	The time the meal or food product was started, represented in an unambiguous time format (e.g., hh:mm:ss).	What was the [meal/food product] start time?	Start Time	Char	R/C	Record the time (as complete as possible) that the [meal/food product] was started.	MLSTDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH START DATE and TIME components and populate the SDTMIG variable MLSTDTC in ISO 8601 format.	N/A	N/A	Recommend collecting the time a meal/food product was started only when a protocol or data collection scenarios supports it. Typically, a start time is not collected unless the subject is under the direct care of the site at the time a meal/food product or the subject records the start time in a diary. See Section 3.7, Mapping Relative Times from Collection to Submissions , and the SDTMIG for more information.
Interventions	ML	N/A	N/A	19	MLENDAT	Meal End Date	The date that the subject ended/stopped taking/consuming /administering the meal or food product product represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the [meal/food product] end date?	End Date	Char	R/C	Record the date the [meal/food product] was stopped using this format (DD-MON-YYYY). If the subject has not stopped taking the [meal/product] leave this field blank.	MLENDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH END DATE and TIME components and populate the SDTMIG variable MLENDTC in ISO 8601 format.	N/A	N/A	The assumption is that sponsors should either have an end date or will indicate that the meal or food product was ongoing at the time of collection or at the end of the study. However, in cases where the end date can be determined from dates collected elsewhere in the CRF it is not necessary to include an end date in the CRF.
Interventions	ML	N/A	N/A	20	MLENTIM	Meal End Time	The time when the subject ended/stopped taking the meal or food product represented in an unambiguous time format (e.g., hh:mm:ss).	What was the [meal/food product] end time?	End Time	Char	R/C	Record the time (as complete as possible) that the [meal/food product] was stopped.	MLENDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH END DATE and TIME components and populate the SDTMIG variable MLENDTC in ISO 8601 format.	N/A	N/A	Recommend collecting the time a meal/food product was ended only when a protocol or data collection scenarios require it or the subject records the start time in a diary. Typically, a end time is not collected unless the subject is under the direct care of the site at the time a meal/food product or the subject records the end time in a diary. See Section 3.7, Mapping Relative Times from Collection to Submissions , and the

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/ CDASH Codelist Name	Implementation Notes
																	SDTMIG for more information.
Interventions	ML	N/A	N/A	21	MLDECOD	Standardized Meal Name	The dictionary or sponsor-defined standardized text description of the topic variable (MLTRT) or the modified topic variable (MLMODIFY), if applicable.	N/A	N/A	Char	O	N/A	MLDECOD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	This field does not typically appear on the CRF. Sponsors will populate this through the coding process. Equivalent to a standardized name in a published or sponsor-defined dictionaries.
Interventions	ML	N/A	N/A	22	MLMODIFY	Modified Reported Term	If the value for MLTRT is modified for coding purposes, then the modified text is placed here.	N/A	N/A	Char	O	N/A	MLMODIFY	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	This is not a data collection field that will appear on the CRF itself. Sponsors will populate this through the coding process.

Assumptions for the CDASHIG ML - Meal Data Domain

- The ML domain is used to represent consumption of any food item that would not be represented in the Exposure domains (EC/EX), Concomitant Medications (CM), Procedure Agents (AG), or Substance Use (SU). Examples of food items that might be represented in other domains include:
 - Investigational nutritional products, represented in EC/EX
 - Food or drink used to treat hypoglycemic events, represented in CM
 - Food or drink given as part of a glucose tolerance test, represented in AG
 - Caffeinated drinks, represented in SU
- The structure of the ML domain is 1 record per meal or food product episode, or prespecified food assessment per subject.
- The topic variable would be the name of a food or beverage substance or the name of the combination of foods (e.g., breakfast bar, water, low-fat meal, breakfast).
- The food substances represented in ML may be prospectively defined within a protocol, collected retrospectively as potential precipitants of clinical events, and/or used to describe nutritional intake.
- This data is typically collected in pharmacokinetic studies.
- The CDASHIG ML domain is specifically defined as the domain in which to collect data about food or other products consumed. Therefore, if MLMOOD were deployed, the value would always be "PERFORMED". For this reason, MLMOOD has not been included in the metadata.

Example CRFs for the CDASHIG ML - Meal Data Domain

Example 1: Meal Log

This is an example CRF used in a study where the contents of the meals were standardized in the protocol.

Title: Meal Log

	Meal Category MLCAT <i>Hidden/pre-populated</i>	Sponsor-Defined
	Meal Subcategory MLSCAT <i>Hidden/pre-populated</i>	Sponsor-Defined
Indicate if the subject consumed any meals today. If Yes, include the appropriate details where indicated on the CRF.	Were any meals consumed today? MLYN Not Submitted	☐ Yes ☐ No <NY codelist>
Indicate the type of meal.	What was the type of meal? MLTRT	☐ BREAKFAST ☐ LUNCH ☐ DINNER ☐ SNACK
Record the amount of the meal consumed.	What was the amount of the meal consumed? MLDSTXT MLDOSTXT	☐ 0 ☐ >0 to <25% ☐ =>25% to <50% ☐ =>50% to <75% ☐ =>75% - <100% ☐ 100%
	Unit MLDOSU <i>Hidden/pre-populated</i>	%<UNIT codelist>
Record the date the meal was consumed using this format (DD-MON-YYYY).	What was the date the meal was consumed? MLSTDAT MLSTDTC	
Record the time (as complete as possible) that the meal was started.	What was the meal start time? MLSTTIM MLSTDTC	
Record the date the meal ended using this format (DD-MON-YYYY).	What was the meal end date? MLENDAT MLENDTC	
Record the time (as complete as possible) that the [meal/product] was ended.	What was the meal end time? MLENTIM MLENDTC	

CRF Metadata

Order	CDASH Variable	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
1	MLCAT		Meal Category		Text	MLCAT		N/A		Sponsor-Defined			Y
2	MLSCAT		Meal Subcategory		Text	MLSCAT		N/A		Sponsor-Defined			Y
3	MLYN	Were any meals consumed today?	Any Meals	Indicate if the subject consumed any meals today. If Yes, include the appropriate details where indicated on the CRF.	Text			(NY)	Yes;No;				
4	MLTRT	What was the type of meal?	[Meal]	Indicate the type of meal.	Text	MLTRT		N/A	BREAKFAST;LUNCH;DINNER;SNACK;				
5	MLDSTXT	What was the amount of the meal consumed?	Amount Consumed	Record the amount of the meal consumed.	Text	MLDOSTXT		N/A	0; >0 to <25%; =>25% to <50%; =>50% to <75%; =>75% - <100%; 100%				
6	MLDOSU	What was the unit?	Unit		Text	MLDOSU		(UNIT)		%			Y
7	MLSTDAT	What was the date the meal was consumed?	Start Date	Record the date the meal was consumed using this format (DD-MON-YYYY).	Text	MLSTDTC		N/A					
8	MLSTTIM	What was the meal start time?	Start Time	Record the time (as complete as possible) that the meal was started.	Text	MLSTDTC		N/A					
9	MLENDAT	What was the meal end date?	End Date	Record the date the meal ended using this format (DD-MON-YYYY).	Text	MLENDTC		N/A					
10	MLENTIM	What was the meal end time?	End Time	Record the time (as complete as possible) that the [meal/product] was ended.	Text	MLENDTC		N/A					

Example 2: Infant Feeding

This example CRF collects dose and dose units to document the amount consumed. The food options therefore specifically include "EXPRESSED BREAST MILK" (i.e., not "BREAST MILK"). This highlights the fact that the breast milk must be expressed and measured before feeding in order to accurately calculate the amount consumed. A different CRF design tailored to a particular protocol would be required when breastfeeding (i.e., not expressed milk) is an option for infant feeding.

Title: Infant Feeding

	Meal Category MLCAT <i>Hidden/pre-populated</i>	Sponsor-Defined
	Meal Subcategory MLSCAT <i>Hidden/pre-populated</i>	Sponsor-Defined
Indicate the type of milk given to the infant.	What is the type of milk given to the infant? MLTRT	☐ COW'S MILK ☐ EXPRESSED BREAST MILK ☐ INFANT FORMULA
Record the amount of milk given in ounces.	What was the amount of milk consumed? MLDOSE	
	Amount Consumed Unit MLDOSU	☐ Fluid Ounce Imperial ☐ Fluid Ounce US ☐ Milliliters <UNIT codelist>
Record the date the meal was consumed using this format (DD-MM-YYYY).	What was the start date? MLSTDAT MLSTDTC	
Record the time (as complete as possible) that the meal was started.	What was the start time? MLSTTIM MLSTDTC	

CRF Metadata

Order	CDASH Variable	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
1	MLCAT	N/A	Meal Category	N/A	Text	MLCAT		N/A		Sponsor-Defined			Y
2	MLSCAT	N/A	Meal Subcategory	N/A	Text	MLSCAT		N/A		Sponsor-Defined			Y
3	MLTRT	What is the type of milk given to the infant?	[Meal]	Indicate the type of milk given to the infant.	Text	MLTRT		N/A	COW'S MILK; EXPRESSED BREAST MILK; INFANT FORMULA				

Order	CDASH Variable	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
4	MLDOSE	What was the amount of milk consumed?	Amount Consumed	Record the amount of milk given in ounces.	Text	MLDOSE		N/A					
5	MLDOSU	N/A	Amount Consumed Unit	N/A	Text	MLDOSU		(UNIT)	Fluid Ounce Imperial; Fluid Ounce US; Milliliters				
6	MLSTDAT	What was the start date?	Start Date	Record the date the meal was consumed using this format (DD-MM-YYYY).	Text	MLSTDTC		N/A					
7	MLSTTIM	What was the start time?	Start Time	Record the time (as complete as possible) that the meal was started.	Text	MLSTDTC		N/A					

Example 3: Food History Post Dose

This example CRF collects information regarding whether a subject had consumed food during a fixed interval (MLEVLNTX).

Title: Food History Post Dose

	MLCAT <i>Hidden/pre-populated</i>	POST-DOSE FOOD
	MLTRT <i>Hidden/pre-populated</i>	FOOD
	MLPRES <i>Hidden/pre-populated</i>	Y<NY codelist>
Indicate if food was consumed by checking Yes or No.	Has the subject consumed any food within 1 hour post dosing? MLCOCCUR IF MLCOCCUR= "Y" or "N" then MLOCCUR. IF MLCOCCUR="UNKNOWN" then MLSTAT="NOT DONE" and MLREASND="Unknown".	☐ Yes ☐ No ☐ Unknown <NY codelist>
If Yes, Indicate why food was consumed within 1 hour post dosing.	What was the reason that the food was consumed? MLREASOC	
Record the date the food was first consumed using this format (DD-MON-YYYY).	What was the date of the food consumption? MLSTDAT MLSTDTC	
Record the time (as complete as possible) that the food was started.	What was the start time of the food consumption? MLSTTIM MLSTDTC	
Evaluation Interval	MLEVLNTX <i>Hidden/pre-populated</i>	WITHIN ONE HOUR POST DOSE

CRF Metadata

Order	CDASH Variable	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
1	MLCAT	N/A	N/A	N/A	Text	MLCAT		N/A		POST-DOSE FOOD			Y
2	MLTRT	N/A	N/A	N/A	Text	MLTRT		N/A		FOOD			Y
3	MLPRES	N/A	N/A	N/A	Text	MLPRES		(NY)		Y			Y
4	MLCOCCUR	Has the subject consumed any food within 1 hour post dosing?	[Prespecified [Meal/Product]	Indicate if food was consumed by checking Yes or No.	Text	MLOCCUR	IF MLCOCCUR= "Y" or "N" then MLOCCUR. IF MLCOCCUR="UNKNOWN" then MLSTAT="NOT DONE" and MLREASND="Unknown".	(NY)	Yes;No; Unknown				
5	MLREASOC	What was the reason that the food was consumed?	Reason for Occurrence	If Yes, Indicate why food was consumed within 1 hour post dosing.	Text	MLREASOC		N/A					
6	MLSTDAT	What was the date of the food consumption?	Start Date	Record the date the food was first consumed using this format (DD-MON-YYYY).	Text	MLSTDTC		N/A					
7	MLSTTIM	What was the start time of the food consumption?	Start Time	Record the time (as complete as possible) that the food was started.	Text	MLSTDTC		N/A					
8	MLEVLNTX	N/A	Evaluation Interval	N/A	Text	MLEVLNTX				WITHIN ONE HOUR POST DOSE			Y

8.1.6 PR - Procedures

Description/Overview for the CDASHIG PR - Procedures Domain

The CDASHIG PR domain is used to collect details describing a subject's therapeutic and diagnostic procedures conducted before, during, and/or after the study. Measurements obtained from procedures are to be represented in the appropriate Findings domain(s). For example, the details of an endoscopy (e.g., date and time of start and stop) are represented in the PR domain; microscopic results would be represented in the Microscopic Findings (MI) domain.

Specification for the CDASHIG PR - Procedures Domain

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/ CDASH Codelist Name	Implementation Notes
Interventions	PR	N/A	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or the EDC system. This field can be included into the database or created during SDTM-based dataset creation before submission.
Interventions	PR	N/A	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted on the CRFs that are shipped to each site. EDC: This should be prepopulated.
Interventions	PR	N/A	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What [is/was] the (study) [subject/participant] identifier?	[Subject/Participant] (Identifier)	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system generated. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Interventions	PR	N/A	N/A	4	PRYN	Any Procedures Performed	An indication of whether the subject had any procedures performed.	Were any surgical, therapeutic, or diagnostic procedures performed?	Any Procedures	Char	O	Indicate if the subject had any surgical, therapeutic or diagnostic procedures. If "Yes", include the appropriate details where indicated on the CRF.	N/A	Does not map to an SDTMIG variable. The SDTM annotated CRF indicates that this field is NOT SUBMITTED.	(NY)	N/A	The intent/purpose of collecting this field is to help with data cleaning and monitoring. It provides verification that all other fields on the CRF were deliberately left blank.
Interventions	PR	N/A	N/A	5	PRCAT	Procedure Category	A grouping of topic-variable values based on user-defined characteristics.	What was the category of the procedure?	[Procedure Category]; NULL	Char	O	Record the procedure category, if not preprinted on the CRF.	PRCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, and not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/ CDASH Codelist Name	Implementation Notes
																	such as "Category" can be included as the column header.
Interventions	PR	N/A	N/A	6	PRSCAT	Procedure Subcategory	A sub-division of the PRCAT values based on user-defined characteristics.	What was the subcategory of the procedure?	[Procedure Subcategory]; NULL	Char	O	Record the procedure subcategory, if not preprinted on the CRF.	PRSCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be preprinted on the CRF or screen and prepopulated in the data management system. This is not typically a question to which the site would provide an answer. PRSCAT can only be used if there is a PRCAT and it must be a subcategorization of PRCAT.
Interventions	PR	N/A	N/A	7	PRSPID	Procedure Sponsor-Defined Identifier	A sponsor-defined identifier. In CDASH, This is typically used for preprinted or auto-generated numbers on the CRF, or any other type of identifier that does not already have a defined CDASH identifier field.	[Sponsor-defined question]	[Sponsor defined]	Char	O	If collected on the CRF, sponsor may insert instructions to ensure each record has a unique identifier.	PRSPID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. May be used to create RELREC to link this record with a record in another domain.	N/A	N/A	Because SPID is a sponsor-defined identifier, conformance to Question Text or Item Prompt is not applicable. Typically used as an identifier in a data query to communicate clearly to the site the specific record in question or to reconcile procedure records with medical history and/or with AEs. May be used to record preprinted number (e.g., line number, record number) on the CRF. This field may be populated by the sponsor's data collection system.
Interventions	PR	N/A	N/A	8	PRTRT	Reported Name of Procedure	The verbatim surgical, therapeutic, or diagnostic procedure's name.	What was the procedure name?	[Procedure Name]; (Specify) Other	Char	HR	Record only one procedure per line.	PRTRT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	In most cases, the verbatim procedure names or therapy will be coded to a standard dictionary (e.g., MedDRA, SNOMED) after the data have been collected on the CRF.
Interventions	PR	N/A	N/A	9	PRDECOD	Standardized Procedure Name	The dictionary or sponsor-defined standardized text description of PRTRT, or the modified topic variable (PRMODIFY), if applicable.	N/A	[Standardized Procedure Name]	Char	O	N/A	PRDECOD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(PROCEDUR)	N/A	This is typically not a data collection field that will appear on the CRF. If the sponsor chooses to code the procedure, the sponsor will populate this through the coding process. If PRPRES is used, and the information about a specific standardized procedure name is being solicited, the data from PRTRT may map directly to the SDTMIG PRDECOD variable.
Interventions	PR	N/A	N/A	10	PRMODIFY	Modified Procedure Name	If the value for PRTRT is modified for coding purposes, then the	N/A	N/A	Char	O	N/A	PRMODIFY	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	This is not a data collection field that will appear on the CRF. If the

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/ CDASH Codelist Name	Implementation Notes
							modified text is placed here.										sponsor chooses to code the procedure, the sponsor will populate this through the coding process.
Interventions	PR	N/A	N/A	11	PRPRES	Procedure Prespecified	An indication that a specific intervention or a group of interventions is prespecified on a CRF.	N/A	N/A	Char	O	N/A	PRPRES	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(NY)	N/A	For prespecified interventions, a hidden field on a CRF defaulted to "Y", or added during the SDTM dataset creation. If a study collects both prespecified and free-text interventions, the value of PRPRES should be "Y" for all prespecified interventions and null for interventions reported as free text.
Interventions	PR	N/A	N/A	12	PROCCUR	Procedure Occurrence	An indication of whether a prespecified procedure (PRTRT) happened when information about the occurrence of a specific intervention is solicited.	Was [PRDECOD/PRTRT] performed?; Has the subject had [PRDECOD/PRTRT]?	[PRDECOD/PRTRT] Performed	Char	O	Indicate if [specific procedure] was performed by checking Yes or No.	PROCCUR	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. If the response was not asked or answered, populate the SDTMIG variable PRSTAT with "NOT DONE".	(NY)	N/A	PROCCUR is used to report the occurrence of a prespecified procedure or a group of procedures. PROCCUR is not used for spontaneously free text-reported procedures. The site should be able to indicate that the response was not asked or answered.
Interventions	PR	N/A	N/A	13	PRREASOC	Procedure Reason for Occur Value	An explanation for why a scheduled procedure did or did not occur.	What was the reason that the procedure did or not occur?	Reason for Occur Value	Char	O	Indicate why the procedure did or did not occur.	PRREASOCCDASH-2156	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The reason the scheduled procedure was or was not performed may be chosen from a sponsor-defined codelist (e.g., SUBJECT REFUSED) or entered as free text. When -- REASOC is used, -- OCCUR must also be populated in the SDTM dataset with a value of "Y" or "N".
Interventions	PR	N/A	N/A	14	PRREASND	Procedure Reason Not Done	An explanation for why the data are not available.	What was the reason not done?	Reason not done	Char	O	Provide the reason why the procedure was not done.	PRREASND	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The reason the data are not available may be chosen from a sponsor-defined list (e.g., broken equipment, subject refused) or entered as free text. When PRREASND is used, the SDTMIG variable PRSTAT should also be populated in the SDTM-based dataset. The value "NOT DONE" here indicates that the subject was not questioned/data was not collected. It does not mean that the subject did not have the procedure.
Interventions	PR	N/A	N/A	15	PRPRIOR	Prior Procedure	Indication the procedure occurred prior to [PRSTTPT] or prior to the date in DM.RFSTDTC.	Was the procedure performed prior to [PRSTTPT]?; Was the procedure performed prior to study start?	Prior to [PRSTTPT]; Prior to study	Char	O	Check if the procedure was started before the specified point in time.	PRSTRTPT; PRSTRF	This does not map directly to an SDTMIG variable. May be used to populate a value into an SDTM relative timing variable such as PRSTRF or PRSTRTPT. When populating	(NY)	N/A	See Section 3.7, Mapping Relative Times from Collection to Submissions , and the SDTMIG for

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/ CDASH Codelist Name	Implementation Notes
														PRSTRF, or PRSTRTPT, if the value of the CDASH field PRPRIOR is "Y" a value from the CDISC CT (STENRF) may be used. When PRPRIOR refers to the Study Reference Period (defined in DM.RFSTDTC to DM.RFENDTC) the SDTM variable PRSTRF should be populated. When PRPRIOR is compared to another time point, the SDTM variables PRSTRTPT and PRSTTPT should be used. Note: PRSTRTPT must refer to the time-point anchor described in PRSTTPT.			more information about mapping relative times. .
Interventions	PR	N/A	N/A	16	PRSTDAT	Procedure Start Date	The date or start date of when the procedure started or was performed, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the procedure (start) date ?	(Start) Date	Char	R/C	Record the date the procedure was started or performed using this format (DD-MON-YYYY). Procedures performed during the study are expected to have a complete start date. Prior procedures that are exclusionary should have both a start and end date.	PRSTDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH START DATE and TIME components and populate the SDTMIG variable PRSTDTC in ISO 8601 format.	N/A	N/A	The preferred method is to collect a complete Start Date. Partial dates (e.g., providing year only) for procedures started a considerable amount of time prior to the start of study are acceptable.
Interventions	PR	N/A	N/A	17	PRONGO	Ongoing Procedure	Indication the procedure is ongoing when no end date is provided.	Was the procedure ongoing (as of the [study-specific timepoint or period])?	Ongoing (as of the [study-specific timepoint or period])	Char	O	Indicate if the procedure has not ended at the time of data collection and the end date should be left blank.	PRENRTPT; PRENRF	This does not map directly to an SDTM variable. May be used to populate a value into an SDTMIG relative timing variable such as PRENRF or PRENRTPT. When populating PRENRF, if the value of PRONGO is "Y", the value of "DURING", "AFTER" or "DURING/AFTER" may be used. When populating PRENRTPT, if the value of PRONGO is "Y", the value of "ONGOING" may be used. When PRONGO refers to the Study Reference Period (defined in DM.RFSTDTC to DM.RFENDTC) the SDTM variable PRENRF should be populated. When PRONGO is used in conjunction with another time point, the SDTM variables PRENRTPT and PRENRTPT should be used. Note: PRENRTPT must refer to a time point anchor described in PRENRTPT.	(NY)	N/A	Completed to indicate that the procedure has not stopped at the time point defined by the study. The purpose of collecting this field is to help with data cleaning and monitoring; this field provides further confirmation that the End Date was deliberately left blank. See Section 3.7, Mapping Relative Times from Collection to Submissions , and SDTMIG for more information about mapping relative times.
Interventions	PR	N/A	N/A	18	PRENDAT	Procedure End Date	The end date of the procedure, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the procedure (end) date?	(End) Date	Char	R/C	Record the end date of the procedure using this format (DD-MON-YYYY). If the procedure has not ended, leave this field blank and populate PRONGO as "Y".	PRENDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH END DATE and TIME components and populate the SDTM variable PRENDTC in ISO 8601 format.	N/A	N/A	The assumption is that sponsors should either have an end date or will indicate that the procedure was ongoing at the time of collection or at the end of the study. However, in cases where the end date can be determined from dates collected elsewhere in the CRF it is not necessary to include an end date in the CRF. For example, if the procedure is started and stopped within the same day, the

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/ CDASH Codelist Name	Implementation Notes
																	end date will be the same as the start date.
Interventions	PR	N/A	N/A	19	PRINDC	Procedure Indication	The condition, disease, symptom, or disorder that the procedure was used to address or investigate (e.g., why the therapy was taken or administered, why the procedure was performed).	For what indication was the [PRTRT] performed?	Indication	Char	O	Record the reason the procedure was performed based on clinical investigator's evaluation. If performed to treat a condition, and a diagnosis was made, the indication should be the diagnosis. If performed to treat a condition, and no diagnosis was made, the indication should be the signs and symptoms. If taken as prophylaxis, report as "Prophylaxis for" and include a description of the condition(s).	PRINDC	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	This additional information is collected on the CRF when the sponsor wants to capture the reason(s) why a procedure was performed. This information can then be used as deemed appropriate for coding, analysis (e.g., in the classification of procedures), for reconciling the procedures performed on a subject with their provided medical history, and/or AEs/SAEs as part of the data clean-up and monitoring process.
Interventions	PR	N/A	N/A	20	PRAENO	Related Adverse Event ID	Identifier for the adverse event that is the indication for this procedure.	What was the identifier for the adverse event(s) for which the procedure was performed?	Related Adverse Event Identifier	Char	O	Record the identifier of the adverse event for which this procedure was performed.	N/A	This does not map directly to an SDTMIG variable. For the SDTM submission datasets, may be used to create RELREC to link this record with a record in the AE domain.	N/A	N/A	The intent is to establish a link between the adverse event and the procedure performed for the adverse event. PRAENO can be used to identify a relationship between records in the PR dataset and records in the AE dataset. See the SDTMIG for information on RELREC.
Interventions	PR	N/A	N/A	21	PRMHNO	Related Medical History Event ID	Identifier for the medical history event that is the indication for this procedure.	What was the identifier for the medical history event(s) for which the procedure was performed?	Related Medical History Event Identifier	Char	O	Record the identifier of the medical history event for which this procedure was performed.	N/A	This does not map directly to an SDTMIG variable. For the SDTM submission datasets, may be used to create RELREC to link this record with a record in the MH domain.	N/A	N/A	The intent is to establish a link between the medical history condition and the procedure undergone for the medical history condition. PRMHNO can be used to identify a relationship between records in the PR dataset and records in the MH dataset. See the SDTMIG for information on RELREC.
Interventions	PR	N/A	N/A	22	PRDSTXT	Procedure Dose Description	The dose/amount administered during the procedure.	What was the [dose/amount] of [PRTRT] (per administration/for the procedure)?	[Dose/Amount]	Char	O	Record the [dose/amount] of [PRTRT] per administered.	PRDOSE; PRDOSTXT	This does not map directly to an SDTMIG variable. Numeric values map to PRDOSE in SDTM. Non-numeric values (e.g., 200-400) map to PRDOSTXT in SDTM.	N/A	N/A	Defining this data collection field as a dose text field allows for flexibility in capturing dose entries as numbers, text or ranges. The data collected in this dose text-format field should be separated or mapped to either SDTMIG PRDOSE if numeric or PRDOSTXT if text.
Interventions	PR	N/A	N/A	23	PRDOSU	Procedure Dose Unit	The unit for intended dose/amount for PRDOSE.	What was the unit?	Unit	Char	O	Record the unit for the amount of [PRTRT]	PRDOSU	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(UNIT)	N/A	When sponsors collect data for amount of PRTRT performed or

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/ CDASH Codelist Name	Implementation Notes
							PRDOSTOT, or PRDOSTXT.					performed or administered.					administered, the unit should be collected as well (as applicable).
Interventions	PR	N/A	N/A	24	PRDOSFRQ	Procedure Frequency per Interval	The number/amount of the procedure that was given/administered/taken during a specific interval.	What was the frequency of [PRTRT]?	Frequency	Char	O	Record how often the procedure was performed.	PRDOSFRQ	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(FREQ)	N/A	This may be collected if it cannot be determined from other sources or if there are multiple options. Usually expressed as the number of procedures given per a specific interval.
Interventions	PR	N/A	N/A	25	PRROUTE	Procedure Route of Administration	The route of administration of the procedure.	What was the route of administration of the procedure?	Route	Char	O	Provide the route of administration for the procedure.	PRROUTE	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(ROUTE)	N/A	This additional information may be important to collect on the CRF when the sponsor would want to capture a procedure's route of administration for comparative analysis purposes.
Interventions	PR	N/A	N/A	26	PRLOC	Location of Procedure	A description of the anatomical location of an procedure (e.g., location of a biopsy).	What was the anatomical location where the procedure was performed?	Anatomical Location	Char	O	Record the body location where the procedure was performed.	PRLOC	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(LOC)	N/A	Collected when the sponsor needs to identify the specific anatomical location (e.g., Liver for the Biopsy). LAT, DIR, PORTOT are used to further describe the anatomical location.
Interventions	PR	N/A	N/A	27	PRLAT	Procedure Laterality	Qualifier for anatomical location, further detailing side of the body for the procedure administration.	What was the side of the anatomical location of the administration?	Side	Char	O	Record the side of the anatomical location where the procedure was administered.	PRLAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(LAT)	N/A	Further details the laterality of the location where the procedure was administered/taken. This may be preprinted or collected. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Interventions	PR	N/A	N/A	28	PRDIR	Procedure Directionality	Qualifier further detailing the position of the anatomical location, relative to the center of the body, organ, or specimen.	What was the directionality of the anatomical location of the procedure?	Directionality	Char	O	Record the direction of the anatomical location where the procedure was administered.	PRDIR	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(DIR)	N/A	May be preprinted or collected when the sponsor needs to identify the directionality of the anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Interventions	PR	N/A	N/A	29	PRPORTOT	Procedure Portion or Totality	Qualifier for anatomical location, further detailing the distribution (i.e., arrangement of, apportioning of).	What was the portion or totality of the anatomical location that was treated?	Portion or Totality	Char	O	Record the portion of the body location that was treated.	PRPORTOT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(PORTOT)	N/A	Collected when the sponsor needs to identify the specific portionality for the anatomical locations. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Interventions	PR	N/A	N/A	30	PRFAST	Procedure Fasting Status	An indication that the subject has abstained from food/water for the specified amount of time.	Was the subject fasting?	Fasting	Char	O	Record whether the subject was fasting prior to the procedure being performed.	PRFAST	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(NY)	N/A	This information is collected when the procedure may be affected by whether the subject was fasting. This may not be relevant for all procedures.
Interventions	PR	N/A	N/A	31	PRDOSRGM	Procedure Intended Dose Regimen	The text description of the (intended) schedule or regimen for the procedure.	What was the intended procedure regimen?	Intended Procedure Regimen	Char	O	Record the intended regimen for the procedure to be performed.	PRDOSRGM	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The regimen information may further clarify the dose administration and dose frequency (e.g., TWO WEEKS ON, TWO WEEKS OFF). This may

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/ CDASH Codelist Name	Implementation Notes
																	be prespecified or collected. The sponsor may wish to create a codelist to collect this data consistently.
Interventions	PR	N/A	N/A	32	PRDOSADJ	Procedure Adjusted	An indication of whether the procedure dose/amount was adjusted.	Was the procedure dose adjusted?	(Dose) Adjusted	Char	O	Record if the procedure was adjusted from planned.	N/A	When PRADJ is collected, does not map to an SDTMIG variable. The SDTM annotated CRF indicates that this field is NOT SUBMITTED. When PRADJ is not collected, the sponsor may submit this variable as a SUPPQ.	(NY)	N/A	Typically, the intent/purpose of collecting this field is to help with data cleaning and monitoring. It provides verification that the associate field on the CRF (PRADJ) was deliberately left blank. However, the sponsor may collect whether the procedure dose/amount was adjusted, without collecting the reason for the change.
Interventions	PR	N/A	N/A	33	PRADJ	Reason for Procedure Adjustment	Description of or explanation for why a procedure dose/amount was adjusted.	What was the reason the procedure dose was adjusted?	Reason Adjusted	Char	O	Record why the procedure dose was adjusted from planned.	PRADJ	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Captures the reason the PRTRT dose was changed or modified. The reason may be chosen from a sponsor-defined list (e.g., adverse event, insufficient response) or entered as free text.
Interventions	PR	N/A	N/A	34	PRTRTCMP	Completed Procedure	Indication of whether the subject completed the intended regimen.	Did the subject complete the full course of the [PRTRT]?	Completed [PR Intervention Topic]	Char	O	Record if the subject completed the intended regimen.	SUPPPR.QVAL	This does not map directly to an SDTMIG variable. This information could be submitted in a SUPPPR dataset as the value of SUPPPR.QVAL where SUPPPR.QNAM="PRTRTCMP" and SUPPPR.QLABEL="Treatment Completed". Refer to the current SDTM and SDTMIG for instructions on placement of NSVs in SDTM domains.	(NY)	N/A	Depending on how the PTTRT dose details are collected via the CRF/eCRF, it may be possible to derive those data if the regimen data are collected.
Interventions	PR	N/A	N/A	35	PRITRPYN	Procedure Interrupted	An indication of whether the procedure was interrupted.	Was the procedure interrupted?	Procedure Interrupted	Char	O	Record if the procedure was interrupted.	N/A	Does not map to an SDTMIG variable. The SDTM annotated CRF indicates that this field is NOT SUBMITTED.	(NY)	N/A	Provides a definitive response regarding any procedure interruption. The intent/purpose of collecting this field is to help with data cleaning and monitoring when the duration of the interruption is collected. In some situations, if the actual duration of the interruption is not collected, or not derived, this information could be submitted in a SUPPPR dataset.
Interventions	PR	N/A	N/A	36	PRITRPRS	Reason Procedure Interrupted	An explanation for why the intervention was interrupted.	Why was the procedure interrupted?	Reason Procedure Interrupted	Char	O	Record the reason the procedure was interrupted.	SUPPPR.QVAL	This information could be submitted in a SUPPPR dataset as the value of SUPPPR.QVAL where SUPPPR.QNAM="PRITRPRS" and SUPPPR.QLABEL="Reason Intervention Interrupted". Refer to the current SDTM and SDTMIG for instructions on placement of NSVs in SDTM domains.	N/A	N/A	This CDASH field is use to collected the reason why an intervention was interrupted. The sponsor may define controlled terminology.
Interventions	PR	N/A	N/A	37	PRCINTD	Procedure Interruption Duration	The collected duration of the procedure interruption.	What was the duration of the procedure interruption?	(Interruption) Duration	Char	O	Record how long the procedure was interrupted before it resumed.	SUPPPR.QVAL	This does not map directly to an SDTMIG variable. This information could be submitted in a SUPPPR dataset as the value of SUPPPR.QVAL where SUPPPR.QNAM="PRITRPD"	N/A	N/A	This field is used to collect the duration of procedure interruption. In some situations, the duration of the

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/ CDASH Codelist Name	Implementation Notes
														and SUPPPR.QLABEL= "Interruption Duration". Concatenate the collected procedure interruption duration and the duration unit components and create PRITRPD using ISO 8601 Period format. Refer to the current SDTM and SDTMIG for instructions on placement of NSVs in SDTM domains.			interruption may not be collected but calculated from the procedure start and end times recorded elsewhere in the CRF.
Interventions	PR	N/A	N/A	38	PRCINTDU	Procedure Interruption Duration Units	The unit for the collected duration of the procedure interruption.	What was the interruption duration unit?	(Interruption Duration) Unit	Char	O	Record the unit for the duration of interruption of the procedure.	SUPPPR.QVAL	This does not map directly to an SDTMIG variable. This information could be submitted in a SUPPPR.QVAL dataset as the value of SUPPPR.QVAL where SUPPPR.QNAM="PRITRPD" and SUPPPR.QLABEL= "Interruption Duration". Concatenate the collected procedure interruption duration and the duration unit components and create PRITRPD using ISO 8601 Period format. Refer to the current SDTM and SDTMIG for instructions on placement of NSVs in SDTM domains.	(UNIT)	N/A	The unit should be collected as a qualifier to the number for duration.
Interventions	PR	N/A	N/A	39	PRLLT	Procedure Lowest Level Term	The dictionary-derived text description of the lowest level term.	N/A	N/A	Char	O	N/A	SUPPPR.QVAL	This information could be submitted in a SUPPPR dataset as the value of SUPPPR.QVAL where SUPPPR.QNAM="PRLLT" and SUPPPR.QLABEL="Lower Level Term". Refer to the current SDTM and SDTMIG for instructions on placement of NSVs in SDTM domains. Sponsors should include an Origin column in the SUPPQ dataset to indicate that the data was "ASSIGNED".	N/A	N/A	This field does not typically appear on the CRF. Sponsors will populate this through the coding process. This is applicable to items using MedDRA coding. Rationale for adding coding variables to CDASH is to provide a more complete data management package. This variable could be used in the PR domain for coding. Another dictionary can be used and the appropriate coding elements added, if appropriate, in the SUPPPR.QVAL dataset.
Interventions	PR	N/A	N/A	40	PRLLTCD	Procedure Lowest Level Term Code	The dictionary-derived code for the lowest level term.	N/A	N/A	Num	O	N/A	SUPPPR.QVAL	This information could be submitted in a SUPPPR dataset as the value of SUPPPR.QVAL where SUPPPR.QNAM="PRLLTCD" and SUPPPR.QLABEL="Lower Level Term Code". Refer to the current SDTM and SDTMIG for instructions on placement of NSVs in SDTM domains. Sponsors should include an Origin column in the SUPPQ dataset to indicate that the data was "ASSIGNED".	N/A	N/A	This field does not typically appear on the CRF. Sponsors will populate this through the coding process. This is applicable to items using MedDRA coding. Rationale for adding coding variables to CDASH is to provide a more complete data management package. This variable could be used in the PR domain for MedDRA coding. Other dictionaries can be used and the appropriate coding elements added, if appropriate, in the SUPPPR.QVAL dataset.
Interventions	PR	N/A	N/A	41	PRPTCD	Procedure Preferred Term Code	The dictionary-derived code for the preferred term.	N/A	N/A	Num	O	N/A	SUPPPR.QVAL	This information could be submitted in a SUPPPR.QVAL dataset where SUPPPR.QNAM="PRPTCD" and SUPPPR.QLABEL= "Preferred Term Code Lower Level Term Code". Refer to the current SDTM and SDTMIG for	N/A	N/A	This field does not typically appear on the CRF. Sponsors will populate this through the coding process. This is applicable to items using

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/ CDASH Codelist Name	Implementation Notes
														Instructions on placement of NSVsin SDTM domains. Sponsors should include an Origin column in the SUPPQ dataset to indicate that the data was "ASSIGNED".			MedDRA coding. Rationale for adding coding variables to CDASH is to provide a more complete data management package. This variable could be used in the PR domain for MedDRA coding. Other dictionaries can be used and the appropriate coding elements added, if appropriate, in the SUPPPR.QVAL dataset.
Interventions	PR	N/A	N/A	42	PRHLT	Procedure High Level Term	The dictionary-derived text description of the high level term for the primary system organ class (SOC).	N/A	N/A	Char	O	N/A	SUPPPR.QVAL	This information could be submitted in a SUPPPR dataset as the value of SUPPPR.QVAL where SUPPPR.QNAM="PRHLT" and SUPPPR.QLABEL="High Level Term". Refer to the current SDTM and SDTMIG for instructions on placement of NSVs in SDTM domains. Sponsors should include an Origin column in the SUPPQ dataset to indicate that the data was "ASSIGNED".	N/A	N/A	This is not a data collection field that would appear on the CRF. Sponsors populate this through the coding process. This is applicable to items using MedDRA coding. Rationale for adding coding variables to CDASH is to provide a more complete data management package. This variable could be used in the PR domain for MedDRA coding. Other dictionaries can be used and the appropriate coding elements added, if appropriate, in the SUPPPR.QVAL dataset.
Interventions	PR	N/A	N/A	43	PRHLTCD	Procedure High Level Term Code	The dictionary-derived code for the high level term for the primary system organ class (SOC).	N/A	N/A	Num	O	N/A	SUPPPR.QVAL	This information could be submitted in a SUPPPR.QVAL dataset where SUPPPR.QNAM="PRHLTCD" and SUPPPR.QLABEL="High Level Term Code". Refer to the current SDTM and SDTMIG for instructions on placement of NSVs in SDTM domains. Sponsors should include an Origin in the define metadata document to indicate that the data was "ASSIGNED".	N/A	N/A	This is not a data collection field that would appear on the CRF. Sponsors will populate this through the coding process. This is applicable to items using MedDRA coding. Rationale for adding coding variables to CDASH is to provide a more complete data management package. This variable could be used in the PR domain for MedDRA coding. Other dictionaries can be used and the appropriate coding elements added, if appropriate, in the SUPPPR.QVAL dataset.
Interventions	PR	N/A	N/A	44	PRHLGT	Procedure High Level Group Term	The dictionary-derived text description of the high level group term for the primary system organ class (SOC).	N/A	N/A	Char	O	N/A	SUPPPR.QVAL	This information could be submitted in a SUPPPR dataset as the value of SUPPPR.QVAL where SUPPPR.QNAM="PRHLGT" and SUPPPR.QLABEL="High Level Group Term". Refer to the current SDTM and SDTMIG for instructions on placement of NSVs in SDTM domains. Sponsors should include an Origin column in the SUPPQ dataset to indicate that the data was "ASSIGNED".	N/A	N/A	This field does not typically appear on the CRF. Sponsors will populate this through the coding process. This is applicable to items using MedDRA coding. Rationale for adding coding variables to CDASH is to provide a more complete data

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/ CDASH Codelist Name	Implementation Notes
																	management package. This variable could be used in the PR domain for MedDRA coding. Other dictionaries can be used and the appropriate coding elements added, if appropriate, in the SUPPPR.QVAL dataset.
Interventions	PR	N/A	N/A	45	PRHLGTCD	Procedure High Level Group Term Code	The dictionary-derived code for the high level group term for the primary system organ class (SOC).	N/A	N/A	Num	O	N/A	SUPPPR.QVAL	This information could be submitted in a SUPPPR dataset as the value of SUPPPR.QVAL where SUPPPR.QNAM= "PRHLGTCD" and SUPPPR.QLABEL="High Level Group Term Code". Refer to the current SDTM and SDTMIG for instructions on placement of NSVs in SDTM domains. Sponsors should include an Origin column in the SUPPQ dataset to indicate that the data was "ASSIGNED".	N/A	N/A	This is not a data collection field that would appear on the CRF. Sponsors will populate this through the coding process. This is applicable to items using MedDRA coding. Rationale for adding coding variables to CDASH is to provide a more complete data management package. This variable could be used in the PR domain for MedDRA coding. Other dictionaries can be used and the appropriate coding elements added, if appropriate, in the SUPPPR.QVAL dataset.
Interventions	PR	N/A	N/A	46	PRSOC	PR Primary System Organ Class	The dictionary-derived text description of the primary system organ class (SOC).	N/A	N/A	Char	O	N/A	SUPPPR.QVAL	This information could be submitted in a SUPPPR.QVAL dataset where SUPPPR.QNAM="PRSOC" and SUPPPR.QLABEL="Primary System Organ Class". Refer to the current SDTM and SDTMIG for instructions on placement of NSVs in SDTM domains. Sponsors should include an Origin in the define metadata document to indicate that the data was "ASSIGNED".	N/A	N/A	This is not a data collection field that would appear on the CRF. Sponsors will populate this through the coding process. This is applicable to items using MedDRA coding. Rationale for adding coding variables to CDASH is to provide a more complete data management package. This variable could be used in the PR domain for MedDRA coding. Other dictionaries can be used and the appropriate coding elements added, if appropriate, in the SUPPPR.QVAL dataset.
Interventions	PR	N/A	N/A	47	PRSOCCD	PR Primary System Organ Class Code	The dictionary-derived code for the primary system organ class (SOC).	N/A	N/A	Num	O	N/A	SUPPPR.QVAL	This information could be submitted in a SUPPPR dataset as the value of SUPPPR.QVAL where SUPPPR.QNAM= "PRSOCCD" and SUPPPR.QLABEL="Primary System Organ Class Code". Refer to the current SDTM and SDTMIG for instructions on placement of NSVs in SDTM domains. Sponsors should include an Origin column in the SUPPQ dataset to indicate that the data was "ASSIGNED".	N/A	N/A	This field does not typically appear on the CRF. Sponsors will populate this through the coding process. This is applicable to items using MedDRA coding. Rationale for adding coding variables to CDASH is to provide a more complete data management package. This variable could be used in the PR domain for MedDRA coding. Other dictionaries can be

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/ CDASH Codelist Name	Implementation Notes
																	used and the appropriate coding elements added, if appropriate, in the SUPPPR.QVAL dataset.

Assumptions for the CDASHIG PR - Domain

1. Information on procedures is generally collected either by recording free text or using a prespecified list of terms.
2. Because the solicitation of information on specific therapeutic and diagnostic procedures may affect the frequency at which they are reported, the fact that a specific procedure was solicited may be of interest to reviewers. PROCCUR is used to indicate whether a prespecified procedure occurred. A value of "Y" indicates that the procedure occurred; "N" indicates that it did not. If a procedure was not prespecified, the value of PROCCUR should not be collected.

Example CRFs for the CDASHIG PR - Procedures Domain

Example 1

Title: Prespecified Procedures

Procedure Category

PULMANGI_PRCATPRCAT where PRTRT = "PULMONARY ANGIOGRAM"

Pre-populated

Procedure Name

PULMANGI_PRTRTPRTRT

Pre-populated

PULMANGI_PRPRESPPRPRESP where PRTRT = "PULMONARY ANGIOGRAM"

Hidden/pre-populated

Indicate if a pulmonary angiogram was performed by checking Yes or No.

Was a pulmonary angiogram performed?

PULMANGI_PROCCURPROCCUR where PRTRT = "PULMONARY ANGIOGRAM"

Record the date the procedure was started or performed using this format (DD-MON-YYYY).

Start Date

PULMANGI_PRSTDATPRSTDT where PRTRT = "PULMONARY ANGIOGRAM"

Record the reason the procedure was performed based on clinical investigator's evaluation. If performed to treat a condition, and a diagnosis was made, the indication should be the diagnosis. If performed to treat a condition, and no diagnosis was made, the indication should be the signs and symptoms. If taken as prophylaxis, report as "Prophylaxis for" and include a description of the condition(s).

For what indication was the pulmonary angiogram performed?

PULMANGI_PRINDCPRINDC where PRTRT = "PULMONARY ANGIOGRAM"

Record the identifier of the adverse event for which this procedure was performed.

Adverse Event Identifier

PULMANGI_PRAENOAssociate with related AE record in RELREC where PRTRT = "PULMONARY ANGIOGRAM"

OUTPATIENT PROCEDURES

PULMONARY ANGIOGRAM

Yes

<NY codelist>

Yes

No

<NY codelist>

	Procedure Category CARDCATH_PRCAT PRCAT where PRTRT = "CARDIAC CATHETERIZATION" <i>Pre-populated</i>	INPATIENT PROCEDURES
	Procedure Name CARDCATH_PRTRT PRTRT <i>Pre-populated</i>	CARDIAC CATHETERIZATION
	CARDCATH_PRPRESP PRPRESP where PRTRT = "CARDIAC CATHETERIZATION" <i>Hidden/pre-populated</i>	☒ Yes <NY codelist>
Indicate if cardiac catheterization was performed by checking Yes or No.	Was cardiac catheterization performed? CARDCATH_PROCCUR PROCCUR where PRTRT = "CARDIAC CATHETERIZATION"	☐ Yes ☐ No <NY codelist>
Record the date the procedure was started or performed using this format (DD-MON-YYYY).	Start Date CARDCATH_PRSTDAT PRSTDTC where PRTRT = "CARDIAC CATHETERIZATION"	
Record if the procedure was interrupted.	Was the procedure interrupted? CARDCATH_PRITRPYN Not Submitted	☐ Yes ☐ No <NY codelist>
Record how long the procedure was interrupted before it resumed.	What was the duration of the procedure interruption? CARDCATH_PRCINTD SUPPPR.QVAL where SUPPPR.QNAM="PRITRPD" and SUPPPR.QLABEL="Interruption Duration" and PRTRT = "CARDIAC CATHETERIZATION"	
Record the unit for the duration of interruption of the procedure.	Interruption Duration Unit CARDCATH_PRCINTDU SUPPPR.QVAL where SUPPPR.QNAM="PRITRPD" and SUPPPR.QLABEL="Interruption Duration" and PRTRT = "CARDIAC CATHETERIZATION"	☐ HOURS ☐ min <UNIT codelist>
Record the reason the procedure was performed based on clinical investigator's evaluation. If performed to treat a condition, and a diagnosis was made, the indication should be the diagnosis. If performed to treat a condition, and no diagnosis was made, the indication should be the signs and symptoms. If taken as prophylaxis, report as "Prophylaxis for" and include a description of the condition(s).	For what indication, was the cardiac catheterization performed? CARDCATH_PRINDC PRINDC where PRTRT = "CARDIAC CATHETERIZATION"	
Record the identifier of the adverse event for which this procedure was performed.	Adverse Event Identifier CARDCATH_PRAENO Associate with related AE record in RELREC where PRTRT = "CARDIAC CATHETERIZATION"	

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
PULMANGI_PRCAT	1	What was the category of the procedure?	Procedure Category	Record the procedure category, if not preprinted on the CRF.	Text	PRCAT	PRCAT where PRTRT = "PULMONARY ANGIOGRAM"			OUTPATIENT PROCEDURES	Prompt		
PULMANGI_PRTRT	2	What was the procedure name?	Procedure Name	Record only one procedure per line.	Text	PRTRT				PULMONARY ANGIOGRAM	Prompt		
PULMANGI_PRPRESP	3	N/A	N/A	N/A	Text	PRPRESP	PRPRESP where PRTRT = "PULMONARY ANGIOGRAM"	(NY)	Yes	Yes		Radio	Y
PULMANGI_PROCCUR	4	Was a pulmonary angiogram performed?	Pulmonary Angiogram Performed	Indicate if a pulmonary angiogram was performed by checking Yes or No.	Text	PROCCUR	PROCCUR where PRTRT = "PULMONARY ANGIOGRAM"	(NY)	Yes; No			Radio	

CDISC CDASH Implementation Guide for Human Clinical Trials (Version 2.3 Final)

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
PULMANGI_PRSTDAT	5	What was the procedure Start date?	Start Date	Record the date the procedure was started or performed using this format (DD-MON-YYYY).	Date	PRSTDTC	PRSTDTC where PRTRT = "PULMONARY ANGIOGRAM"				Prompt		
PULMANGI_PRINDC	6	For what indication was the pulmonary angiogram performed?	Indication	Record the reason the procedure was performed based on clinical investigator's evaluation. If performed to treat a condition, and a diagnosis was made, the indication should be the diagnosis. If performed to treat a condition, and no diagnosis was made, the indication should be the signs and symptoms. If taken as prophylaxis, report as "Prophylaxis for" and include a description of the condition(s).	Text	PRINDC	PRINDC where PRTRT = "PULMONARY ANGIOGRAM"						
PULMANGI_PRAENO	7	What was the identifier for the adverse event(s) for which the procedure was performed?	Adverse Event Identifier	Record the identifier of the adverse event for which this procedure was performed.	Text	N/A	Associate with related AE record in RELREC where PRTRT = "PULMONARY ANGIOGRAM"				Prompt		
CARDCATH_PRCAT	8	What was the category of the procedure?	Procedure Category	Record the procedure category, if not preprinted on the CRF.	Text	PRCAT	PRCAT where PRTRT = "CARDIAC CATHETERIZATION"			INPATIENT PROCEDURES	Prompt		
CARDCATH_PRTRT	9	What was the procedure name?	Procedure Name	Record only one procedure per line.	Text	PRTRT				CARDIAC CATHETERIZATION	Prompt		
CARDCATH_PRPRESP	10	N/A	N/A	N/A	Text	PRPRESP	PRPRESP where PRTRT = "CARDIAC CATHETERIZATION"	(NY)	Yes	Yes		Radio	Y
CARDCATH_PROCCUR	11	Was cardiac catheterization performed?	Cardiac Catheterization Performed	Indicate if cardiac catheterization was performed by checking Yes or No.	Text	PROCCUR	PROCCUR where PRTRT = "CARDIAC CATHETERIZATION"	(NY)	Yes; No			Radio	
CARDCATH_PRSTDAT	12	What was the procedure start date?	Start Date	Record the date the procedure was started or performed using this format (DD-MON-YYYY).	Date	PRSTDTC	PRSTDTC where PRTRT = "CARDIAC CATHETERIZATION"						
CARDCATH_PRITRPN	13	Was the procedure interrupted?	Procedure Interrupted	Record if the procedure was interrupted.	Text	N/A		(NY)	Yes; No			Radio	
CARDCATH_PRCINTD	14	What was the duration of the procedure interruption?	Collected Interruption Duration	Record how long the procedure was interrupted before it resumed.	Text	SUPPPR.QVAL	SUPPPR.QVAL where SUPPPR.QNAM="PRITRPD" and SUPPPR.QLABEL="Interruption Duration" and PRTRT = "CARDIAC CATHETERIZATION"						
CARDCATH_PRCINTDU	15	What was the interruption duration unit?	Interruption Duration Unit	Record the unit for the duration of interruption of the procedure.	Text	N/A	SUPPPR.QVAL where SUPPPR.QNAM="PRITRPD" and SUPPPR.QLABEL="Interruption Duration" and PRTRT = "CARDIAC CATHETERIZATION"	(UNIT)	HOURS; min		Prompt	Radio	
CARDCATH_PRINDC	16	For what indication, was the cardiac	Indication	Record the reason the procedure was performed based on	Text	PRINDC	PRINDC where PRTRT = "CARDIAC CATHETERIZATION"						

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
		catheterization performed?		clinical investigator's evaluation. If performed to treat a condition, and a diagnosis was made, the indication should be the diagnosis. If performed to treat a condition, and no diagnosis was made, the indication should be the signs and symptoms. If taken as prophylaxis, report as "Prophylaxis for" and include a description of the condition(s).									
CARDCATH_PRAENO	17	What was the identifier for the adverse event(s) for which the procedure was performed?	Adverse Event Identifier	Record the identifier of the adverse event for which this procedure was performed.	Text	N/A	Associate with related AE record in RELREC where PRTRT = "CARDIAC CATHETERIZATION"				Prompt		

Example 2

Title: Spontaneously Reported Procedures

Indicate if the subject had any surgical, therapeutic or diagnostic procedures. If Yes, include the appropriate details where indicated on the CRF.

Record only one procedure per line.

Record the reason the procedure was performed based on clinical investigator's evaluation. If performed to treat a condition, and a diagnosis was made, the indication should be the diagnosis. If performed to treat a condition, and no diagnosis was made, the indication should be the signs and symptoms. If taken as prophylaxis, report as "Prophylaxis for" and include a description of the condition(s).

Record the date the procedure was started or performed using this format (DD-MON-YYYY). Procedures performed during the study are expected to have a complete start date. Prior procedures that are exclusionary should have both a start and end date.

Were any surgical, therapeutic or diagnostic procedures performed? PRYN Not Submitted	☐ Yes ☐ No <NY codelist>
Procedure Name PRTRT	
Indication PRINDC	
Start Date PRSTDAT PRSTDTC	

Record the start time (as complete as possible) when the procedure started.	Start Time
Record the end date of the procedure using this format (DD-MON-YYYY). If the procedure has not ended, leave this field blank.	End Date
Record the start time (as complete as possible) when the procedure ended.	End Time

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
PRYN	1	Were any surgical, therapeutic or diagnostic procedures performed?	Any Procedures	Indicate if the subject had any surgical, therapeutic or diagnostic procedures. If Yes, include the appropriate details where indicated on the CRF.	Text	N/A		(NY)	Yes; No			Radio	
PRTRT	2	What was the procedure name?	Procedure Name	Record only one procedure per line.	Text	PRTRT					Prompt		
PRINDC	3	For what indication, was the procedure performed?	Indication	Record the reason the procedure was performed based on clinical investigator's evaluation. If performed to treat a condition, and a diagnosis was made, the indication should be the diagnosis. If performed to treat a condition, and no diagnosis was made, the indication should be the signs and symptoms. If taken as prophylaxis, report as "Prophylaxis for" and include a description of the condition(s).	Text	PRINDC					Prompt		
PRSDAT	4	What was the procedure start date?	Start Date	Record the date the procedure was started or performed using this format (DD-MON-YYYY). Procedures performed during the study are expected to have a complete start date. Prior procedures that are exclusionary should have both a start and end date.	Date	PRSTDTC					Prompt		
PRSTTIM	5	What was the procedure start time?	Start Time	Record the start time (as complete as possible) when the procedure started.	Time	PRSTDTC					Prompt		
PRENDAT	6	What was the procedure end date?	End Date	Record the end date of the procedure using this format (DD-MON-YYYY). If the procedure has not ended, leave this field blank.	Date	PRENDTC					Prompt		

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
PRENTIM	7	What was the procedure end time?	End Time	Record the start time (as complete as possible) when the procedure ended.	Time	PRENDTC					Prompt		

8.1.7 SU - Substance Use

Description/Overview for the CDASHIG SU - Substance Use Domain

This CDASHIG SU domain is used to collect information on substance use when this is relevant to the assessment of the efficacy and safety of therapies. The amount of information collected for the SU domain depends upon the sponsor's protocol. In many protocols, only information on the use of the substance is required. In such cases, many of the variables in this domain (e.g., duration, amount) would not be collected.

CDASH recommends the use of the more descriptive CDASHIG variable SUNCF with responses of "Never", "Current", and "Former" for each substance-use type, rather than a simple "Yes/No" response. Based on the wide variability of protocol definitions of *use*, the specific definitions and timeframes for the SUNCF responses would be sponsor-/protocol-defined. By using the SUNCF response categories for usage, a number of questions about use and frequency can be collapsed, in turn decreasing the number of data points required in the SU domain. More detailed information about duration, amount, and start and end dates is optionally captured.

Specification for the CDASHIG SU - Substance Use Domain

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Interventions	SU	N/A	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included into the database or populated during SDTM-based dataset creation before submission.
Interventions	SU	N/A	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted on the CRFs that are shipped to each site. EDC: This should be prepopulated.
Interventions	SU	N/A	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What [is/was] the (study) [subject/participant] identifier?	[Subject/Participant] (Identifier)	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system generated. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Interventions	SU	N/A	N/A	4	SUTRT	Reported Name of Substance	The type of substance (e.g., TOBACCO, ALCOHOL, CAFFEINE or CIGARETTES, CIGARS, COFFEE).	What [is/was] the [name/type] of (the) substance used?	[Type of Substance]	Char	HR	N/A	SUTRT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsors may require different types of substance-use data (e.g., illicit drug use, cigarettes); the value for category may be preprinted on the CRF as a label for the prompt for Substance Use. If a more detailed type of substance appears on the CRF (e.g., CIGARETTES, CIGARS rather than TOBACCO), SUCAT should be TOBACCO and SUTRT should be CIGARETTES.
Interventions	SU	N/A	N/A	5	SUCAT	Category for Substance Use	A grouping of topic-variable values based on user-defined characteristics.	What is/was the category of the substance (used)?	[Substance (Used) Category]; NULL	Char	R/C	Record the Substance Used category, if not preprinted on the CRF.	SUCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology (e.g., TOBACCO, ALCOHOL, CAFFEINE). Sponsors may require different types of substance-use data (e.g., illicit drug use, cigarettes); the value for category may be preprinted on the CRF. If a more detailed type of substance appears on the

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	CRF (e.g., CIGARETTES, CIGARS, rather than TOBACCO), SUCAT is TOBACCO and SUTRT is CIGARETTES. If the sponsor does not specify a type of tobacco on the CRF, SUTRT is TOBACCO. If SUCAT is not collected (e.g., it is evident from the protocol design), it could be populated during the SDTM-based dataset creation process.
Interventions	SU	N/A	N/A	6	SUSCAT	Subcategory for Substance Use	A sub-division of the SUCAT values based on user-defined characteristics.	What was the subcategory of the substance (used)?	[Substance (Used) Subcategory]; NULL	Char	O	Record the Substance Use subcategory, if not preprinted on the CRF.	SUSCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. The value for subcategory may be preprinted on the CRF or hidden. SUSCAT can only be used if there is a SUCAT and it must be a subcategorization of SUCAT.
Interventions	SU	N/A	N/A	7	SUPRESP	SU Prespecified	An indication that a specific intervention or a group of interventions is prespecified on a CRF.	N/A	N/A	Char	O	N/A	SUPRESP	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(NY)	N/A	For prespecified interventions, a hidden field on a CRF defaulted to "Y", or added during the SDTM dataset creation. If a study collects both prespecified and free-text interventions, the value of SUPRESP should be "Y" for all prespecified interventions and null for interventions reported as free text.
Interventions	SU	N/A	N/A	8	SUYN	Any Substance Used	An indication of whether any data was collected for the intervention topic.	Were any [sponsor-phrase/substance name/recreational drugs] used?	Any [Substance Name (Used)]	Char	O	Indicate if the subject had used any (sponsor-defined phrase/recreational drugs/alcohol/substance name).	N/A	Does not map to an SDTMIG variable. The SDTM annotated CRF indicates that this field is NOT SUBMITTED.	(NY)	N/A	General prompt question to aid in monitoring and data cleaning. This provides verification that all other fields on the CRF were deliberately left blank. This is a field that can be used on any Interventions CRF to indicate whether there is data to record.
Interventions	SU	N/A	N/A	9	SUNCF	Never Current Former Usage	Indication the prespecified substance was used.	Has the subject ever [used/consumed] [SUTRT/SUCAT]?	([Substance]) Usage	Char	R/C	Check the appropriate box to indicate if the subject has ever used/consumed tobacco/alcohol/caffeine, currently consumes tobacco/alcohol/caffeine, or formerly used/consumed tobacco/alcohol/caffeine.	SUOCCUR; SUSTRTPT; SUSTRF; SUENRTPT; SUENRF; SUPPSU.QVAL	This does not map directly to an SDTMIG variable. May be used to populate SUOCCUR and relative timing variables.	(NCF)	(SUNCF)	The 3 options (NEVER, CURRENT, FORMER) are sponsor-defined in relation to the protocol. If the sponsor has specific definitions, these definitions are detailed in the instructions to the site. As this type of response does not correspond exactly to an SDTM variable, CDASH recommends using the CDASHIG variable SUNCF. Sponsors must decide how to populate the appropriate relative timing variables when creating the SDTM-based datasets. For example, If SUNCF ="Never", the value of

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	SUOCCUR will be "N" and all relative timing variables will be null. If the sponsor chooses to populate the relative start references (SUSTRTPT, SUSTRF) the value will be "BEFORE" when SUNCF= "CURRENT" and "FORMER". If the sponsor also chooses to use relative end references (SUENRF, SUENRTPT) , the SUENRTPT value will be "ONGOING" when SUNCF="CURRENT" while the value of SUENRF will be "DURING/AFTER". Note: When using SUSTRTPT and/or SUENRTPT, these must refer to a time-point anchor (e.g., SCREENING, in SUSTTPT/SUENTPT).
Interventions	SU	N/A	N/A	10	SUSPID	Substance Use Sponsor-Defined Identifier	A sponsor-defined identifier. In CDASH, this is typically used for preprinted or auto-generated numbers on the CRF, or any other type of identifier that does not already have a defined CDASH identifier field.	[Sponsor-defined question]	[Sponsor defined]	Char	O	If collected on the CRF, sponsor may insert instructions to ensure each record has a unique identifier.	SUSPID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. May be used to create RELREC to link this record with a record in another domain.	N/A	N/A	Because SPID is a sponsor-defined identifier, conformance to Question Text or Item Prompt is not applicable. Typically used as an identifier in a data query to communicate clearly to the site the specific record in question or to reconcile data. May be used to record preprinted number (e.g., line number, record number) on the CRF. This field may be populated by the sponsor's data collection system.
Interventions	SU	N/A	N/A	11	SUREASND	Reason Substance Use Not Collected	An explanation for why data are not available.	What was the reason the data was not collected?	Reason Not Collected	Char	O	Provide the reason why the substance used data were not collected.	SUREASND	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The reason data are not available may be chosen from a sponsor-defined list (e.g., subject refused) or entered as free text. When SUREASND is used, the SDTMIG variable SUSTAT should also be populated in the SDTM-based dataset.
Interventions	SU	N/A	N/A	12	SUDSTXT	Substance Dose Description	The amount of substance used (e.g., 1-2 packs, 8 oz).	What is/was the amount of [SUTRT] used/consumed?	Amount	Char	O	Check the appropriate box to indicate the amount of tobacco/alcohol/caffeine the subject consumes on a regular basis.	SUDOSE; SUDOSU; SUDOSTXT	This does not map directly to an SDTMIG variable. Numeric values map to SUDOSE in SDTM. Non-numeric values (e.g., 200-400) map to SUDOSTXT in SDTM.	N/A	N/A	Where possible, the options for dose/amount are preprinted on the CRF. In the example given in the definition, "packs" and "ounces" are included as a point of reference. They would, of course, be submitted as SUDOSU. Care should be taken to map each record to the appropriate SDTM variable SUDOSTXT (text results that cannot be represented in a numeric field) and SUDOSE (numeric results).

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Interventions	SU	N/A	N/A	13	SUDOSFRQ	Substance Use Frequency per Interval	The number/amount of the of substance consumed per a specific interval.	What [is/was] the frequency of [SUTRT] [use/consumption]?	Frequency	Char	O	Record how often the subject regularly [uses / consumes] (the [substance]).	SUDOSFRQ	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(FREQ)	N/A	When possible, the options for dose/amount frequency are preprinted on the CRF. (e.g., PER DAY, PER WEEK, OCCASIONAL).
Interventions	SU	N/A	N/A	14	SUSTDAT	Substance Use Start Date	The date substance use started, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the start date of [SUTRT/SUCAT] use/consumption?	Start Date	Char	O	Record the start date of the substance use using this format (DD-MON-YYYY).	SUSTDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH START DATE and TIME components and populate the SDTMIG variable SUSTDTC in ISO 8601 format.	N/A	N/A	The sponsor may choose to capture a complete date or any variation thereof (e.g., month and year, year).
Interventions	SU	N/A	N/A	15	SUENDAT	Substance Use End Date	The date substance use ended, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the end date of [SUTRT/SUCAT] use/consumption?	End Date	Char	O	Record the end date of the substance use using this format (DD-MON-YYYY).	SUENDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH END DATE and TIME components and populate the SDTMIG variable SUENDTC in ISO 8601 format.	N/A	N/A	The sponsor may choose to capture a complete date or any variation thereof (e.g., month and year, year).
Interventions	SU	N/A	N/A	16	SUCDUR	Substance Use Collected Duration	Collected duration of the substance use.	What was the duration of [SUTRT/SUCAT] use/consumption?	Duration	Char	O	Provide the duration of the substance use (e.g., Record how long the subject has smoked).	SUDUR	This does not map directly to an SDTMIG variable. For the SDTM-based dataset, concatenating the CDASH collected duration and collected duration unit and populate the SDTMIG variable SUDUR in ISO 8601 format. Example: P1DT2H (for 1 day, 2 hours).	N/A	N/A	This is only collected on the CRF if this level of detail is needed and if SUSTDAT and SUENDAT are not collected on the CRF.
Interventions	SU	N/A	N/A	17	SUCDURU	Substance Use Collected Duration Unit	Unit of the collected duration of the substance use. Used only if duration was	What was the unit of duration of [SUTRT/SUCAT] use/consumption?	(Duration) Unit	Char	O	Select the appropriate duration unit of the substance use.	SUDUR	This does not map directly to an SDTMIG variable. For the SDTM-based dataset,	(UNIT)	N/A	Sponsor-defined options should be preprinted on the CRF to avoid making this a free-text field. This will allow the response to be translated into ISO 8601 format.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
							collected on the CRF.							concatenating the CDASH collected duration and collected duration unit and populate the SDTMIG variable SUDUR in ISO 8601 format. Example: P1DT2H (for 1 day, 2 hours).			
Interventions	SU	N/A	N/A	18	SUMODIFY	Modified Substance Name	If the value for SUTERM is modified for coding purposes, then the modified text is placed here.	N/A	N/A	Char	O	N/A	SUMODIFY	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	This is not a data collection field that would appear on the CRF. If the sponsor chooses to code the substance use, the sponsor will populate this through the coding process.
Interventions	SU	N/A	N/A	19	SUDECOD	Standardized Substance Name	The dictionary or sponsor-defined standardized text description of SUTRT, or the modified topic variable (SUMODIFY), if applicable.	N/A	N/A	Char	O	N/A	SUDECOD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The sponsor is expected to provide the dictionary name and version used to map the terms utilizing the Define-XML external codelist attributes. Sponsors should include an Origin in the define metadata to indicate that the data was "ASSIGNED".	N/A	N/A	This is typically not a data collection field that will appear on the CRF. If the sponsor chooses to code the substance use, the sponsor will populate this through the coding process. Equivalent to the generic drug name in published (e.g., WHODrug, SNOMED, ICD9) or sponsor-defined dictionaries. If SUPRESP is used, and the information about a specific standardized substance name is being solicited, the data from SUTRT may map directly to the SDTMIG SUDECOD variable.

Assumptions for the CDASHIG SU - Substance Use Domain

1. Categories SUCAT and SUSCAT
 - a. Sponsors may require different types of substance-use data (e.g., illicit drug use, cigarettes) to be collected; the value for category may be preprinted on the CRF.
 - b. SUCAT and SUSCAT should not be redundant with SUTRT. For example, if a more detailed type of substance usage is collected on the CRF (e.g., "CIGARETTES", "CIGARS"), SUCAT should be "TOBACCO" and SUTRT could be "CIGARETTES", "CIGARS". If the sponsor does not solicit responses about specific types of substances used on the CRF (e.g., "CIGAR", "CIGARETTE"), the value of SUTRT is the more general description of the substance (e.g., "TOBACCO") and SUCAT is generally null. This practice avoids assigning the same value to both SUTRT and SUCAT. However, for consistency across studies, the sponsor may elect to repeat the values of SUTRT in SUCAT.
2. The SDTMIG variable SUPRESP should be prepopulated to the value of "Y" when information about the use of a specific substance is solicited on the CRF.
3. Relative Timing Variables
 - a. Relative timing variables are used to represent collected data in the SDTM tabulations in those cases where a start date or an end date has not been collected, but some indication of when/if the intervention or event started or ended has been collected. In the CDASHIG SU domain, if the CDASHIG variable SUNCF is used (with the possible responses of "Never", "Current", and "Former"), the collected values may be used to derive a value into an SDTMIG relative timing variable to represent when the subject started or stopped using the substance relative to either a time point or to a period of time in the study. For example, if the value collected in SUNCF is "Current", the value of "ONGOING" may be represented in the SDTMIG variable SUENRTPT to indicate that the subject was still using cigarettes as of the time point described in SUENTPT. It is recommended that the sponsor collect either a date or a description of a time point that will be used in conjunction with relative timing variables. See the SDTMIG for more information about relative timing variables.
 - b. If the actual, complete start date or end date of the substance use has been collected, there is no need to use relative timing variables.
4. Start and End Dates
 - a. Start and end dates can be collected if this level of detail is required by the protocol. Partial dates may be collected when the subject does not remember the complete date of when substance use started or ended. The sponsor may choose to capture a complete date or any variation thereof (e.g., month and year, year).
 - b. Sponsors may elect to capture only a start date, or only an end date, and use the associated SDTMIG relative timing variables to represent information about the date not collected.
 - c. If the sponsor is only interested in collecting whether or not the subject is consuming a particular substance, start and end dates are optional and may be omitted, and SUNCF may be collected as described above.
5. Coding
 - a. Coding may be performed if deemed necessary by the sponsor. The SDTMIG variable SUDECOD is a permissible variable in the SDTMIG SU domain.
 - b. Coding variables are not usually displayed on CRFs. If a sponsor chooses to display coding on the form, CDASH does not advocate using that as a field for entry by site personnel.

Example CRFs for the CDASHIG SU - Substance Use Domain

Example 1

Title: Recreational Drug Substance Use

	Substance Use Category SUCAT <i>Pre-populated</i>	Recreational Drugs
Indicate if the subject had used any recreational drugs.	Were any recreational drugs used? SUYN <i>Not Submitted</i>	☐ Yes ☐ No <NY codelist>
Record the name of the recreational drug used.	What was the substance used? SUTRT	
Check the appropriate box to indicate if the subject currently or formerly used recreational drugs.	Usage SUNCF SUOCCUR = "Y" WHEN SUNCF = "CURRENT". SUOCCUR = "Y" WHEN SUNCF = "FORMER".	☐ Current ☐ Former <NCF codelist>
Indicate the amount of recreational drugs the subject consumes on a regular basis.	What was the amount of substance used? SUDSTXT SUDOSE SUDOSTXT	
Record how often the subject regularly uses recreational drugs.	Frequency SUDOSFRQ	☐ QD ☐ EVERY WEEK ☐ QM ☐ PA <FREQ codelist>
Provide the duration of the substance use (e.g., how long the subject has smoked).	Duration SUCDUR SUDUR	
Select the appropriate duration unit of the substance use.	Unit SUCDURU SUDUR	☐ DAYS ☐ MONTHS ☐ YEARS <UNIT codelist>

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
SUCAT	1	What is the category of the substance used?	Substance Use Category	Record the Substance Used category, if not pre-printed on the CRF.	Text	SUCAT				Recreational Drugs			
SUYN	2	Were any recreational drugs used?	Any Recreational Drugs Used	Indicate if the subject had used any recreational drugs.	Text	N/A		(NY)	Yes; No				

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
SUTRT	3	What was the substance used?	Type of Recreational Drug Used	Record the name of the recreational drug used.	Text	SUTRT							
SUNCF	4	Does subject use recreational drugs?	Usage	Check the appropriate box to indicate if the subject currently or formerly used recreational drugs.	Text	SUOCCUR; SUSTRTPT; SUSTRF; SUENRTPT; SUENRF	SUOCCUR = "Y" WHEN SUNCF = "CURRENT". SUOCCUR = "Y" WHEN SUNCF = "FORMER".	(NCF)	Current; Former		Prompt		
SUDSTXT	5	What was the amount of substance used?	Amount	Indicate the amount of recreational drugs the subject consumes on a regular basis.	Text	SUDOSE; SUDOSTXT							
SUDOSFRQ	6	What was the frequency of recreational drug use?	Frequency	Record how often the subject regularly uses recreational drugs.	Text	SUDOSFRQ		(FREQ)	QD; EVERY WEEK; QM; PA		Prompt		
SUCDUR	7	What was the duration of recreational drug use consumption?	Duration	Provide the duration of the substance use (e.g., how long the subject has smoked).	Text	SUDUR					Prompt		
SUCDURU	8	What was the unit of duration of recreational drug use?	Unit	Select the appropriate duration unit of the substance use.	Text	SUDUR		(UNIT)	DAYS; MONTHS; YEARS		Prompt		

Example 2

This sponsor used a generic value (UNIT) to collect the amount consumed. Sponsors could collect the amount using mL or oz.

Title: Alcohol Substance Use**CRF Completion Instructions**

The The amount of each type of alcohol consumed should be an integer. The following description should be used in determining the amount consumed:

1 Beer Unit = 12 oz or 360 ml

1 Wine Unit = 5 oz or 150 ml

1 Spirits Unit = 1.5 oz or 45 ml

Substance Use Category		ALCOHOL
SUCAT <i>Hidden/pre-populated</i>		
Check the appropriate box to indicate if the subject currently or formerly consumed alcohol.	Has the subject ever consumed alcohol? ALCOHOL_SUNCF SUOCCUR = "N" WHERE SUNCF = "NEVER", SUOCCUR = "Y" WHERE SUNCF = "CURRENT", SUOCCUR = "Y" WHERE SUNCF = "FORMER",	☐ Never ☐ Current ☐ Former <NCF codelist>
Record the start date of the alcohol consumption using this format (DD-MON-YYYY).	Start Date ALCOHOL_SUSTDAT SUSTDTC	
Record the end date of the alcohol consumption using this format (DD-MON-YYYY).	End Date ALCOHOL_SUENDAT SUENDTC	
Indicate the amount of beer the subject consumes on a regular basis. 1 Beer Unit = 12 oz or 360 ml.	What was the amount of beer consumed? BEER_SUDOSE SUDOSE/SUDOSTXT WHERE SUTRT = "BEER"	
	Unit BEER_SUDOSU SUDOSU WHERE SUTRT = "BEER" <i>Hidden/pre-populated</i>	UNIT<UNIT codelist>
Record how often the subject regularly consumes beer.	What was the frequency of beer consumption? BEER_SUDOSFRQ SUDOSFRQ WHERE SUTRT = "BEER"	☐ QD ☐ EVERY WEEK ☐ QM ☐ PA <FREQ codelist>
Indicate the amount of wine the subject consumes on a regular basis. 1 Wine Unit = 5 oz or 150 ml.	What was the amount of wine consumed? WINE_SUDOSE SUDOSE/SUDOSTXT WHERE SUTRT = "WINE"	
	Unit WINE_SUDOSU SUDOSU WHERE SUTRT = "WINE" <i>Hidden/pre-populated</i>	UNIT<UNIT codelist>
Record how often the subject regularly consumes wine.	What was the frequency of wine consumption? WINE_SUDOSFRQ SUDOSFRQ WHERE SUTRT = "WINE"	☐ QD ☐ EVERY WEEK ☐ QM ☐ PA <FREQ codelist>
Indicate the amount of spirits the subject consumes on a regular basis. 1 Spirits Unit = 1.5 oz or 45 ml.	What was the amount of spirits consumed? SPIRITS_SUDOSE SUDOSE/SUDOSTXT WHERE SUTRT = "SPIRITS"	
	Unit SPIRITS_SUDOSU SUDOSU WHERE SUTRT = "SPIRITS" <i>Hidden/pre-populated</i>	UNIT<UNIT codelist>
Record how often the subject regularly consumes spirits.	What was the frequency of spirits consumption? SPIRITS_SUDOSFRQ SUDOSFRQ WHERE SUTRT = "SPIRITS"	☐ QD ☐ EVERY WEEK ☐ QM ☐ PA <FREQ codelist>

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
SUCAT	1	What is the category of the substance used?	Substance Use Category	The amount of each type of alcohol consumed should be an integer. The following description should be used in determining the amount consumed: 1 Beer Unit = 12 oz or 360 ml. 1 Wine Unit = 5 oz or 150 ml. 1 Spirits Unit = 1.5 oz or 45 ml.	Text	SUCAT				ALCOHOL	Prompt		Yes
ALCOHOL_SUNCF	2	Has the subject ever consumed alcohol?	Usage	Check the appropriate box to indicate if the subject currently or formerly consumed alcohol.	Text	SUOCCUR	SUOCCUR = "N" WHERE SUNCF = "NEVER". SUOCCUR = "Y" WHERE SUNCF = "CURRENT". SUOCCUR = "Y" WHERE SUNCF = "FORMER".	(NCF)	Never; Current; Former				
ALCOHOL_SUSTDAT	3	What was the start date of alcohol consumption?	Start Date	Record the start date of the alcohol consumption using this format (DD-MON-YYYY).	Date	SUSTDTC					Prompt		
ALCOHOL_SUENDAT	4	What was the end date of alcohol consumption?	End Date	Record the end date of the alcohol consumption using this format (DD-MON-YYYY).	Date	SUENDTC					Prompt		
BEER_SUDOSE	5	What was the amount of beer consumed?	Amount	Indicate the amount of beer the subject consumes on a regular basis. 1 Beer Unit = 12 oz or 360 ml.	Text	SUDOSE; SUDOSTXT	SUDOSE/SUDOSTXT WHERE SUTRT = "BEER"						
BEER_SUDOSU	6	What was the unit for the amount of beer consumption?	Unit	N/A	Text	SUDOSU	SUDOSU WHERE SUTRT = "BEER"	(UNIT)		UNIT			Yes
BEER_SUDOSFRQ	7	What was the frequency of beer consumption?	Frequency	Record how often the subject regularly consumes beer.	Text	SUDOSFRQ	SUDOSFRQ WHERE SUTRT = "BEER"	(FREQ)	QD; EVERY WEEK; QM; PA			Prompt	
WINE_SUDOSE	8	What was the amount of wine consumed?	Amount	Indicate the amount of wine the subject consumes on a regular basis. 1 Wine Unit = 5 oz or 150 ml.	Text	SUDOSE; SUDOSTXT	SUDOSE/SUDOSTXT WHERE SUTRT = "WINE"						
WINE_SUDOSU	9	What was the unit for the amount of wine consumption?	Unit	N/A	Text	SUDOSU	SUDOSU WHERE SUTRT = "WINE"	(UNIT)		UNIT			Yes
WINE_SUDOSFRQ	10	What was the frequency of wine consumption?	Frequency	Record how often the subject regularly consumes wine.	Text	SUDOSFRQ	SUDOSFRQ WHERE SUTRT = "WINE"	(FREQ)	QD; EVERY WEEK; QM; PA			Prompt	
SPIRITS_SUDOSE	11	What was the amount of spirits consumed?	Amount	Indicate the amount of spirits the subject consumes on a regular	Text	SUDOSE; SUDOSTXT	SUDOSE/SUDOSTXT WHERE SUTRT = "SPIRITS"						

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
				basis. 1 Spirits Unit = 1.5 oz or 45 ml.									
SPIRITS_SUDOSU	12	What was the unit for the amount of spirits consumption?	Unit	N/A	Text	SUDOSU	SUDOSU WHERE SUTRT = "SPIRITS"	(UNIT)		UNIT			Yes
SPIRITS_SUDOSFRQ	13	What was the frequency of spirits consumption?	Frequency	Record how often the subject regularly consumes spirits.	Text	SUDOSFRQ	SUDOSFRQ WHERE SUTRT = "SPIRITS"	(FREQ)	QD; EVERY WEEK; QM; PA			Prompt	

8.2 Events Class Domains

The Events class includes CDASH domains that define standards for the collection of occurrences or incidents occurring during a trial (e.g., adverse events, disposition) or prior to a trial (e.g., medical history).

8.2.1 General CDASH Assumptions for Events Domains

- CDASH --YN variables with the question text "Were there any <events>?" (e.g., "Were there any adverse events?", "Were there any healthcare encounters?") are intended to assist in the cleaning of data and in confirming there are no missing values. These questions can be added to any CRF in order to capture this information.
- CDASH --CAT and/or --SCAT are generally not entered on the CRF by sites. Implementers may prepopulate and display these category values to help site personnel understand what data should be recorded on the CRF. Implementers may also prepopulate hidden variables with the values assigned within their operational database. Categories and subcategories are typically evident from the protocol design, and could be populated during SDTM dataset creation.
- Date and Time Variables
 - CDASH date variables (e.g., --DAT, --STDAT, --ENDAT) are concatenated with CDASH time variables (e.g., --TIM, --STTIM, --ENTIM, if time is collected) into the appropriate SDTM --DTC variables (e.g., --DTC, --STDTC, --ENDTC) using ISO 8601 format.
 - Collecting the time of an event is only appropriate if it can be easily obtained and if there is a scientific reason, such as the need to know the order of events (e.g., the adverse event started after dosing). An example of this would be a study where the subject is confined to a phase 1 unit and under the direct care of the unit staff at the time that the event started or using time to tie together dosing and pharmacokinetic (PK) sample collection.
- The CDASH --COCCUR variable (see Section 3.4, How to Create New Data Collection Fields When No CDASHIG Field Has Been Defined) may be used when a specific event is solicited (preprinted) on the CRF and the CRF uses a sponsor-defined codelist. For example, a sponsor may combine the concepts of the CDASH OCCUR variable while also allowing for a "NOT DONE" response. Because the SDTM Controlled Terminology for --OCCUR only includes "N", "Y", and "UNKNOWN" responses, if the CDASH variable --OCCUR is used, the CRF would require a second question to indicate that the data were not collected. The CDASH variable --COCCUR is only used when events are prespecified.

5. The CDASH variable --REASND is used in conjunction with SDTM variable --STAT. The value "NOT DONE" in --STAT indicates that the subject was not questioned about the event or that data was not collected; it does not mean that the subject had no events.
6. The CDASH --SPID variable may be populated by the sponsor's data collection system. If collected, it can be beneficial to use an identifier in a data query to communicate clearly to the site the specific record in question. This field may be populated by the sponsor's data collection system.
7. Coding
 - c. The CDASH variables used for coding are not data collection fields that will appear on the CRF itself. Sponsors will populate these through the coding process.
 - d. When free-text event terms are entered, the location may be included in --TERM to facilitate coding and further clarify the event. This location information does not need to be removed from the verbatim term when creating SDTM submission datasets.
 - e. The CDASH variables --LLT, --LLTCD, --PTCD, --HLT, --HLTCD, --HLGT, --HLGTC, --SOC, and --SOCCD are only applicable to events coded in MedDRA.
8. Location (--LOC, --LAT, --DIR, --PORTOT)
 - f. Location is collected when the sponsor needs to identify the specific anatomical location of the event.
 - g. Implementers may collect the location information using a subset list of controlled terminology on the CRF. Location variables can be prepopulated as needed. There is currently some overlap across the LOC, LAT, and DIR variables for controlled terminology. While the overlap exists, ensure that this overlap for these variables is not part of database design.

8.2.2 AE - Adverse Events

Description/Overview for the CDASHIG AE - Adverse Events Domain

The CDASHIG Adverse Events (AE) domain includes clinical data describing "any untoward medical occurrence in a patient or clinical investigation subject administered a pharmaceutical product and which does not necessarily have to have a causal relationship with this treatment" (ICH E2A; available at <https://www.fda.gov/regulatory-information/>). In consultation with regulatory authorities, sponsors may extend or limit the scope of adverse event collection (e.g., collecting pretreatment events related to trial conduct, not collecting events assessed as efficacy endpoints). Events included in the AE domain should be consistent with protocol requirements. Adverse event terms may be captured either as free text or via a prespecified list of terms. The structure of the SDTMIG AE domain is 1 record per adverse event per subject. It is the sponsor's responsibility to define an *event*. This definition may vary based on the sponsor's requirements for characterizing and reporting product safety and is usually described in the protocol.

As with all the data collection variables recommended in CDASH, it is assumed that sponsors will add other data variables as needed to meet protocol-specific and other data collection requirements (e.g., therapeutic area-specific data elements and others as required per protocol, business practice or operating procedures). Sponsors should define the appropriate collection period for adverse events.

Specification for the CDASHIG AE - Adverse Events Domain

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Events	AE	N/A	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or the EDC system. This field can be included into the database or populated during SDTM-based dataset creation before submission.
Events	AE	N/A	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted for the CRFs that are shipped to each site. EDC: This should be prepopulated.
Events	AE	N/A	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What [is/was] the (study) [subject/participant] identifier?	[Subject/Participant] (Identifier)	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system generated. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Events	AE	N/A	N/A	4	AEYN	Any Adverse Event	An indication of whether any AEs were experienced during the study.	Were any adverse events experienced?	Any Adverse Events	Char	O	Indicate if the subject experienced any adverse events. If Yes, include the appropriate details where indicated on the CRF.	N/A	Does not map to an SDTMIG variable. The SDTM annotated CRF indicates that this field is NOT SUBMITTED.	(NY)	N/A	The intent/purpose of collecting this field is to help with data cleaning and monitoring. It provides verification that all other fields on the CRF were deliberately left blank.
Events	AE	N/A	N/A	5	AECAT	Category for Adverse Event	A grouping of topic-variable values based on user-defined characteristics.	What is the category of the adverse event?	[Adverse Event Category]; NULL	Char	O	Record the adverse event category, if not preprinted on the CRF.	AECAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, and not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Category" can be included as the column heading.
Events	AE	N/A	N/A	6	AESCAT	Subcategory for Adverse Event	A sub-division of the AECAT values based on user-defined characteristics.	What is the subcategory of the adverse event?	[Adverse Event Subcategory]; NULL	Char	O	Record the adverse event subcategory, if not preprinted on the CRF.	AESCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be preprinted

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	on the CRF or screen and prepopulated in the data management system. This is not typically a question to which the site would provide an answer. AESCAT can only be used if there is an AECAT and it must be a subcategorization of AECAT.
Events	AE	N/A	N/A	7	AESPID	AE Sponsor-Defined Identifier	A sponsor-defined identifier. In CDASH, This is typically used for preprinted or auto-generated numbers on the CRF, or any other type of identifier that does not already have a defined CDASH identifier field.	[Sponsor-defined question]	[Sponsor defined]	Char	O	If collected on the CRF, sponsor may insert instructions to ensure each record has a unique identifier.	AESPID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. May be used to create RELREC to link this record with a record in another domain.	N/A	N/A	Because SPID is a sponsor-defined identifier, conformance to Question Text or Item Prompt is not applicable. Typically used as an identifier in a data query to communicate clearly to the site the specific record in question or to reconcile concomitant medications, procedures and/or medical history records with AEs. If CMAENO or PRAENO is used, this is the identifier to which CMAENO or PRAENO refers. May be used to record preprinted number (e.g., line number, record number) on the CRF. This field may be populated by the sponsor's data collection system.
Events	AE	N/A	N/A	8	AETERM	Reported Term for the Adverse Event	The reported or prespecified name of the adverse event.	What is the adverse event term?	Adverse Event	Char	HR	Record only 1 diagnosis, sign, or symptom per line (e.g., nausea and vomiting should not be recorded in the same entry, but as 2 separate entries). Using accepted medical terminology, enter the diagnosis (if known); otherwise enter a sign or symptom.	AETERM	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Can be represented either as an open-entry field to capture verbatim terms reported by subjects or preprinted, in the situation where solicited AEs of interest are captured. In most cases, the verbatim term (i.e., investigator-reported term) will be coded to a standard medical dictionary (e.g., MedDRA, WHO ART) after the data have been collected on the CRF.
Events	AE	N/A	N/A	9	AEOCCUR	Adverse Event Occurrence	An indication of whether a prespecified adverse event or a group of adverse events occurred when information about the occurrence of a specific event is solicited.	Did the subject have [prespecified adverse event/group of adverse events]?	[Specific Adverse Event]	Char	O	Indicate if [specific adverse event] has occurred/is occurring, by checking Yes or No.	FA.FAORRES	This does not map directly to an SDTMIG variable. Because the SDTM AE domain is intended to hold only adverse events that actually happen, all values collected in AEOCCUR for prespecified AEs should be submitted in a Findings About Adverse Events data set (FAAE) where FAORRES=the value of AEOCCUR where FATESTCD="OCCUR". In addition, where AEOCCUR="Y", there should be a corresponding record in the AE domain.	(NY)	N/A	The CDASH variable AEOCCUR is used to indicate the occurrence of prespecified adverse events (e.g., "Did the subject have high blood pressure?"). AEOCCUR should not be used for spontaneously reported adverse events. The site should be able to indicate that the response was not asked or answered.
Events	AE	N/A	N/A	10	AEPRESP	prespecified Adverse Event	An indication that a specific event or group of	N/A	N/A	Char	O	N/A	AEPRESP	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(NY)	N/A	A hidden field on a CRF defaulted to "Y", or added during SDTM-based

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
							events are prespecified on a CRF.										dataset creation, when the AE is prespecified. Null for spontaneously reported events. If a study collects both prespecified and free-text adverse events, the value of AEPRESP should be "Y" for all prespecified events and null for events reported as free-text. AEPRESP is a permissible field in SDTM and may be omitted from the SDTM-based dataset if all events were collected as free text.
Events	AE	N/A	N/A	11	AESTDAT	Adverse Event Start Date	The start date of the adverse event, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What is the adverse event start date?	Start Date	Char	HR	Record the start date of the adverse event using this format (DD-MON-YYYY).	AESTDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH START DATE and TIME components and populate the SDTMIG variable AESTDTC in ISO 8601 format.	N/A	N/A	N/A
Events	AE	N/A	N/A	12	AESTTIM	Start Time of Adverse Event	The start time of the adverse event, represented in an unambiguous time format (e.g., hh:mm:ss).	What is the adverse event start time?	Start Time	Char	R/C	Record the start time (as complete as possible) of the adverse event.	AESTDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH START DATE and TIME components and populate the SDTMIG variable AESTDTC in ISO 8601 format.	N/A	N/A	Collecting the time an AE started is only appropriate if it can be realistically determined and if there is a scientific reason for needing to know this level of detail. An example is where the subject is under the direct care of the site at the time the event started and the study design is such that it is important to know the AE start time with respect to dosing.
Events	AE	N/A	N/A	13	AELOC	AE Location of Event	A description of the anatomical location relevant for the adverse event.	What is the anatomical location of the adverse event?	Anatomical Location	Char	O	Indicate the anatomical location of the adverse event.	AELOC	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(LOC)	N/A	Collected or preprinted when the sponsor needs to identify the specific anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF. LAT, DIR, PORTOT are used to further describe the anatomical location.
Events	AE	N/A	N/A	14	AELAT	Adverse Event Laterality	Qualifier for anatomical location, further detailing the side of the body relevant for the event.	What is the side of the anatomical location of the adverse event?	Side	Char	O	Record the side of the anatomical location of the adverse event.	AELAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(LAT)	N/A	May be preprinted or collected when the sponsor needs to identify the specific side of the anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Events	AE	N/A	N/A	15	AEDIR	Adverse Event Directionality	Qualifier further detailing the position of the anatomical location, relative to the center of the body, organ, or specimen.	What is the directionality of the anatomical location of the adverse event?	Directionality	Char	O	Record the directionality of the anatomical location of the adverse event.	AEDIR	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(DIR)	N/A	May be preprinted or collected when the sponsor needs to identify the directionality of the anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Events	AE	N/A	N/A	16	AEPORTOT	AE Location Portion or Totality	Qualifier for anatomical location, further detailing the distribution (i.e., arrangement of, apportioning of).	What is the portion or totality of the anatomical location of the adverse event?	Portion or Totality	Char	O	Indicate the portion or totality anatomical location of the adverse event.	AEPORTOT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(PORTOT)	N/A	Collected when the sponsor needs to identify the specific portionality for the anatomical locations. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Events	AE	N/A	N/A	17	AEONGO	Ongoing Adverse Event	Indication that an adverse event is ongoing when no end date is provided.	Is the adverse event ongoing (as of [the study-specific time point or period])?	Ongoing (as of [the study-specific time point or period])	Char	O	Indicate if the adverse event has not resolved at the time of data collection; leave the End Date blank.	AEENRTPT; AEENRF	This does not map directly to an SDTMIG variable. May be used to populate a value into an SDTMIG relative timing variable such as AEENRF or AEENRTPT. When populating AEENRF, if the value of AEONGO is "Y", the value of "DURING", "AFTER" or "DURING/AFTER" may be used. When populating AEENRTPT, if the value of AEONGO is "Y", the value of "ONGOING" may be used. When AEONGO refers to the Study Reference Period (defined in DM.RFSTDTC to DM.RFENDTC) the SDTMIG variable AEENRF should be populated. When AEONGO is compared to another time point, the SDTMIG variables AEENRTPT and AEENTPT should be used. Note: AEENRTPT must refer to a time-point anchor described in AEENTPT.	(NY)	N/A	Completed to indicate that the AE has not resolved at the time of data collection, when no end date is collected. In some cases the ongoing status may be determined from AE Outcome. The purpose of collecting this field is to help with data cleaning and monitoring; this field provides further confirmation that End Date was deliberately left blank. Often used as a tick/checkbox.
Events	AE	N/A	N/A	18	AEENDAT	Adverse Event End Date	The date when the adverse event resolved/ended, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the adverse event end date?	End Date	Char	R/C	Record the date that the adverse event, resolved using this format (DD-MON-YYYY). If the AE is ongoing, leave the field blank.	AEENDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH END DATE and TIME components and populate the SDTMIG variable AEENDTC in ISO 8601 format.	N/A	N/A	The definition of resolved is sponsor-specific. The preferred method is to collect a complete end date (if applicable). Partial dates (e.g., providing year only, month and year only) may be acceptable.
Events	AE	N/A	N/A	19	AEENTIM	End Time of Adverse Event	The time when the adverse event ended/resolved, represented in an unambiguous time format (e.g., hh:mm:ss).	What was the adverse event end time?	End Time	Char	R/C	Record the time (as complete as possible) that the adverse event resolved.	AEENDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH END DATE and TIME components and populate the SDTMIG variable AEENDTC in ISO 8601 format.	N/A	N/A	Collecting the time an AE resolved is only appropriate if it can be realistically determined and if there is a scientific reason for needing to know this level of detail. An example is where the subject is under the direct care of the site at the time the event resolved and the study design is such that it is important to know the AE end time with respect to dosing.
Events	AE	N/A	N/A	20	AESEV	AE Severity/Intensity	The severity or intensity of the event.	What is the severity of the adverse event?	Severity	Char	R/C	The reporting physician/healthcare professional will assess the severity of the event using the sponsor-defined categories. This assessment is subjective and the reporting physician/ healthcare professional should use medical judgment to	AESEV	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(AESEV)	N/A	Either AESEV or AETOXGR must appear on the CRF. Some studies may mandate the collection of both. Refer to ICH E3 Section 12.2.4.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
												compare the reported adverse event to similar type events observed in clinical practice. Severity is not equivalent to seriousness.					
Events	AE	N/A	N/A	21	AETOXGR	AE Standard Toxicity Grade	The grade of the severity of the event using a standard "toxicity" scale (e.g., NCI CTCAE).	What is the [NCI CTCAE/Name of scale (toxicity) grade] of the adverse event?	[NCI CTCAE/ Name of the scale] (Toxicity) Grade	Char	R/C	The reporting physician/healthcare professional will assess the severity of the adverse event using the specified grades scale.	AETOXGR	Maps directly to the SDTMIG variable listed in the SDTMIG Target columnnet. The sponsor is expected to provide the toxicity scale name and version used to map the terms utilizing the Define-XML external codelist attributes.	N/A	N/A	Either AESEV or AETOXGR must appear on the CRF. Some studies may mandate the collection of both. Refer to ICH E3 Section 12.2.4. CTCAE grade is commonly used in oncology studies, although it can also be used elsewhere. Other published toxicity-like scales can also be used.
Events	AE	N/A	N/A	22	AESER	AE Serious Event	An indication of whether the adverse event is determined to be "serious," based on what is defined in the regulations/protocol.	Was the adverse event serious?	Serious	Char	R/C	Assess if the adverse event should be classified as "serious," based on the criteria defined in the regulations/protocol.	AESER	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(NY)	N/A	This field is related to the individual SAE-type fields, which may or may not be collected on the CRF. Either AESER or all the SAE-type fields must be present on the CRF. Sponsors should consult with regulatory agencies regarding the collection of this data.
Events	AE	N/A	N/A	23	AESDTH	Results in Death	An indication the serious adverse event resulted in death.	Did the adverse event result in death?	Death	Char	R/C	Record whether the serious adverse event resulted in death.	AESDTH	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(NY)	N/A	If details regarding SAEs are collected in the clinical database, then it is recommended that a separate Yes/No variable be defined for each SAE type. Sponsors may only collect the AESER field when collecting individual SAE types in a separate pharmacovigilance database. Sponsors should consult with regulatory agencies regarding the collection of this data.
Events	AE	N/A	N/A	24	DTHDAT	Death Date	Date of death for any subject who died.	What [is/was] the subject's date of death?	Death Date	Char	O	Record the date of death.	DM.DTHDTC	This field does not map directly to an SDTMIG variable. For the SDTM dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTM variable DTHDTC in ISO 8601 format.	N/A	N/A	In the CDASH model, Death Date is a timing variable; it is not included as a timing variable in the SDTMIG. It may be collected on any CRF deemed appropriate by the sponsor, but should only be collected once. The SDTMIG variable DTHDTC is mapped to the DM domain during the SDTM submission dataset creation process. The SDTMIG variable DM.DTHFLG is not a CDASH variable, but it is typically populated during the SDTM submission dataset creation process. Death Date may be mapped to other SDTM domains, as deemed

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	appropriate by the sponsor (e.g., DS).
Events	AE	N/A	N/A	25	AESLIFE	Is Life Threatening	An indication the serious adverse event was life threatening.	Was the adverse event life threatening?	Life Threatening	Char	R/C	Record whether the serious adverse event is life threatening.	AESLIFE	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(NY)	N/A	If details regarding SAEs are collected in the clinical database, then it is recommended that a separate Yes/No variable be defined for each SAE type. Sponsors may only collect the AESER field when collecting individual SAE types in a separate pharmacovigilance database. Sponsors should consult with regulatory agencies regarding the collection of this data.
Events	AE	N/A	N/A	26	AESHOSP	Requires or Prolongs Hospitalization	An indication the serious adverse event resulted in an initial or prolonged hospitalization.	Did the adverse event result in initial or prolonged hospitalization for the subject?	Hospitalization (initial or prolonged)	Char	R/C	Record whether the serious adverse event resulted in an initial or prolonged hospitalization.	AESHOSP	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(NY)	N/A	If details regarding SAEs are collected in the clinical database, then it is recommended that a separate Yes/No variable be defined for each SAE type. Sponsors may only collect the AESER field when collecting individual SAE types in a separate pharmacovigilance database. Sponsors should consult with regulatory agencies regarding the collection of this data.
Events	AE	N/A	N/A	27	AESDISAB	Persist or Signif Disability/Incapacity	An indication the serious adverse event was associated with a persistent or significant disability or incapacity.	Did the adverse event result in disability or permanent damage?	Disability or Permanent Damage	Char	R/C	Record whether the serious adverse event resulted in a persistent or significant disability or incapacity.	AESDISAB	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(NY)	N/A	If details regarding SAEs are collected in the clinical database, then it is recommended that a separate Yes/No variable be defined for each SAE type. Sponsors may only collect the AESER field when collecting individual SAE types in a separate pharmacovigilance database. Sponsors should consult with regulatory agencies regarding the collection of this data.
Events	AE	N/A	N/A	28	AESCONG	Congenital Anomaly or Birth Defect	An indication the serious adverse event was associated with a congenital anomaly or birth defect.	Was the adverse event associated with a congenital anomaly or birth defect?	Congenital Anomaly or Birth Defect	Char	R/C	Record whether the serious adverse event was associated with congenital anomaly or birth defect.	AESCONG	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(NY)	N/A	If details regarding SAEs are collected in the clinical database, then it is recommended that a separate Yes/No variable be defined for each SAE type. Sponsors may only collect the AESER field when collecting individual SAE types in a separate pharmacovigilance database. Sponsors should consult with regulatory agencies regarding the collection of this data.
Events	AE	N/A	N/A	29	AESINTV	Needs Intervention to Prevent Impairment	An indication an adverse event required medical or surgical intervention to	Did the adverse event require intervention to	Needs Intervention to Prevent Impairment	Char	O	Record whether the serious adverse event required intervention to	AESINTV	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(NY)	N/A	If details regarding SAEs are collected in the clinical database, then it is

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
							preclude permanent impairment of a body function, or prevent permanent damage to a body structure, due to the use of a medical product.	prevent permanent impairment or damage resulting from the use of a medical product?				prevent permanent impairment or damage due to the use of a medical product.					recommended that a separate Yes/No variable be defined for each SAE type. Sponsors may only collect the AESER field when collecting individual SAE types in a separate pharmacovigilance database. Sponsors should consult with regulatory agencies regarding the collection of this data.
Events	AE	N/A	N/A	30	AESMIE	Other Medically Important Serious Event	An indication additional categories for seriousness apply.	Was the adverse event a medically important event not covered by other serious criteria?	Other Serious (Important Medical Events)	Char	R/C	Record whether the serious adverse event is an "important medical event," which may be defined in the protocol or in the investigator brochure.	AESMIE	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(NY)	N/A	If details regarding SAEs are collected in the clinical database, then it is recommended that a separate Yes/No variable be defined for each SAE type. Sponsors may only collect the AESER field when collecting individual SAE types in a separate pharmacovigilance database. Sponsors should consult with regulatory agencies regarding the collection of this data.
Events	AE	N/A	N/A	31	AESCAN	Involves Cancer	An indication the serious event was associated with the development of cancer.	Was the adverse event associated with the development of cancer?	Cancer	Char	O	Record whether the serious adverse event was associated with development of cancer.	AESCAN	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(NY)	N/A	If details regarding SAEs are collected in the clinical database, then it is recommended that a separate Yes/No variable be defined for each SAE type. Sponsors may only collect the AESER field when collecting individual SAE types in a separate pharmacovigilance database. Sponsors should consult with regulatory agencies regarding the collection of this data. "Involves cancer" (AESCAN) and "Occurred with overdose" (AESOD) are not part of the ICH definition of an SAE, but these categories are available for use in studies conducted under guidelines that existed prior to the FDA's adoption of the ICH definition.
Events	AE	N/A	N/A	32	AESOD	Occurred with Overdose	An indication the serious event occurred with an overdose.	Did the adverse event occur with an overdose?	Overdose	Char	O	Record whether the serious adverse event occurred with an overdose.	AESOD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(NY)	N/A	If details regarding SAEs are collected in the clinical database, then it is recommended that a separate Yes/No variable be defined for each SAE type. Sponsors may only collect the AESER field when collecting individual SAE types in a separate pharmacovigilance database. Sponsors should consult with regulatory agencies

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	regarding the collection of this data. "Involves cancer" (AESCAN) and "Occurred with overdose" (AESOD) are not part of the ICH definition of an SAE, but these categories are available for use in studies conducted under guidelines that existed prior to the FDA's adoption of the ICH definition.
Events	AE	N/A	N/A	33	AEREL	AE Causality	An indication the study treatment had a causal effect on the adverse event, as determined by the clinician/investigator.	Was this adverse event related to study treatment?	Relationship to Study Treatment	Char	HR	Indicate if the cause of the adverse event is related to the study treatment and cannot be reasonably explained by other factors (e.g., subject's clinical state, concomitant therapy, other interventions).	AEREL	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology is used to indicate the relationship between the AE and the study treatment (e.g., ICH E2B examples include "Not Related", "Unlikely Related", "Possibly Related", "Related"). Another possibility is the use of "Y" and "N". CDISC Controlled Terminology may be defined in the future. It is recommended that sponsors check with the appropriate regulatory authority for population of this variable to ensure it meets expectations for submission. There is no industry-wide controlled terminology for relationship to treatment. It is recommended that sponsors establish terminology and apply it consistently.
Events	AE	N/A	N/A	34	AEACN	Action Taken with Study Treatment	A description of the action taken with study treatment as a result of the event.	What action was taken with study treatment?	Action Taken with Study Treatment	Char	R/C	Record changes made to the study treatment resulting from the adverse event.	AEACN	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(ACN)	N/A	CDISC Controlled Terminology is used to indicate the action taken with the study treatment in response to the AE. How to handle multiple actions taken is up to the sponsor. If this information is collected elsewhere (e.g., on the Exposure CRF), then it is not required to be collected on the AE CRF. This variable is not to be used for actions taken with devices. See the SDTMIG-MD for information on reporting multiple actions, or actions with multiple devices.
Events	AE	N/A	N/A	35	AEACNDEV	Actions Taken with Device	A description of the action taken, with respect to a device used in a study (which may or may not be the device under study), as a result of the event.	What action was taken with a device used in the study?	Action Taken with Device	Char	O	Record actions taken resulting from the adverse event that are related to a study or non-study device.	AEACNDEV	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology for actions that are related to the device (e.g., device removed, primary care physician notified). See the SDTMIG-MD for information on reporting multiple actions, or actions with multiple devices.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Events	AE	N/A	N/A	36	AEACNOYN	Any Other Actions Taken	An indication whether any other actions were taken in response to the adverse event that were unrelated to study treatment dose changes or other non-study treatments given because of this adverse event.	Were any other actions taken in response to this adverse event?	Any Other Action(s) Taken	Char	O	Indicate whether any other action(s) were taken in response to the adverse event that are unrelated to study treatment dose changes or other non-study treatments given because of this event. If Yes, briefly describe these actions.	N/A	Does not map to an SDTMIG variable. The SDTM annotated CRF indicates that this field is NOT SUBMITTED.	(NY)	N/A	The intent/purpose of collecting this field is to help with data cleaning and monitoring. It provides verification that the AEACNOTH field on the CRF was deliberately left blank.
Events	AE	N/A	N/A	37	AEACNOTH	Other Action Taken	A description of other action taken as a result of the event that is unrelated to dose adjustments of the study treatment.	What other action was taken?	Other Action Taken	Char	O	Record all other action(s) taken resulting from the adverse event that are unrelated to study treatments given because of this AE.	AEACNOTH	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	This is usually collected as a free-text field. If possible/desired, the sponsor can create controlled terminology (e.g., treatment unblinded, primary care physician notified).
Events	AE	N/A	N/A	38	AEOUT	Outcome of Adverse Event	A description of the outcome of an event.	What is the outcome of this adverse event?	Outcome	Char	R/C	Record the appropriate outcome of the event in relation to the subject's status.	AEOUT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(OUT)	N/A	CDISC Controlled Terminology is used to indicate the outcome of the event as it relates to the subject's status. The Outcome controlled terminology includes ICH E2B values. The use of this field is the recommended way to describe whether and how the AE resolved. Because the outcome of an AE may be death, if this field is NOT used, be sure to provide another form, such as Disposition, with clear instructions to record deaths there.
Events	AE	N/A	N/A	39	AEDIS	AE Caused Study Discontinuation	An indication of whether the event caused the subject to discontinue from the study.	Did the adverse event cause the subject to be discontinued from the study?	Caused Study Discontinuation	Char	O	Record if the adverse event caused the subject to discontinue from the study.	SUPPAE.QVAL	This does not map directly an SDTMIG variable. May be used to create a RELREC to link the AE to the Disposition record (see the SDTMIG). The sponsor may also submit this data in a SUPPAE dataset where SUPPAE.QNAM = "AEDIS" and SUPPAE.QLABEL = "Caused Study Discontinuation", if appropriate. Refer to the current SDTM and SDTMIG for instructions on placement of NSVs in SDTM domains.	(NY)	N/A	Because the Action Taken field was defined to only collect changes made to the study treatment due to the AE, an additional field was created to identify the AE(s) that caused the subject to discontinue from the study. Some sponsors opt to capture this information only on the Subject Disposition CRF, whereas others choose to collect this data on both the Subject Disposition and AE CRFs, so the specific AE term(s) and related data can be identified. If the CRF is designed to link the DS and AE records, then RELREC can be used to identify that relationship.
Events	AE	N/A	N/A	40	AERLNSYN	AE Related to Non-Study Treatment	An indication whether, in the investigator's opinion, the event may have been due to a treatment other than study treatment.	Was this adverse event due to treatment other than study treatment?	Related to Non-Study Treatment	Char	O	Indicate if this adverse event was due to treatment other than study treatment. If Yes, briefly describe this non-study treatment relationship.	N/A	Does not map to an SDTMIG variable. The SDTM annotated CRF indicates that this field is NOT SUBMITTED.	(NY)	N/A	The intent/purpose of collecting this field is to help with data cleaning and monitoring. It provides verification that the CDASH AERELNST field on the CRF was deliberately left blank.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Events	AE	N/A	N/A	41	AERELNST	AE Relationship to Non-Study Treatment	Description of the investigator's opinion as to whether the adverse event may have been due to a treatment other than study treatment.	What is the relationship to non-study treatment?	Relationship to Non-Study Treatment	Char	O	Record the investigator's opinion as to whether the event may have been due to a treatment other than study treatment.	AERELNST	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	May be reported as free text (e.g., "MORE LIKELY RELATED TO ASPIRIN USE"). If possible/desired, sponsors can create controlled terminology.
Events	AE	N/A	N/A	42	AESI	Adverse Event of Special Interest	An adverse event of special interest (serious or non-serious) is one of scientific and medical concern specific to the sponsor's product or program, for which ongoing monitoring and rapid communication by the investigator to the sponsor can be appropriate. Such an event might warrant further investigation in order to characterize and understand it. Depending on the nature of the event, rapid communication by the trial sponsor to other parties (e.g., regulators) might also be warranted.	Is this event of special interest?	Adverse Event of Special Interest	Char	O	Record the investigator's opinion as to whether the event is an adverse event of special interest by the sponsor.	N/A	Does not map to an SDTM variable. The SDTM annotated CRF indicates that this field is NOT SUBMITTED.	(NY)	N/A	This CDASH field may be used just to trigger other CRF pages, or populate a value in AECAT or AESCAT. If submitted, this information could be submitted in a SUPPAE dataset where SUPPAE.QNAM = "AESI" and SUPPAE.QLABEL = "Adverse Event of Special Interest. Refer to the current SDTM and SDTMIG for instructions on placement of NSVs in SDTM domains.
Events	AE	N/A	N/A	43	AEPATT	Pattern of Adverse Event	Used to indicate the pattern of the event over time.	What is the adverse event pattern?	Pattern	Char	O	For each adverse event, check the pattern of the AE. If a single event, choose Single.	AEPATT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Used to report the pattern of the AE (e.g., "INTERMITTENT", "CONTINUOUS", "SINGLE EVENT"). For crossover trials, it is NOT recommended to capture this field for intermittent AEs. Instead, the AE should have corresponding start and stop dates to capture when the AE started and stopped.
Events	AE	N/A	N/A	44	AECONTRT	Concomitant or Additional Trtmt Given	An indication whether a concomitant or additional treatment given because of the occurrence of the event.	Was a concomitant or additional treatment given due to this adverse event?	Concomitant or Additional Treatment Given Due to This AE	Char	O	Indicate if any non-study treatments were received because of this adverse event. If Yes, medications should be recorded on the ConMed CRF and procedures recorded on the Procedures CRF.	AECONTRT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(NY)	N/A	If medication data are reported, the CMAENO variable (on the CM CRF) may be used to collect the associated AE Identifier in order to populate RELREC. If procedures are reported, the PRAENO variable (on the PR CRF) may be used to collect the associated AE Identifier in order to populate RELREC.
Events	AE	N/A	N/A	45	AEMODIFY	AE Modified Reported Term	If the value for AETERM is modified to facilitate coding, then AEMODIFY will contain the modified text.	N/A	N/A	Char	R/C	N/A	AEMODIFY	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	This is not a data collection field that would appear on the CRF. Sponsors will populate this through the coding process.
Events	AE	N/A	N/A	46	AEDECOD	AE Dictionary-Derived Term	The dictionary or standardized text description of AETERM or the modified topic variable (AEMODIFY), if applicable.	N/A	N/A	Char	O	N/A	AEDECOD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The sponsor is expected to provide the dictionary name and version used to map the terms utilizing the Define-XML external codelist attributes.	N/A	N/A	This is typically not a data collection field that would appear on the CRF. Sponsors will populate this through the coding process. Equivalent to the Preferred Term (PT) in MedDRA.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Events	AE	N/A	N/A	47	AELLT	AE Lowest Level Term	The dictionary-derived text description of the lowest level term.	N/A	N/A	Char	R/C	N/A	AELLT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The sponsor is expected to provide the dictionary name and version used to map the terms utilizing the Define-XML external codelist attributes. Sponsors should include an Origin in the define metadata document to indicate that the data was "ASSIGNED".	N/A	N/A	This field does not typically appear on the CRF. Sponsors will populate this through the coding process. This is applicable to items using MedDRA coding.
Events	AE	N/A	N/A	48	AELLTCD	AE Lowest Level Term Code	The dictionary-derived code for the lowest level term.	N/A	N/A	Num	R/C	N/A	AELLTCD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The sponsor is expected to provide the dictionary name and version used to map the terms utilizing the Define-XML external codelist attributes. Sponsors should include an Origin in the define metadata document to indicate that the data was "ASSIGNED".	N/A	N/A	This field does not typically appear on the CRF. Sponsors will populate this through the coding process. This is applicable to items using MedDRA coding.
Events	AE	N/A	N/A	49	AEPTCD	AE Preferred Term Code	The dictionary-derived code for the preferred term.	N/A	N/A	Num	R/C	N/A	AEPTCD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The sponsor is expected to provide the dictionary name and version used to map the terms utilizing the Define-XML external codelist attributes. Sponsors should include an Origin in the define metadata document to indicate that the data was "ASSIGNED".	N/A	N/A	This field does not typically appear on the CRF. Sponsors will populate this through the coding process. This is applicable to items using MedDRA coding.
Events	AE	N/A	N/A	50	AEHLT	AE High Level Term	The dictionary-derived text description of the high level term for the primary system organ class (SOC).	N/A	N/A	Char	R/C	N/A	AEHLT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The sponsor is expected to provide the dictionary name and version used to map the terms utilizing the Define-XML external codelist attributes. Sponsors should include an Origin in the define metadata document to indicate that the data was "ASSIGNED".	N/A	N/A	This field does not typically appear on the CRF. Sponsors will populate this through the coding process. This is applicable to items using MedDRA coding.
Events	AE	N/A	N/A	51	AEHLTCD	AE High Level Term Code	The dictionary-derived code for the high level term for the primary system organ class (SOC).	N/A	N/A	Num	R/C	N/A	AEHLTCD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The sponsor is expected to provide the dictionary name and version used to map the terms utilizing the Define-XML external codelist attributes. Sponsors should include an Origin in the define metadata document to indicate that the data was "ASSIGNED".	N/A	N/A	This field does not typically appear on the CRF. Sponsors will populate this through the coding process. This is applicable to items using MedDRA coding.
Events	AE	N/A	N/A	52	AEHLGT	AE High Level Group Term	The dictionary-derived text description of the high level group term for the primary system organ class (SOC).	N/A	N/A	Char	R/C	N/A	AEHLGT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The sponsor is expected to provide the dictionary name and version used to map the terms utilizing the Define-XML external codelist attributes. Sponsors should include an Origin in the	N/A	N/A	This field does not typically appear on the CRF. Sponsors will populate this through the coding process. This is applicable to items using MedDRA coding.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
														define metadata document to indicate that the data was "ASSIGNED".			
Events	AE	N/A	N/A	53	AEHLGTCD	AE High Level Group Term Code	The dictionary-derived code for the high level group term for the primary system organ class (SOC).	N/A	N/A	Num	R/C	N/A	AEHLGTCD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The sponsor is expected to provide the dictionary name and version used to map the terms utilizing the Define-XML external codelist attributes. Sponsors should include an Origin in the define metadata document to indicate that the data was "ASSIGNED".	N/A	N/A	This field does not typically appear on the CRF. Sponsors will populate this through the coding process. This is applicable to items using MedDRA coding.
Events	AE	N/A	N/A	54	AESOC	AE Primary System Organ Class	The dictionary-derived text description of the primary system organ class (SOC).	N/A	N/A	Char	R/C	N/A	AESOC	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The sponsor is expected to provide the dictionary name and version used to map the terms utilizing the Define-XML external codelist attributes. Sponsors should include an Origin in the define metadata document to indicate that the data was "ASSIGNED".	N/A	N/A	This field does not typically appear on the CRF. Sponsors will populate this through the coding process. This is applicable to items using MedDRA coding. Will be the same as the AEBODSYS if the primary SOC was used for analysis.
Events	AE	N/A	N/A	55	AESOCCD	AE Primary System Organ Class Code	The dictionary-derived code for the primary system organ class (SOC).	N/A	N/A	Num	R/C	N/A	AESOCCD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The sponsor is expected to provide the dictionary name and version used to map the terms utilizing the Define-XML external codelist attributes. Sponsors should include an Origin in the define metadata document to indicate that the data was "ASSIGNED".	N/A	N/A	This field does not typically appear on the CRF. Sponsors will populate this through the coding process. This is applicable to items using MedDRA coding. Will be the same as AEBDSYCD if the primary SOC was used for analysis.

Assumptions for the CDASHIG AE - Adverse Events Domain

1. The CDASHIG AEYN variable with the question text “Were any adverse events experienced?” is intended to assist in the cleaning of data and in confirming that there are no missing values. This CDASHIG variable is not included as part of the SDTMIG AE domain for submission. This question is annotated as "NOT SUBMITTED" on the CRF.
2. Categories AECAT and AESCAT
 - a. AECAT and AESCAT should not be redundant with the dictionary coding provided by AEDECOD and AESOC (i.e., they should provide a different means of defining or classifying AE records).
 - b. AECAT and AESCAT are intended for categorizations that are defined in advance. For example, a sponsor may have a separate CRF page for AEs of special interest and then another page for all other AEs. In cases where a category of AEs of special interest resembles a part of the dictionary hierarchy (e.g., "CARDIAC EVENTS"), the categorization represented by AECAT and AESCAT may differ from the categorization derived from the coding dictionary.
3. Presence or Absence of Events
 - a. AEs are most often collected as free-text, spontaneously reported adverse events. There may be cases where the occurrences of specific adverse events are solicited, per protocol requirements. In that case, the prespecified adverse events would be listed on the CRF with a "Yes/No" question (AEOCCUR) asking about the occurrence of each.
 - b. The CDASHIG variable AEOCCUR does not map directly to an SDTM variable. Because the SDTM AE domain is intended to hold only adverse events that actually happen, all values collected in AEOCCUR for prespecified AEs should be submitted in a Findings About Adverse Events domain (FAAE), where FAORRES = the value of AEOCCUR where FATESTCD = "OCCUR". In addition, where AEOCCUR = "Y", there should be a corresponding record in the AE domain.
 - c. It is important to reiterate the distinction between adverse events and clinical events, especially if there are prespecified terms. In consulting with regulatory authorities, certain events (e.g., events associated with protocol endpoints) may simply be clinical events. (See Section 8.2.3, [Clinical Events](#), for more details.)
4. Coding
 - a. AEDECOD is the preferred term derived by the sponsor from the coding dictionary. It is a required SDTMIG variable and must have a value. It is expected that the reported term (AETERM) will be coded using a standard dictionary such as MedDRA. Sponsors are expected to provide the dictionary name and version used to map the terms utilizing the define.xml external codelist attributes.
 - b. AEMODIFY is a permissible SDTMIG variable and should be included if the sponsor's coding procedure permits modification of a verbatim term. The modified term is listed in AEMODIFY. The variable should be populated per the sponsor's coding procedure.
 - c. The CDASHIG elements AELLT, AELLTCD, AEPTCD, AEHLT, AEHLTCD, AEHLGT, AEHLGTCD, AEBDSYCD, AESOC, and AESOCCD are only applicable to events coded in MedDRA. These items are not expected for non-MedDRA coding.
5. Relative Timing Variables
 - a. The AEONGO field does not map directly to an SDTMIG variable but it may be used to derive a value into an SDTMIG relative timing variable such as AEENRF or AEENRTPT. When populating AEENRF, if the AEONGO field is checked, a value of "DURING", "AFTER", or "DURING/AFTER" may be derived, as is appropriate to the study. When populating AEENRTPT, if the AEONGO field is checked, the value of "ONGOING" may be derived. **Note:** AEENRTPT must refer to a time-point anchor as described in AEENTPT.
 - b. Note that AEONGO is a special-use case of "Yes/No", where the question is usually presented as a single possible response of "Yes" when there is no applicable end date at the time of collection. In this case, if the box is checked and the end date is blank, the desired SDTMIG relative timing variable can be derived according to assumption 5a. If the box is not checked (AEONGO is NULL) and an end date

is present, no SDTMIG relative timing variable would be derived. In some cases unique to AE, the ongoing status may be determined from AE Outcome. AEONGO is only used to derive an appropriate SDTMIG relative timing variable and should not be submitted on its own in the AE or SUPPAE dataset. The purpose of collecting this field is to help with data cleaning and monitoring; this field provides further confirmation that the end date was deliberately left blank.

6. CDASHIG Action Taken Variables

- a. CDASHIG variables AEACN, AECONTRT, AEACNDEV, AEACNOYN, and AEACNOTH are used to collect the action taken as the result of an AE.
- b. AEACN describes action taken with study treatment as a result of the event. It is expected that a response would be provided for this question for all AEs. If multiple treatments are administered, then corresponding variables should be created to capture the action taken for each treatment.
- c. AEACNOTH describes Other Action(s) taken in response to an adverse event that are unrelated to study treatment dose changes or other non-study treatment given because of this adverse event. This field is usually collected as a free-text field (e.g., Treatment Unblinded, Primary Care Physician Notified). If possible/desired, the sponsor can create sponsor-defined controlled terminology. The CDASHIG variable AEACNOYN is used in conjunction with AEACNOTH to assist in the cleaning of data and in confirming that AEACNOTH is not missing. AEACNOYN is not included as part of the SDTMIG AE domain for submission and is annotated as "NOT SUBMITTED" on the CRF. The CDASHIG variable AEACNOYN should only be used on the AE CRF.
- d. AECONTRT indicates if any non-study treatments were received because of this adverse event. If "Yes" is answered for this question, any drugs used are recorded on the Concomitant Medications CRF and any procedures performed are recorded on the Procedure CRF. The CDASHIG variables CMAENO (on the CM CRF) or PRAENO (on the PR CRF) can be collected to identify the adverse event associated with this treatment by recording the appropriate AESPID. The RELREC dataset can be used to identify this relationship.
- e. AEACNDEV describes action taken with respect to a device in a study, which may or may not be the device under study. This field is usually collected as a free-text field. If possible/desired, the sponsor can create sponsor-defined controlled terminology. FDA medical device reporting (MDR) guidelines (available at <https://www.fda.gov/medicaldevices/>) provide controlled terminology for reporting device problems.

7. Serious Adverse Events

- a. If details regarding serious adverse events are collected in the clinical database, then it is recommended that a separate "Yes/No" variable be defined for each SAE type (AESCAN, AESCONG, AESDISAB, AESDTH, AESHOSP, AESLIFE, AESOD, AESMIE).
- b. Sponsors should consult with the regulatory agencies to which data will be submitted regarding the collection of this data (see, e.g., FDA study data technical conformance guidance, available at <https://www.fda.gov/ForIndustry/DataStandards/>). The serious categories Involves Cancer (AESCAN) and Occurred with Overdose (AESOD) are not part of the ICH definition of an SAE, but these categories are available for use in studies conducted under guidelines that existed prior to the FDA's adoption of the ICH definition.

8. CDASHIG Variables AESEV, AETOXGR

- a. In studies using a standard toxicity scale (e.g., the US National Cancer Institute's Common Terminology Criteria for Adverse Events (CTCAE); available at <https://ctep.cancer.gov/protocoldevelopment/>), AETOXGR should be used instead of AESEV. In most cases, either AESEV or AETOXGR is populated, but not both.
- b. There may be cases in which a sponsor may need to populate both variables. Whether populating either AESEV or AETOXGR or both, the sponsor is expected to provide the dictionary name and version or standard toxicity scale name and version used to map the terms utilizing Define-XML external codelist attributes.

9. CDASHIG Variable DTHDAT

- a. The CDASH Model allows the date of death to be collected on any CRF deemed appropriate by the sponsor. Death date is mapped to other SDTMIG domains, as deemed appropriate by the sponsor (e.g., DM, DS).
 - b. The death date should only be collected on 1 form.
10. The CDASH domain-specific variables AEUNANT, AERLPRT, AERLPRC, AESINTV, and --RLDEV are often used when reporting medical device events.

Example CRF for the CDASHIG AE - Adverse Events Domain

Example 1

Title: Adverse Events

Example CRF Completion Instructions

- Record all adverse events (AEs) except [list of protocol-defined exceptions] on the AE CRF after informed consent is obtained.
- All serious adverse events (SAEs), regardless of relationship to study drug, must be reported via telephone or fax within 24 hours of discovery.
- Safety information (e.g., AE, SAE) identified for all subjects must be recorded on source documents from the time informed consent is obtained.

Indicate if the subject experienced any adverse events. If Yes, include the appropriate details where indicated on the CRF.

If collected on the CRF, the sponsor may insert instructions to ensure each record has a unique identifier.

Record only 1 diagnosis, sign, or symptom per line (e.g., nausea and vomiting should not be recorded in the same entry, but as 2 separate entries). Using accepted medical terminology, enter the diagnosis (if known); otherwise, enter a sign or symptom.

Record the start date of the AE using this format (DD-MON-YYYY).

Indicate if the adverse event has not resolved at the time of data collection; leave the End Date blank.

Record the date that the AE resolved using this format (DD-MON-YYYY). If the AE is ongoing, leave the field blank.

The reporting physician/healthcare professional will assess the severity of the event using sponsor-defined categories. This assessment is subjective and the reporting physician/ healthcare professional should use medical judgment to compare the reported AE to similar type events observed in clinical practice. Severity is not equivalent to seriousness.

Assess if an adverse event should be classified as serious based on the criteria defined in the protocol.

Record whether the serious adverse event resulted in death.

Record the date of death.

Were any adverse events experienced?	☐ Yes ☐ No <NY codelist>
Adverse Event Category	Sponsor Defined
Adverse Event Subcategory	Sponsor Defined
AE Number	
What is the adverse event term?	
Start Date	
Is the adverse event ongoing?	☐ Yes <NY codelist>
End Date	
Severity	☐ MILD ☐ MODERATE ☐ SEVERE <AESEV codelist>
Was the adverse event serious?	☐ Yes ☐ No <NY codelist>
Did the adverse event result in death?	☐ Yes ☐ No <NY codelist>
Death Date	

Record whether the serious adverse event is life-threatening.	Life Threatening AESLIFE	☐ Yes ☐ No <NY codelist>
Record whether the serious adverse event resulted in an initial or prolonged hospitalization.	Hospitalization (initial or prolonged) AESHOSP	☐ Yes ☐ No <NY codelist>
Record whether the serious adverse event resulted in a persistent or significant disability or incapacity.	Disability or Permanent Damage AESDISAB	☐ Yes ☐ No <NY codelist>
Record whether the serious adverse event was associated with congenital anomaly or birth defect.	Congenital Anomaly or Birth Defect AESCONG	☐ Yes ☐ No <NY codelist>
Record whether the serious adverse event required intervention to prevent permanent impairment or damage due to the use of a medical product.	Needs Intervention to Prevent Impairment AESINTV	☐ Yes ☐ No <NY codelist>
Record whether the serious adverse event is an important medical event, which may be defined in the protocol or in the investigator brochure.	Other Serious (Important Medical Events) AESMIE	☐ Yes ☐ No <NY codelist>
Indicate if the cause of the adverse event was related to the study treatment and cannot be reasonably explained by other factors (e.g., subject's clinical state, concomitant therapy, other interventions).	Relationship to Study Treatment AEREL	☐ NOT RELATED ☐ UNLIKELY RELATED ☐ POSSIBLY RELATED ☐ RELATED
Record changes made to the study treatment resulting from the adverse event.	Action Taken with Study Treatment AEACN	☐ DRUG WITHDRAWN ☐ DOSE REDUCED ☐ DOSE INCREASED ☐ DOSE NOT CHANGED ☐ UNKNOWN ☐ NOT APPLICABLE <ACN codelist>
Record the appropriate outcome of the event in relation to the subject's status.	Outcome AEOUT	☐ RECOVERING / RESOLVING ☐ NOT RECOVERED / NOT RESOLVED ☐ RECOVERED / RESOLVED ☐ RECOVERED / RESOLVED WITH SEQUELAE ☐ FATAL <OUT codelist>

CRF Metadata

Order	Question Text	Prompt	CRF Completion Instructions	Type	CDASH Variable	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology CodeList Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
1	Were any adverse events experienced?	Any Adverse Events	Indicate if the subject experienced any adverse events. If Yes, include the appropriate details where indicated on the CRF.	Text	AEYN	N/A		(NY)	Yes; No				
2	What is the category of the adverse event?	Adverse Event Category	Record the adverse event category, if not pre-printed on the CRF.	Text	AECAT	AECAT				Sponsor Defined			Yes
3	What is the subcategory of the adverse event?	Adverse Event Subcategory	Record the adverse event subcategory, if not pre-printed on the CRF.	Text	AESCAT	AESCAT				Sponsor Defined			Yes
4	What is the adverse event identifier?	AE Number	If collected on the CRF, the sponsor may insert instructions to ensure each record has a unique identifier.	Integer	AESPID	AESPID					prompt		
5	What is the adverse event term?	Adverse Event	Record only 1 diagnosis, sign, or symptom per line (e.g., nausea and vomiting should not be recorded in the same entry, but as 2 separate entries). Using accepted medical terminology, enter the diagnosis (if known); otherwise, enter a sign or symptom.	Text	AETERM	AETERM							
6	What is the adverse event start date?	Start Date	Record the start date of the AE using this format (DD-MON-YYYY).	Date	AESTDAT	AESTDTC					prompt		
7	Is the adverse event ongoing?	Ongoing	Indicate if the adverse event has not resolved at the time of data collection; leave the End Date blank.	Text	AEONGO	AEENRPT; AEENRF	AEENRPT; AEENRF	(NY)	Yes			checkbox	
8	What was the adverse event end date?	End Date	Record the date that the AE resolved using this format (DD-MON-YYYY). If the AE is ongoing, leave the field blank.	date	AEENDAT	AEENDTC					prompt		
9	What is the severity of the adverse event?	Severity	The reporting physician/healthcare professional will assess the severity of the event using sponsor-defined categories. This assessment is subjective and the reporting physician/healthcare professional should use medical	Text	AESEV	AESEV		(AESEV)	MILD; MODERATE; SEVERE		prompt		

Order	Question Text	Prompt	CRF Completion Instructions	Type	CDASH Variable	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology CodeList Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
			judgment to compare the reported AE to similar type events observed in clinical practice. Severity is not equivalent to seriousness.										
10	Was the adverse event serious?	Serious	Assess if an adverse event should be classified as serious based on the criteria defined in the protocol.	Text	AESER	AESER		(NY)	Yes; No				
11	Did the adverse event result in death?	Death	Record whether the serious adverse event resulted in death.	Text	AESDTH	AESDTH		(NY)	Yes; No				
12	What [is/was] the subject's date of death?	Death Date	Record the date of death.	date	DTHDAT	DM.DTHDTC					prompt		
13	Was the adverse event life-threatening?	Life Threatening	Record whether the serious adverse event is life-threatening.	Text	AESLIFE	AESLIFE		(NY)	Yes; No		prompt		
14	Did the adverse event result in initial or prolonged hospitalization for the subject?	Hospitalization (initial or prolonged)	Record whether the serious adverse event resulted in an initial or prolonged hospitalization.	Text	AESHOSP	AESHOSP		(NY)	Yes; No		prompt		
15	Did the adverse event result in disability or permanent damage?	Disability or Permanent Damage	Record whether the serious adverse event resulted in a persistent or significant disability or incapacity.	Text	AESDISAB	AESDISAB		(NY)	Yes; No		prompt		
16	Was the adverse event associated with a congenital anomaly or birth defect?	Congenital Anomaly or Birth Defect	Record whether the serious adverse event was associated with congenital anomaly or birth defect.	Text	AESCONG	AESCONG		(NY)	Yes; No		prompt		
17	Did the adverse event require intervention to prevent permanent impairment or damage resulting from the use of a medical product?	Needs Intervention to Prevent Impairment	Record whether the serious adverse event required intervention to prevent permanent impairment or damage due to the use of a medical product.	Text	AESINTV	AESINTV CDASH-2105 - Jira issue doesn't exist or you don't have permission to view it.		(NY)	Yes; No		prompt		
18	Was the adverse event a medically important event not covered by	Other Serious (Important Medical Events)	Record whether the serious adverse event is an important medical event, which may be defined in the protocol	Text	AESMIE	AESMIE		(NY)	Yes; No		prompt		

Order	Question Text	Prompt	CRF Completion Instructions	Type	CDASH Variable	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology CodeList Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
	other "serious" criteria?		or in the investigator brochure.										
19	Was this adverse event related to study treatment?	Relationship to Study Treatment	Indicate if the cause of the adverse event was related to the study treatment and cannot be reasonably explained by other factors (e.g., subject's clinical state, concomitant therapy, other interventions).	Text	AEREL	AEREL			NOT RELATED; UNLIKELY RELATED; POSSIBLY RELATED; RELATED		prompt		
20	What action was taken with the study treatment?	Action Taken with Study Treatment	Record changes made to the study treatment resulting from the adverse event.	Text	AEACN	AEACN		(ACN)	DRUG WITHDRAWN; DOSE REDUCED; DOSE INCREASED; DOSE NOT CHANGED; UNKNOWN; NOT APPLICABLE		prompt		
21	What is the outcome of this adverse event?	Outcome	Record the appropriate outcome of the event in relation to the subject's status.	Text	AEOUT	AEOUT		(OUT)	RECOVERING / RESOLVING; NOT RECOVERED / NOT RESOLVED; RECOVERED / RESOLVED; RECOVERED / RESOLVED WITH SEQUELAE; FATAL		prompt		

8.2.3 CE - Clinical Events

Description/Overview for the CDASHIG CE - Clinical Events Domain

The CDASHIG CE domain includes clinical events of interest that would not be classified as adverse events. Events included in the CE dataset should be consistent with protocol requirements. Clinical events may be captured either as free text or via a prespecified list of terms. The structure of the CE domain is 1 record per clinical event per subject. It is the sponsor's responsibility to define a *clinical event*, and the event is usually described in the protocol.

As with all the data collection variables recommended in CDASH, it is assumed that sponsors will add other data variables as needed to meet protocol-specific and other data collection requirements (e.g., therapeutic area-specific data elements; others as required per protocol, business practice, or operating procedures). Sponsors should define the appropriate collection period for clinical events.

Specification for the CDASHIG CE - Clinical Events Domain

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Events	CE	N/A	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included in the database or populated during SDTM-based dataset creation before submission.
Events	CE	N/A	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted on the CRFs that are shipped to each site. EDC: This should be prepopulated.
Events	CE	N/A	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What [is/was] the (study) [subject/participant] identifier?	[Subject/Participant] (Identifier)	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system-generated. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Events	CE	N/A	N/A	4	CECAT	Category for Clinical Event	A grouping of topic-variable values based on user-defined characteristics.	What is the category of the clinical event?	[Clinical Event Category]; NULL	Char	O	Record the clinical event category, if not preprinted on the CRF.	CECAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Category" can be included as the column header.
Events	CE	N/A	N/A	5	CESCAT	Subcategory for Clinical Event	A sub-division of the CECAT values based on	What is the subcategory of the clinical event?	[Clinical Event Subcategory]; NULL	Char	O	Record the clinical event subcategory, if not preprinted on the CRF.	CESCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be preprinted

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
							user-defined characteristics.										on the CRF or screen and prepopulated in the data management system. This is not typically a question to which the site would provide an answer. CESCAT can only be used if there is an CECAT and it must be a subcategorization of CECAT.
Events	CE	N/A	N/A	6	CEYN	Any Clinical Event	An indication of whether any clinical events were experienced during the study.	Were any clinical events experienced?	Any Clinical Events	Char	O	Indicate if the subject experienced any clinical events. If Yes, include the appropriate details where indicated on the CRF.	N/A	Does not map to an SDTMIG variable. The SDTM annotated CRF indicates that this field is NOT SUBMITTED.	(NY)	N/A	The intent/purpose of collecting this field is to help with data cleaning and monitoring. It provides verification that all other fields on the CRF were deliberately left blank.
Events	CE	N/A	N/A	7	CESPID	CE Sponsor-Defined Identifier	A sponsor-defined identifier. In CDASH, this is typically used for preprinted or auto-generated numbers on the CRF, or any other type of identifier that does not already have a defined CDASH identifier field.	[Sponsor defined question]	[Sponsor defined]	Char	O	If collected on the CRF, the sponsor may insert instructions to ensure each record has a unique identifier.	CESPID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. May be used to create RELREC to link this record with a record in another domain.	N/A	N/A	Because SPID is a sponsor-defined identifier, conformance to Question Text or Item Prompt is not applicable. Typically used as an identifier in a data query to communicate clearly to the site the specific record in question or to reconcile concomitant medications, procedures and/or medical history records with CEs. If CMCENO or PRCENO is used, this is the identifier to which CMCENO or PRCENO refers. May be used to record preprinted number (e.g., line number, record number) on the CRF. This field may be populated by the sponsor's data collection system.
Events	CE	N/A	N/A	8	CETERM	Reported Term for the Clinical Event	The reported or prespecified name of the clinical event.	What is the clinical event term?	[Clinical Event]; Specify (Other/Details)	Char	HR	Record the clinical event or [insert text corresponding to the specific clinical event].	CETERM	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Can be represented either as a free-text field to capture verbatim terms reported by subjects; or preprinted, in situation where solicited CEs of interest are captured. May be used as Specify Other field to collect more details on a prespecified CEDECOD value, or when CEDECOD=Other. In most cases, the verbatim term (i.e., investigator-reported term) will be coded to a standard medical dictionary (e.g.,

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	MedDRA, WHO ART) after the data have been collected on the CRF
Events	CE	N/A	N/A	9	CEOCCUR	Clinical Event Occurrence	An indication of whether a prespecified clinical event or a group of clinical events occurred when information about the occurrence of a specific event is solicited.	Did the subject have [prespecified clinical event/group of clinical events]?	[Specified Clinical Event]	Char	O	Indicate if [specific clinical event] has occurred/is occurring by checking Yes or No.	CEOCCUR	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(NY)	N/A	The CDASH variable CEOCCUR is used to report the occurrence of prespecified clinical event not considered to be an adverse event by the sponsor. CEOCCUR should not be used for spontaneously reported events. The site should be able to indicate that the question was not asked or answered.
Events	CE	N/A	N/A	10	CEPRES	Clinical Event Prespecified	An indication that a specific event, or group of events, are prespecified on a CRF.	N/A	N/A	Char	O	N/A	CEPRES	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(NY)	N/A	A hidden field on a CRF defaulted to "Y", or added during the SDTM-based dataset creation when the clinical event is prespecified. Null for spontaneously reported events. If a study collects both prespecified CEs and free-text events, the value of CEPRES should be "Y" for all prespecified events and null for events reported as free text. CEPRES is a permissible field in SDTM and may be omitted from the SDTM-based dataset if all events were collected as free text.
Events	CE	N/A	N/A	11	CESTDAT	Clinical Event Start Date	The start date of the clinical event, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the [clinical event] start date?	Start Date	Char	R/C	Record the start date of the [clinical event] using this format (DD-MON-YYYY).	CESTDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH START DATE and TIME components and populate the SDTMIG variable CESTDTC in ISO 8601 format.	N/A	N/A	N/A
Events	CE	N/A	N/A	12	CESTTIM	Clinical Event Start Time	The start time of the clinical event, represented in an unambiguous date format (e.g., hh:mm:ss).	What was the [clinical event] start time?	Start Time	Char	O	If appropriate, record the start time (as complete as possible) of the [clinical event].	CESTDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH START DATE and TIME components and populate the SDTMIG variable CESTDTC in ISO 8601 format.	N/A	N/A	Collecting the time a CE started is only appropriate if it can be realistically determined and if there is a scientific reason for needing to know this level of detail. An example is where the subject is under the direct care of the site at the time the event started and the study design is such that it is important to know the CE start time with respect to dosing.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Events	CE	N/A	N/A	13	CELOC	Clinical Event Location	A description of the anatomical location relevant for the clinical event.	What was the anatomical location of the [clinical event]?	Anatomical Location	Char	O	Indicate the anatomical location of the clinical event.	CELOC	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(LOC)	N/A	Collected or preprinted when the sponsor needs to identify the specific anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF. LAT, DIR, PORTOT are used to further describe the anatomical location.
Events	CE	N/A	N/A	14	CELAT	Clinical Event Laterality	Qualifier for anatomical location, further detailing the side of the body relevant for the event.	What was the side of the anatomical location of the [clinical event]?	Side	Char	O	Record the side of the anatomical location of the clinical event.	CELAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(LAT)	N/A	May be preprinted or collected when the sponsor needs to identify the specific side of the anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Events	CE	N/A	N/A	15	CEDIR	Clinical Event Directionality	Qualifier further detailing the position of the anatomical location, relative to the center of the body, organ, or specimen.	What was the directionality of the anatomical location of the [clinical event]?	Directionality	Char	O	Record the directionality of the anatomical location of the clinical event.	CEDIR	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(DIR)	N/A	May be preprinted or collected when the sponsor needs to identify the directionality of the anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Events	CE	N/A	N/A	16	CEPORTOT	CE Location Portion or Totality	Qualifier for anatomical location, further detailing the distribution (i.e., arrangement of, apportioning of).	What was the portion or totality of the anatomical location of the clinical event?	Portion or Totality	Char	O	Indicate the portion or totality of anatomical location of the clinical event.	CEPORTOT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(PORTOT)	N/A	Collected when the sponsor needs to identify the specific portionality for the anatomical locations. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Events	CE	N/A	N/A	17	CEONGO	Ongoing Clinical Event	Indication the clinical event is ongoing when no end date is provided.	Was the [clinical event] ongoing (as of [the study-specific timepoint or period]?)	Ongoing (as of the [study-specific timepoint or period])	Char	O	Indicate if the clinical event has not resolved at the time of data collection. If ongoing, leave the end date blank.	CEENRTPT; CEENRF	This does not map directly to an SDTMIG variable. May be used to populate a value into an SDTMIG relative timing variable (e.g., CEENRF, CEENRTPT). When populating CEENRF, if the value of CEONGO is "Y", the values of "DURING", "AFTER", or "DURING/AFTER" may be used. When populating CEENRTPT, if the value of CEONGO is "Y", the value of "ONGOING" may be used. When CEONGO refers to the Study Reference Period (defined in DM.RFSTDTC to DM.RFENDTC), the SDTMIG variable CEENRF should be	(NY)	N/A	Completed to indicate that the CE has not resolved at the time of data collection, when no end date is collected. In some cases the ongoing status may be determined from CE Outcome. The purpose of collecting this field is to help with data cleaning and monitoring; this field provides further confirmation that the end date was deliberately left blank. Often used as a tick/checkbox.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
														populated. When CEONGO is compared to another time point, the SDTMIG variables CEENRTPT and CEENTPT should be used. Note: CEENRTPT must refer to a time-point anchor described in CEENTPT.			
Events	CE	N/A	N/A	18	CEENDAT	Clinical Event End Date	The date when the clinical event resolved/ ended, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the [clinical event] end date?	End Date	Char	R/C	Record the date that the [clinical event] resolved using this format (DD-MON-YYYY). If the [clinical event] is ongoing, leave the field blank.	CEENDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH END DATE and TIME components and populate the SDTMIG variable CEENDTC in ISO 8601 format.	N/A	N/A	The definition of resolved is sponsor-specific. The preferred method is to collect a complete end date. Partial dates (e.g., providing year only, month and year only) may be acceptable.
Events	CE	N/A	N/A	19	CEENTIM	Clinical Event End Time	The time when the clinical event ended/resolved, represented in an unambiguous time format (e.g., hh:mm:ss).	What was the [clinical event] end time?	End Time	Char	O	Record the time (as complete as possible) that the [clinical event] resolved.	CEENDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH END DATE and TIME components and populate the SDTMIG variable CEENDTC in ISO 8601 format.	N/A	N/A	Collecting the time an CE resolved is only appropriate if it can be realistically determined and if there is a scientific reason for needing to know this level of detail. An example is where the subject is under the direct care of the site at the time the event resolved and the study design is such that it is important to know the CE end time with respect to dosing.
Events	CE	N/A	N/A	20	CESEV	CE Severity/Intensity	The severity or intensity of the event.	What was the severity of the [clinical event]?	Severity	Char	O	The reporting physician/healthcare professional will assess the severity of the event using the sponsor-defined categories. This assessment is subjective and the reporting physician/ healthcare professional should use medical judgment to compare the reported clinical event to similar type events observed in clinical practice.	CESEV	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The sponsor is expected to provide the toxicity scale name and version used to map the terms utilizing the Define-XML external codelist attributes.	N/A	N/A	Some studies may collect severity and/or toxicity grade.
Events	CE	N/A	N/A	21	CETOX	Clinical Event Toxicity Description	A description of toxicity quantified by CETOXGR (e.g., NCI CTCAE Short Name).	What was the description of the toxicity?	[NCI CTCAE] Toxicity	Char	O	Record the description of the toxicity.	CETOX	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The sponsor is expected to provide the toxicity scale name and version used to map the terms utilizing the	N/A	N/A	This would typically be the text description quantified by CETOXGR (e.g., HYPERCALCEMIA, HYPOCALCEMIA).

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
														Define-XML external code list attributes.			
Events	CE	N/A	N/A	22	CETOXGR	Clinical Event Toxicity Grade	The toxicity grade using a standard toxicity scale (e.g., NCI CTCAE).	What was the toxicity grade?	[NCI CTCAE Toxicity] Grade	Char	O	Record the severity of the clinical event using the CTCAE toxicity grades.	CETOXGR	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The sponsor is expected to provide the toxicity scale name and version used to map the terms utilizing the Define-XML external codelist attributes.	N/A	N/A	Some studies may collect severity and/or toxicity grade. CDISC Controlled Terminology (TOXGRV3; TOXGRV4) may be used.
Events	CE	N/A	N/A	23	CEMODIFY	Clinical Event Modified Term	If the value for CETERM is modified to facilitate coding, then CEMODIFY will contain the modified text.	N/A	N/A	Char	O	N/A	CEMODIFY	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	This is not a data collection field that would appear on the CRF. Sponsors will populate this through the coding process.
Events	CE	N/A	N/A	24	CEDECOD	CE Dictionary-Derived Term	The dictionary- or sponsor-defined standardized text description of CETERM or the modified topic variable (CEMODIFY), if applicable.	N/A	N/A	Char	O	N/A	CEDECOD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The sponsor is expected to provide the dictionary name and version used to map the terms utilizing the Define-XML external codelist attributes. Sponsors should include an Origin in the define metadata document to indicate that the data was "ASSIGNED".	N/A	N/A	This is typically not a data collection field that would appear on the CRF. Sponsors will populate this through the coding process. Equivalent to the Preferred Term (PT in MedDRA).
Events	CE	N/A	N/A	25	CELLT	Clinical Event Lowest Level Term	The dictionary-derived text description of the lowest level term.	N/A	N/A	Char	O	N/A	CELLT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The sponsor is expected to provide the dictionary name and version used to code utilizing the Define-XML external codelist attributes. Sponsors should include an Origin in the define metadata document to indicate that the data was "ASSIGNED".	N/A	N/A	This field does not typically appear on the CRF. Sponsors will populate this through the coding process. This is applicable to items using MedDRA coding.
Events	CE	N/A	N/A	26	CELLTCD	Clinical Event Lowest Level Term Code	The dictionary-derived code for the lowest level term.	N/A	N/A	Num	O	N/A	CELLTCD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The sponsor is expected to provide the dictionary name and version used to code utilizing the Define-XML external codelist attributes. Sponsors should include an Origin in the define metadata document to indicate	N/A	N/A	This field does not typically appear on the CRF. Sponsors will populate this through the coding process. This is applicable to items using MedDRA coding.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
														that the data was "ASSIGNED".			
Events	CE	N/A	N/A	27	CEPTCD	Clinical Event Preferred Term Code	The dictionary-derived code for the preferred term.	N/A	N/A	Num	O	N/A	CEPTCD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The sponsor is expected to provide the dictionary name and version used to code utilizing the Define-XML external codelist attributes. Sponsors should include an Origin in the define metadata document to indicate that the data was "ASSIGNED".	N/A	N/A	This field does not typically appear on the CRF. Sponsors will populate this through the coding process. This is applicable to items using MedDRA coding.
Events	CE	N/A	N/A	28	CEHLT	Clinical Event High Level Term	The dictionary-derived text description of the high level term for the primary system organ class (SOC).	N/A	N/A	Char	O	N/A	CEHLT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The sponsor is expected to provide the dictionary name and version used to code utilizing the Define-XML external codelist attributes. Sponsors should include an Origin in the define metadata document to indicate that the data was "ASSIGNED".	N/A	N/A	This field does not typically appear on the CRF. Sponsors will populate this through the coding process. This is applicable to items using MedDRA coding.
Events	CE	N/A	N/A	29	CEHLTCD	Clinical Event High Level Term Code	The dictionary-derived code for the high level term for the primary system organ class (SOC).	N/A	N/A	Num	O	N/A	CEHLTCD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The sponsor is expected to provide the dictionary name and version used to code utilizing the Define-XML external codelist attributes. Sponsors should include an Origin in the define metadata document to indicate that the data was "ASSIGNED".	N/A	N/A	This field does not typically appear on the CRF. Sponsors will populate this through the coding process. This is applicable to items using MedDRA coding.
Events	CE	N/A	N/A	30	CEHLGT	Clinical Event High Level Group Term	The dictionary-derived text description of the high level group term for the primary system organ class (SOC).	N/A	N/A	Char	O	N/A	CEHLGT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The sponsor is expected to provide the dictionary name and version used to code utilizing the Define-XML external codelist attributes. Sponsors should include an Origin in the define metadata document to indicate that the data was "ASSIGNED".	N/A	N/A	This field does not typically appear on the CRF. Sponsors will populate this through the coding process. This is applicable to items using MedDRA coding.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Events	CE	N/A	N/A	31	CEHLGTCD	CE High Level Group Term Code	The dictionary-derived code for the high level group term for the primary system organ class (SOC).	N/A	N/A	Num	O	N/A	CEHLGTCD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The sponsor is expected to provide the dictionary name and version used to code utilizing the Define-XML external codelist attributes. Sponsors should include an Origin in the define metadata document to indicate that the data was "ASSIGNED".	N/A	N/A	This field does not typically appear on the CRF. Sponsors will populate this through the coding process. This is applicable to items using MedDRA coding.
Events	CE	N/A	N/A	32	CESOC	CE Primary System Organ Class	The dictionary-derived text description of the primary system organ class (SOC).	N/A	N/A	Char	O	N/A	CESOC	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The sponsor is expected to provide the dictionary name and version used to code utilizing the Define-XML external codelist attributes. Sponsors should include an Origin in the define metadata document to indicate that the data was "ASSIGNED".	N/A	N/A	This field does not typically appear on the CRF. Sponsors will populate this through the coding process. This is applicable to items using MedDRA coding. Will be the same as the CEBODSYS if the primary SOC was used for analysis.
Events	CE	N/A	N/A	33	CESOCCD	CE Primary System Organ Class Code	The dictionary-derived code for the primary system organ class (SOC).	N/A	N/A	Num	O	N/A	CESOCCD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The sponsor is expected to provide the dictionary name and version used to code utilizing the Define-XML external codelist attributes. Sponsors should include an Origin in the define metadata document to indicate that the data was "ASSIGNED".	N/A	N/A	This field does not typically appear on the CRF. Sponsors will populate this through the coding process. This is applicable to items using MedDRA coding. Will be the same as CEBDSYCD if the primary SOC was used for analysis.

Assumptions for the CDASHIG CE - Clinical Events Domain

1. The CDASHIG variable CEYN, with the question text “Were any clinical events experienced?”, is intended to assist in the cleaning of data and in confirming that no data are unintentionally missing. This CDASHIG variable is not included as part of the SDTMIG CE domain for submission. This field is annotated as NOT SUBMITTED on the CRF.
2. The determination of events to be considered clinical events versus adverse events should be done carefully and with reference to regulatory guidelines or consultation with a regulatory review division. Please note that all reportable adverse events that would contribute to AE incidence tables in a clinical study report must be included in the AE domain. Adverse event data should not be commingled with clinical event data. The collection of write-in events on a Clinical Events CRF should be considered with caution.
3. Events considered to be clinical events may include episodes of symptoms of the disease under study (often known as “signs and symptoms”), or about events that do not constitute adverse events in themselves, although they might lead to the identification of an adverse event. For example, in a study of an investigational treatment for migraine headaches, migraine headaches may not be considered to be adverse events per protocol. The occurrence of migraines or associated signs and symptoms might be reported in CE.
4. Some clinical events may escalate (e.g., increase in duration, severity) and require additional collection in AE. This should be clearly defined in the protocol.
5. The CDASHIG variable CEYN, with the question text “Were any clinical events experienced?”, is intended to assist in the cleaning of data and in confirming that no data are unintentionally missing. This CDASHIG variable is not included as part of the SDTM Events domain for submission. This field is annotated as NOT SUBMITTED on the CRF.
6. Categories CECAT and CESCOT should not be redundant with the domain code or dictionary classification provided by CEDECOD and CESOC (i.e., they should provide a different means of defining or classifying CE records).
7. Presence or Absence of Events
 - a. The CDASHIG variable CEOCCUR is used to record whether a subject had a prespecified clinical event. Example: “Does the subject have a fever?”
8. Clinical events should be collected on the CRF when it is important to know when or if an event occurred; thus, either or both of CEOCCUR and CESTDAT should appear on the CRF.
9. Coding
 - a. CEDECOD is the preferred term derived by the sponsor from the coding dictionary. It is permissible to code CETERM using a standard dictionary (e.g., MedDRA). Sponsors are expected to provide the dictionary name and version used to map the terms utilizing Define-XML external codelist attributes.
 - b. CEMODIFY is a permissible variable and should be included if the sponsor’s coding procedure permits modification of a verbatim term. The modified term is listed in CEMODIFY. The variable should be populated per the sponsor’s coding procedure. The CDASHIG elements CELLT, CELLTCD, CEPTCD, CEHLT, CEHLTCD, CEHLGT, CEHLGTCD, CEBDSYCD, CESOC, and CESOCCD are only applicable to events coded in MedDRA. These items are not expected for non-MedDRA coding.
10. Relative Timing Variables
 - a. CEONGO field does not map directly to an SDTMIG variable. It may be used to derive a value into an SDTMIG relative timing variable (e.g., CEENRF, CEENRTPT) when no end date is recorded. When populating CEENRF, if the value of CEONGO is “Y”, a value (from the values “DURING”, “AFTER,” or “DURING/AFTER,” as is appropriate to the study) may be derived.
 - b. When populating CEENRTPT, if the value of CEONGO is “Y”, the value of “ONGOING” may be derived. CEENRTPT must refer to a time-point anchor described in CEENTPT.

11. CEONGO is a special use case of Yes/No where the question is usually presented as a single possible response of "Yes" in conjunction with another question (e.g., an end date). CEONGO is completed to indicate that the CE has not resolved at the time of data collection, and thus no end date is collected. The purpose of collecting this field is to help with data cleaning and monitoring, as this field provides further confirmation that the end date was deliberately left blank.

Example CRF for the CDASHIG CE - Clinical Events Domain

Example 1

Title: Hypoglycemic Events

	Clinical Event Category HYPOEV_CECAT CECAT Hidden/pre-populated	HYPO EVENTS
	Clinical Event HYPOEV_CETERM CETERM where CECAT = "HYPO EVENTS" Hidden/pre-populated	HYPOGLYCEMIC EVENT
Indicate if the subject experienced any hypoglycemic events. If Yes, include the appropriate details where indicated on the CRF.	Were any hypoglycemic events experienced? HYPOEV_CEYN Not Submitted	☐ Yes ☐ No <NY codelist>
	Sponsor Defined ID HYPOEV_CESPID CESPID where CECAT = "HYPO EVENTS" Pre-populated	001
The start date of the clinical event represented in an unambiguous date format (e.g., DD-MON-YYYY).	Start Date HYPOEV_CESTDAT CESTDTC where CECAT = "HYPO EVENTS"	
The start time of the clinical event represented in an unambiguous date format (e.g., hh:mm:ss).	Start Time HYPOEV_CESTTIM CESTDTC where CECAT = "HYPO EVENTS"	
Record the time period during which the hypoglycemic event occurred.	When did the Hypoglycemic Event Occur? WHENOCC SUPPCE.QVAL where SUPPCE.QNAM = "WHENOCC" and SUPPCE.QLABEL = "When Did the Hypoglycemic Event Occur?"	☐ Between Bedtime and Waking ☐ Between Waking and Bedtime
Indicate whether or not the investigator has determined this to be an adverse event.	In the Opinion of the Investigator Was This an Adverse Event? WASAEYN_FAORRES FAORRES where FATESTCD = "WASAEYN" and FATEST = "Was this an adverse event?" and FAOBJ = "HYPOGLYCEMIC EVENT"	☐ No ☐ Yes <NY codelist>
	Lab Panel Name LBCAT Hidden/pre-populated	CHEMISTRY
	Lab Test Name LBTEST Hidden/pre-populated	GLUCOSE
Indicate whether or not glucose measurement obtained.	Was a glucose measurement obtained at the time of the event? LBPERF LBSTAT = "NOT DONE" when LBPERF = "N" and LBSTAT is null when LBPERF = "Y"	☐ No ☐ Yes <NY codelist>
Record laboratory test result.	Glucose Result LBORRES	

Record or select the original unit in which these data were collected.	Glucose Units LBORRESU	☐ mg/dL ☐ mmol/L <UNIT codelist>
	Study Treatment Category ECCATHidden/pre-populated	HIGHLIGHTED DOSE
Record the name of study treatment.	Last Study Medication Taken ECTRT	
Record the start date of the study treatment administration using this format (DD-MON-YYYY).	Date ECSTDAT ECSTDTC	
Record the start time (as complete as possible) when administration of study treatment started.	Time ECSTTIM ECSTDTC	Error! The input type has been specified as "date", but ECSTTIM is a time variable.
Record the dose or amount of study treatment that was administered to/taken by the subject in the period recorded, from the start date/time to the end date/time inclusive.	Dose EC DSTXT ECDOSTXT ECDOSE	
Record the unit of dose or amount taken per period recorded (e.g., ng, mg, mg/kg).	Units ECDOSU	☐ mg ☐ mL <UNIT codelist>
	Concomitant Medication Category ANTIHYPR_CMCATCMCATHidden/pre-populated	ANTI-HYPERGLYCEMIC MED
	Concomitant Medication Subcategory ANTIHYPR_CMSCATCMSCAT where CMCAT = "ANTI-HYPERGLYCEMIC MED"Hidden/pre-populated	HIGHLIGHTED DOSE
Provide the full trade or proprietary name of the medication; otherwise the generic name may be recorded.	Last Concomitant Diabetic Medication Taken ANTIHYPR_CMTRTCMTRT where CMCAT = "ANTI-HYPERGLYCEMIC MED"	
Record the date the concomitant medication dose was taken using this format (DD-MON-YYYY).	Date ANTIHYPR_CMSTDATCMSTDTC where CMCAT = "ANTI-HYPERGLYCEMIC MED"	
Record the time (as complete as possible) that the concomitant medication dose was taken.	Time ANTIHYPR_CMSTTIMCMSTDTC where CMCAT = "ANTI-HYPERGLYCEMIC MED"	
Record the dose of concomitant medication taken per administration (e.g., 200).	Dose ANTIHYPR_CMDSTXTCMDOSTXT and CMDOSE where CMCAT = "ANTI-HYPERGLYCEMIC MED"	
Record the dose unit of the dose of concomitant medication taken (e.g., mg.).	Unit ANTIHYPR_CMDOSUCMDOSU where CMCAT = "ANTI-HYPERGLYCEMIC MED"	☐ g ☐ IU ☐ mg ☐ mL ☐ ug <UNIT codelist>

Record using DD-MMM-YYYY format.	Date of Last Meal MLSTDAT MLSTDTC	
Record time using a 24-hour clock.	Time of Last Meal MLSTTIM MLSTDTC	
	Clinical Event Category HYPOSYMP_CECAT CECAT Hidden/pre-populated	HYPO SYMPTOMS
Indicate if the subject experienced any signs/symptoms. If Yes, include the appropriate details where indicated on the CRF.	Were any signs/symptoms reported? HYPOSYMP_CEYN Not Submitted	☐ No ☐ Yes <NY codelist>
Record whether the subject experienced sweating during the hypoglycemic event.	Sweating HYPOSYMP_SWEATING_CEOCCUR CEOCCUR where CETERM = "SWEATING" and CECAT = "HYPO SYMPTOMS" and CEPRESP = "Y"	☐ No ☐ Yes <NY codelist>
Record whether the subject experienced tremors/trembling during the hypoglycemic event.	Tremors/Trembling HYPOSYMP_TREMOR_CEOCCUR CEOCCUR where CETERM = "TREMORS/TREMBLING" and CECAT = "HYPO SYMPTOMS" and CEPRESP = "Y"	☐ No ☐ Yes <NY codelist>
Record whether the subject experienced dizziness during the hypoglycemic event.	Dizziness HYPOSYMP_DIZZY_CEOCCUR CEOCCUR where CETERM = "DIZZINESS" and CECAT = "HYPO SYMPTOMS" and CEPRESP = "Y"	☐ No ☐ Yes <NY codelist>
Record whether the subject experienced cognitive impairment during the hypoglycemic event.	Cognitive Impairment HYPOSYMP_COGIMP_CEOCCUR CEOCCUR where CETERM = "COGNITIVE IMPAIRMENT" and CECAT = "HYPO SYMPTOMS" and CEPRESP = "Y"	☐ No ☐ Yes <NY codelist>
Record whether the subject experienced loss of consciousness during the hypoglycemic event.	Loss of Consciousness HYPOSYMP_LOSOCONS_CEOCCUR CEOCCUR where CETERM = "LOSS OF CONSCIOUSNESS" and CECAT = "HYPO SYMPTOMS" and CEPRESP = "Y"	☐ No ☐ Yes <NY codelist>
Record whether the subject experienced convulsions/seizure during the hypoglycemic event.	Convulsions/Seizure HYPOSYMP_SEIZURE_CEOCCUR CEOCCUR where CETERM = "CONVULSIONS/SEIZURE" and CECAT = "HYPO SYMPTOMS" and CEPRESP = "Y"	☐ No ☐ Yes <NY codelist>
Record whether the subject experienced coma during the hypoglycemic event.	Coma HYPOSYMP_COMA_CEOCCUR CEOCCUR where CETERM = "COMA" and CECAT = "HYPO SYMPTOMS" and CEPRESP = "Y"	☐ No ☐ Yes <NY codelist>
Record whether the subject experienced an "other" sign/symptom during the hypoglycemic event.	Other (Specify) HYPOSYMP_OTHER_CEOCCUR CEOCCUR where CETERM = value entered in HYPOSYMP_CETERM and CECAT = "HYPO SYMPTOMS"	☐ No ☐ Yes <NY codelist>
If "other" is indicated, specify the sign/symptom.	If Other, specify HYPOSYMP_CETERM CETERM where CECAT = "HYPO SYMPTOMS"	

	Category HPF_FACAT FACAT Hidden/pre-populated HPF_FAOBJ FAOBJ where FACAT = "PRECIPIATING FACTORS" Hidden/pre-populated	PRECIPIATING FACTORS
Indicate if there are findings. If Yes, include the appropriate details where indicated on the CRF.	Were any precipitating factors reported? HPF_FAYN Not Submitted	☐ No ☐ Yes <NY codelist>
Indicate if alcohol consumption was a precipitating factor of the hypoglycemic event.	Alcohol Consumption HPF_ALCPF_FAOIRES FAOIRES where FATESTCD = "ALCPF" and FATEST = "Alcohol Consumption as a Precip Factor" and FACAT = "PRECIPITATING FACTORS" and FAOBJ = "HYPOGLYCEMIC EVENT"	☐ No ☐ Yes <NY codelist>
Indicate if concurrent illness was a precipitating factor of the hypoglycemic event.	Concurrent Illness HPF_ILLPF_FAOIRES FAOIRES where FATESTCD = "ILLPF" and FATEST = "Concurrent illness as a Precip Factor" and FACAT = "PRECIPITATING FACTORS" and FAOBJ = "HYPOGLYCEMIC EVENT"	☐ No ☐ Yes <NY codelist>
Indicate if deviation from dosing instructions was a precipitating factor of the hypoglycemic event.	Deviation from Dosing Instructions HPF_DSDVPF_FAOIRES FAOIRES where FATESTCD = "DSDVPF" and FATEST = "Dosing Deviation as a Precip Factor" and FACAT = "PRECIPITATING FACTORS" and FAOBJ = "HYPOGLYCEMIC EVENT"	☐ No ☐ Yes <NY codelist>
Indicate if missed, delayed, or smaller meal was a precipitating factor of the hypoglycemic event.	Missed, Delayed or Smaller Meal HPF_MEALPF_FAOIRES FAOIRES where FATESTCD = "MEALPF" and FATEST = "Meal Variance as a Precip Factor" and FACAT = "PRECIPITATING FACTORS" and FAOBJ = "HYPOGLYCEMIC EVENT"	☐ No ☐ Yes <NY codelist>
Indicate if physical activity was a precipitating factor of the hypoglycemic event.	Physical Activity HPF_PAPF_FAOIRES FAOIRES where FATESTCD = "PAPF" and FATEST = "Physical Activity as a Precip Factor" and FACAT = "PRECIPITATING FACTORS" and FAOBJ = "HYPOGLYCEMIC EVENT"	☐ No ☐ Yes <NY codelist>
Indicate if there was an other precipitating factor of the hypoglycemic event.	Other (Specify) HPF_OTHPF_FAOIRES FAOIRES where FATESTCD/FATEST are derived from the value entered in HPF_FATEST and FACAT = "PRECIPITATING FACTORS" and FAOBJ = "HYPOGLYCEMIC EVENT"	☐ No ☐ Yes <NY codelist>
If "other" is indicated, specify the precipitating factor.	If Other, specify HPF_FATEST FATEST where FACAT = "PRECIPITATING FACTORS" and FAOBJ = "HYPOGLYCEMIC EVENT"	
	Concomitant Medication Category HTG_CMCAT CMCAT Hidden/pre-populated	HYPO TREATMENT
Indicate if the subject took any treatment for the hypoglycemic event. If Yes, include the appropriate details where indicated on the CRF.	Was any treatment given for the hypoglycemic event? HTG_CMYN Not Submitted	☐ No ☐ Yes <NY codelist>
Indicate if drink was taken by checking Yes or No.	Drink HTG_DRINK_CMOCCUR CMOCCUR where CMTRT = "DRINK" and CMCAT = "HYPO TREATMENT" and CMPRESP = "Y"	☐ No ☐ Yes <NY codelist>
Indicate if food was taken by selecting Yes or No.	Food HTG_FOOD_CMOCCUR CMOCCUR where CMTRT = "FOOD" and CMCAT = "HYPO TREATMENT" and CMPRESP = "Y"	☐ No ☐ Yes <NY codelist>

Indicate if glucose tablets were taken by selecting Yes or No.

Glucose Tablets

HTG_GLUCTAB_CMOCCUR

CMOCCUR where CMTRT = "GLUCOSE TABLETS" and CMCAT = "HYPO TREATMENT" and CMPRESP = "Y"

☐ No

☐ Yes

<NY codelist>

Indicate if glucagon injection was taken by selecting Yes or No.

Glucagon Injection

HTG_GLUCINJ_CMOCCUR

CMOCCUR where CMTRT = "GLUCAGON INJECTION" and CMCAT = "HYPO TREATMENT" and CMPRESP = "Y"

☐ No

☐ Yes

<NY codelist>

Indicate if intravenous glucose was taken by selecting Yes or No.

Intravenous Glucose

HTG_IVGLUC_CMOCCUR

CMOCCUR where CMTRT = "INTRAVENOUS GLUCOSE" and CMCAT = "HYPO TREATMENT" and CMPRESP = "Y"

☐ No

☐ Yes

<NY codelist>

Category

TRTADMIN_FACAT

FACAT

Hidden/pre-populated

TRTADMIN_FAOBJ

FAOBJ where FACAT = "TREATMENT ADMINISTRATION"

Hidden/pre-populated

TREATMENT ADMINISTRATION

HYPOGLYCEMIC EVENT

Indicate the investigator's assessment of the subject's need for assistance.

If treatment was given, indicate if assistance was needed?

TRTADMIN_TXASSIST_FAORRES

FAORRES where FATESTCD = "TXASSIST" and FATEST = "Treatment Assistance" and FACAT = "TREATMENT ADMINISTRATION" and FAOBJ = "HYPOGLYCEMIC EVENT"

☐ None - Subject Treated Self

☐ Subject was Capable of Treating Self, but Received Assistance

☐ Subject was Not Capable of Treating Self and Required Assistance

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
HYPOEV_CECAT	1	What is the category of the clinical event?	Clinical Event Category	Record the clinical event category, if not pre-printed on the CRF.	Text	CECAT				HYPO EVENTS	Prompt		Yes
HYPOEV_CETERM	2	What is the clinical event term?	Clinical Event	Record the clinical event or [insert text corresponding to the specific clinical event].	Text	CETERM	CETERM where CECAT = "HYPO EVENTS"			HYPOGLYCEMIC EVENT	Prompt		Yes
HYPOEV_CEYN	3	Were any hypoglycemic events experienced?	Any Hypoglycemic Events	Indicate if the subject experienced any hypoglycemic events. If Yes, include the appropriate details where indicated on the CRF.	Text	N/A		(NY)	Yes; No			radio	
HYPOEV_CESPID	4	What is the clinical event identifier?	Sponsor Defined ID	If collected on the CRF, sponsors may insert instructions to ensure each record has a unique identifier.	Text	CESPID	CESPID where CECAT = "HYPO EVENTS"			001	Prompt		
HYPOEV_CESTDAT	5	What was the clinical event start date?	Start Date	The start date of the clinical event represented in an unambiguous date format (e.g., DD-MON-YYYY).	Date	CESTDTC	CESTDTC where CECAT = "HYPO EVENTS"				Prompt		
HYPOEV_CESTTIM	6	What was the clinical event start time?	Start Time	The start time of the clinical event represented in an unambiguous date format (e.g., hh:mm:ss).	Time	CESTDTC	CESTDTC where CECAT = "HYPO EVENTS"				Prompt		
WHENOCC	7	When did the Hypoglycemic Event Occur?	Time Period	Record the time period during which the hypoglycemic event occurred.	Text	SUPPCE.QVAL	SUPPCE.QVAL where SUPPCE.QNAM = "WHENOCC" and SUPPCE.QLABEL = "When Did the Hypoglycemic Event Occur?"		Between Bedtime and Waking; Between Waking and Bedtime			radio	
WASAEYN_FAORRES	8	In the Opinion of the Investigator Was This an Adverse Event?	Adverse Event	Indicate whether or not the investigator has determined this to be an adverse event.	Text	FAORRES	FAORRES where FATESTCD = "WASAEYN" and FATEST = "Was this an adverse event?" and FAOBJ = "HYPOGLYCEMIC EVENT"	(NY)	No; Yes			radio	

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
LBCAT	9	What was the name of the lab panel?	Lab Panel Name	Record the lab test category, if not pre-printed on the CRF.	Text	LBCAT				CHEMISTRY	Prompt		Yes
LBTEST	10	What was the lab test name?	Lab Test Name	Record the name of the Lab measurement or finding, if not preprinted on the CRF. If collected on the CRF, the sponsor may provide additional instructions to ensure the data is entered as intended.	Text	LBTEST				GLUCOSE	Prompt		Yes
LBPERF	11	Was a glucose measurement obtained at the time of the event?	Lab Performed	Indicate whether or not glucose measurement obtained.	Text	LBSTAT	LBSTAT = "NOT DONE" when LBPERF = "N" and LBSTAT is null when LBPERF = "Y"	(NY)	No; Yes			radio	
LBORRES	12	What was the result of the glucose lab test?	Glucose Result	Record laboratory test result.	Text	LBORRES					Prompt		
LBORRESU	13	What was the unit of the glucose lab result?	Glucose Units	Record or select the original unit in which these data were collected.	Text	LBORRESU		(UNIT)	mg/dL; mmol/L		Prompt	radio	
ECCAT	14	What is the category of the study treatment?	Study Treatment Category	Record the study treatment category, if not pre-printed on the CRF.	Text	ECCAT				HIGHLIGHTED DOSE	Prompt		Yes
ECTRT	15	What was the last study medication taken?	Last Study Medication Taken	Record the name of study treatment.	Text	ECTRT					Prompt		
ECSTDAT	16	What was the dose date?	Date	Record the start date of the study treatment administration using this format (DD-MON-YYYY).	Date	ECSTDTC					Prompt		
ECSTTIM	17	What was the dose time?	Time	Record the start time (as complete as possible) when administration of study treatment started.	Date	ECSTDTC					Prompt		
ECDSTXT	18	What was the dose per administration of study treatment?	Dose	Record the dose or amount of study treatment that was administered to/taken by the subject in the period recorded, from the start date/time to the end date/time inclusive.	Text	ECDOSTXT; ECDOSE					Prompt		
ECDOSU	19	What were the units for the dose?	Units	Record the unit of dose or amount taken per period recorded (e.g., ng, mg, mg/kg).	Text	ECDOSU		(UNIT)	mg; mL		Prompt	radio	
ANTIHYPYR_CMCAT	20	What is the category for the concomitant medication?	Concomitant Medication Category	Record the concomitant medication category, if not pre-printed on the CRF.	Text	CMCAT				ANTI-HYPERGLYCEMIC MED	Prompt		Yes
ANTIHYPYR_CMSCAT	21	What is the subcategory for the concomitant medication?	Concomitant Medication Subcategory	Record the concomitant medication subcategory, if not pre-printed on the CRF.	Text	CMSCAT	CMSCAT where CMCAT = "ANTI-HYPERGLYCEMIC MED"			HIGHLIGHTED DOSE	Prompt		Yes
ANTIHYPYR_CMTRT	22	What was the last concomitant diabetic medication taken?	Last Concomitant Diabetic Medication Taken	Provide the full trade or proprietary name of the medication; otherwise the generic name may be recorded.	Text	CMTRT	CMTRT where CMCAT = "ANTI-HYPERGLYCEMIC MED"				Prompt		
ANTIHYPYR_CMSTDAT	23	What was the concomitant medication dose date?	Date	Record the date the concomitant medication dose was taken using this format (DD-MON-YYYY).	Date	CMSTDTC	CMSTDTC where CMCAT = "ANTI-HYPERGLYCEMIC MED"				Prompt		
ANTIHYPYR_CMSTTIM	24	What was the concomitant medication dose time?	Time	Record the time (as complete as possible) that the concomitant medication dose was taken.	Time	CMSTDTC	CMSTDTC where CMCAT = "ANTI-HYPERGLYCEMIC MED"				Prompt		

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
ANTIHYPR_CMDSTXT	25	What was the individual dose of the concomitant medication?	Dose	Record the dose of concomitant medication taken per administration (e.g., 200).	Text	CMDOSTXT; CMDOSE	CMDOSTXT and CMDOSE where CMCAT = "ANTI-HYPERGLYCEMIC MED"				Prompt		
ANTIHYPR_CMDOSU	26	What is the unit for the dose of concomitant medication?	Unit	Record the dose unit of the dose of concomitant medication taken (e.g., mg.).	Text	CMDOSU	CMDOSU where CMCAT = "ANTI-HYPERGLYCEMIC MED"	(UNIT)	g; IU; mg; mL; ug		Prompt	radio	
MLSTDAT	27	What was the date of last meal?	Date of Last Meal	Record using DD-MMM-YYYY format.	Date	MLSTDTC					Prompt		
MLSTTIM	28	What was the time of last meal?	Time of Last Meal	Record time using a 24-hour clock.	Time	MLSTDTC					Prompt		
HYPOSYMP_CECAT	29	What is the category of the clinical event?	Clinical Event Category	Record the clinical event category, if not preprinted on the CRF.	Text	CECAT				HYPO SYMPTOMS	Prompt		Yes
HYPOSYMP_CEYN	30	Were any signs/symptoms reported?	Any Signs/Symptoms	Indicate if the subject experienced any signs/symptoms. If Yes, include the appropriate details where indicated on the CRF.	Text	N/A		(NY)	No; Yes			radio	
HYPOSYMP_SWEATING_CEOCCUR	31	Did the subject experience sweating?	Sweating	Record whether the subject experienced sweating during the hypoglycemic event.	Text	CEOCCUR	CEOCCUR where CETERM = "SWEATING" and CECAT = "HYPO SYMPTOMS" and CEPRESP = "Y"	(NY)	No; Yes		Prompt	radio	
HYPOSYMP_TREMOR_CEOCCUR	32	Did the subject experience tremors/trembling?	Tremors/Trembling	Record whether the subject experienced tremors/trembling during the hypoglycemic event.	Text	CEOCCUR	CEOCCUR where CETERM = "TREMORS/TREMBLING" and CECAT = "HYPO SYMPTOMS" and CEPRESP = "Y"	(NY)	No; Yes		Prompt	radio	
HYPOSYMP_DIZZY_CEOCCUR	33	Did the subject experience dizziness?	Dizziness	Record whether the subject experienced dizziness during the hypoglycemic event.	Text	CEOCCUR	CEOCCUR where CETERM = "DIZZINESS" and CECAT = "HYPO SYMPTOMS" and CEPRESP = "Y"	(NY)	No; Yes		Prompt	radio	
HYPOSYMP_COGIMP_CEOCCUR	34	Did the subject experience cognitive impairment?	Cognitive Impairment	Record whether the subject experienced cognitive impairment during the hypoglycemic event.	Text	CEOCCUR	CEOCCUR where CETERM = "COGNITIVE IMPAIRMENT" and CECAT = "HYPO SYMPTOMS" and CEPRESP = "Y"	(NY)	No; Yes		Prompt	radio	
HYPOSYMP_LOSOCONS_CEOCCUR	35	Did the subject experience loss of consciousness?	Loss of Consciousness	Record whether the subject experienced loss of consciousness during the hypoglycemic event.	Text	CEOCCUR	CEOCCUR where CETERM = "LOSS OF CONSCIOUSNESS" and CECAT = "HYPO SYMPTOMS" and CEPRESP = "Y"	(NY)	No; Yes		Prompt	radio	
HYPOSYMP_SEIZURE_CEOCCUR	36	Did the subject experience convulsions/seizure?	Convulsions/Seizure	Record whether the subject experienced convulsions/seizure during the hypoglycemic event.	Text	CEOCCUR	CEOCCUR where CETERM = "CONVULSIONS/SEIZURE" and CECAT = "HYPO SYMPTOMS" and CEPRESP = "Y"	(NY)	No; Yes		Prompt	radio	
HYPOSYMP_COMA_CEOCCUR	37	Did the subject experience coma?	Coma	Record whether the subject experienced coma during the hypoglycemic event.	Text	CEOCCUR	CEOCCUR where CETERM = "COMA" and CECAT = "HYPO SYMPTOMS" and CEPRESP = "Y"	(NY)	No; Yes		Prompt	radio	
HYPOSYMP_OTHER_CEOCCUR	38	Did the subject experience any other sign/symptom?	Other (Specify)	Record whether the subject experienced an "other" sign/symptom during the hypoglycemic event.	Text	CEOCCUR	CEOCCUR where CETERM = value entered in HYPOSYMP_CETERM and CECAT = "HYPO SYMPTOMS"	(NY)	No; Yes		Prompt	radio	
HYPOSYMP_CETERM	39	If Other, specify	Specify	If "other" is indicated, specify the sign/symptom.	Text	CETERM	CETERM where CECAT = "HYPO SYMPTOMS"						
HPF_FACAT	40	What is the category?	Category	Record the FA category, if not pre-printed on the CRF.	Text	FACAT				PRECIPITATING FACTORS	Prompt		Yes
HPF_FAOBJ	41	N/A	N/A	N/A	Text	FAOBJ	FAOBJ where FACAT = "PRECIPITATING FACTORS"			HYPOGLYCEMIC EVENT	Prompt		Yes
HPF_FAYN	42	Were any precipitating factors reported?	Any Precipitating Factors	Indicate if there are findings. If Yes, include the appropriate details where indicated on the CRF.	Text	N/A		(NY)	No; Yes			radio	
HPF_ALCPF_FAORRES	43	Was alcohol consumption a precipitating factor?	Alcohol Consumption	Indicate if alcohol consumption was a	Text	FAORRES	FAORRES where FATESTCD = "ALCPF" and FATEST = "Alcohol	(NY)	No; Yes		Prompt	radio	

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
				precipitating factor of the hypoglycemic event.			Consumption as a Precip Factor" and FACAT = "PRECIPITATING FACTORS" and FAOBJ = "HYPOGLYCEMIC EVENT"						
HPF_ILLPF_FAORRES	44	Was concurrent illness a precipitating factor?	Concurrent Illness	Indicate if concurrent illness was a precipitating factor of the hypoglycemic event.	Text	FAORRES	FAORRES where FATESTCD = "ILLPF" and FATEST = "Concurrent Illness as a Precip Factor" and FACAT = "PRECIPITATING FACTORS" and FAOBJ = "HYPOGLYCEMIC EVENT"	(NY)	No; Yes		Prompt	radio	
HPF_DSDVPF_FAORRES	45	Was deviation from dosing instructions a precipitating factor?	Deviation from Dosing Instructions	Indicate if deviation from dosing instructions was a precipitating factor of the hypoglycemic event.	Text	FAORRES	FAORRES where FATESTCD = "DSDVPF" and FATEST = "Dosing Deviation as a Precip Factor" and FACAT = "PRECIPITATING FACTORS" and FAOBJ = "HYPOGLYCEMIC EVENT"	(NY)	No; Yes		Prompt	radio	
HPF_MEALPF_FAORRES	46	Was missed, delayed or smaller meal a precipitating factor?	Missed, Delayed or Smaller Meal	Indicate if missed, delayed, or smaller meal was a precipitating factor of the hypoglycemic event.	Text	FAORRES	FAORRES where FATESTCD = "MEALPF" and FATEST = "Meal Variance as a Precip Factor" and FACAT = "PRECIPITATING FACTORS" and FAOBJ = "HYPOGLYCEMIC EVENT"	(NY)	No; Yes		Prompt	radio	
HPF_PAPF_FAORRES	47	Was physical activity a precipitating factor?	Physical Activity	Indicate if physical activity was a precipitating factor of the hypoglycemic event.	Text	FAORRES	FAORRES where FATESTCD = "PAPF" and FATEST = "Physical Activity as a Precip Factor" and FACAT = "PRECIPITATING FACTORS" and FAOBJ = "HYPOGLYCEMIC EVENT"	(NY)	No; Yes		Prompt	radio	
HPF_OTHPF_FAORRES	48	Was there any other precipitating factor?	Other (Specify)	Indicate if there was an other precipitating factor of the hypoglycemic event.	Text	FAORRES	FAORRES where FATESTCD/FATEST are derived from the value entered in HPF_FATEST and FACAT = "PRECIPITATING FACTORS" and FAOBJ = "HYPOGLYCEMIC EVENT"	(NY)	No; Yes		Prompt	radio	
HPF_FATEST	49	If Other, specify	Specify	If "other" is indicated, specify the precipitating factor.	Text	FATEST	FATEST where FACAT = "PRECIPITATING FACTORS" and FAOBJ = "HYPOGLYCEMIC EVENT"						
HTG_CMCAT	50	What is the category for the concomitant medication?	Concomitant Medication Category	Record the concomitant medication category, if not pre-printed on the CRF.	Text	CMCAT				HYPO TREATMENT	Prompt		Yes
HTG_CMYN	51	Was any treatment given for the hypoglycemic event?	Any Treatment	Indicate if the subject took any treatment for the hypoglycemic event. If Yes, include the appropriate details where indicated on the CRF.	Text	N/A		(NY)	No; Yes			radio	
HTG_DRINK_CMOCCUR	52	Did the subject take drink?	Drink	Indicate if drink was taken by checking Yes or No.	Text	CMOCCUR	CMOCCUR where CMTRT = "DRINK" and CMCAT = "HYPO TREATMENT" and CMPRESP = "Y"	(NY)	No; Yes		Prompt	radio	
HTG_FOOD_CMOCCUR	53	Did the subject take food?	Food	Indicate if food was taken by selecting Yes or No.	Text	CMOCCUR	CMOCCUR where CMTRT = "FOOD" and CMCAT = "HYPO TREATMENT" and CMPRESP = "Y"	(NY)	No; Yes		Prompt	radio	
HTG_GLUCTAB_CMOCCUR	54	Did the subject take glucose tablets?	Glucose Tablets	Indicate if glucose tablets were taken by selecting Yes or No.	Text	CMOCCUR	CMOCCUR where CMTRT = "GLUCOSE TABLETS" and CMCAT = "HYPO TREATMENT" and CMPRESP = "Y"	(NY)	No; Yes		Prompt	radio	
HTG_GLUCINJ_CMOCCUR	55	Did the subject take a glucagon injection?	Glucagon Injection	Indicate if glucagon injection was taken by selecting Yes or No.	Text	CMOCCUR	CMOCCUR where CMTRT = "GLUCAGON INJECTION" and CMCAT = "HYPO TREATMENT" and CMPRESP = "Y"	(NY)	No; Yes		Prompt	radio	

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
HTG_IVGLUC_CMOCCUR	56	Did the subject take intravenous glucose?	Intravenous Glucose	Indicate if intravenous glucose was taken by selecting Yes or No.	Text	CMOCCUR	CMOCCUR where CMTRT = "INTRAVENOUS GLUCOSE" and CMCAT = "HYPO TREATMENT" and CMPRESP = "Y"	(NY)	No; Yes		Prompt	radio	
TRTADMIN_FACAT	57	What is the category?	Category	Record the FA category, if not pre-printed on the CRF.	Text	FACAT				TREATMENT ADMINISTRATION	Prompt		Yes
TRTADMIN_FAOBJ	58	N/A	N/A	N/A	Text	FAOBJ	FAOBJ where FACAT = "TREATMENT ADMINISTRATION"			HYPOGLYCEMIC EVENT	Prompt		Yes
TRTADMIN_TXASSIST_FAORRES	59	If treatment was given, indicate if assistance was needed?	Need for Assistance	Indicate the investigator's assessment of the subject's need for assistance.	Text	FAORRES	FAORRES where FATESTCD = "TXASSIST" and FATEST = "Treatment Assistance" and FACAT = "TREATMENT ADMINISTRATION" and FAOBJ = "HYPOGLYCEMIC EVENT"		None - Subject Treated Self; Subject was Capable of Treating Self, but Received Assistance; Subject was Not Capable of Treating Self and Required Assistance			radio	

For another way to represent data collected using the CE domain, see the CDISC Therapeutic Area Data Standards User Guide for Diabetes v1.0 Section 3.3.2, Example 5 (available at <https://www.cdisc.org/standards/therapeutic-areas/diabetes>).

8.2.4 DS - Disposition

Description/Overview for the CDASHIG DS - Disposition Domain

The CDASHIG DS domain includes disposition events, protocol milestones (e.g., informed consent obtained, randomized) and other events. Sponsors may choose which disposition events, milestones, and other events to submit for a study. The DS dataset provides an accounting for all subjects who entered the study. In the DS domain, DSCAT is used to distinguish between disposition events, protocol milestones, and other events. The controlled terminology for DSCAT consists of "DISPOSITION EVENT", "PROTOCOL MILESTONE", and "OTHER EVENT". This section describes 2 different data collection scenarios for the disposition domain. The data collection scenario is similar for disposition events that are considered protocol milestones or other events, whereas the data collection scenario for subject disposition events is different.

Scenario 1: Protocol Milestone or Other Event

This scenario includes disposition events that are considered protocol-specified, point-in-time events and other events. Common protocol milestones include “INFORMED CONSENT OBTAINED” and “RANDOMIZED”; "OTHER EVENT" includes other important events occurring during a trial, but which were not driven by protocol requirements nor captured in another Events or Interventions class dataset (e.g., "TREATMENT UNBLINDED”). The codelist used for DSDECOD is specific to the scenario. (PROTMLST) is used when DSCAT = "PROTOCOL MILESTONE" and (OTHEVENT) is used when DSCAT = "OTHER EVENT".

Scenario 2: Study Participation Disposition Event

This scenario includes disposition events that describe a subject's completion status or reason for discontinuation of the entire study or a phase or segment of the study, including screening and post-treatment follow-up. The codelist used for DSDECOD is specific to the scenario. (NCOMPLT) is used when DSCAT = "DISPOSTION EVENT".

Specification for the CDASHIG DS - Disposition Domain

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Events	DS	PROTOCOL MILESTONE/OTHER EVENT	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	displayed clearly on the CRF and/or in the EDC system. This field can be included in the database or populated during SDTM-based dataset creation before submission.
Events	DS	PROTOCOL MILESTONE/OTHER EVENT	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted on the CRFs that are shipped to each site. EDC: This should be prepopulated.
Events	DS	PROTOCOL MILESTONE/OTHER EVENT	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What [is/was] the (study) [subject/participant] identifier?	[Subject/Participant] (Identifier)	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system-generated. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Events	DS	PROTOCOL MILESTONE/OTHER EVENT	N/A	4	DSCAT	Category for Disposition Event	A categorization of the disposition events, which is used to distinguish between disposition events, protocol milestones, and other events.	What was the category of the disposition?	[Disposition Category]	Char	HR	If collected on the CRF, the sponsor provides instructions to ensure the data is entered as intended.	DSCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(DSCAT)	N/A	This would most commonly be a heading on the CRF or screen, not a question to which the site would provide an answer. In this implementation scenario, DSCAT="PROTOCOL MILESTONE" or "OTHER EVENT".
Events	DS	PROTOCOL MILESTONE/OTHER EVENT	N/A	5	DSSCAT	Subcategory for Disposition Event	A sub-division of the DSCAT values based on user-defined characteristics.	What was the subcategory of the disposition?	[Disposition Subcategory]; NULL	Char	O	If collected on the CRF, the sponsor provides instructions to ensure the data is entered as intended.	DSSCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be preprinted on the CRF or screen and prepopulated in the data management system. This is not typically a question to which the site would provide an answer. DSSCAT can only be used if there is an DSCAT and it must be a subcategorization of the Protocol Milestone or Other Event.
Events	DS	PROTOCOL MILESTONE/OTHER EVENT	N/A	6	EPOCH	Epoch	Trial Epoch (e.g., 'BLINDED TREATMENT', 'OPEN LABEL TREATMENT', 'SCREENING', 'RUN-IN') for which subject disposition is being collected.	What is the trial period for this disposition event?	Trial Period	Char	R/C	Check the [epoch, or insert more appropriate wording] for which disposition event is being recorded.	EPOCH	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(EPOCH)	N/A	If protocol milestones or other events are collected more than once in the study, EPOCH may be needed to differentiate them. Typically, the trial epoch will be preprinted on the CRF as part of the title of the page; however, some companies have a standard CRF module that

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	includes a pick-list of epochs. See the SDTMIG for further information regarding EPOCH.
Events	DS	PROTOCOL MILESTONE/OTHER EVENT	N/A	7	DSDECOD	Standardized Disposition Term	The standardized terminology of the disposition term.	[Sponsor-defined]	[Sponsor-defined]	Char	R/C	If collected on the CRF, the sponsor provides instructions to ensure the data is entered as intended.	DSDECOD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. Both DSDECOD and DSTERM must be populated in SDTM.	(PROTMLST) (OTHEVENT)	N/A	Refer to the SDTMIG for guidelines for assigning DSCAT, DSTERM, and DSDECOD for events considered protocol milestones or other events. Where DSCAT = "PROTOCOL MILESTONE", DSTERM contains the verbatim (as collected) and/or standardized text; DSDECOD uses the extensible controlled terminology codelist (PROTMLST) Where DSCAT="OTHER EVENT", DSDECOD uses the extensible controlled terminology codelist (OTHEVENT).
Events	DS	PROTOCOL MILESTONE/OTHER EVENT	N/A	8	DSTERM	Reported Term for the Disposition Event	The verbatim or prespecified name of the disposition term.	[Sponsor-defined]	[Sponsor-defined]	Char	R/C	If collected on the CRF, the sponsor provides instructions to ensure the data is entered as intended.	DSTERM	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The SDTMIG variables DSDECOD and DSTERM must be populated in SDTM.	N/A	N/A	When defining protocol milestones or other events, sponsors may populate DSTERM and DSDECOD with the same value (e.g., RANDOMIZATION, INFORMED CONSENT OBTAINED). DSTERM may also be populated with a verbatim term, which is then standardized in DSDECOD.
Events	DS	PROTOCOL MILESTONE/OTHER EVENT	N/A	9	DSSTDAT	Disposition Event Start Date	The date of the specified protocol milestone (e.g., informed consent, randomization) represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the [protocol milestone/other event name] (start) date?	[Protocol Milestone/Other Event Name] (start) Date	Char	R/C	Record the date of the protocol milestone/other event as defined in the protocol and/or CRF completion instructions, using this format (DD-MON-YYYY).	DSSTDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH START DATE and TIME components and populate the SDTMIG variable DSSTDTC in ISO 8601 format.	N/A	N/A	Sponsors should define in the protocol and/or CRF completion instructions the criteria for completion of each protocol milestone/other event and its associated (start) date.
Events	DS	PROTOCOL MILESTONE/OTHER EVENT	N/A	10	DSSTTIM	Disposition Event Start Time	The time of the specified protocol milestone (e.g., informed consent, randomization) or other event, represented in an unambiguous time format (e.g., hh:mm:ss).	What was the [protocol milestone/other event name] (start) time?	[Protocol Milestone/Other Event Name] (start) Time	Char	O	Record the time (as complete as possible) as defined in the protocol and/or CRF completion instructions.	DSSTDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH START DATE and TIME components and populate the SDTMIG variable DSSTDTC in ISO 8601 format.	N/A	N/A	Sponsors should define in the protocol and/or CRF completion instructions the criteria for completion of each protocol milestone/other event (start) time. Collecting the time of the event is only appropriate if it can be realistically determined and if there is a scientific reason for needing to know this level of detail.
Events	DS	PROTOCOL MILESTONE/OTHER EVENT	N/A	11	DSUNBLND	Unblinded	An indication of whether the subject's treatment information was revealed to any unauthorized site	Was (study) treatment unblinded by the site?	Unblinded	Char	O	Record "Yes" if the subject's treatment assignment was unblinded/unmasked intentionally due to an adverse event, or unintentionally for	DSTERM; DSDECOD	This does not map directly to an SDTM variable. If the CDASH field DSUNBLND="Y", then the SDTMIG variables DSDECOD and DSTERM="TREATMENT UNBLINDED" and DSCAT	(NY)	N/A	If DSUNBLND is "Yes" and information was collected about the reason for the unblinding, populate DSCAT with "OTHER EVENT" and the SDTMIG variables DSTERM with

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
							personnel during the trial.					other reasons (e.g., an administrative action) during the subject's blinded/masked treatment.		"OTHER EVENT". If DSUNBLIND="N", then the CRF should be annotated to indicate that this value is NOT SUBMITTED.			the free text and DSDECOD with the standardized text (e.g., TREATMENT UNBLINDED). If DSUNBLND is "Yes", and the unblinding also resulted in the subject discontinuing the trial prematurely, be sure to capture the applicable discontinuation details. If the unblinding occurred due to an adverse event, DSTERM contains the text of the AE (if collected on the CRF) and in the AE domain the SDTMIG variable AEACNOTH ("Were any other actions taken in response to this adverse event?") may include the text "Treatment Unblinded". DSUNBLND may also be used to document intentional unblinding at a protocol-defined point in the trial.
Events	DS	STUDY PARTICIPATION DISPOSITION EVENT	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included into the database or populated during SDTM-based dataset creation before submission.
Events	DS	STUDY PARTICIPATION DISPOSITION EVENT	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted on the CRFs that are shipped to each site. EDC: This should be prepopulated.
Events	DS	STUDY PARTICIPATION DISPOSITION EVENT	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What [is/was] the (study) [subject/participant] identifier?	[Subject/Participant] (Identifier)	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system-generated. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Events	DS	STUDY PARTICIPATION DISPOSITION EVENT	N/A	4	DSCAT	Category for Disposition Event	A categorization of the disposition events which is used to distinguish	What was the category of the disposition?	[Disposition Category]	Char	HR	If collected on the CRF, the sponsor provides instructions to ensure the data is entered as intended.	DSCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(DSCAT)	N/A	This would most commonly be a heading on the CRF or screen, not a question to which the site would provide an answer. This is

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
							between disposition events, protocol milestones, and other events.										used to distinguish a DISPOSITION EVENT, a PROTOCOL MILESTONE, or an OTHER EVENT. In this implementation scenario, DSCAT="DISPOSITION EVENT"
Events	DS	STUDY PARTICIPATION DISPOSITION EVENT	N/A	5	DSSCAT	Subcategory for Disposition Event	A sub-division of the DSCAT values based on user-defined characteristics.	What was the subcategory of the disposition?	[Disposition Subcategory]; NULL	Char	O	If collected on the CRF, the sponsor provides instructions to ensure the data is entered as intended.	DSSCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be preprinted on the CRF or screen and prepopulated in the data management system. This is not typically a question to which the site would provide an answer. DSSCAT can only be used if there is an DSCAT, and it must be a subcategorization of the Disposition event.
Events	DS	STUDY PARTICIPATION DISPOSITION EVENT	N/A	6	EPOCH	Epoch	Trial epoch (e.g., 'BLINDED TREATMENT', 'OPEN LABEL TREATMENT', 'SCREENING', 'RUN-IN') for which subject disposition is being collected.	What is the trial period for this disposition event?	Trial Period	Char	R/C	Check the [epoch, or insert more appropriate wording] for which disposition is being recorded.	EPOCH	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(EPOCH)	N/A	If disposition events are collected more than once in the study, EPOCH may be needed to differentiate them. Typically, the trial epoch will be preprinted on the CRF as part of the title of the page; however, some companies have a standard CRF module that includes a pick-list of epochs. See the SDTMIG for further information regarding EPOCH.
Events	DS	STUDY PARTICIPATION DISPOSITION EVENT	N/A	7	DSDECOD	Standardized Disposition Term	The standardized terminology of the disposition term that describes whether a subject completed the study or a portion of a study (epoch), or the reason they did not complete.	What was the subject's status (at the EPOCH/study specific time frame)?	Status (at the EPOCH/study specific time frame)	Char	R/C	Document the subject's status at [insert text corresponding to the selected trial epoch/study specific time frame]. If the subject discontinued prematurely, record the primary reason for discontinuation.	DSDECOD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. Both DSDECOD and DSTERM must be populated in the SDTM-based datasets. If DSTERM was collected as an "Other, Specify" free text, populate DSTERM with the free text and populate DSDECOD with the sponsor-defined standardized text. If DSDECOD was collected with no free text, populate DSTERM and DSDECOD in the SDTM-based dataset with the DSDECOD value that was collected.	(NCOMPLT)	N/A	DSDECOD can be used as the standardized coded list with DSTERM used to capture any Specify, Other information, or DSDECOD can be used on its own. For sponsor and/or study-specific reasons for discontinuation, it is recommended that these reasons be preprinted on the CRF, as subcategories of the appropriate standardized DSDECOD item. However, it is recommended to limit the use of sponsor and study-specific reasons in order to promote consistent use of terminology and permit the combination of data across multiple sponsors. Either DSTERM or DSDECOD must be on the CRF. Both may be used if DSTERM is used as a Specify, Other field.
Events	DS	STUDY PARTICIPATION DISPOSITION EVENT	N/A	8	DSTERM	Reported Term for the Disposition Event	The verbatim or prespecified name of the event. The reported or prespecified	What was the subject's status?; If [DSDECOD], specify	[Status]; [Specify]	Char	R/C	Document the subject's status at [insert text corresponding to the selected trial epoch]. If the subject	DSTERM	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The SDTMIG variables DSDECOD and DSTERM must be populated in SDTM. If DSTERM was	N/A	N/A	If used with a DECOD list, free-text description of the subject's "Other" status. DSTERM is the verbatim term for subject status when Other is selected

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
							name for how a subject completed the study or a portion of a study (epoch), or the reason they did not complete.					discontinued prematurely, record the primary reason for discontinuation. (Or, if used with a DECOD list) If Other is selected from the Status list, provide the verbatim reason.		collected as an "Other, Specify" free text, populate the SDTMIG variable DSTERM with the free text and populate DSDECOD with the sponsor-defined standardized text. If DSDECOD was collected with no free text, populate DSTERM and DSDECOD in the SDTM-based dataset with the DSDECOD value that was collected.			from the DSDECOD code list. This field would only be used with the prompt and completion instructions provided as a Specify, Other field in conjunction with DSDECOD. DSTERM may be used by itself when no code list is provided for DSDECOD on the CRF. Either DSTERM or DSDECOD must be on the CRF. DSTERM is required in the SDTM-based dataset.
Events	DS	STUDY PARTICIPATION DISPOSITION EVENT	N/A	9	DSSTDAT	Disposition Event Start Date	The date of the specified disposition event (e.g., study completion or discontinuation), represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the disposition event date?	Disposition Event Date	Char	R/C	Record the date of disposition event as defined in the protocol and/or CRF completion instructions using this format (DD-MON-YYYY)	DSSTDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH START DATE and TIME components and populate the SDTMIG variable DSSTDTC in ISO 8601 format.	N/A	N/A	Sponsors should define in the protocol and/or CRF completion instructions the criteria for completion of each epoch for which a Disposition CRF will be provided. Define also the date of completion or discontinuation. Only collect the date of the disposition event once. For example, if the date of the last dose is defined to mark the end of the treatment phase epoch, and is collected on the Exposure CRF, then this field would not be collected on the Disposition CRF. If not collected elsewhere, this field is collected on the Disposition CRF.
Events	DS	STUDY PARTICIPATION DISPOSITION EVENT	N/A	10	DSSTTIM	Disposition Event Start Time	The time of the specified disposition event (e.g., study completion or discontinuation), represented in an unambiguous time format (e.g., hh:mm:ss).	What was the disposition event time?	Disposition Event Time	Char	O	Record the time (as complete as possible) that the subject completed the study or portion of the study as defined in the protocol and/or CRF completion instructions. If the subject did not complete the study or portion of the study, record the time (as complete as possible) as defined in the protocol and/or CRF completion instructions.	DSSTDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH START DATE and TIME components and populate the SDTMIG variable DSSTDTC in ISO 8601 format.	N/A	N/A	Sponsors should define in the protocol and/or CRF completion instructions the criteria for completion of each epoch for which a Disposition CRF will be provided. Define also the date of completion or discontinuation. Collecting the time of completion or discontinuation is only appropriate if it can be realistically determined and if there is a scientific reason for needing to know this level of detail. Typically, it is not recommended that a time be collected unless the subject is under the direct care of the site at the time of the event. Only collect the time of completion or discontinuation on the Disposition CRF module if the same information is not being collected on another CRF module. For example, if the time of the last dose is defined to mark the end of the treatment phase epoch, and is collected on

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	the Drug Exposure CRF, then this field would not be collected on the Disposition CRF.
Events	DS	STUDY PARTICIPATION DISPOSITION EVENT	N/A	11	DTHDAT	Death Date	Date of death for any subject who died.	What [is/was] the subject's date of death?	Death Date	Char	O	Record the date of death	DM.DTHDTC	This field does not map directly to an SDTMIG variable. For the SDTM dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTM variable DTHDTC in ISO 8601 format.	N/A	N/A	The CDASH model defines Death Date as a timing variable; this is not included as a timing variable in the SDTMIG. It may be collected on any CRF deemed appropriate by the sponsor, but should only be collected once. The SDTMIG variable DTHDTC is mapped to the DM domain during the SDTM submission dataset creation process. The SDTMIG variable DM.DTHFLG is not a CDASH variable, but is populated during the SDTM submission dataset creation process. Death Date may also be mapped to other SDTM domains (e.g., DS) as deemed appropriate by the sponsor.
Events	DS	STUDY PARTICIPATION DISPOSITION EVENT	N/A	12	DSCONT	Subject Continue	The plan for subject continuation to the next phase of the study or another study at the time of completion of the CRF.	Will the subject continue?	Subject Continue	Char	O	Record if the subject will be continuing to [the next phase of this study/related study] (sponsor to specify as appropriate).	SUPPDS.QVAL	This information could be submitted in a SUPPDS dataset as the value of SUPPDS.QVAL when SUPPDS.QNAM= "DSCONT" and SUPPDS.QLABEL="Subject Continue". Refer to the current SDTM and SDTMIG for instructions on placement of non-standard variables in SDTM domains.	(NY)	N/A	Sponsors should specify the next phase of the study or the related study on the CRF. Typically this is a prompt to aid in monitoring and data cleaning, and usually not submitted in a SUPPDS dataset.
Events	DS	STUDY PARTICIPATION DISPOSITION EVENT	N/A	13	DSNEXT	Next EPOCH	Identifies the study epoch or new study in which the subject will participate.	What is the next [epoch/period/study/trial] the subject will [continue to/enter/enroll]?	Next [Epoch/Period/Study/Trial]	Char	O	Record the planned subsequent [study epoch/study] in which the subject intends to participate.	N/A	Sponsor-defined SDTMIG mapping.	N/A	N/A	Sponsors should specify the next phase of the study or the related study on the CRF. The data are to be used to aid in monitoring and data cleaning. No specific SDTM-based dataset mapping rules are provided because the mapping depends on the situation (e.g., next epoch, next trial). Per sponsor decision, plans to enter the next epoch within a study may be included in the SDTM submission datasets (e.g., SE). Actual subject entry into the next study is submitted as part of Trial Design datasets of that study.

Assumptions for the CDASHIG DS - Disposition Domain

1. Sponsors may choose which disposition events and milestones to collect for a study. A *milestone* is a protocol-specified point in time that is not assigned to an epoch. A *disposition event* describes whether a subject completed the study or portion of a study (epoch), or the reason they did not complete. Sponsors may collect 1 disposition event for the trial as a whole, or they may collect dispositions for each epoch of a trial.
2. Disposition data may be collected on a CRF dedicated to disposition data, or collected across several forms that also contain data that are not DS. In the latter case, the disposition should be mapped to the appropriate DS SDTMIG variable (e.g., DSCAT, DSSTDTC, DSTERM, DSDECOD). The same disposition data should not be collected both on domain-specific forms and on a DS form.
 - a. The CDASHIG DS domain does not specify where to collect protocol milestones within the CRF. Protocol milestones may be included in convenient places in the CRF. For example, informed consent date or randomization date may be collected on the same CRF page as demographics data, and mapped for submission to the SDTMIG DS domain.
 - i. The CDASH Model allows for date of death to be collected on any CRF deemed appropriate by the sponsor and mapped for submission to the SDTMIG DS domain; the date of death also may be collected as part of a DS form. However, consideration should be given to designing the CRF to collect the date of death only once in a study. DTHDAT is included in scenario 2.
3. Controlled Terminology (NCOMPLT) is focused on disposition events, and is used when DSCAT is "DISPOSITION EVENT". Because the complete list of CT may not be appropriate, sponsors may choose to include only subsets of CT on the CRF. The choices that appear for a DS event are dependent upon the event itself, and the contents of the list can vary if data are collected for multiple epochs in a study. For example, "Non-Compliance with Study Drug" and "Lack of Efficacy" are not applicable choices prior to the start of treatment; "Failure to Meet Randomization Criteria" is an applicable choice only for the epoch that immediately follows the date of the subject's randomization.
4. If DSUNBLND is "Yes", and the unblinding/unmasking resulted in the subject discontinuing the trial prematurely, DSTERM and DSDECOD capture the applicable details. If the unblinding/unmasking occurred due to an adverse event, DSTERM contains the text of the AE, and the AE "Were any other actions taken in response to this adverse event?" (AEACNOTH [optional]) free text may include text of "Treatment Unblinded". DSUNBLND may also be used to document intentional unblinding at a protocol-defined point in the trial. DSUNBLIND is include in scenario 1.
5. DSCONT and DSNEXT data are used to aid in monitoring and data cleaning. Because the questions relate to future plans, the validity of the responses cannot be ascertained until the subject enters the subsequent epoch or new study. DSCONT and DSNEXT are include in scenario 2.
6. Associations between DSCAT and some DSDECOD codelist values are described in the DS codetable, available at <https://www.cdisc.org/standards/terminology/controlled-terminology>.

Example CRFs for the CDASHIG DS - Disposition Domain

Example 1

Title: Informed Consent

Record the date of informed consent as defined in the protocol and/or CRF completion instructions using this format (DD-MON-YYYY). Record the time (as complete as possible) of informed consent as defined in the protocol and/or CRF completion instructions.	Disposition Category	DSCAT DSCAT="PROTOCOL MILESTONE" where DSDECOD and DSTERM="INFORMED CONSENT OBTAINED" <i>Hidden/pre-populated</i>	PROTOCOL MILESTONE <DSCAT codelist>
	What was the informed consent date?	DSSTDAT DSSTDTC	
	What was the informed consent time?	DSSTTIM DSSTDTC	

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Value	SDTMIG Target Mapping	Controlled Terminology Code List Name	CRF Implementation Notes	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
DSCAT	1	What was the category of the disposition?	Disposition Category	If collected on the CRF, the sponsor provides instructions to ensure the data is entered as intended.	Text	DSCAT	DSCAT="PROTOCOL MILESTONE" where DSDECOD and DSTERM="INFORMED CONSENT OBTAINED"	(DSCAT)	Refer to the SDTMIG for guidelines for assigning DSCAT, DSTERM, and DSDECOD for events considered protocol milestones.		PROTOCOL MILESTONE	prompt		Yes
DSSTDAT	2	What was the informed consent date?	Informed Consent Date	Record the date of informed consent as defined in the protocol and/or CRF completion instructions using this format (DD-MON-YYYY).	Date	DSSTDTC						qtext		
DSSTTIM	3	What was the informed consent time?	Informed Consent Time	Record the time (as complete as possible) of informed consent as defined in the protocol and/or CRF completion instructions.	Time	DSSTDTC						qtext		

Example 2

In this example, the Disposition CRF simply collects whether the subject completed the study, so there is only 1 record per subject.

Title: Study Disposition

Disposition Category

DSCAT *Hidden/pre-populated*

What was the subject's status?

DSDECOD

Specify

DSTERM

Study Completion/Discontinuation Date

DSSTDAT **DSSTDTC**

Study Completion/Discontinuation Time

DSSTTIM **DSSTDTC**

Document the subject's status at study completion.
If the subject discontinued prematurely, record the primary reason for discontinuation.

If Adverse Event is selected from the Status list, provide the verbatim reason.

Record the date that the subject completed the study using this format (DD-MON-YYYY). If the subject did not complete the study, record the date that the subject discontinued.

Record the time (as complete as possible) that the subject completed the study. If the subject did not complete the study, record the time (as complete as possible) that the subject discontinued.

DISPOSITION EVENT<DSCAT codelist>

☐ COMPLETED

☐ ADVERSE EVENT

☐ DEATH

☐ DISEASE RELAPSE

☐ LACK OF EFFICACY

☐ LOST TO FOLLOW-UP

☐ NON-COMPLIANCE WITH STUDY DRUG

☐ PHYSICIAN DECISION

☐ PREGNANCY

☐ PROGRESSIVE DISEASE

☐ PROTOCOL DEVIATION

☐ RECOVERY

☐ SITE TERMINATED BY SPONSOR

☐ STUDY TERMINATED BY SPONSOR

☐ TECHNICAL PROBLEMS

☐ WITHDRAWAL BY PARENT/GUARDIAN

☐ WITHDRAWAL BY SUBJECT

<NCOMPLT codelist>

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	CRF Implementation Notes	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
DSCAT	1	What was the category of the disposition?	Disposition Category	If collected on the CRF, the sponsor provides instructions to ensure the data is entered as intended.	Text	DSCAT		(DSCAT)			DISPOSITION EVENT	prompt		Yes

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	CRF Implementation Notes	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
DSDECOD	2	What was the subject's status?	Status	Document the subject's status at study completion. If the subject discontinued prematurely, record the primary reason for discontinuation.	Text	DSDECOD		(NCOMPLT)	The Controlled Terminology (NCOMPLT) is focused on disposition events, and is used when DSCAT is "DISPOSITION EVENT".	COMPLETED; ADVERSE EVENT; DEATH; DISEASE RELAPSE; LACK OF EFFICACY; LOST TO FOLLOW-UP; NON-COMPLIANCE WITH STUDY DRUG; PHYSICIAN DECISION; PREGNANCY; PROGRESSIVE DISEASE; PROTOCOL DEVIATION; RECOVERY; SITE TERMINATED BY SPONSOR; STUDY TERMINATED BY SPONSOR; TECHNICAL PROBLEMS; WITHDRAWAL BY PARENT/GUARDIAN; WITHDRAWAL BY SUBJECT			radio	
DSTERM	3	If adverse event, specify	Specify	If Adverse Event is selected from the Status list, provide the verbatim reason.	Text	DSTERM			If DSTERM was collected as an adverse event, Specify", populate the SDTMIG variable DSTERM with the free text and populate DSDECOD with the standardized text from (NCOMPLT).			prompt		
DSSTDAT	4	What was the study completion/discontinuation date?	Study Completion/Discontinuation Date	Record the date that the subject completed the study using this format (DD-MON-YYYY). If the subject did not complete the study, record the date that the subject discontinued.	Date	DSSTDTC								
DSSTTIM	5	What was the study completion/discontinuation time?	Study Completion/Discontinuation Time	Record the time (as complete as possible) that the subject completed the study. If the subject did not complete the study, record the time (as complete as possible) that the subject discontinued.	Time	DSSTDTC								

Example 3

In this example, the Disposition CRF collects multiple disposition events at different time points in the study as indicated by the trial period (epoch).

Title: Trial Period Disposition

	Disposition Category DSCATHidden/pre-populated	DISPOSITION EVENT<DSCAT codelist>
Select the trial epoch for which disposition is being recorded.	Epoch EPOCH	☐ INDUCTION TREATMENT ☐ BLINDED TREATMENT ☐ OPEN LABEL TREATMENT ☐ FOLLOW-UP ☐ LONG-TERM FOLLOW-UP <EPOCH codelist>
Record the date that the subject completed the study or trial period using this format (DD-MON-YYYY). If the subject did not complete the study or trial period, record the date that the subject discontinued.	Completion/Discontinuation Date DSSTDATDSSTDTC	
Record the time (as complete as possible) that the subject completed the study or trial period as defined in the protocol. If the subject did not complete the study or trial period, record the time (as complete as possible).	Completion/Discontinuation Time DSSTTIMDSSTDTC	
Document the subject's status for the study or trial period. If the subject discontinued prematurely, record the primary reason for discontinuation.	What was the subject's status? DSDECOD	☐ COMPLETED ☐ ADVERSE EVENT ☐ DEATH ☐ DISEASE RELAPSE ☐ LACK OF EFFICACY ☐ LOST TO FOLLOW-UP ☐ NON-COMPLIANCE WITH STUDY DRUG ☐ PHYSICIAN DECISION ☐ PREGNANCY ☐ PROGRESSIVE DISEASE ☐ PROTOCOL DEVIATION ☐ RECOVERY ☐ SITE TERMINATED BY SPONSOR ☐ STUDY TERMINATED BY SPONSOR ☐ TECHNICAL PROBLEMS ☐ WITHDRAWAL BY PARENT/GUARDIAN ☐ WITHDRAWAL BY SUBJECT ☐ OTHER <NCOMPLT codelist>
If Adverse Event or Other is selected from the Status list, provide the verbatim reason.	Specify DSTERM	

Record if the subject will be continuing to the next trial period of this study.

Will the subject continue?

DSCONT

 SUPPDS.QVAL when SUPPDS.QNAM= "DSCONT" and SUPPDS.QLABEL="Subject Continue".

☐ No

☐ Yes

<NY codelist>

Record the planned subsequent trial epoch in which the subject intends to participate.

What is the next epoch the subject will continue to enter?

DSNEXT

 Not Submitted

☐ BLINDED TREATMENT

☐ OPEN LABEL TREATMENT

☐ FOLLOW-UP

☐ LONG-TERM FOLLOW-UP

☐ NOT APPLICABLE

<EPOCH codelist>

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTM Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
DSCAT	1	What was the category of the disposition?	Disposition Category	If collected on the CRF, the sponsor provides instructions to ensure the data is entered as intended.	Text	DSCAT		(DSCAT)		DISPOSITION EVENT	prompt		Yes
EPOCH	2	What is the trial epoch for this disposition event?	Epoch	Select the trial epoch for which disposition is being recorded.	Text	EPOCH		(EPOCH)	INDUCTION TREATMENT; BLINDED TREATMENT; OPEN LABEL TREATMENT; FOLLOW-UP; LONG-TERM FOLLOW-UP		prompt	radio	
DSSTDAT	3	What was the completion/discontinuation date?	Completion/Discontinuation Date	Record the date that the subject completed the study or trial period using this format (DD-MON-YYYY). If the subject did not complete the study or trial period, record the date that the subject discontinued.	Date	DSSTDTC							
DSSTTIM	4	What was the completion/discontinuation time?	Completion/Discontinuation Time	Record the time (as complete as possible) that the subject completed the study or trial period as defined in the protocol. If the subject did not complete the study or trial period, record the time (as complete as possible).	Time	DSSTDTC							
DSDECOD	5	What was the subject's status?	Status	Document the subject's status for the study or trial period. If the subject discontinued prematurely, record the primary reason for discontinuation.	Text	DSDECOD		(NCOMPLT)	COMPLETED; ADVERSE EVENT; DEATH; DISEASE RELAPSE; LACK OF EFFICACY; LOST TO FOLLOW-UP; NON-COMPLIANCE WITH STUDY DRUG; PHYSICIAN DECISION; PREGNANCY; PROGRESSIVE DISEASE; PROTOCOL DEVIATION; RECOVERY; SITE TERMINATED BY SPONSOR; STUDY TERMINATED BY SPONSOR; TECHNICAL PROBLEMS; WITHDRAWAL BY PARENT/GUARDIAN; WITHDRAWAL BY SUBJECT; OTHER			radio	
DSTERM	6	If other, specify	Specify	If Adverse Event or Other is selected from the Status	Text	DSTERM					prompt		

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTM Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
				list, provide the verbatim reason.									
DSCONT	7	Will the subject continue?	Continue	Record if the subject will be continuing to the next trial period of this study.	Text	SUPPDS.QVAL	SUPPDS.QVAL when SUPPDS.QNAM= "DSCONT" and SUPPDS.QLABEL="Subject Continue".	(NY)	No; Yes			radio	
DSNEXT	8	What is the next epoch the subject will continue to enter?	Next epoch	Record the planned subsequent trial epoch in which the subject intends to participate.	Text	N/A		(EPOCH)	BLINDED TREATMENT; OPEN LABEL TREATMENT; FOLLOW-UP; LONG-TERM FOLLOW-UP; NOT APPLICABLE				

8.2.5 DV - Protocol Deviations

Description/Overview for the CDASHIG DV - Protocol Deviations Domain

The CDASHIG DV domain is intended to collect protocol deviations or violations that occur after enrollment. It is not intended to collect information about inclusion/exclusion criteria; that data should be collected in the IE domain.

Considerations Regarding Use of a Protocol Deviations CRF

Sponsors must employ a robust and systematic method for recording protocol deviations; this may include the use of a dedicated CRF for this purpose, or the intentional inclusion of data collection fields throughout the entire set of CRFs that will detect protocol deviations.

The DV domain metadata and example CRF were developed as a guide that sponsors could use for designing a DV CRF and associated database, should they choose to do so.

See Appendix B, [Glossary and Abbreviations](#), for definitions of *protocol deviation* and *protocol violation*.

Specification for the CDASHIG DV - Protocol Deviations Domain

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Events	DV	N/A	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included in the database or populated during SDTM-based dataset creation before submission.
Events	DV	N/A	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted on the CRFs that are shipped to each site.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	EDC: This should be prepopulated.
Events	DV	N/A	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What [is/was] the (study) [subject/participant] identifier?	[Subject/Participant] (Identifier)	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system-generated. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Events	DV	N/A	N/A	4	DVCAT	Category for Protocol Deviation	A grouping of topic-variable values based on user-defined characteristics.	What is the category of the protocol deviation?	[Protocol Deviation Category]; NULL	Char	O	Record the deviation category, if not preprinted on the CRF.	DVCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Category" can be included as the column header.
Events	DV	N/A	N/A	5	DVSCAT	Subcategory for Protocol Deviation	A sub-division of the DVCAT values based on user-defined characteristics.	What is the subcategory of the protocol deviation?	[Protocol Deviation Subcategory]; NULL	Char	O	Record the deviation event subcategory, if not preprinted on the CRF.	DVSCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be preprinted on the CRF or screen and prepopulated in the data management system. This is not typically a question to which the site would provide an answer. DVSCAT can only be used if there is an DVCAT, and it must be a subcategorization of DVCAT.
Events	DV	N/A	N/A	6	DVYN	Any Protocol Deviation	An indication of whether there were any protocol deviations.	Were there any protocol deviations?	Any Deviations	Char	O	Enter Yes if a protocol deviation occurred and No if none occurred. Ensure that any adverse event which triggers a protocol deviation (e.g., concomitant medication use, newly discovered medical history) is noted in the respective CRF.	N/A	Does not map to an SDTMIG variable. The SDTM annotated CRF indicates that this field is NOT SUBMITTED.	(NY)	N/A	The intent/purpose of collecting this field is to help with data cleaning and monitoring. It provides verification that all other fields on the CRF were deliberately left blank.
Events	DV	N/A	N/A	7	DVDECOD	Protocol Deviation Coded Term	The sponsor-defined standardized text for the name of the protocol deviation.	What was the (standardized) protocol deviation (term)/(code)?	(Standardized) Protocol Deviation (Term)	Char	R/C	Record protocol deviations identified and/or select the appropriate code from the list of protocol deviation terms.	DVDECOD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	DVTERM and DVDECOD may have the same value. If the CRF is collecting protocol deviations using a codelist of responses, then DVDECOD should be used to store the codelist response. Sponsors must use either DVDECOD or DVTERM on the CRF and, in some cases, both may be used.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	For example, if the CRF collects "Specify, Other" or similar additional free-text descriptions of codelist items, then DVTERM should be used to store the detailed descriptive text.
Events	DV	N/A	N/A	8	DVTERM	Protocol Deviation Term	The reported or prespecified name of the protocol deviation.	What was the protocol deviation term?	(Specify) Protocol Deviation	Char	R/C	Record the appropriate code from the list of protocol deviation terms.	DVTERM	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	DVTERM and DVDECOD may have the same value. If the CRF is collecting protocol deviations using a free-text field, then DVTERM should be used to store the free-text response. Sponsors may use either DVDECOD or DVTERM on the CRF, but a value in DVTERM is required in the SDTM-based datasets.
Events	DV	N/A	N/A	9	DVSTDAT	Deviation Start Date	The start date of deviation, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the protocol deviation start date?	Start Date	Char	O	Record the start date that the protocol deviation using this format (DD-MON-YYYY). This should be the start or occurrence of the protocol deviation, not the date it was discovered or reported.	DVSTDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH START DATE and TIME components and populate the SDTMIG variable DVSTDTC in ISO 8601 format.	N/A	N/A	This may be derived if not collected on a CRF.
Events	DV	N/A	N/A	10	DVSTTIM	Deviation Start Time	The start time of the deviation, represented in an unambiguous time format (e.g., hh:mm:ss).	What was the protocol deviation start time?	Start Time	Char	O	If appropriate, record the start time (as complete as possible) of the protocol deviation in an unambiguous time format (e.g., hh:mm:ss). This should be the start or occurrence of the protocol deviation, not the time it was discovered or reported.	DVSTDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH START DATE and TIME components and populate the SDTMIG variable DVSTDTC in ISO 8601 format.	N/A	N/A	N/A
Events	DV	N/A	N/A	11	DVENDAT	Deviation End Date	The end date of the deviation, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the protocol deviation end date?	End Date	Char	O	Record the end date of the protocol deviation using this format (DD-MON-YYYY). This should be the date the protocol deviation stopped, not the date it was discovered or reported.	DVENDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH END DATE and TIME components and populate the SDTMIG variable DVENDTC in ISO 8601 format.	N/A	N/A	N/A
Events	DV	N/A	N/A	12	DVENTIM	Deviation End Time	The end time of the deviation, represented in an unambiguous time	What was the protocol deviation end time?	End Time	Char	O	If appropriate, record the end time (as complete as possible) of the protocol deviation in	DVENDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset,	N/A	N/A	N/A

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
							format (e.g., hh:mm:ss).					an unambiguous time format (e.g., hh:mm:ss). This should be the time the protocol deviation stopped, not the time it was discovered or reported.		concatenate all collected CDASH END DATE and TIME components and populate the SDTMIG variable DVENDTC in ISO 8601 format.			
Events	DV	N/A	N/A	13	DVSPID	DV Sponsor-Defined Identifier	A sponsor-defined identifier. In CDASH, this is typically used for preprinted or auto-generated numbers on the CRF, or any other type of identifier that does not already have a defined CDASH identifier field.	[Sponsor-defined question]	[Sponsor defined]	Char	O	If collected on the CRF, the sponsor may insert instructions to ensure each record has a unique identifier.	DVSPID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. May be used to create RELREC to link this record with a record in another domain.	N/A	N/A	Because SPID is a sponsor-defined identifier, conformance to Question Text or Item Prompt is not applicable. Typically used as an identifier in a data query to communicate clearly to the site the specific record in question or to reconcile data. May be used to record preprinted number (e.g. line number, record number) on the CRF. This field may be populated by the sponsor's data collection system.

Assumptions for the CDASHIG DV - Protocol Deviations Domain

Sponsors who decide to use a DV CRF should not rely on this CRF as the only source of protocol deviation information for a study. Rather, they should also utilize monitoring, data review, and programming tools to assess whether there were protocol deviations in the study that may affect the usefulness of the datasets for analysis of efficacy and safety.

Example CRF for the CDASHIG DV - Protocol Deviations Domain

Example 1

Title: Protocol Deviations

Enter Yes if a protocol deviation occurred and No if none occurred. Ensure that any adverse event which triggers a protocol deviation (e.g., concomitant medication use, newly discovered medical history) is noted on the respective CRF.

If collected on the CRF, sponsor may insert instructions to ensure each record has a unique identifier.

Record protocol deviations identified and/or select the appropriate code from the list of protocol deviation terms.

Record the protocol deviation if not listed above.

Record the start date for the protocol deviation using this format (DD-MON-YYYY). This should be the start or occurrence of the protocol deviation, not the date it was discovered or reported.

Record the end date of the protocol deviation using this format (DD-MON-YYYY). This should be the date the protocol deviation stopped, not the date it was discovered or reported.

Were there any protocol deviations? DVYN Not Submitted	☐ Yes ☐ No <NY codelist>
What is the protocol deviation identifier? DVSPID	
What was the protocol deviation? DVDECOD	☐ Informed Consent Not Obtained ☐ Inclusion Criteria Not Met ☐ Study Drug Non-Compliance ☐ Randomization Error ☐ Other
Specify Protocol Deviation DVTERM	
Start Date DVSTDAT DVSTDTC	
End Date DVENDAT DVENDTC	

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTM Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
DVYN	1	Were there any protocol deviations?	Any Deviations	Enter Yes if a protocol deviation occurred and No if none occurred. Ensure that any adverse event which triggers a protocol deviation (e.g., concomitant medication use, newly discovered medical history) is noted on the respective CRF.	Text	N/A		(NY)	Yes; No				
DVSPID	2	What is the protocol deviation identifier?	DV Number	If collected on the CRF, sponsor may insert instructions to ensure each record has a unique identifier.	Text	DVSPID							Yes

DVDECOD	3	What was the protocol deviation?	Protocol Deviation	Record protocol deviations identified and/or select the appropriate code from the list of protocol deviation terms.	Text	DVDECOD				Informed Consent Not Obtained; Inclusion Criteria Not Met; Study Drug Non-Compliance; Randomization Error; Other				
DVTERM	4	What was the protocol deviation term?	Specify Protocol Deviation	Record the protocol deviation if not listed above.	Text	DVTERM					Prompt			
DVSTDAT	5	What was the protocol deviation start date?	Start Date	Record the start date for the protocol deviation using this format (DD-MON-YYYY). This should be the start or occurrence of the protocol deviation, not the date it was discovered or reported.	Date	DVSTDTC								
DVENDAT	6	What was the protocol deviation end date?	End Date	Record the end date of the protocol deviation using this format (DD-MON-YYYY). This should be the date the protocol deviation stopped, not the date it was discovered or reported.	Date	DVENDTC								

8.2.6 HO - Healthcare Encounters

Description/Overview for the CDASHIG HO - Healthcare Encounters Domain

The CDASHIG HO domain includes inpatient and outpatient healthcare events (e.g., hospitalizations, nursing home stays, rehabilitation facility stays, medical practitioner office visits).

This domain is used to record information about the event (e.g., type of encounter, timing). Other data about interventions administered or findings measured, observed, or tested during the healthcare encounter should be collected for submission in those respective domains. For example:

- Information about imaging—for example, MRI or endoscopic retrograde cholangiopancreatography (ERCP), which is a combination of an upper gastrointestinal endoscopy and x-ray—would be collected in the Procedures (PR) domain.
- Laboratory results would be reported in the LB domain.

It may not be necessary to collect data for the HO domain if the planned reporting or analysis is about the interventions and/or findings data rather than the number/types of encounters, the duration of encounters, and so on.

Specification for the CDASHIG HO - Healthcare Encounters Domain

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Events	HO	N/A	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included into the database or populated during SDTM-based dataset creation before submission.
Events	HO	N/A	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted on the CRFs that are shipped to each site. EDC: This should be prepopulated.
Events	HO	N/A	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What [is/was] the (study) [subject/participant] identifier?	[Subject/Participant] (Identifier)	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system-generated. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Events	HO	N/A	N/A	4	HOYN	Any Healthcare Encounters	An indication of whether there were any healthcare encounters.	Were there any healthcare encounters?	Any Healthcare Encounters	Char	O	Indicate if the subject experienced any healthcare encounters. If Yes, include the appropriate details where indicated on the CRF.	N/A	Does not map to an SDTMIG variable. The SDTM annotated CRF indicates that this field is NOT SUBMITTED.	(NY)	N/A	The intent/purpose of collecting this field is to help with data cleaning and monitoring. It provides verification that all other fields on the CRF were deliberately left blank.
Events	HO	N/A	N/A	5	HOCAT	Category for Healthcare Encounter	A grouping of topic-variable values based on user-defined characteristics.	What was the category of the healthcare encounter?	[Healthcare Encounter Category]; NULL	Char	O	If collected on the CRF, the sponsor provides instructions to ensure the data is entered as intended.	HOCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Category" can be included as the column header. Examples include HOSPITALIZATION and OUTPATIENT.
Events	HO	N/A	N/A	6	HOSCAT	Subcategory for Healthcare Encounter	A sub-division of the HOCAT values based on user-defined characteristics.	What was the subcategory of the healthcare encounter?	[Healthcare Encounter Subcategory]; NULL	Char	O	If collected on the CRF, the sponsor provides instructions to ensure the data is entered as intended.	HOSCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be preprinted on the CRF or screen and prepopulated in the data management system. This is not typically a question to which the site would provide an answer. HOSCAT can only be used if there is an HOCAT, and it must

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	be a subcategorization of HOCAT.
Events	HO	N/A	N/A	7	HOOCUR	Healthcare Encounter Occurrence	An indication of whether a health encounter occurred when information about the occurrence of a specific event is solicited.	Did the subject have [prespecified healthcare encounter term]?	[prespecified Healthcare Encounter Term]	Char	O	Indicate if [specific healthcare encounter/event topic] has occurred/is occurring by checking Yes or No.	HOOCUR	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(NY)	N/A	The CDASH variable HOOCUR is used to report the occurrence of a prespecified healthcare encounter. HOOCUR is not used if the healthcare encounters are collected on the CRF in a manner that requires a free-text response. The site should be able to indicate in a separate item (or system variable) that the question was not asked or answered.
Events	HO	N/A	N/A	8	HOPRESP	prespecified Healthcare Encounter	An indication that a specific event, or group of events, are specified on a CRF.	N/A	N/A	Char	O	N/A	HOPRESP	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(NY)	N/A	A hidden field on a CRF defaulted to "Y", or added during the SDTM-based dataset creation, when the healthcare encounter is prespecified. Null for spontaneously reported events. If a study collects both prespecified healthcare encounters as well as free-text events, the value of HOPRESP should be "Y" for all prespecified events and null for events reported as free-text. HOPRESP is a permissible field in SDTM and may be omitted from the SDTM-based dataset if all events were collected as free text.
Events	HO	N/A	N/A	9	HOREASND	Reason Healthcare Encounter Not Done	An explanation for why the data are not available.	What was the reason the data were not collected?	Reason Not Collected	Char	O	Provide the reason why the subject's Healthcare Encounters experience was not assessed.	HOREASND	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The reason the data are not available may be chosen from a sponsor defined list (e.g., subject not asked) or entered as free text. When HOREASND is used, the SDTMIG variable HOSTAT should also be populated in the SDTM-based dataset.
Events	HO	N/A	N/A	10	HOSPID	HO Sponsor-Defined Identifier	A sponsor-defined identifier. In CDASH, This is typically used for preprinted or auto-generated numbers on the CRF, or any other type of identifier that does not already have a defined CDASH identifier field.	[Sponsor-defined question]	[Sponsor-defined]	Char	O	If collected on the CRF, sponsor may insert instructions to ensure each record has a unique identifier.	HOSPID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. May be used to create RELREC to link this record with a record in another domain.	N/A	N/A	Because SPID is a sponsor-defined identifier, conformance to Question Text or Item Prompt is not applicable. Typically used as an identifier in a data query to communicate clearly to the site the specific record in question or to reconcile data. May be used to record preprinted number (e.g. line number, record number) on the CRF. This field may be populated by the sponsor's data collection system.
Events	HO	N/A	N/A	11	HOTERM	Reported Term for Healthcare Encounter	The reported or prespecified name of the healthcare encounter.	What was the healthcare encounter?: If [HODECOD], specify	[Healthcare Encounter]; [Specify]	Char	HR	Record the healthcare encounter or if used with a HODECOD list, "Other" specify.	HOTERM	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	If collected on the CRF, sponsors must use either HODECOD or HOTERM and in some cases, both may be used. If the CRF is collecting healthcare encounters using a standardized sponsor-defined code list (e.g., INPATIENT ER, ICU, SURGERY, GENERAL WARD, PROVIDER OFFICE - PRIVATE, PROVIDER OFFICE - HOSPITAL,

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	GASTROENTEROLOGIST), then HODECOD may be used to store the code list response. If the CRF collects "Specify, Other" or similar additional free-text descriptions of code list items, then HOTERM may be used to store the detailed descriptive text. If HOTERM is entered only as free text, HODECOD would be populated through the sponsor's coding process.
Events	HO	N/A	N/A	12	HODECOD	HO Standardized Term	The sponsor-defined standardized text description of HOTERM or the modified topic variable (HOMODIFY), if applicable.	What was the (standardized) healthcare encounter (term/code)?	(Standardized) Healthcare Encounter (Term)	Char	R/C	Select the healthcare encounter.	HODECOD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	If collected on the CRF, sponsors must use either HODECOD or HOTERM and in some cases, both may be used. If the CRF is collecting healthcare encounters using a standardized sponsor defined code list (e.g., INPATIENT ER, ICU, SURGERY, GENERAL WARD, PROVIDER OFFICE-PRIVATE, PROVIDER OFFICE-HOSPITAL, GASTROENTEROLOGIST), then HODECOD may be used to store the code list response. If the CRF collects "Specify, Other" or similar additional free-text descriptions of code list items, then HOTERM may be used to store the detailed descriptive text. If HOTERM is entered only as free text, HODECOD would be populated through the sponsor's coding process.
Events	HO	N/A	N/A	13	HOSTDAT	Healthcare Encounter Start Date	The start date the healthcare encounter, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the [healthcare encounter/HOTERM] [start/admission] date?	([HOTERM])[Start/Admission] Date	Char	O	Record the start date of the healthcare encounter (e.g., date of admission) using this format (DD-MON-YYYY).	HOSTDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH START DATE and TIME components and populate the SDTMIG variable HOSTDTC in ISO 8601 format.	N/A	N/A	The preferred method is to collect a complete start date. Partial dates (e.g., providing year only, month and year only) may be acceptable.
Events	HO	N/A	N/A	14	HOSTTIM	Healthcare Encounter Start Time	The start time of the healthcare encounter, (e.g., time of admission), represented in an unambiguous time format (e.g., hh:mm:ss).	What was the [healthcare encounter/HOTERM] [start/admission] time?	([HOTERM])[Start/Admission] Time	Char	O	Record the start time (as complete as possible) of the healthcare encounter in an unambiguous time format (e.g., hh:mm:ss).	HOSTDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH START DATE and TIME components and populate the SDTMIG variable HOSTDTC in ISO 8601 format.	N/A	N/A	N/A
Events	HO	N/A	N/A	15	HOENDAT	Healthcare Encounter End Date	The end date of the healthcare encounter (e.g., date of discharge), represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the [healthcare encounter/HOTERM] [end/discharge] date?	([HOTERM])[End/Discharge] Date	Char	O	Record the end date of the healthcare encounter using this format (DD-MON-YYYY).	HOENDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH END DATE and TIME components and populate the SDTMIG variable HOENDTC in ISO 8601 format.	N/A	N/A	The preferred method is to collect a complete end date. Partial dates (e.g., providing year only, month and year only) may be acceptable.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Events	HO	N/A	N/A	16	HOENTIM	Healthcare Encounter End Time	The end time of the healthcare encounter (e.g., time of discharge), represented in an unambiguous time format (e.g., hh:mm:ss).	What was the [healthcare encounter/HOTERM] [end/discharge] time?	[(HOTERM)][End/Discharge]Time	Char	O	Record the end time (as complete as possible) of the healthcare encounter in an unambiguous time format (e.g., hh:mm:ss).	HOENDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH END DATE and TIME components and populate the SDTMIG variable HOENDTC in ISO 8601 format.	N/A	N/A	N/A
Events	HO	N/A	N/A	17	HOC DUR	Healthcare Encounter Collected Duration	Collected duration of the healthcare encounter.	What was the duration of the [healthcare encounter/HOTERM]?	Duration	Char	O	Provide the duration of the healthcare encounter.	HODUR	This does not map directly to an SDTMIG variable. For the SDTM-based dataset, concatenate the CDASH collected duration and collected duration unit and populate the SDTMIG variable HODUR in ISO 8601 Period format. Example: P1DT2H (for 1 day, 2 hours).	N/A	N/A	Collected duration of the healthcare encounter. Used only if collected on the CRF and not derived from the start and end date/times.
Events	HO	N/A	N/A	18	HOC DURU	HO Collected Duration Unit	Unit of the collected duration of the healthcare encounter. Used only if duration was collected on the CRF.	What was the duration unit of the [healthcare encounter/HOTERM]?	(Duration) Unit	Char	O	Select the appropriate duration unit of the healthcare encounter.	HODUR	This does not map directly to an SDTMIG variable. For the SDTM-based dataset, concatenate the CDASH collected duration and collected duration unit and populate the SDTMIG variable HODUR in ISO 8601 Period format. Example: P1DT2H (for 1 day, 2 hours).	(UNIT)	N/A	To ensure data quality, it is recommended that the appropriate duration unit(s) be preprinted on the (e)CRF. If only 1 unit is appropriate, no data entry would be required.
Events	HO	N/A	N/A	19	HOONGO	Ongoing Healthcare Encounter	Indication that the encounter is ongoing when no end date is provided.	Was the [healthcare encounter/HOTERM] ongoing(as of the[study-specific timepoint or period]?	Ongoing as of the[study-specific timepoint or period]	Char	O	Record the healthcare encounter as ongoing ('Y') if it has not stopped at[at the timepoint defined by the study].	HOENRF; HOENRTPT	This does not map directly to an SDTM variable. May be used to populate a value into an SDTMIG relative timing variable (e.g., HOENRF, HOENRTPT). When populating HOENRF, if the value of HOONGO is "Y", the values of "DURING", "AFTER", or "DURING/AFTER" may be used. When populating HOENRTPT, if the value of HOONGO is "Y", the value of "ONGOING" may be used. When HOONGO refers to the Study Reference Period (defined in DM.RFSTDTC to DM.RFENDTC) the SDTMIG variable HOENRF should be populated. When HOONGO is compared to any other time point, the SDTMIG variables HOENRTPT and HOENTPT should be used. Note: HOENRTPT must refer to a time-point anchor described in HOENTPT.	(NY)	N/A	Completed to indicate that the healthcare encounter has not ended at the time of data collection. It is expected that every reported encounter has either an end date or the Ongoing field is populated, but not both. The purpose of collecting this field is to help with data cleaning and monitoring; this field provides further confirmation that End Date was deliberately left blank. Often used as a tick/checkbox. See Section 3.7, Mapping Relative Times from Collection to Submissions , and SDTMIG for more information.
Events	HO	N/A	N/A	20	HOREAS	Reason for the Healthcare Encounter	Denotes the reason for the healthcare encounter.	What was the reason for the [healthcare encounter/HOTERM]?	Reason for the Healthcare Encounter	Char	O	Provide the reason for the subject's Healthcare Encounters.	SUPPHO.QVAL	This does not map directly to an SDTMIG variable. This information could be submitted in a SUPPHO dataset as the value of SUPPHO_QVAL where SUPPHO.QNAM ="HOREAS" and SUPPHO.QLABEL="Healthcare Encounter Reason". Refer to the current SDTM and SDTMIG for instructions on placement of non-standard variables in SDTM domains.	N/A	N/A	To ensure data quality, it is recommended that the sponsor develop controlled terminology (e.g., LACK OF EFFICACY, ADVERSE EVENT, CHEMOTHERAPY, PHYSICAL THERAPY, INDICATION UNDER STUDY, NOT INDICATION UNDER STUDY). The sponsor may, however choose to collect this as free text or as a combination of preprinted options and free text in the form of "Specify_Other".
Events	HO	N/A	N/A	21	HOAENO	Related Adverse Event ID	Identifier for the adverse event	What was the identifier for the adverse event(s), which	Adverse Event Identifier	Char	O	Record the identifier for the adverse event	N/A	This does not map directly to an SDTMIG variable. For the SDTM submission datasets, may be used	N/A	N/A	The intent is to establish a link between the healthcare encounter record and the AE

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
							that precipitated this encounter.	precipitated the [healthcare encounter/HOTERM]?				that precipitated this encounter.		to create RELREC to link this record with a record in the Adverse Events domain.			that was the primary cause of the encounter. HOAENO can be used in RELREC to identify a relationship between records in HO dataset and records in the AE dataset. Other identifiers needed to create RELREC (e.g., HOMHNO) can be created as needed. See SDTMIG for information on RELREC.

Assumptions for the CDASHIG HO - Healthcare Encounters Domain

Please refer to the SDTMIG for Healthcare Encounters domain assumptions.

Example CRFs for the CDASHIG HO - Healthcare Encounters Domain

Example 1

This example shows CRF fields for the following data: reason for the healthcare encounter (HOREAS), encounter duration (HOCDUR), and any linked adverse events.

Title: Healthcare Encounters

Indicate if the subject experienced any healthcare encounters. If yes, include the appropriate details where indicated on the CRF.	Has the subject reported any healthcare encounters? HOYN Not Submitted	☐ Yes ☐ No <NY codelist>
	Healthcare Encounter Category HOCAT Pre-populated	OUTPATIENT ENCOUNTER
	Healthcare Encounter HOTERM Pre-populated	PHYSICAL THERAPY CLINIC
Indicate if physical rehabilitation services has occurred/has occurring by checking Yes or No.	Did the subject have physical rehabilitation services? HOCCUR	☐ Yes ☐ No <NY codelist>
Provide the reason for the subject's physical rehabilitation services.	What was the reason for the physical rehabilitation services? HOREAS SUPPHO.QVAL WHERE QNAM = "HOREAS"	
Record the identifier for the adverse event that precipitated this encounter.	What was the the adverse event identifier that precipitated this encounter? HOAENO ASSOCIATE WITH RELATED RECORD VIA RELREC	
	Healthcare Encounter Category HOCAT Pre-populated	INPATIENT ENCOUNTER
	Healthcare Encounter HOTERM Pre-populated	INTENSIVE CARE UNIT
Indicate if the subject was admitted to ICU by checking Yes or No.	Was the subject admitted to the ICU? HOCCUR	☐ Yes ☐ No <NY codelist>
Record the date of admission using this format (DD-MON-YYYY).	Admission Date HOSTDAT HOSTDTC	
Record Yes if the subject is still in ICU at the time of data collection. If Yes, the duration and duration unit should be left blank.	Was the ICU admission still ongoing? HOONGO If Yes, HOENRF = "AFTER" or HOENRTPT = "ONGOING"	☐ Yes <NY codelist>
Provide the duration of the subject was in ICU.	How long was the subject in ICU? HOCDUR HODUR	
Select the appropriate duration unit of the healthcare encounter.	Duration Unit HOCDURU HODUR	☐ Days ☐ Weeks <UNIT codelist>

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
HOYN	1	Has the subject reported any healthcare encounters?	Any Healthcare Encounters	Indicate if the subject experienced any healthcare encounters. If yes, include the appropriate details where indicated on the CRF.	Text	N/A		(NY)	Yes; No			Radio	
HOCAT	2	What was category of the Healthcare Encounter?	Healthcare Encounter Category	If collected on the CRF, the sponsor provides instructions to ensure the data is entered as intended.	Text	HOCAT				OUTPATIENT ENCOUNTER	Prompt		
HOTERM	3	What was the healthcare encounter?	Healthcare Encounter		Text	HOTERM				PHYSICAL THERAPY CLINIC			
HOOCUR	4	Did the subject have physical rehabilitation services?	Physical Rehabilitation Services	Indicate if physical rehabilitation services has occurred/is occurring by checking Yes or No.	Text	HOOCUR		(NY)	Yes; No			Radio	
HOREAS	5	What was the reason for the physical rehabilitation services?	Reason for the Physical Rehabilitation Services	Provide the reason for the subject's physical rehabilitation services.	Text	SUPPHO.QVAL	SUPPHO.QVAL WHERE QNAM = "HOREAS"						
HOAENO	6	What was the adverse event identifier that precipitated this encounter?	Related Adverse Event Identifier	Record the identifier for the adverse event that precipitated this encounter.	Text	N/A	ASSOCIATE WITH RELATED RECORD VIA RELREC						
HOCAT	7	What was category of the Healthcare Encounter?	Healthcare Encounter Category	If collected on the CRF, the sponsor provides instructions to ensure the data is entered as intended.	Text	HOCAT				INPATIENT ENCOUNTER			
HOTERM	8	What was the healthcare encounter?	Healthcare Encounter		Text	HOTERM				INTENSIVE CARE UNIT			
HOOCUR	9	Was the subject admitted to the ICU?	Admitted to ICU	Indicate if the subject was admitted to ICU by checking Yes or No.	Text	HOOCUR		(NY)	Yes; No			Radio	
HOSTDAT	10	What was the admission date?	Admission Date	Record the date of admission using this format (DD-MON-YYYY).	Date	HOSTDTC							
HOONGO	11	Was the ICU admission still ongoing?	Ongoing	Record Yes if the subject is still in ICU at the time of data collection. If Yes, the duration and	Text	If Yes, HOENRF = "AFTER" or HOENRPT = "ONGOING"		(NY)	Yes;				

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
				duration unit should be left blank.									
HOC DUR	12	How long was the subject in ICU?	Duration in ICU	Provide the duration of the subject was in ICU.	Text	HODUR							
HOC DURU	13	What was the duration unit of the ICU admission?	Duration Unit	Select the appropriate duration unit of the healthcare encounter.	Text	HODUR		(UNIT)	Days; Weeks		Prompt	Radio	

Example 2

Title: Healthcare Encounters

Indicate if the subject experienced any healthcare encounters. If Yes, include the appropriate details where indicated on the CRF.

Were there any outpatient healthcare encounters? ☐ Yes
☐ No
 <NY codelist>

OUTPAT_HOYN Not Submitted

Indicate if the subject experienced any healthcare encounters. If Yes, include the appropriate details where indicated on the CRF.

Were there any inpatient healthcare encounters? ☐ Yes
☐ No
 <NY codelist>

INPAT_HOYN Not Submitted

If collected on the CRF, the sponsor provides instructions to ensure the data is entered as intended.

Healthcare Encounter Category ☐ OUTPATIENT ENCOUNTER
☐ INPATIENT ENCOUNTER

HOCAT

Record the healthcare encounter name.

What was the healthcare encounter?

HOTERM

Record the start date of the healthcare encounter (e.g., date of admission) using this format (DD-MON-YYYY).

Date

HOSTDAT HOSTDTC

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
Part 1													
OUTPAT_HOYN	1	Were there any outpatient healthcare encounters?	Any Healthcare Encounters	Indicate if the subject experienced any healthcare encounters. If Yes, include the appropriate details	Text	N/A		(NY)	Yes; No			Radio	

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
				where indicated on the CRF.									
INPAT_HOYN	2	Were there any inpatient healthcare encounters?	Any Healthcare Encounters	Indicate if the subject experienced any healthcare encounters. If Yes, include the appropriate details where indicated on the CRF.	Text	N/A		(NY)	Yes; No			Radio	
Part 2													
HOCAT	1	What was the category of the healthcare encounter?	Healthcare Encounter Category	If collected on the CRF, the sponsor provides instructions to ensure the data is entered as intended.	Text	HOCAT			OUTPATIENT ENCOUNTER; INPATIENT ENCOUNTER		Prompt		
HOTERM	2	What was the healthcare encounter?	Healthcare Encounter	Record the healthcare encounter name.	Text	HOTERM							
HOSTDAT	3	What was the date?	Date	Record the start date of the healthcare encounter (e.g., date of admission) using this format (DD-MON-YYYY).	Date	HOSTDTC					Prompt		

Example 3

This example CRF collects admission and discharge dates and times for admission to hospitals and rehabilitation facilities.

Title: Healthcare Encounters

Healthcare Encounter Category HOCAT <i>Pre-populated</i>	INPATIENT ENCOUNTERS
Healthcare Encounter HOSP_HOTERM HOTERM <i>Pre-populated</i>	HOSPITAL
Provide the reason why the subject's Healthcare Encounters experience was not assessed. What was the reason the hospitalization data was not collected? HOSP_HOREASND HOREASND where HOTERM = "HOSPITAL" HOCCUR is Null and HOSTAT="NOT DONE"	☐ Not Asked ☐ Subject Refused ☐ Unknown
Indicate if a hospitalization has occurred/is occurring by checking Yes or No. Did the subject have any hospitalizations? HOSP_HOCCUR HOCCUR where HOTERM = "HOSPITAL"	☐ Yes ☐ No <NY codelist>
Record the start date of the healthcare encounter (e.g., date of admission) using this format (DD-MON-YYYY). Hospitalization Admission Date HOSP_HOSTDAT HOSTDTC where HOTERM = "HOSPITAL"	

Record the start time (as complete as possible) of the healthcare encounter in an unambiguous time format (e.g., hh:mm:ss).	Hospitalization Admission Time HOSP_HOSTTIMHOSTDTC where HOTERM = "HOSPITAL"
Record the healthcare encounter as ongoing (Yes) if it has not ended at the time of data collection; the end date should be left blank.	Was the hospitalization ongoing? HOSP_HOONGOIf Yes, HOENRF = "AFTER" or HOENRTPT = "ONGOING" where HOTERM = "HOSPITAL" ☐ Yes <NY codelist>
Record the end date of the healthcare encounter using this format (DD-MON-YYYY).	Hospitalization Discharge Date HOSP_HOENDATHOENDTC where HOTERM = "HOSPITAL"
Record the end time (as complete as possible) of the healthcare encounter in an unambiguous time format (e.g., hh:mm:ss).	Hospitalization Discharge Time HOSP_HOENTIMHOENDTC where HOTERM = "HOSPITAL"
	Healthcare Encounter REHAB_HOTERMHOTERM Pre-populated REHABILITATION FACILITY
Provide the reason why the subject's Healthcare Encounters experience was not assessed.	What was the reason the rehabilitation facility data was not collected? REHAB_HOREASNDHOREASND where HOTERM = "REHABILITATION FACILITY" HOOCCUR is Null and HOSTAT= "NOT DONE" ☐ Not Asked ☐ Subject Refused ☐ Unknown
Indicate if a rehabilitation facility admission has occurred/is occurring by checking Yes or No.	Did the subject have any rehabilitation facility admissions? REHAB_HOOCURHOOCCUR where HOTERM = "REHABILITATION FACILITY" ☐ Yes ☐ No <NY codelist>
Record the start date of the healthcare encounter (e.g., date of admission) using this format (DD-MON-YYYY).	Rehabilitation Facility Admission Date REHAB_HOSTDATHOSTDTC where HOTERM = "REHABILITATION FACILITY"
Record the start time (as complete as possible) of the healthcare encounter in an unambiguous time format (e.g., hh:mm:ss).	Rehabilitation Facility Admission Time REHAB_HOSTTIMHOSTDTC where HOTERM = "REHABILITATION FACILITY"
Record the healthcare encounter as ongoing (Yes) if it has not ended at the time of data collection; the end date should be left blank.	Was the rehabilitation facility admission ongoing? REHAB_HOONGOHOENRF = "AFTER" or HOENRTPT= "ONGOING" where HOTERM = "REHABILITATION FACILITY" ☐ Yes <NY codelist>
Record the end date of the healthcare encounter using this format (DD-MON-YYYY).	Rehabilitation Facility Discharge Date REHAB_HOENDATHOENDTC where HOTERM = "REHABILITATION FACILITY"
Record the end time (as complete as possible) of the healthcare encounter in an unambiguous time format (e.g., hh:mm:ss).	Rehabilitation Facility Discharge Time REHAB_HOENTIMHOENDTC where HOTERM = "REHABILITATION FACILITY"

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
HOCAT	1	What was the category of the healthcare encounter?	Healthcare Encounter Category	If collected on the CRF, the sponsor provides instructions	Text	HOCAT				INPATIENT ENCOUNTERS	Prompt		

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
				to ensure the data is entered as intended.									
HOSP_HOTERM	2	What was the healthcare encounter?	Healthcare Encounter	Record the healthcare encounter name.	Text	HOTERM				HOSPITAL	Prompt		
HOSP_HOREASND	3	What was the reason the hospitalization data was not collected?	Reason Not Collected	Provide the reason why the subject's Healthcare Encounters experience was not assessed.	Text	HOREASND	HOREASND where HOTERM = "HOSPITAL" HOOCCUR is Null and HOSTAT="NOT DONE"		Not Asked; Subject Refused; Unknown				
HOSP_HOCCUR	4	Did the subject have any hospitalizations?	Hospitalizations	Indicate if a hospitalization has occurred/is occurring by checking Yes or No.	Text	HOCCUR	HOCCUR where HOTERM = "HOSPITAL"	(NY)	Yes; No			Radio	
HOSP_HOSTDAT	5	What was the hospitalization admission date?	Hospitalization Admission Date	Record the start date of the healthcare encounter (e.g., date of admission) using this format (DD-MON-YYYY).	Date	HOSTDTC	HOSTDTC where HOTERM = "HOSPITAL"				Prompt		
HOSP_HOSTTIM	6	What was the hospitalization admission time?	Hospitalization Admission Time	Record the start time (as complete as possible) of the healthcare encounter in an unambiguous time format (e.g., hh:mm:ss).	Time	HOSTDTC	HOSTDTC where HOTERM = "HOSPITAL"				Prompt		
HOSP_HOONGO	7	Was the hospitalization ongoing?	Hospitalization Ongoing	Record the healthcare encounter as ongoing (Yes) if it has not ended at the time of data collection; the end date should be left blank.	Text	HOENRF; HOENRTPT	If Yes, HOENRF ="AFTER" or HOENRTPT ="ONGOING" where HOTERM = "HOSPITAL"	(NY)	Yes;				
HOSP_HOENDAT	8	What was the hospitalization discharge date?	Hospitalization Discharge Date	Record the end date of the healthcare encounter using this format (DD-MON-YYYY).	Date	HOENDTC	HOENDTC where HOTERM = "HOSPITAL"				Prompt		
HOSP_HOENTIM	9	What was the hospitalization discharge time?	Hospitalization Discharge Time	Record the end time (as complete as possible) of the healthcare encounter in an unambiguous time format (e.g., hh:mm:ss).	Time	HOENDTC	HOENDTC where HOTERM = "HOSPITAL"				Prompt		
REHAB_HOTERM	10	What was the healthcare encounter?	Healthcare Encounter	Record the healthcare encounter name.	Text	HOTERM				REHABILITATION FACILITY	Prompt		
REHAB_HOREASND	11	What was the reason the rehabilitation facility data was not collected?	Reason Rehabilitation Facility Not Collected	Provide the reason why the subject's Healthcare Encounters experience was not assessed.	Text	HOREASND	HOREASND where HOTERM = "REHABILITATION FACILITY" HOOCCUR is Null and HOSTAT="NOT DONE"		Not Asked; Subject Refused; Unknown;				
REHAB_HOCCUR	12	Did the subject have any rehabilitation facility admissions?	Rehabilitation Facility	Indicate if a rehabilitation facility admission has occurred/is occurring by checking Yes or No.	Text	HOCCUR	HOCCUR where HOTERM = "REHABILITATION FACILITY"	(NY)	Yes; No			Radio	
REHAB_HOSTDAT	13	What was the rehabilitation facility admission date?	Rehabilitation Facility Admission Date	Record the start date of the healthcare encounter (e.g., date of admission) using this format (DD-MON-YYYY).	Date	HOSTDTC	HOSTDTC where HOTERM = "REHABILITATION FACILITY"				Prompt		
REHAB_HOSTTIM	14	What was the rehabilitation facility admission time?	Rehabilitation Facility Admission Time	Record the start time (as complete as possible) of the healthcare encounter in an unambiguous time format (e.g., hh:mm:ss).	Time	HOSTDTC	HOSTDTC where HOTERM = "REHABILITATION FACILITY"				Prompt		
REHAB_HOONGO	15	Was the rehabilitation facility admission ongoing?	Rehabilitation Facility Ongoing	Record the healthcare encounter as ongoing (Yes) if it has not ended at the time of	Text	HOENRF; HOENRTPT	HOENRF = "AFTER" or HOENRTPT ="ONGOING" where HOTERM = "REHABILITATION FACILITY"	(NY)	Yes;				

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
				data collection; the end date should be left blank.									
REHAB_HOENDAT	16	What was the rehabilitation facility discharge date?	Rehabilitation Facility Discharge Date	Record the end date of the healthcare encounter using this format (DD-MON-YYYY).	Date	HOENDTC	HOENDTC where HOTERM = "REHABILITATION FACILITY"				Prompt		
REHAB_HOENTIM	17	What was the rehabilitation facility discharge time?	Rehabilitation Facility Discharge Time	Record the end time (as complete as possible) of the healthcare encounter in an unambiguous time format (e.g., hh:mm:ss).	Time	HOENDTC	HOENDTC where HOTERM = "REHABILITATION FACILITY"				Prompt		

8.2.7 MH - Medical History

Description/Overview for the CDASHIG MH - Medical History Domain

The CDASHIG MH domain includes the subject's medical history at the start of the trial. The CDASH metadata tables contain the most common general medical history data collection fields. In cases where more indication-specific medical history is required by the protocol, sponsors should add fields as needed from the CDASH Events model.

Specification for the CDASHIG MH - Medical History Domain

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Events	MH	N/A	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included into the database or populated during SDTM- based dataset creation before submission.
Events	MH	N/A	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted on the CRFs that are shipped to each site. EDC: This should be prepopulated.
Events	MH	N/A	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What [is/was] the (study) [subject/participant] identifier?	[Subject/Participant] (Identifier)	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system-generated. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Events	MH	N/A	N/A	4	MHYN	Any Medical History Event	An indication of whether there was	Were any medical conditions or events reported?; Has the	Any Medical History	Char	O	Indicate if the subject experienced any medical	N/A	Does not map to an SDTMIG variable. The SDTM annotated CRF indicates that this field is NOT SUBMITTED.	(NY)	N/A	The intent/purpose of collecting this field is to help with data cleaning and

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
							any medical history to report.	subject had any medical conditions or events?				conditions or events. If Yes, include the appropriate details where indicated on the CRF.					monitoring. It provides verification that all other fields on the CRF were deliberately left blank.
Events	MH	N/A	N/A	5	MHCAT	Category for Medical History	A grouping of topic-variable values based on user-defined characteristics.	What was the category of the medical history?	[Medical History Category]; NULL	Char	R/C	If collected on the CRF, the sponsor provides instructions to ensure the data is entered as intended.	MHCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology (e.g., CARDIAC, GENERAL). This would most commonly be either a heading or a preprinted category value on the CRF, not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Category" can be included as the column header. This would be used when specific medical history (e.g., disease under study details) is captured, in addition to the general medical history.
Events	MH	N/A	N/A	6	MHSCAT	Subcategory for Medical History	A sub-division of the MHCAT values based on user-defined characteristics.	What was the subcategory of the medical history?	[Medical History Subcategory]; NULL	Char	O	If collected on the CRF, the sponsor provides instructions to ensure the data is entered as intended.	MHSCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be preprinted on the CRF or screen and prepopulated in the data management system. This is not typically a question to which the site would provide an answer. Typically would be used when specific medical history (e.g., disease diagnosis) is captured, in addition to the general medical history. MHSCAT can only be used if there is an MHCAT, and it must be a subcategorization of MHCAT.
Events	MH	N/A	N/A	7	MHDAT	Medical History Collection Date	The date on which the medical history was collected, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the date the medical history was collected?	Collection Date	Char	O	Record the date on which the medical history was collected using this format (DD-MON-YYYY).	MHDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable MHDTC in ISO 8601 format.	N/A	N/A	This should be a complete date. The date of collection may be determined from a collected visit date.
Events	MH	N/A	N/A	8	MHSPID	MH Sponsor-Defined Identifier	A sponsor-defined identifier. In CDASH, this is typically used for preprinted or auto-generated numbers on the CRF, or any other type of identifier that does not already have a defined CDASH identifier field.	[Sponsor-defined question]	[Sponsor defined]	Char	O	If collected on the CRF, sponsor may insert instructions to ensure each record has a unique identifier.	MHSPID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. May be used to create RELREC to link this record with a record in another domain.	N/A	N/A	Because SPID is a sponsor-defined identifier, conformance to Question Text or Item Prompt is not applicable. Typically used as an identifier in a data query to communicate clearly to the site the specific record in question or to reconcile concomitant medications and/or procedure records with MH. May be used to record preprinted number (e.g. line number, record number) on the CRF. This field may be populated by the sponsor's data collection

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	system. If CMMHNO or PRMHNO is used, this is the identifier to which CMMHNO or PRMHNO refers.
Events	MH	N/A	N/A	9	MHEVDTYP	Medical History Event Date Type	Specifies the aspect of the medical condition or event by which MHSTDTC and/or MHENDTC is defined.	What was the medical history event date type?	Medical History Event Date Type	Char	O	The instructions depend upon the format of the CRF. Sponsors may print these values on the CRF or use them as defaulted or hidden text.	MHEVDTYP	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(MHEDTTYP)	N/A	The type of start/ and or end date (e.g., DIAGNOSIS, SYMPTOMS, RELAPSE, INFECTION). It is not related to the trial's condition. This date type cannot be a PRIMARY DIAGNOSIS, SECONDARY DIAGNOSIS because these terms do not define the date type.
Events	MH	N/A	N/A	10	MHTERM	Reported Term for the Medical History	The reported or prespecified name of the medical condition or event.	What is the medical condition or event term?	Medical History Term	Char	HR	Record all relevant medical conditions or events, as defined in the protocol. Record only 1 medical condition or event per line. Ensure that the medical conditions or events listed on the Medical History page do not meet any of the exclusion criteria.	MHTERM	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsors should collect all relevant medical conditions or events, as defined in the protocol. It is a best practice for sponsors to collect all relevant history of surgeries or procedures using the associated diagnosis in the MH domain, while reporting relevant surgeries and procedures in the SDTM PR domain. Sponsors should provide instructions on how surgeries and procedures will be handled based on the protocol requirements. Information on specified surgeries or procedures should be collected in the PR domain.
Events	MH	N/A	N/A	11	MHOCCUR	Medical History Occurrence	An indication of whether a prespecified medical condition/event or a group of medical conditions/events occurred when information about the occurrence of a specific event is solicited.	Did the subject have [prespecified medical condition/event/group of medical conditions]; Is the [prespecified medical occurring]?	[Medical condition/Event]	Char	O	Indicate if [specific medical condition/event] has occurred/Is occurring by checking Yes or No.	MHOCCUR	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(NY)	N/A	MHOCCUR is used to report the occurrence of specified medical conditions or events. MHOCCUR is not used if the medical conditions or events are collected on the CRF in a manner that requires spontaneously free-text response. The site should be able to indicate that the question was not asked or answered.
Events	MH	N/A	N/A	12	MHPRESP	Medical History Event Prespecified	An indication that a specific event, or group of events, are prespecified on a CRF.	N/A	N/A	Char	O	N/A	MHPRESP	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(NY)	N/A	A hidden field on a CRF defaulted to "Y", or added during the SDTM-based dataset creation when the medical condition or event is prespecified. Null for spontaneously reported events. If a study collects both prespecified medical history and free-text events, the value of MHPRESP should be "Y" for all prespecified events and null for medical conditions or events reported as free text. MHPRESP is a permissible field in SDTM and may be omitted from the SDTM-based dataset if all events were collected as free text.
Events	MH	N/A	N/A	13	MHPRIOR	Prior Medical History Event	An indication of whether the event	Did the medical condition or event start	Prior to [MHSTTPT]; Prior to Study	Char	O	Check if the medical condition or event	MHSTRTPT; MHSTRF	This does not map directly to an SDTM variable. May be used to populate a	(NY)	N/A	Sponsors may collect this information rather than start

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
							occurred prior to study start.	prior to [MHSTTPT]?; Did the medical condition or event start prior to study start?				started [before the study].		value into an SDTMIG relative timing variable such as MHSTRF or MHSTRTPT. When populating MHSTRF, or MHSTRTPT, if the value of the CDASH field MHPRIOR is "Y" a value from the CDISC CT (STENRF) may be used. When MHPRIOR refers to the Study Reference Period (defined in DM.RFSTDTC to DM.RFENDTC) the SDTMIG variable MHSTRF should be populated. When MHPRIOR is compared to another time point, the SDTMIG variables MHSTRTPT and MHSTTPT should be used. Note: MHSTRTPT must refer to the time-point anchor described in MHSTTPT.			dates. See Section 3.7, Mapping Relative Times from Collection to Submissions , and SDTMIG v3.2 Section 4.1.4.7 for more information.
Events	MH	N/A	N/A	14	MHONGO	Ongoing Medical History Event	Indication the medical condition or event is ongoing when no end date is provided.	Is the medical condition or event ongoing (as of the [study-specific timepoint or period])?	Ongoing (as of the [study-specific timepoint or period])	Char	O	Record the medical condition or event as ongoing ("Y") if it has not ended at the time of data collection. If the medical condition or event is ongoing, the end date should be left blank.	MHENRF; MHENRTPT	This does not map directly to an SDTM variable. May be used to populate a value into an SDTMIG relative timing variable such as MHENRF or MHENRTPT. When populating MHENRF, if the value of MHONGO is "Y", the value of "DURING", "AFTER" or "DURING/AFTER" may be used. When populating MHENRTPT, if the value of MHONGO is "Y", the value of "ONGOING" may be used. When MHONGO refers to the Study Reference Period (defined in DM.RFSTDTC to DM.RFENDTC) the SDTMIG variable MHENRF should be populated. When MHONGO is compared to another time point, the SDTMIG variables MHENRTPT and MHENTPT should be used. Note: MHENRTPT must refer to a time-point anchor described in MHENTPT.	(NY)	N/A	Completed to indicate that the condition has not resolved at the time of data collection. It is expected that every reported condition has either an end date or the Ongoing field is populated, but not both. See Section 3.7, Mapping Relative Times from Collection to Submissions , and SDTMIG v3.2 Section 4.1.4.7 for more information.
Events	MH	N/A	N/A	15	MHCTRL	MH Disease or Symptom Under Control	Indication of whether the medical condition or event is under control at the time of data collection.	Is the medical condition or event under control?	Medical Condition Under Control	Char	O	Select the most appropriate response.	SUPPMH.QVAL	This does not map directly to an SDTMIG variable. This information could be submitted in a SUPPMH dataset as the value of SUPPMH.QVAL where SUPPMH.QNAM ="MHCTRL" and SUPPMH.LABEL="Medical Condition Under Control". Refer to the current SDTM and SDTMIG for instructions on placement of non-standard variables in SDTM domains.	(NY)	N/A	MHCTRL is not defined in the SDTMIG MH domain. If collected, it should be submitted in the SUPPMH dataset. If MHCTRL is collected, the sponsor must provide information on the relative timeframe. Generally, MHDAT is collected or determined using the visit date of the collection to indicate this is the subject's status at the time of data collection.
Events	MH	N/A	N/A	16	MHSTDAT	Medical History Event Start Date	The start date of medical history event or condition, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What [is/was] the [medical event or condition/category of the event] start date?	Start Date	Char	O	Record the start date of the medical event or condition using this format (DD-MON-YYYY).	MHSTDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH START DATE and TIME components and populate the SDTMIG variable MHSTDTC in ISO 8601 format.	N/A	N/A	The sponsor may choose to capture a complete date or any variation thereof (e.g., month and year, year).
Events	MH	N/A	N/A	17	MHENDAT	Medical History Event End Date	The end date of medical history event or condition, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What[is/was] the[medical event or condition/category of the event] end date?	End Date	Char	O	Record the end date of the medical event or condition using this format (DD-MON-YYYY).	MHENDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH END DATE and TIME components and populate the SDTMIG variable MHENDTC in ISO 8601 format.	N/A	N/A	The sponsor may choose to capture a complete date or any variation thereof (e.g., month and year, year).
Events	MH	N/A	N/A	18	MHLOC	Medical History Event Location	A description of the anatomical location relevant for the	What was the anatomical location of the medical condition or event?	Anatomical Location	Char	O	Indicate the anatomical location of the medical event or condition.	MHLOC	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(LOC)	N/A	Collected or preprinted when the sponsor needs to identify the specific anatomical location (e.g., ARM for skin

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
							medical condition or event.										rash). Could be a defaulted or hidden field on the CRF for prespecified [MHTERM/Event Topic]. Sponsors may collect the data using a subset list of controlled terminology on the CRF. LAT, DIR, PORTOT are used to further describe the anatomical location.
Events	MH	N/A	N/A	19	MHLAT	Medical History Event Laterality	Qualifier for anatomical location, further detailing the side of the body relevant for the event.	What was the side of the anatomical location of the medical condition or event?	Side	Char	O	Record the side of the anatomical location of the medical event.	MHLAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(LAT)	N/A	May be preprinted or collected when the sponsor needs to identify the specific side of the anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Events	MH	N/A	N/A	20	MHDIR	Medical History Directionality	Qualifier further detailing the position of the anatomical location, relative to the center of the body, organ, or specimen.	What was the directionality of the anatomical location of the medical condition or event?	Directionality	Char	O	Record the directionality of the anatomical location of the medical event.	MHDIR	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(DIR)	N/A	May be preprinted or collected when the sponsor needs to identify the directionality of the anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Events	MH	N/A	N/A	21	MHPORTOT	MH Event Location Portion or Totality	Qualifier for anatomical location, further detailing the distribution (i.e., arrangement of, apportioning of).	What was the portion or totality of the anatomical location of the of the medical condition or event?	Portion or Totality	Char	O	Indicate the portion or totality anatomical location of the medical event.	MHPORTOT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(PORTOT)	N/A	Collected when the sponsor needs to identify the specific portionality for the anatomical locations. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Events	MH	N/A	N/A	22	MHMODIFY	MH Modified Reported Term	If the value for MHTERM is modified to facilitate coding, then MHMODIFY will contain the modified text.	N/A	N/A	Char	O	N/A	MHMODIFY	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	This is not a data collection field that would appear on the CRF. Sponsors will populate this through the coding process.
Events	MH	N/A	N/A	23	MHDECOD	MH Dictionary-Derived Term	The dictionary text description of MHTERM or the modified topic variable (MH MODIFY), if applicable.	N/A	N/A	Char	O	N/A	MHDECOD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The sponsor is expected to provide the dictionary name and version used to map the terms utilizing the Define-XML external codelist attributes. Sponsors should include an Origin in the define metadata document to indicate that the data was "ASSIGNED".	N/A	N/A	This is typically not a data collection field that will appear on the CRF. Sponsors will populate this through the coding process. Equivalent to the Preferred Term (PT in MedDRA).
Events	MH	N/A	N/A	24	MHLLT	Medical History Event Lowest Level Term	The dictionary-derived text description of the lowest level term.	N/A	N/A	Char	O	N/A	MHLLT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The sponsor is expected to provide the dictionary name and version used to code utilizing the Define-XML external codelist attributes. Sponsors should include an Origin in the define metadata document to indicate that the data was "ASSIGNED".	N/A	N/A	This field does not typically appear on the CRF. Sponsors will populate this through the coding process. This is applicable to items using MedDRA coding.
Events	MH	N/A	N/A	25	MHLLTCD	MH Event Lowest Level Term Code	The dictionary-derived code for the lowest level term.	N/A	N/A	Num	O	N/A	MHLLTCD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The sponsor is expected to provide the dictionary name and version used to code utilizing the Define-XML external codelist attributes. Sponsors should include an Origin in the define metadata document to indicate that the data was "ASSIGNED".	N/A	N/A	This field does not typically appear on the CRF. Sponsors will populate this through the coding process. This is applicable to items using MedDRA coding.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Events	MH	N/A	N/A	26	MHPTCD	MH Event Preferred Term Code	The dictionary-derived code for the preferred term.	N/A	N/A	Num	O	N/A	MHPTCD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The sponsor is expected to provide the dictionary name and version used to code utilizing the Define-XML external codelist attributes. Sponsors should include an Origin in the define metadata document to indicate that the data was "ASSIGNED".	N/A	N/A	This field does not typically appear on the CRF. Sponsors will populate this through the coding process. This is applicable to items using MedDRA coding.
Events	MH	N/A	N/A	27	MHHLT	Medical History Event High Level Term	The dictionary-derived text description of the high level term for the primary system organ class (SOC).	N/A	N/A	Char	O	N/A	MHHLT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The sponsor is expected to provide the dictionary name and version used to code utilizing the Define-XML external codelist attributes. Sponsors should include an Origin in the define metadata document to indicate that the data was "ASSIGNED".	N/A	N/A	This field does not typically appear on the CRF. Sponsors will populate this through the coding process. This is applicable to items using MedDRA coding.
Events	MH	N/A	N/A	28	MHHLTCD	MH Event High Level Term Code	The dictionary-derived code for the high level term for the primary system organ class (SOC).	N/A	N/A	Num	O	N/A	MHHLTCD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The sponsor is expected to provide the dictionary name and version used to code utilizing the Define-XML external codelist attributes. Sponsors should include an Origin in the define metadata document to indicate that the data was "ASSIGNED".	N/A	N/A	This field does not typically appear on the CRF. Sponsors will populate this through the coding process. This is applicable to items using MedDRA coding.
Events	MH	N/A	N/A	29	MHHLGT	MH Event High Level Group Term	The dictionary-derived text description of the high level group term for the primary system organ class (SOC).	N/A	N/A	Char	O	N/A	MHHLGT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The sponsor is expected to provide the dictionary name and version used to code utilizing the Define-XML external codelist attributes. Sponsors should include an Origin in the define metadata document to indicate that the data was "ASSIGNED".	N/A	N/A	This field does not typically appear on the CRF. Sponsors will populate this through the coding process. This is applicable to items using MedDRA coding.
Events	MH	N/A	N/A	30	MHHLGTCD	MH Event High Level Group Term Code	The dictionary-derived code for the high level group term for the primary system organ class (SOC).	N/A	N/A	Num	O	N/A	MHHLGTCD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The sponsor is expected to provide the dictionary name and version used to code utilizing the Define-XML external codelist attributes. Sponsors should include an Origin in the define metadata document to indicate that the data was "ASSIGNED".	N/A	N/A	This field does not typically appear on the CRF. Sponsors will populate this through the coding process. This is applicable to items using MedDRA coding.
Events	MH	N/A	N/A	31	MHSOC	MH Event Primary System Organ Class	The dictionary-derived text description of the primary system organ class (SOC).	N/A	N/A	Char	O	N/A	MHSOC	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The sponsor is expected to provide the dictionary name and version used to code utilizing the Define-XML external codelist attributes. Sponsors should include an Origin in the define metadata document to indicate that the data was "ASSIGNED".	N/A	N/A	This field does not typically appear on the CRF. Sponsors will populate this through the coding process. This is applicable to items using MedDRA coding. Will be the same as MHBODSYS if the primary SOC was used for analysis.
Events	MH	N/A	N/A	32	MHSOCCD	MH Event Primary System Organ Class Code	The dictionary-derived code for the primary system organ class (SOC).	N/A	N/A	Num	O	N/A	MHSOCCD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The sponsor is expected to provide the dictionary name and version used to code utilizing the Define-XML external codelist attributes. Sponsors should include an Origin in the define metadata document to indicate that the data was "ASSIGNED".	N/A	N/A	This field does not typically appear on the CRF. Sponsors will populate this through the coding process. This is applicable to items using MedDRA coding. Will be the same as MHBDSYCD if the primary SOC was used for analysis.

Assumptions for the CDASHIG MH - Medical History Domain

1. Medical History Collection Period
 - a. Sponsors should define the appropriate collection period for medical history in the protocol. The evaluation interval may be provided in the SDTMIG variables MHEVLINT or MHEVINTX. These intervals are not recorded by the investigator, but are populated by the sponsor in the SDTMIG MH dataset. These intervals may be printed on the CRF as instruction text.
2. Medical History Coding
 - a. Sponsors who code medical history should use appropriate dictionary variables for the coding. Sponsors are expected to provide the dictionary name and version used to map the terms using Define-XML external codelist attributes.
 - b. CDASH recommends coding using MedDRA. Coding of medical history provides methodology to compare medical history to adverse events and facilitate the identification of unexpected safety concerns or potential relationships to past treatments. It is recommended that coding be done during the execution phase of a study rather than after it is completed, as this facilitates efficient resolution of any coding queries.
 - c. For uncoded medical history, a sponsor-defined categorization of medical history events is recommended. One approach is to use the MHCAT variable.
 - d. Coding variables are not a data collection field that will appear on the CRF itself; sponsors will populate this through the coding process. When MedDRA is used as the coding dictionary, the MedDRA coding variables are included in the SDTM dataset.
3. Date of Collection (DAT) is the date that the data were recorded, and not the date that the condition started or the event occurred. The date of collection can be derived from the date of the visit.
4. Relative Timing Variables
 - a. The date of data collection in conjunction with a collected time point anchor date and the MHONGO CDASHIG fields would determine how the SDTMIG relative timing variables would be populated.
 - b. The MHONGO field does not map directly to an SDTMIG variable, but it may be used to derive a value into an SDTM-based relative timing variable (e.g., MHENRF, MHENRTPT). When populating MHENRF, if the value of MHONGO is "Y", the values of "DURING", "AFTER", or "DURING/AFTER" may be derived. When populating MHENRTPT, if the value of MHONGO is "Y", the value of "ONGOING" may be derived. **Note:** MHENRTPT must refer to a time-point anchor described in MHENTPT. See Section 3.7, [Mapping Relative Times from Collection to Submissions](#), and the SDTMIG for more information.
 - c. MHONGO is a special-use case of "Yes/No", where the question is usually presented as a single possible response of "Yes" when there is no applicable end date at time of collection. In this case, if the box is checked and the end date is blank, MHONGO is "Yes". If the box is not checked and an end date is present, MHONGO is "No". MHONGO should not be submitted in the MH or SUPPMH dataset.
 - d. MHPRIOR can be added to this domain from the CDASH Model and used when the sponsor elects not to collect start dates (even partial dates) on the MH CRF. The sponsor would derive a value into an SDTMIG relative timing variable such as MHSTRF or MHSTRTPT. When populating MHSTRF, if the value of MHPRIOR is "Y", the value of "BEFORE" may be derived. When populating MHSTRTPT, if the value of MHPRIOR is "Y", the value of "BEFORE" may be derived. **Note:** MHSTRTPT must refer to a "time point anchor" as described in MHSTTPT.
5. Start and End Dates
 - a. Partial dates are commonly collected in MH where the subject may not remember the complete date of when a medical history condition started or ended. The sponsor may choose to capture a complete date or any variation thereof (e.g., month and year, year).
6. Medical History Event Type (MHEVDTP) is used to specify the aspect of the medical condition or event by which its start date is defined. This variable (MHEVDTP) is only to be used in the MH domain. This

variable is used when the CRF records multiple dates (e.g., date when condition was diagnosed, date when symptoms were first reported prior to diagnosis, date when subject had a relapse, date when infection associated with the diagnosis was reported). Example values for MHEVDTYP include DIAGNOSIS, SYMPTOMS, RELAPSE, and INFECTION.

7. Non-standard Supplemental Qualifier Variables

- a. Condition under control (MHCTRL) is used to indicate that the disease/symptoms are under control at the time of data collection. It is recommended that because this NSV has an implied time frame, the sponsor should provide the MHDTC data in the SDTMIG MH domain when using it. See the CDASHIG Medical History Metadata Table for detailed mapping instructions.

Example CRFs for the CDASHIG MH - Medical History Domain

Example 1

Title: Cirrhosis History

	Medical History Category MHCAT <i>Hidden/pre-populated</i>	CIRRHOSIS HISTORY
	Medical History Term MHTERM <i>Hidden/pre-populated</i>	CIRRHOSIS
	MHPRESP <i>Hidden/pre-populated</i>	☒ Yes <NY codelist>
Indicate if cirrhosis has occurred/is occurring by checking Yes or No.	Did the subject have cirrhosis? MHOCCUR	☐ Yes ☐ No <NY codelist>
Record the start date of the medical event or condition using this format (DD-MON-YYYY).	Start Date MHSTDAT MHSTDTC	
Record the medical condition or event as ongoing (Yes) if it has not ended at the time of data collection; the end date should be left blank.	Ongoing MHONGO MHENRF or MHENRTPT	☐ Yes ☐ No <NY codelist>
Record the end date of the medical event or condition using this format (DD-MON-YYYY).	End Date MHENDAT MHENDTC	

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
MHCAT	1	What was the category of the medical history?	Medical History Category	If collected on the CRF, the sponsor provides instructions to ensure the data is entered as intended.	Text	MHCAT				CIRRHOSIS HISTORY	Prompt		Yes
MHTERM	2	What is the medical condition or event term?	Medical History Term	Record all relevant medical conditions or events, as defined in the protocol. Record only one medical condition or event per line. Ensure that the medical conditions or events listed on the Medical History page do not meet any of the exclusion criteria.	Text	MHTERM				CIRRHOSIS	Prompt		Yes
MHPRESP	3	N/A	N/A	N/A	Text	MHPRESP		(NY)	Yes	Yes		radio	Yes
MHOCCUR	4	Did the subject have cirrhosis?	Cirrhosis	Indicate if cirrhosis has occurred/is occurring by checking Yes or No.	Text	MHOCCUR		(NY)	Yes; No			radio	
MHSTDAT	5	What was the medical condition or event start date?	Start Date	Record the start date of the medical event or condition using this format (DD-MON-YYYY).	Date	MHSTDTC					Prompt		
MHONGO	6	Is the medical condition or event ongoing?	Ongoing	Record the medical condition or event as ongoing (Yes) if it has not ended at the time of data collection; the end date should be left blank.	Text	MHENRF; MHENRTPT	MHENRF or MHENRTPT	(NY)	Yes; No		Prompt	radio	
MHENDAT	7	What was the medical condition or event end date?	End Date	Record the end date of the medical event or condition using this format (DD-MON-YYYY).	Date	MHENDTC					Prompt		

Example 2**Title: General Medical History**

Indicate if the subject experienced any medical conditions or events. If Yes, include the appropriate details where indicated on the CRF.

Sponsor-Defined CRF Completion Instructions

Record all relevant medical conditions or events, as defined in the protocol. Record only one medical condition or event per line. Ensure that the medical conditions or events listed on the Medical History page do not meet any of the exclusion criteria.

Record the start date of the medical event or condition using this format (DD-MON-YYYY).

Record the medical condition or event as ongoing (Yes) if it has not ended at the time of data collection; the end date should be left blank.

Record the end date of the medical event or condition using this format (DD-MON-YYYY).

Has the subject had any medical conditions or events? MHYN Not Submitted	☐ Yes ☐ No <NY codelist>
Medical History Category MHCAT Pre-populated	Sponsor Defined
What is the medical condition or event identifier? MHSPID	
What is the medical condition or event term? MHTERM	
Start Date MHSDAT MHSTDT	
Is the medical condition or event ongoing? MHONGO MHENRF/ MHENRPT	☐ Yes ☐ No <NY codelist>
End Date MHENDAT MHENDTC	

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
MHYN	1	Has the subject had any medical conditions or events?	Any Medical History	Indicate if the subject experienced any medical conditions or events. If Yes, include the appropriate details where indicated on the CRF.	Text	N/A		(NY)	Yes; No			radio	
MHCAT	2	What was the category of the medical history?	Medical History Category	If collected on the CRF, the sponsor provides instructions to ensure the data is entered as intended.	Text	MHCAT				Sponsor Defined	prompt		
MHSPID	3	What is the medical condition or	MH Number	Sponsor-Defined CRF Completion Instructions	Text	MHSPID							

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
		event identifier?											
MHTERM	4	What is the medical condition or event term?	Medical History Term	Record all relevant medical conditions or events, as defined in the protocol. Record only one medical condition or event per line. Ensure that the medical conditions or events listed on the Medical History page do not meet any of the exclusion criteria.	Text	MHTERM							
MHSTDAT	5	What was the medical condition or event start date?	Start Date	Record the start date of the medical event or condition using this format (DD-MON-YYYY).	Date	MHSTDTCT					prompt		
MHONGO	6	Is the medical condition or event ongoing?	Ongoing	Record the medical condition or event as ongoing (Yes) if it has not ended at the time of data collection; the end date should be left blank.	Text	MHENRF/ MHENRTPT		(NY)	Yes; No			radio	
MHENDAT	7	What was the medical condition or event end date?	End Date	Record the end date of the medical event or condition using this format (DD-MON-YYYY).	Date	MHENDTCT					prompt		

Example 3

Title: Psychiatric History: Symptom Start and Diagnosis Dates

Medical History Category	MHCAT <i>Hidden/pre-populated</i>	PSYCHIATRIC HISTORY
Medical History Term	MHTERM <i>Hidden/pre-populated</i>	MAJOR DEPRESSIVE DISORDER
Record the start date of the medical event or condition using this format (DD-MON-YYYY).	Major Depressive Disorder Symptom Start Date MDD_SYMP_MHSTDAT MHSTDTCT where MHEVDTYPE="SYMPTOM ONSET"	
[Medical History Event Date Type]	MDD_SYMP_MHEVDTYPE MHEVDTYPE <i>Hidden/pre-populated</i>	SYMPTOM ONSET
Record the start date of the medical event or condition using this format (DD-MON-YYYY).	Major Depressive Disorder Diagnosis Date MDD_DIAG_MHSTDAT MHSTDTCT where MHEVDTYPE="DIAGNOSIS"	
Medical History Event Date Type	MDD_DIAG_MHEVDTYPE MHEVDTYPE <i>Hidden/pre-populated</i>	DIAGNOSIS

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
MHCAT	1	What was the category of the medical history?	Medical History Category	If collected on the CRF, the sponsor provides instructions to ensure the data is entered as intended.	Text	MHCAT				PSYCHIATRIC HISTORY	Prompt		Yes
MHTERM	2	What is the medical condition or event term?	Medical History Term	Record all relevant medical conditions or events, as defined in the protocol. Record only one medical condition or event per line. Ensure that the medical conditions or events listed on the Medical History page do not meet any of the exclusion criteria.	Text	MHTERM				MAJOR DEPRESSIVE DISORDER	Prompt		Yes
MDD_SYMP_MHSTDAT	3	What was the major depressive disorder symptom start date?	Major Depressive Disorder Symptom Start Date	Record the start date of the medical event or condition using this format (DD-MON-YYYY).	Date	MHSTDTC	MHSTDTC where MHEVDTYPE= "SYMPTOM ONSET"				Prompt		
MDD_SYMP_MHEVDTYPE	4	What was the medical history event date type?	[Medical History Event Date Type]	The instructions depend upon the format of the CRF. Sponsors may pre-print these values on the CRF or use them as defaulted or hidden text.	Text	MHEVDTYPE				SYMPTOM ONSET	Prompt		Yes
MDD_DIAG_MHSTDAT	5	What was the major depressive disorder diagnosis date?	Major Depressive Disorder Diagnosis Date	Record the start date of the medical event or condition using this format (DD-MON-YYYY).	Date	MHSTDTC	MHSTDTC where MHEVDTYPE="DIAGNOSIS"				Prompt		
MDD_DIAG_MHEVDTYPE	6	What was the medical history event date type?	Medical History Event Date Type	The instructions depend upon the format of the CRF. Sponsors may pre-print these values on the CRF or use them as defaulted or hidden text.	Text	MHEVDTYPE				DIAGNOSIS	Prompt		Yes

8.2.8 SA - Serious Adverse Events

This is a CDASH-only domain that is not reflected in the corresponding SDTMIG for this release. This domain is not included in regulatory submissions that follow SDTM guidelines.

Description/Overview for the CDASHIG SA - Serious Adverse Events Domain

The variables included in the CDASHIG SA Metadata Table have been developed specifically for the collection of data for the identification, processing, and reporting of an SAE. This table contains fields for data collection at the site, such as information on the location of the site, study identifier, and reporter identifiers (the reporter is the primary source of the information). **Note:** Certain data fields are included that contain information that is to be provided by the sponsor, not the investigative site(s).

Specification for the CDASHIG SA - Serious Adverse Events Domain

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Events	SA	SAE	N/A	1	SASTTIM	SAE/Reaction Start Time	Time the adverse event/reaction became serious.	What is the start time of the serious adverse event/reaction?	Serious adverse event/reaction start time	Char	O	Record the start time (as complete as possible) of the AE. This is the time that the adverse event started, even if it was not serious at this time.	N/A	Does not map to SDTM.	N/A	N/A	Collecting the time an AE was started is only appropriate if it can be realistically determined and if there is a scientific reason for needing to know this level of detail. An example is where the subject is under the direct care of the site at the time the event started and the study design is such that it is important to know the AE start time with respect to dosing.
Events	SA	SAE	N/A	2	SAENTIM	SAE/Reaction Start Time	Time the serious adverse event/reaction ended.	What is the end time of the serious adverse event/reaction?	Serious adverse event/reaction end time.	Char	O	Enter the time the serious adverse event/reaction ended.	N/A	Does not map to SDTM.	N/A	N/A	The definition of resolved may be Sponsor-specific. This field does not map directly to a standard SDTM variable. The end time of the SAE is the time when the serious adverse event/reaction reached a final outcome. We have treated SAENTIM as a separate variable from SAENTIM; however, depending on the data policy of the implementer AEENTIM and SAENTIM can be identical.
Events	SA	SAE	N/A	3	SADCHLLT	Dechallenge Result	Outcome of withdrawing interrupting, or otherwise altering administration of study treatment.	What was the result of dechallenge?	Dechallenge Result	Char	R/C	Record the result of study treatment dechallenge.	N/A	Does not map to SDTM.	N/A	N/A	Deploy in the CRF as appropriate within the sponsors processes for collecting serious AE data. Dechallenge is applicable only if Action Taken with Study Drug indicates a change in dose or drug. (i.e., AEACN response cannot be "Dose Not Changed", "Not Applicable" or "Unknown").
Events	SA	SAE	N/A	4	SARCHLLT	Rechallenge Result	Outcome of restarting or otherwise returning administration of study treatment to previous level.	What was the result of rechallenge?	Rechallenge Result	Char	R/C	Record the result of study treatment rechallenge.	N/A	Does not map to SDTM.	(SARCRR)	N/A	Deploy in the CRF as appropriate within the sponsors processes for collecting serious AE data. Rechallenge is applicable only if dechallenge occurred.
Events	SA	SAE	N/A	5	SANARR	Narrative	Additional facts related to a serious adverse event.	What are the additional details of the SAE?	Narrative	Char	O	Record any additional facts - not already reported - that further clarify the serious event or facts surrounding it.	N/A	Does not map to SDTM.	N/A	N/A	Deploy in the CRF as appropriate within the sponsors processes for collecting serious AE data.
Events	SA	SAE	N/A	6	SACSLTRS	Causality Assessment	Sponsor's assessment of the relationship between the event and participating in the trial.	Could the event have been related to/caused by the drug or study participation?	Causality assessment	Char	HR	Not completed by site.	N/A	Does not map to SDTM.	N/A	N/A	Indicate whether the event could have been related to the drug or treatment, intervention, or study participation (e.g., procedure).
Events	SA	SAE	N/A	7	SACSLTAE	Adverse Event Assessed	AE to which the relatedness assessment belongs	Which event is being assessed for relatedness with the drug?	Adverse event assessed	Char	O	Not completed by site.	N/A	Does not map to SDTM.	N/A	N/A	It is recommended that this field is auto-populated.
Events	SA	SAE	N/A	8	SACSTSCR	Causality Assessment Source	Source of assessment	Who made this assessment?	Causality assessment source	Char	O	Not completed by site.	N/A	Does not map to SDTM.	N/A	N/A	Source of assessment (e.g., initial reporter, investigator, regulatory agency, company).
Events	SA	SAE	N/A	9	SACSTMTH	Causality Assessment Method	Method of assessment	How was this assessment done?	Causality assessment method	Char	O	Not completed by site.	N/A	Does not map to SDTM.	N/A	N/A	Method of assessment (e.g., global introspection, algorithm, Bayesian calculation).
Events	SA	SAE	N/A	10	INVMNAM	Reporter's Middle Name	The middle name of the primary investigator for a site	What is the middle name of the Investigator?	Investigator Middle Name	Char	O	Record the middle name of the principal investigator at the site	N/A	Does not map to SDTM.	N/A	N/A	Primary investigator for a site is responsible for the collection and reporting of the SAE information; as such, if possible, the

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	investigator's middle name should be auto-populated from a trial management system as part of the reporter's full name.
Events	SA	SAE	N/A	11	SITEPC	Reporter's Postcode	The postcode for a site within a study	What is the site postcode?	Site Postcode	Num	HR	Record the postcode of the site	N/A	Does not map to SDTM.	N/A	N/A	The site postcode should be auto-populated from a trial management system as part of the reporter's location information.
Events	SA	SAE	N/A	12	SITEST	Reporter's State or Province	The state or province for a site within a study	What is the site state or province?	Site State or Province	Char	HR	Record the state or province of the site	N/A	Does not map to SDTM.	N/A	N/A	The site state or province should be auto-populated from a trial management system as part of the reporter's location information.
Events	SA	SAE	N/A	13	SITEC	Reporter's City	The city for a site within a study	What is the site city?	Site City	Char	HR	Record the city of the site	N/A	Does not map to SDTM.	N/A	N/A	The site city should be auto-populated from a trial management system as part of the reporter's location information.
Events	SA	SAE	N/A	14	SITES	Reporter's Street	The street address for a site within a study	What is the site street address?	Site Street Address	Char	HR	Record the street address of the site	N/A	Does not map to SDTM.	N/A	N/A	The site street address should be auto-populated from a trial management system as part of the reporter's location information.
Events	SA	SAE	N/A	15	SITETEL	Reporter's Telephone	The telephone number for a site within a study	What is the site telephone number?	Site Telephone Number	Num	HR	Record the telephone number of the site	N/A	Does not map to SDTM.	N/A	N/A	The site telephone number should be auto-populated from a trial management system as part of the reporter's location information.
Events	SA	SAE	N/A	16	SITEFAX	Reporter's Fax	The fax number for a site within a study	What is the site fax number?	Site Fax Number	Num	R/C	Record the fax number of the site	N/A	Does not map to SDTM.	N/A	N/A	The site fax number should be auto-populated from a trial management system as part of the reporter's location information.
Events	SA	SAE	N/A	17	AWARDAT	Date Rpt Was First Received from Source	The date the Serious Adverse Event report was initially reported to the sponsor	What is the date the report was submitted to the sponsor?	Sponsor Awareness Date	Char	HR	N/A	N/A	Does not map to SDTM.	N/A	N/A	While this field is not typically entered on a eCRF, it should be displayed clearly on the CRF and/or the EDC system.
Events	SA	SAE	N/A	18	INVTL	Reporter's Title	The title of the primary investigator for a site	What is the title of the investigator?	Investigator Title	Char	HR	Record the title of the principal investigator at the site	N/A	Does not map to SDTM.	N/A	N/A	The investigator's title should be auto-populated from a trial management system as the reporter's title.
Events	SA	SAE	N/A	19	INVEMAIL	Sender's Email Address	The email address of the primary investigator for a site	What is the email address of the investigator?	Investigator Email Address	Char	O	Record the email address of the principal investigator at the site	N/A	Does not map to SDTM.	N/A	N/A	If E2B is generated from the EDC, the site PI's email address should be auto-populated as the sender.
Events	SA	SAE	N/A	20	SAERCAT	Report Nullification/amendment	Category of the SAE report	What is the SAE report category	Report Category	Char	R/C	Select the category of the SAE report	N/A	Does not map to SDTM.	N/A	N/A	Depending on the reporting system, it may be derived (initial vs amendment). If a site nullifies a case, then the NULAREAS variable must be populated.
Events	SA	SAE	N/A	21	GESTAGE	Gestation Period of Fetus at Onset	Gestational Period of the fetus at time reaction/event was observed (numeric)	What is the gestational period of the fetus at the time the serious adverse event was observed?	Gestational Onset Period	Num	R/C	Enter the fetus's gestational period at the time the serious adverse event was observed.	N/A	Does not map to SDTM.	N/A	N/A	If the fetus is the subject of the investigation, the GESTAGE may be calculated from the value in SCORRES where SCTESTCD = EGESTAGE and need not be re-collected.
Events	SA	SAE	N/A	22	GESTAGEU	Gestation Period at Onset Unit	Unit for Gestational Period of the fetus at time reaction/event was observed	What is the fetal gestational period unit at the time the serious adverse event was observed?	Gestational Period Unit	Char	R/C	Enter the fetus's gestational period unit at the time the serious adverse event was observed.	N/A	Does not map to SDTM.	N/A	N/A	This field is needed to complete the SAE form that is submitted to drug safety. This field is not intended to be part of the regulatory file submission.

Assumptions for the CDASHIG SA - Serious Adverse Events Domain

1. This is a CDASH-only domain.
2. In order to implement this domain, it is necessary to reference the CDASH Serious Adverse Event Supplement (available at <https://www.edisc.org/standards/foundational/cdash>).

8.3 Findings Class Domains

The CDASH Findings class includes domains that define collection standards for results from evaluations such as physical examinations, laboratory tests, ECG testing, and responses to questionnaires.

8.3.1 General CDASH Assumptions for Findings Domains

1. CDASH --CAT and/or --SCAT are generally not entered on the CRF by sites. Implementers may prepopulate and display these category values to help site personnel understand what data should be recorded on the CRF. Implementers may also prepopulate hidden variables with the values assigned within their operational database. Categories and subcategories that are not collected and are self-evident from the protocol design are populated during the creation of the SDTM submission dataset.
2. CDASH defines --PERF and --STAT variables to record whether an assessment has been performed/collected. --REASND is used to collect a reason why an assessment was not done.
 - a. The --PERF variable has the Question Text "[Were any/Was the] [--TEST/ topic] [measurement(s)/test(s) /examinations (s)/specimen(s) /sample(s)] [performed/collected]?", intended to assist in the cleaning of data and in confirming that there are no missing values.
 - b. --PERF may be used at the page, panel, or question level. --PERF may be used during the creation of SDTM submission datasets to derive a value into the SDTM variable --STAT. The implementer can use a combination of --CAT and --SCAT, with the --TESTCD= "--ALL" and --TEST= "<Name of the CRF module>" to represent what tests were not performed. See the SDTMIG for more information.
 - i. The CRF examples typically include generic mapping instruction for --PERF variables. Sponsors must decide how to model each test not performed (e.g., to denote that all tests were not performed using TESTCD = "--ALL"). For example, Ophthalmic Examinations (OE) CRF examples illustrate the use of OETESTCD = "OEALL". See Section 8.3.19, [OE - Ophthalmic Examinations](#).
 - c. The --STAT variable has the Question Text "Was the [--TEST] not [completed/answered/done/assessed/evaluated]?; Indicate if (the [--TEST] was) not [answered/assessed/done/evaluated/performed]." This is intended to be used to collect a simple "NOT DONE" checkbox at the page, panel, or question level.
 - d. The CDASH variable --REASND is only used with the SDTM variable --STAT. The value "NOT DONE" in --STAT indicates that the findings test was not performed.
3. The CDASH --SPID variable may be populated by the sponsor's data collection system. If collected, it can be beneficial to use an identifier in a data query to communicate clearly to the site the specific record in question. This field may be populated by the sponsor's data collection system.
4. Date and Time Variables
 - a. CDASH variables (--DAT, --TIM) are used in Findings domains to collect the date or date and time that the test was done or performed. The SDTM --DTC variable contains either a date or date and time when a specimen is collected or the start date or start date and time when a specimen is collected over time.
 - b. Collecting the time is only appropriate if it can be realistically determined and if there is a scientific reason for needing to know this level of detail. An example is where the subject is under the direct care of the site at the time the test was performed and the study design is such that it is important to know the time the test was performed with respect to dosing time. The metadata tables typically only include --DAT but --TIM can be added, when appropriate.
 - c. Implementers must not use these elements to record a date that is the result of a test (e.g., date of last day on the job, which would be recorded in the CDASH variable --ORRES). See the SDTMIG for more information.
 - d. The date of collection of a test may be derived from the date of visit. If so, a separate date of observation field is not required to be present on the CRF.

- e. The CDASH Model has a standard variable only for specimen collection (i.e., --DAT). Collection date is critical because results are pertinent at the time of collection. In most cases, this is sufficient for analysis. However, if specimens are collected and preserved for future testing, the development of new methodologies between collection and analysis may have significant implications for interpretation of results. SDTM recognizes this issue and has created an NSV (QNAM = --ASYDTC, QLABEL = Assay Date/Time) to store assay date and time when needed.
5. Horizontal (Denormalized) and Vertical Data Structures (Normalized)
 - a. In the CDASHIG metadata tables, many of the CDASH Findings class domains are presented in a normalized structure (1 record for each test) that is similar to the SDTM, even though many data management systems hold the data in a denormalized structure (1 variable for each test). When implementing CDASH in a denormalized structure, create variable names for the Findings --TEST and/or --TESTCD values. To do this, define the denormalized variable names using available CDISC Controlled Terminology for --TESTCD. Alternatively, CDASH variable names for data management systems allowing more than 8-character variable names can use CDASH variables using the following naming convention: <--TESTCD>_<-- SDTM variable name> where --TESTCD is the appropriate CT for the test code (e.g., DIABP_VSORRES, DIABP_VSLOC). Other naming convention may be used. See the CRFs in Section 8.3.18, [Vital Signs](#), for examples of CDASH variable naming conventions.
 - b. In the horizontal (denormalized) setting, SDTM variables such as --PERF, --LOC, --STAT may be collected once for the whole horizontal record and applying the value to all of the observations on that record, or they can be collected per test using the CDASH variable such as <--TESTCD>_--PERF. When SDTM submission datasets are created, any variables collected for the entire horizontal record must be mapped to each vertical record (as appropriate).
 - c. In the horizontal (denormalized) setting, an identifier (e.g., --GRPID) may be used to identify all --TESTCD collected on the same record. This facilitates transformation from the CDASH horizontal setting to the SDTM vertical setting and creation of RELRECs.
 6. Tests and Original Results
 - a. The value in --TEST cannot be longer than 40 characters. The corresponding codelist value for the short test name (at most 8 characters) must also be populated in the SDTM variable --TESTCD.
 - b. --TESTCD should be used to create a variable name and --TEST be used as the prompt on the CRF. Both --TESTCD and --TEST are recommended for use in the operational database. See Section 5, [Conformance to the CDASH Standard](#), for more details.
 - c. The CDASH variable --ORRES is used to collect test results or findings in the original units in character format.
 - d. If the results are modified for coding, the --MODIFY variable contains any modified text.
 - e. If normal or reference ranges are collected for results, the CDASH variables --ORNRLO and --ORNRHI and --NRIND are used.
 - f. CDASH does not define the SDTM variable used to standardize the findings results (e.g., --STRESC, --STRESN) or to standardize the normal/reference ranges (--STNRLO, --STNRHI, --STNRC). The standardization of the original findings results and normal/reference ranges is expected to be performed during the creation of the SDTM submission datasets. Extensive discussion on the standardization of findings results is provided in the SDTMIG.
 7. Location Variables (--LOC, --LAT, --DIR, --PORTOT)
 - a. These variables are used to collect the location of the test. The SDTM acknowledges that the results themselves may not be at the same location as the test. This is a known issue with the SDTM.
 - b. Sponsors may collect the data using a subset list of controlled terminology on the CRF. --LOC could be a defaulted or hidden field on the CRF.
 8. CDASH uses the variables --ORRES, --RES, --DESC, and --RESOTH to collect results for the observation class findings. The variable pairs --RES/--DESC, and --RES/--RESOTH are often used when a finding result is collected using 2 CRF questions but is combined into a single row in the SDTM dataset. The

variable --ORRES is used when the finding result is based on a single question, and is mapped directly to a single row in SDTM. CDASH recommends that:

- a. The --ORRES variable is used when the finding result is collected using a single question. The result should map directly to the SDTM variable --ORRES.
 - b. --RES and --DESC are used when a question is asked to collect the finding result, with a follow-up question for a description of the finding. Typically, the question would be "Is the <condition> [normal/abnormal] or [absent/present]?", with a follow-up question such as "What is the abnormality?" or "What is the finding that was observed?" --RES is used to collect whether the finding is normal/abnormal or absent/present and --DESC is used to collect the description of the finding. Typically, this data is modeled in the SDTM as described in the Physical Examination (PE) domain:
 - i. --ORRES result is normal/absent, or
 - ii. --ORRES is the actual abnormality/observed finding and the collected value abnormal/present are not represented.
 - c. --RES and --RESOTH are used when a question is asked that allows the selection of a prespecified finding, with a follow-up question to ask about the prespecified response "OTHER". Typically, the question would be "What is the result?" with a set of prespecified responses, including the choice "OTHER" with the follow-up question "Specify, Other". --RES is used to collect the finding with prespecified responses, and --RESOTH is used to collect "Specify, Other". Typically, --RESOTH data is modeled in SDTM as --ORRES (instead of the response "OTHER").
9. The Findings About Events and Intervention domains use the same root variables as the Findings domain, with the addition of the --OBJ variable. The CDASHIG metadata tables contain a generic FA domain.

It is assumed that implementers will add other data variables as needed to meet protocol-specific and other data collection requirements (e.g., therapeutic area-specific data elements; others as required per protocol, business practice, or operating procedures) to Findings and Findings About domains.

8.3.2 CP - Cell Phenotype Findings

Description/Overview for the CDASHIG CP - Cell Phenotype Findings Domain

The CDASHIG CP domain is a findings domain that contains data related to the characterization of cell phenotype, lineage, and function based on expression of specific markers in single cell or particle suspensions.

The CP domain is modeled for use with disseminated tissue specimens (e.g., blood and other body fluids, bone marrow aspirates) and cell suspensions, and is not currently modeled for evaluations of solid tissue specimens. The domain is intended to support tests associated with a cell phenotyping component based on the use of markers and is not intended for tests that are not associated with marker-based phenotyping, which are more appropriate to include in another domain (e.g., Immunogenicity Specimen Assessments (IS), Laboratory Test Results (LB), Microscopic Findings (MI)). The CP domain is not intended to supplant use of the LB domain for routine lab hematology (e.g., blood cell differentials), nor is it intended for findings originating from microscopic assessment of cells, including those employing immunohistochemical (IHC) techniques.

Data to be collected needs to be carefully determined from data providers. There are many new SDTM permissible variables that can be included to fully document tests and associated findings for a particular use case. It is anticipated that these new SDTM permissible variables would be provided by the testing laboratory and not collected by an investigator. The CDASH Team has decided to include meta specifications that include only a minimum set of variables (e.g., the collection of the specimen) at this time. See Section 3.4, [How to Create New Data Collection Fields When No CDASHIG Field Has Been Defined](#), for information on extending CDASH as needed. Users should also consult the SDTMIG for more information on the use of this domain.

Specification for the CDASHIG CP - Cell Phenotype Findings Domain

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings	CP	N/A	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included in the database or populated during SDTM-based dataset creation before submission.
Findings	CP	N/A	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted on the CRFs that are shipped to each site. EDC: This should be prepopulated.
Findings	CP	N/A	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What [is/was] the (study) [subject/participant] identifier?	[Subject/Participant] (Identifier)	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system-generated. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Findings	CP	N/A	N/A	4	VISIT	Visit Name	The name of a clinical encounter that encompasses planned and unplanned trial interventions, procedures, and assessments that may be performed on a subject.	What is the visit name?	[Visit]	Char	R/C	N/A	VISIT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The name of the clinical encounter is typically preprinted on the CRF or displayed in the EDC for any visit-based data collection, most often in Findings domains. This Visit text description is then available in any EDC data extract for that Findings domain.
Findings	CP	N/A	N/A	5	VISDAT	Visit Date	Date the clinical encounter occurred (or started).	What [is/was] the date of the visit?	(Visit) Date	Char	R/C	Record the [date/start date] of the visit using DD-MON-YYYY format.	N/A	This field is not an SDTM variable. The date of a measurement, test, observation, or specimen collection can be determined from the date/time of visit (VISDAT/VISTIM) and then concatenating the CDASH VISDAT/VISTIM components and populating the SDTMIG variable CPDTC in ISO 8601 format.	N/A	N/A	The date the cell phenotype specimen was collected can be determined from the visit date variable (VISDAT) and applying that date to all of the cell phenotype at that visit, or the specimen collection date can be collected on the Cell Phenotype CRF using the date (CPDAT) field.
Findings	CP	N/A	N/A	6	CPCAT	Category for Cell Phenotype	A grouping of topic-variable values based on user-defined characteristics.	What is the category of the cell phenotype?	[Cell Phenotype Category]; NULL	Char	R/C	Record the cell phenotype test category, if not preprinted on the CRF.	CPCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, and not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Category" can be included as the column heading.
Findings	CP	N/A	N/A	7	CPSCAT	Subcategory for Cell Phenotype	A sub-division of the CPCAT values based on user-defined characteristics.	What is the subcategory of the cell phenotype ?	[Cell Phenotype Subcategory]; NULL	Char	R/C	Record the cell phenotype test subcategory, if not preprinted on the CRF.	CPSCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be preprinted on the CRF or screen and prepopulated in the data management system. This is not typically a question to

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	which the site would provide an answer. CPSCAT can only be used if there is a CPCAT, and it must be a subcategorization of CPCAT.
Findings	CP	N/A	N/A	8	CPPERF	Cell Phenotype Test Performed	An indication of whether a planned cell phenotype measurement, series of cell phenotype measurements, test, or observation was performed or specimens collected.	Was the (cell phenotype) specimen collected?; Was the (cell phenotype) test performed?	Cell Phenotype Test Performed; Specimen Collected	Char	O	Indicate whether or not the cell phenotype specimen was collected or measurement performed.	CPSTAT	This does not map directly to an SDTMIG variable. May be used to derive a value into the SDTMIG variable CPSTAT. If the CDASH variable CPPERF="N", the value of CPSTAT will be "NOT DONE". If CPPERF="Y", CPSTAT should be null. A combination of SDTMIG variables (e.g., CPCAT and CPSCAT, CPTPT) is used to indicate that multiple tests were not done. In this situation, the SDTMIG variable CPTTESTCD would be populated as CPALL and an appropriate test name (CPTTEST) provided. See SDTMIG for additional information.	(NY)	N/A	This may be implemented for an entire cell phenotype category, or a specific cell phenotype test. This general prompt question is used as a data management tool to verify that missing results are confirmed missing.
Findings	CP	N/A	N/A	9	CPREFID	Cell Phenotype Specimen Reference ID	An internal or external identifier (e.g., specimen identifier).	What was the (cell phenotype specimen) [reference identifier/accession number]?	(Cell Phenotype specimen) [Reference Identifier/Accession Number]	Char	R/C	Record the cell phenotype specimen or accession number assigned.	CPREFID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. May be used to create RELREC to link this record with a record in another domain.	N/A	N/A	This can be used to confirm that the appropriate data record is present in the electronic transfer. May be included for linking back to cell phenotype specimens (e.g., Specimen ID).
Findings	CP	N/A	N/A	10	CPTPT	Cell Phntype Test Planned Time Point Name	A text description of planned time point when measurements should be taken, as defined in the protocol.	What was the planned time point of the collection?	[Planned Time Point Name]	Char	R/C	Record the planned time-point labels for the cell phenotype test, if not preprinted on the CRF.	CPTPT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. See the SDTMIG for additional information on representing time points. SDTMIG time-point anchors CPTPTREF (text description) and CPRFTDTC (date/time) may be needed, as well as SDTMIG variables CPTPTNUM, CPELTM.	N/A	N/A	Planned time points are needed to differentiate multiple sequential assessments. It is recommended that time points should be preprinted on the CRF rather than collected in a free-text field. If the form is laid out as a grid, then words such as "Planned Time Point" can be included in the column heading.
Findings	CP	N/A	N/A	11	CPDAT	Cell Phenotype Specimen Collection Date	The date of cell phenotype specimen collection, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the (start) date of the cell phenotype specimen collection?	Cell Phenotype Specimen Collection (Start) Date	Char	R/C	Record the (start) date when the cell phenotype specimen collection was done using this format (DD-MON-YYYY).	CPDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable CPDTC in ISO 8601 format.	N/A	N/A	A complete date is expected. The date of cell phenotype specimen collection may be determined from the date of visit (VISDAT) and, if so, a separate collection date field is not required. The SDTMIG CPDTC variable contains either a date/time when a cell phenotype specimen is collected at a point in time or the start date/time, when a cell phenotype specimen is collected over time.
Findings	CP	N/A	N/A	12	CPTIM	Cell Phenotype Specimen Collection Time	The time of cell phenotype specimen collection, represented in an unambiguous time format (e.g., hh:mm:ss).	What was the (start) time of the cell phenotype specimen collection?	Cell Phenotype Specimen Collection (Start) Time	Char	R/C	Record the (start) time of collection (as complete as possible).	CPDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable CPDTC in ISO 8601 format.	N/A	N/A	May be required when multiple cell phenotype specimens are collected on 1 day or when the timing in relationship to study treatment is required for analysis or a cell phenotype specimen is collected over an extended time period.

Assumptions for the CDASHIG CP - Cell Phenotype Findings Domain

1. The Cell Phenotype domain captures cell phenotyping and related data based on cell expression markers and other indicators (e.g., stains/dyes) in disseminated tissue specimens and cell suspensions.
2. The CP domain is only used for tests which include a phenotyping component that relies on using cell markers to identify a specific population of cells (e.g., quantitative cell phenotyping), or on which the test is conducted (e.g., quantitative single marker expression, target/receptor occupancy). For example, a test which measures gamma-interferon expression in helper T lymphocytes defined as the CD45+CD3+CD4+CD8- population is an appropriate test for including in CP, whereas a test which measures gamma interferon secretion in an undefined "PBMC" (peripheral blood mononuclear cell) population is not appropriate.
3. A value which is calculated and reported by a lab according to its procedures is considered collected rather than derived; the Derived Flag (CPDRVFL) should be null for these results.
4. CPCELSTA is used in conjunction with CPSCMRKS. When CPCELSTA is populated, CPSCMRKS must also be populated. Conversely, when CPSCMRKS is populated, CPCELSTA must be populated.
5. The combination of values in CPTEST, CPSBMRKS, CPCELSTA, and CPCSMRKS is used to uniquely identify a test. When 1 or more of the variables CPSBMRKS, CPCELSTA, or CPCSMRKS are populated, the Test Name (CPTEST) must be populated with the test name variant containing the "Sub" suffix to indicate that the finding/result pertains to a subpopulation of the cell type named in CPTEST.
6. Populating the CPTEST and CPMRKSTR variables: The general structure of CPTEST depends on the use case (e.g., immunophenotyping, quantitative marker expression, target/receptor occupancy), which is generally conveyed by the CPCAT and/or CPSCAT value(s). Currently, CP supports the following use cases for which guidance on CPTEST and CPMRKSTR values are given:
 - a. Immunophenotyping
 - i. CPTEST is populated with the name of the cell type being measured, not with the set of markers used to define the cell type.
 - ii. It is expected that CPMRKSTR is populated, and that it contains the entire set of markers used to define the test, including those that are also present in CPSBMRKS and/or CPCSMRKS.
 - iii. Marker strings follow, as closely as possible, formatting recommendations presented in assumption 8.
 - b. Quantitative single-marker expression
 - i. CPTEST begins with the identity of the marker (e.g., CD99), followed by the word "Expression" (e.g., "CD99 Expression").
 - ii. It is expected that CPMRKSTR is populated, and that it starts by identifying the marker being quantified (e.g. "CD99"). This is followed by a delimiter (described below) and then the entire marker string used to define the cell population on which the marker is measured, including the marker being quantified, since it also defines the cell population.
 - iii. The general form of the delimiter used to separate the marker being quantified from the cell population on which it is measured is "<space>xxxx<space>", where "xxxx" represents a character string used as delimiting text. It is recommended that the delimiting text is the abbreviation for the unit of measure used to report the level of expression of the quantified marker (e.g., "MESF", "MdFI"). An example which follows this guidance is: CPTEST = "CD99 Expression" and CPMRKSTR = "CD99 MESF CD45+CD3-CD19+CD99+", where "MESF" is the text delimiter and is followed by the entire marker string defining the cell population on which CD99 was measured, which includes the CD99 marker itself.
 - iv. Marker strings follow, as closely as possible, formatting recommendations presented in assumption 8.
 - c. Other use cases (e.g., target/receptor occupancy), refer to the examples section and to published Controlled Terminology supporting CP. In the case of target/receptor occupancy a more generalized test value is populated into CPTEST (e.g., "Total Bound") and the identity of the target/receptor is

included in another variable, such as CPBNDAGT and/or CPTSTPNL (refer to examples). CDISC will continue to develop examples for other use cases as they are identified and modeled.

7. Specifying viability

- a. Because the majority of cell phenotyping tests of interest are for viable cells, the word "Viable" is not generally included in the test name (CPTEST) and usually does not need to be explicitly stated in CPCELSTA. Because populating CPCELSTA and CSMRKS with viability information necessitates appending the "Sub" suffix to the value in CPTEST (per assumption 5), it is recommended that CPCELSTA and CPCSMRKS generally not be used unless a selective viability stain was included in the test in order to differentiate the record for viable cells from record(s) for cells in a different vital state. For example, when viable cells are being compared to apoptotic and/or non-viable cells, it is necessary to differentiate those records using CPCELSTA and CPCSMRKS. In such cases where CPCELSTA and CPCSMRKS are populated, the "Sub" suffix is appended to the value in CPTEST (see assumption 5).
 - b. Viability marker(s) used to define a test are included in the full marker string in CPMRKSTR regardless of whether the viability status is stated explicitly in CPCELSTA. Moreover, if viability is explicitly stated in CPGATE, the marker(s) used to designate viability are included in CPGATDEF. For example, if the value in CPGATE is "Lymphocytes, Viable" and 7AAD- was used to define the viable state, 7AAD- is included in CPGATDEF, in addition to being included in the complete marker string in CPMRKSTR.
- ## 8. Recommended formatting of marker string variables CPMRKSTR, CPSBMRKS, and CPCSMRKS: The marker string variables provide critical information for defining a test. Although there are no current plans to control their values through CDISC Controlled Terminology codelists, adherence to the following formatting guidelines helps to preclude ambiguities that can lead to uncertainty in uniquely understanding a test and its associated result.
- a. Marker strings do not contain delimiting characters (e.g., ",", space, "/", "|") to separate individual markers within the string, nor do they contain punctuation (e.g., hyphens) within individual markers, as these can be confused with symbols used to designate levels of expression and/or make it difficult to distinguish between the individual markers that comprise the string. For example, although the scientific literature often uses "HLA-DR", this is represented in CP marker strings as "HLADR".
 - b. Forward slash "/" is only used to separate the portion of the marker string defining a numerator from the portion defining a denominator.
 - c. When referring to a marker using the cluster of differentiation (CD) designation, "CD" should be included as part of the marker reference. For example, a marker string for helper T lymphocytes comprising CD45, CD3, CD4, and CD8 markers would be "CD45+CD3+CD4+CD8-" (rather than "45+3+4+8-").
 - d. The order of markers within a string is consistent across similar tests, generally proceeding in the order that defines the cell hierarchy from highest to lowest, followed by additional non-lineage-defining markers, and ending with cell state and viability markers. This order maintains alignment with how a test is identified using the ordered combination of CPTEST, CPSMRKS, and CPCELSTA. For example, a test for proliferating viable activated central memory helper T-lymphocytes would be operationally defined in CPMRKSTR as similar to "CD45+CD3+CD19-CD4+CD8-CD197+CD45RA-CD278+Ki67+7AAD-", where the order of markers in the string is "CD45" (leukocyte), "CD3+CD19-" (T lymphocyte), "CD4+CD8-" (helper), "CD197+CD45RA-" (central memory), "CD278+ (activated), Ki67+ (proliferating), 7AAD- (viable). Corresponding to this marker-based definition of the test, and using the appropriate Controlled Terminology terms, CPTEST is "TLym Help Cen Mem Sub", CPCELSTA is "ACTIVATED; PROLIFERATING", and CPCSMRKS is "CD278+Ki67+". If the sponsor also chose to include the viability status as a cell state in addition to the activation and proliferative states, CPCELSTA would be similar to "ACTIVATED; PROLIFERATING; VIABLE" and the corresponding CPCSMRKS value would be "CD278+Ki67+7AAD-". In this example, the named cell population in CPTEST has not been further divided into an unnamed sublineage based on additional sublineage markers; therefore, CPSBMRKS is null.

- e. Forward (FSC) and Side (SSC) light scatter: These parameters are generally used to perform initial gating to exclude debris non-singlets and are often reapplied to differentiate cell subpopulations in the "inclusion" gate. However, FSC and SSC are often not included in marker string definitions as it is generally taken for granted that they were used. In contrast, they *are* usually included in a description of a gating strategy, and would generally be included in CPGATDEF when the full gating strategy is shown. Labs/sponsors may choose whether to include FSC and SSC parameters in CPMRKSTR. It is recommended to include them when they are needed to differentiate one test from another. For example, because there is no universal expression marker specific for lymphocytes, FSC and SSC are used to define the lymphocyte subpopulation within a CD45+ leukocyte population. A test of "Lymphocytes/Leukocytes" defined only in terms of CD45 expression would not make sense as it would be "CD45+/CD45+". In this case, it makes sense to define lymphocytes as "CD45+SSC_{lo}" so that the value in CPMRKSTR is "CD45+SSC_{lo}/CD45+".
- f. Indicating the expression level of individual markers included in a marker string: A variety of formats are used in the scientific literature for indicating the level of expression of a marker on or within a cell. For example, after identifying a marker such as CD4, its level of expression might be represented as 1 of the following:
 - i. neg, min, or - to denote the absence or minimal expression (e.g., CD4_{neg}, CD4_{min}, CD4₋)
 - ii. pos or + to denote that the marker is expressed (e.g., CD4_{pos}, CD4₊)
 - iii. high, hi, or ++ to denote that the marker is expressed at a very high level relative to simply being "positive" (e.g., CD4_{high}, CD4_{hi}, CD4₊₊)
 - iv. other formats (e.g., -/low, -/lo, low, lo, mid, -/+, +++)
- g. Because categories for expression levels are subjective in the sense that they are relative to one another, various formats often overlap, which can create ambiguities. Some degree of consistency in formats used to represent relative expression levels is warranted to mitigate ambiguity, at least to the extent that relative expression levels used to define cell lineages/sublineages are similar across studies and laboratories in order to enable comparisons. Five designations are recommended for use in SDTM datasets:
 - i. "-" (the marker is not expressed; at times, the use of "-lo" may be justified to indicate that the marker is either not expressed or is present in a negligible amount)
 - ii. "lo" (the marker is expressed at a low level)
 - iii. "mid" (the marker is expressed somewhere between a low and "normal" positive level for that cell type)
 - iv. "+" (the marker is expressed at a normal positive level for that cell type)
 - v. "hi" (the marker is expressed at a distinctly higher level than in cells that are "+", such that they are distinguishable from the "+" population and define their own subpopulation)
 - vi. Although these designations are expected to be useful in the majority of cases, it is recognized that designations not listed here may be more appropriate in some cases. The data provider must determine the best way to designate an expression level suited to the purpose of the test, while striving to mitigate ambiguities resulting from lack of consistency of use.
- h. Explicitly indicating the cellular sublocation for a marker: In most cases, the location of a marker on or within a cell is not necessary; however, there are situations in which a marker can be expressed in more than a single cellular compartment and there is a need for the test to distinguish between marker expression in one compartment versus another. To accommodate this, using a lowercase letter in front of the marker is recommended. The cell sublocations are usually related to the cell surface (plasma membrane), cytoplasm, and nucleus. Use *m*, *c*, or *n* in front of the marker to denote "membrane", "cytoplasm", and "nucleus", respectively. An example of a marker often associated with a need to indicate cell location is CD152 (CTLA4), where cytoplasmic expression may define a test to distinguish it from whole cell expression. In this case, "cCD152" is used to denote that it is the cytoplasmic expression of CD152 that is measured for the test.

9. CPNRIND can be added to indicate where a result falls with respect to a reference range defined by CPORNRLO and CPORNRHI (e.g., "HIGH", "LOW").
10. The variable CPORRESU uses the UNIT codelist. This means that sponsors should be submitting a term from the CDISC Submission Value column in the published Controlled Terminology maintained for CDISC by NCI EVS. When sponsors have units that are not in this column, they should first check to see if their unit is mathematically synonymous with an existing unit and submit their lab values using that unit. If this is not the case, then a request for a new term (see <https://ncitform.nci.nih.gov/>) should be submitted.

Example CRF for the CDASHIG CP - Cell Phenotype Findings Domain

Example 1

This CRF shows the use of a targeted comment to collect the reason a pharmacokinetics (PK) sample was drawn more than 5 minutes late.

Title: Cell Phenotype Findings

	Planned Time Point CPTPT <i>Pre-populated</i>	PRE-DOSE
Indicate whether or not the cell phenotype specimen was collected or measurement performed.	Was the cell phenotype specimen collected? CPPERF CPSTAT = "NOT DONE" where CPPERF = "N" and CPSTAT = null where CPPERF = "Y"	☐ Yes ☐ No <NY codelist>
Record the date when the cell phenotype specimen collection was done using this format (DD-MON-YYYY).	Cell Phenotype Specimen Collection Date CPDAT CPDTC	
Record the (start) time of collection (as complete as possible).	Cell Phenotype Specimen Collection Time CPTIM CPDTC	
Record the specimen or accession number assigned.	What was the cell phenotype specimen accession number? CPREFID	

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
CPTPT	1	What was the planned time point of the collection?	Planned Time Point	Record the planned time-point labels for the cell phenotype test, if not pre-printed on the CRF.	Text	CPTPT				PRE-DOSE	Prompt		
CPPERF	2	Was the cell phenotype specimen collected?	Cell Phenotype Specimen Collected	Indicate whether or not the cell phenotype specimen was collected or measurement performed.	Text	CPSTAT	CPSTAT = "NOT DONE" where CPPERF = "N" and CPSTAT = null where CPPERF = "Y"	(NY)	Yes; No			radio	
CPDAT	3	What was the date of the cell phenotype specimen collection?	Cell Phenotype Specimen Collection Date	Record the date when the cell phenotype specimen collection was done using this format (DD-MON-YYYY).	Date	CPDTC					Prompt		
CPTIM	4	What was the time of the cell phenotype specimen collection?	Cell Phenotype Specimen Collection Time	Record the (start) time of collection (as complete as possible).	Time	CPDTC					Prompt		
CPREFID	5	What was the cell phenotype specimen accession number?	Cell Phenotype Specimen Accession Number	Record the specimen or accession number assigned.	Text	CPREFID							

8.3.3 CV - Cardiovascular Systems Findings

Description/Overview for the CDASHIG CV - Cardiovascular Systems Findings Domain

A Findings domain that contains physiological and morphological findings related to the cardiovascular system, including the heart, blood vessels, and lymphatic vessels.

Specification for the CDASHIG CV - Cardiovascular Systems Findings Domain

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/ CDASH Codelist Name	Implementation Notes
Findings	CV	N/A	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTM variable listed in the SDTM Target column .	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included in the database or populated during SDTM-based dataset creation.
Findings	CV	N/A	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted on the CRFs that are shipped to each site. EDC: This should be prepopulated.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/ CDASH Codelist Name	Implementation Notes
Findings	CV	N/A	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What is the subject identifier?	Subject	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be provided to the site using a prepopulated list in the system. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Findings	CV	N/A	N/A	4	VISIT	Visit Name	The name of a clinical encounter that encompasses planned and unplanned trial interventions, procedures, and assessments that may be performed on a subject.	What is the visit name?	[Visit]	Char	R/C	N/A	VISIT	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	The name of the clinical encounter is typically preprinted on the CRF or displayed in the EDC for any visit-based data collection, most often in Findings domains. This Visit text description is then available in any EDC data extract for that Findings domain.
Findings	CV	N/A	N/A	5	VISDAT	Visit Date	Date the clinical encounter occurred (or started).	What [is/was] the date of the visit?	(Visit) Date	Char	R/C	Record the [date/start date] of the visit using this format (DD-MON-YYYY).	N/A	This field is not an SDTM variable. The date of a measurement, test, observation can be determined from the date/time of visit (VISDAT/VISTIM) and then concatenating the CDASH VISDAT/VISTIM components and populating the SDTMIG variable VSDTC in ISO 8601 format.	N/A	N/A	The date the CV measurements were collected can be determined from the visit date variable (VISDAT) and applying that date to all of the observations at that visit, or the collection date can be included on the CV CRF using the Cardiovascular Assessments (CVDAT) field.
Findings	CV	N/A	N/A	6	CVPERF	Cardiovascular Assessment Performed	An indication of whether a planned measurement, test, observation or specimen was performed/collected.	Was cardiovascular assessment performed?	Cardiovascular Assessment Performed	Char	O	Indicate whether or not a cardiovascular assessment was done.	CVSTAT	This field does not map directly to an SDTM variable. May be used to populate a value into the SDTM variable CVSTAT. If the CDASH variable CVPERF="N", the value of the SDTM variable CVSTAT is "NOT DONE". If CVPERF= "Y", CVSTAT is null. A combination of SDTM variables (e.g. CVCAT and CVSCAT, CVTPT) is used to indicate that multiple tests were not done. In this situation, the SDTM variable CVTESTCD would be populated with CVALL and an appropriate test name (CVTEST) provided. See	(NY)	N/A	This field is used to capture a response to whether or not a planned measurement, test or observation was performed. A negative response can be collected as "N" and mapped to the -STAT variable in SDTM as " NOT DONE".

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/ CDASH Codelist Name	Implementation Notes
														SDTMIG for additional information.			
Findings	CV	N/A	N/A	7	CVDAT	Cardiovascular Assessment Date	The date the cardiovascular assessment was performed, represented in an unambiguous date format (e.g. DD-MON-YYYY).	What was the date cardiovascular assessment was performed?	Date	Char	R/C	Record date of assessment was performed using this format (DD-MON-YYYY).	CVDTC	This field does not map directly to an SDTM variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTM variable CVDTC in ISO 8601 format.	N/A	N/A	The date the CV assessment was performed can be determined from the visit date variable (VISDAT) and applying that date to all of the observations at that visit, or the collection date can be included on the CV CRF using the Date of Collection (CVDAT) field.
Findings	CV	N/A	N/A	8	CVTIM	Cardiovascular Assessment Time	The time of assessment, represented in an unambiguous time format (e.g. hh:mm:ss).	What was the time of the Cardiovascular assessment performed?	Time	Char	R/C	Record time of measurement (as complete as possible).	CVDTC	This field does not map directly to an SDTM variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTM variable CVDTC in ISO 8601 format.	N/A	N/A	May be required when multiple assessments are done on 1 day or when the timing in relationship to study treatment is required for analysis
Findings	CV	N/A	N/A	9	CVTPT	CV Assessment Planned Time Point Name	A text description of planned time points when assessments should be performed, as defined in the protocol.	What is the planned time point for this Cardiovascular assessment performed?	[Planned Time Point Name]	Char	R/C	Record the planned time-point labels for cardiovascular assessment, if not preprinted on the CRF.	CVTPT	Maps directly to the SDTM variable listed in the SDTM Target column. See the SDTMIG for additional information on representing time points. The SDTM time-point anchors CVTPTREF (text description) and CVRFTDTC (date/time) may be needed, as well as SDTMIG variables CVTPTNUM, CVELTM.	N/A	N/A	Planned time points are needed to differentiate multiple sequential assessments. It is recommended that time points should be preprinted on the CRF rather than collected in a free-text field. If the form is laid out as a grid, then terms such as "Planned Time Point" can be included in the column heading.
Findings	CV	N/A	N/A	10	CVTEST	Cardiovascular Assessment Test Name	Descriptive name of assessment used to obtain the measurement or finding.	What is the cardiovascular test name?	[Cardiovascular Test Name]	Char	HR	Record the name of the cardiovascular test, if not preprinted on the CRF.	CVTEST; CVTESTCD	Maps directly to the SDTM variable listed in the SDTM Target column. The SDTM variable CVESTCD may be determined from the value collected in CVTEST using the Controlled Terminology List CVTESTCD. The SDTMIG variables CVTESTCD and CVTEST are required in SDTM.	(CVTEST)	N/A	The test name will usually be preprinted on the CRF, and not solicited as a question. If the form is laid out as a grid, then "Test" or "Test Name" can be included in the column heading. CVTEST is most useful as the PROMPT on the field in which the RESULT for that test is collected.
Findings	CV	N/A	N/A	11	CVCAT	Category for Cardiovascular Test	A grouping of topic variable values based on user-defined characteristics.	What is the category of the Cardiovascular test?	[Cardiovascular Test Category]; NULL	Char	R/C	Record the Cardiovascular assessment category if not preprinted on the CRF.	CVCAT	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, not a question to which the site would provide an answer. If a

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/ CDASH Codelist Name	Implementation Notes
																	question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Category" can be included as the column header.
Findings	CV	N/A	N/A	12	CVSCAT	Subcategory Cardiovascular Test	A sub-division of the CVCAT values based on user-defined characteristics.	What was the subcategory of the cardiovascular test?	[Cardiovascular Test Subcategory]; NULL	Char	O	Record the Cardiovascular assessment subcategory if not preprinted on the CRF.	CVSCAT	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined code list. If the form is laid out as a grid, then words such as "Subcategory" can be included in the column heading. CVSCAT can only be used if there is a CVCAT, and it must be a subcategorization of CVCAT.
Findings	CV	N/A	N/A	13	CVORRES	CV Assessment Result in Original Units	Result of the measurement or finding as originally received or collected.	What was the result of the measurement?	[CVTEST] Result	Char	HR	Record the Cardiovascular test result.	CVORRES	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	Both quantitative results and interpretive findings or summaries may be recorded here.
Findings	CV	N/A	N/A	14	CVORRESU	CV Assessment Original Unit	The unit of the result as originally received or collected.	What was the unit of the result?	Unit	Char	R/C	Record or select the original unit in which these data were collected, if not preprinted on CRF.	CVORRESU	Maps directly to the SDTM variable listed in the SDTM Target column.	(UNIT)	N/A	Should be preprinted on the CRF with the associated test when possible, rather than collected in a free-text field. Should be included if applicable and not available elsewhere.
Findings	CV	N/A	N/A	15	CVRES	CV Assessment Test Result or Finding	The result of the measurement or finding as originally received or collected.	Was the result (normal/abnormal/absent/present/ [sponsored defined response])?	(Result)	Char	O	Indicate the overall assessment for [CVTEST].	CVORRES	This does not map directly to an SDTM variable. The mapping instructions depend on the implementation; for example: 1. Where CVRES is to used collect Normal, Abnormal or similar type classifications (e.g., Absent/Present) with a description of the abnormal result using the CDASH field CVDESC. For SDTM submission datasets, If the CDASH field CVRES = "NORMAL",	N/A	N/A	The CDASH field CVRES is used when the collected results are not mapped directly to the SDTM variable CVORRES and must be transformed. For example, 1. CVRES is used to collect standardized values on the CRF and the value of "OTHER" is included and "Specify Other" is collected.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/ CDASH Codelist Name	Implementation Notes
														populate the SDTM variables CVORRES and CVSTRESC with the value of the CDASH field CVRES. If the CDASH field CVRES is "ABNORMAL", populate the SDTM variable REORRES with the CDASH field CVDESC. If the reported findings in CVDESC are coded using a dictionary, then the SDTM variable CVSTRESC is populated with the dictionary preferred term and CVMODIFY is populated with the modified text used for coding. If the reported findings in CVDESC are not coded, then the SDTM variable CVSTRESC is populated with the CDASH CVDESC field. The SDTM variable CVNRIND may be populated with "NORMAL" or "ABNORMAL" if appropriate. 2. Where CVRES is used to collect standardized values (e.g. a codelist) on the CRF and the value of "OTHER" is included, the CDASH field CVRESOTH can be used to collect free-text values for "Specify Other". When using this field, the "OTHER" value recorded in the CDASH field CVRES field is mapped to the SDTM variable CVSTRESC and the value in the CDASH field CVRESOTH is mapped to the SDTM variable REORR.			2. CVORES is collected using Normal, Abnormal and a description of the abnormality is collected.
Findings	CV	N/A	N/A	16	CVDESC	Description of CV Test Finding	Text description of CV test findings.	What was the description of the (abnormality/observed finding/[Sponsor-defined])?	(abnormal) Findings	Char	O	Record all abnormal findings for the Cardiovascular test in the space provided.	CVORRES	This does not map directly to an SDTM variable. May be used to populate a value into the SDTM variable CVORRES. If CVRES="Normal", populate CVORRES with the value of CVRES. If CVRES="Abnormal",	N/A	N/A	CVRES and CVDESC are used when a question is asked to collect the finding result with a follow-up question for a description of the finding. See Section 8.3.1 General CDASH

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/ CDASH Codelist Name	Implementation Notes
														populate CVORRES with the value of CVDESC.			Assumptions for Findings Domains.
Findings	CV	N/A	N/A	21	CVSTAT	CV Completion Status	This variable is used to indicate that data are not available, by having the site recording the value as "Not Done".	Indicate if the [CVTEST] was not [answered/assessed/done/evaluated/ performed].	Not Done	Char	O	Indicate if the cardiovascular test was not done.	CVSTAT	Maps directly to the SDTM variable listed in the SDTM Target column. If collected, the Origin (a column in the Define-XML) ="CRF"; if populated from other sources such as free text or sponsor-defined listing for CVREASND, the Origin ="DERIVED".	(ND)	N/A	Used only when the response value is collected as NOT DONE or NULL in lieu of or in addition to the CDASH CVPERF field. Typically a checkbox which indicates the test was NOT DONE. This field can be useful when multiple questions are asked to confirm that a blank result field is meant to be blank.
Findings	CV	N/A	N/A	22	CVREASND	CV Reason Not Done	An explanation for why the data are not available.	Was the was the reason that the cardiovascular (assessment/[CVTEST]) was not [collected / answered / done / assessed / evaluated]?	Reason Not [Answered/Collected/Done/Evaluated/ Assessed/ Available]	Char	O	Provide the reason the measurement or test was not done.	CVREASND	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	Sponsor-defined controlled terminology may be used. The reason the data are not available may be chosen from a sponsor-defined codelist (e.g., broken equipment, subject refused) or entered as free text. When CVREASND is used, CVSTAT should also be populated in the SDTM-based dataset.
Findings	CV	N/A	N/A	23	CVPOS	CV Position of Subject	The position of the subject during a measurement or examination.	What was the position of the subject during the assessment?	Position	Char	O	Record the position of subject at time of test.	CVPOS	Maps directly to the SDTM variable listed in the SDTM Target column.	(POSITION)	N/A	Results may be affected by whether conditions for Cardiovascular test, as specified in the protocol, were properly met. One common condition is the subject's position. If the protocol requires this type of information, then a CDASH variable [CVTESTCD]_CVPOS may be created for each CVTESTCD and added to the CRF, if needed.
Findings	CV	N/A	N/A	24	CVLOC	Location of CV Assessment Measurement	Location used for the measurement.	What was the anatomical location where the assessment was performed/measurement was taken?	Anatomical Location	Char	O	Record or select location on body where the measurement was performed.	CVLOC	Maps directly to the SDTM variable listed in the SDTM Target column.	(LOC)	N/A	Collected or preprinted when the sponsor needs to identify the specific anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF.LAT, DIR, and PORTOT are used to further describe the anatomical location.
Findings	CV	N/A	N/A	25	CVLAT	Cardiovascular Assessment Laterality	Qualifier for anatomical location.	What was the side of the anatomical location of the [measurement/test/examination])?	Side	Char	O	Record the side of the anatomical	CVLAT	Maps directly to the SDTM variable listed in the SDTM Target column.	(LAT)	N/A	May be preprinted or collected when the sponsor needs to

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/ CDASH Codelist Name	Implementation Notes
							further detailing the side of the body.					location of the cardiovascular test or measurement.					identify the specific side of the anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Findings	CV	N/A	N/A	26	CVDIR	Cardiovascular Assessment Directionality	Qualifier further detailing the position of the anatomical location, relative to the center of the body, organ, or specimen.	What was the directionality of the anatomical location of the cardiovascular test?	Directionality	Char	O	Record the directionality of the anatomical location of the cardiovascular test.	CVDIR	Maps directly to the SDTM variable listed in the SDTM Target column.	(DIR)	N/A	May be preprinted or collected when the sponsor needs to identify the directionality of the anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Findings	CV	N/A	N/A	27	CVMETHOD	Method of Cardiovascular Assessment	The method of the test or examination.	What was the method (used for the [measurement/test/examination])?	Method	Char	O	Record the method used for the cardiovascular test.	CVMETHOD	Maps directly to the SDTM variable listed in the SDTM Target column.	(METHOD)	N/A	This information may be collected when more than 1 method is possible, and collecting the method used is necessary.
Findings	CV	N/A	N/A	28	CVEVAL	Cardiovascular Assessment Evaluator	The role of the person who provided the evaluation.	Who was the evaluator?	Evaluator	Char	O	Select the role of the person who provided the evaluation.	CVEVAL	Maps directly to the SDTM variable listed in the SDTM Target column.	(EVAL)	N/A	Used only for results that are subjective (e.g., assigned by a person or a group). May be a preprinted or collected. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Findings	CV	N/A	N/A	29	CVEVALID	CV Assessment Evaluator Identifier	An identifier used to distinguish multiple evaluators with the same role recorded in CVEVAL.	What is the identifier of the evaluator?	Evaluator Identifier	Char	O	Record the unique identifier assigned to the person making the evaluation.	CVEVALID	Maps directly to the SDTM variable listed in the SDTM Target column.	(MEDEVAL)	N/A	Collect if multiple evaluators are used in the study (may be omitted if multiple evaluators are not used); values should follow controlled terminology.

Assumptions for the CDASHIG CV - Cardiovascular Systems Findings Domain

1.
- This domain has been designed to store data on cardiovascular physiological findings that include information relating to the heart, blood vessels, and circulation, such as ischemic myocardium percentage, stenosis, and New York Heart Association Class.
2.
- This domain holds results/findings of cardiovascular diagnostic procedures. Information about the conduct of the procedure(s), if collected, is submitted in the Procedure Domain (PR). Data describing structural measurements of the heart should be reported in the MO (Morphology) domain.
3.
- Any Identifiers, Timing variables, or Findings general observation class qualifiers may be added to the CV domain, but the following qualifiers would generally not be used in CV: --MODIFY, --BODSYS, -FAST, --ORNRLO, --ORNRHI, --TNRLO, --STNRHI, and --LOINC.

Example CRFs for the CDASHIG CV - Cardiovascular Systems Findings Domain

Example 1

This example shows various findings related to the aortic artery, along with evaluation for the presence or absence of abdominal aortic aneurysms.

Title: Findings related to the aortic artery

Record the date of the cardiovascular assessment, using this format (DD-MON-YYYY).	Collection Date CVDAT CVDTC	
	Cardiovascular Test Name CVTEST CVTESTCD <i>Pre-populated</i>	Transthoracic Echocardiography
This information may be collected when more than 1 method is possible.	What was the method of test used to obtain findings? CVMETHOD	Select...
Indicate the anatomical location, further detailing the side of the body where the measurement was taken.	What was the anatomical location where the measurement was taken? CVLOC	☐ Thoracic Aorta ☐ Suprarenal Aorta ☐ Infrarenal Aorta
Both quantitative results and interpretive findings or summaries may be recorded here.	What was the result of the finding? CVORRES	
Record or select the original unit in which these data were collected, if not preprinted on CRF.	Unit CVORRESU	 <unit codelist>

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-specified Values	Query Display	List Style	Hidden
CVDAT	1	What was the date of the cardiovascular assessment?	Collection Date	Record the date of the cardiovascular assessment, using this format (DD-MON-YYYY).	Date	CVDTC					Prompt		
CVTEST	2	What was the name of the cardiovascular assessment?	Cardiovascular Test Name	Indicate the cardiovascular test used to obtain findings.	Text	CVTEST; CVTESTCD				Transthoracic Echocardiography	Text		
CVMETHOD	5	What was the method of test used to obtain findings?	Method	This information may be collected when more than 1 method is possible.	Text	CVMETHOD			Aneurysm Indicator;Dissection Indicator;Stanford AoD Classification;Aneurysm Indication		Text	Dropdown	
CVLOC	4	What was the anatomical location where the measurement was taken?	Anatomical Location	Indicate the anatomical location, further detailing the side of the body where the	Text	CVLOC			Thoracic Aorta;Suprarenal Aorta; Infrarenal Aorta		Text	Radio	

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-specified Values	Query Display	List Style	Hidden
				measurement was taken.									
CVORRES	5	What was the result of the finding?	Result	Both quantitative results and interpretive findings or summaries may be recorded here.	Text	CVORRES					Text		
CVORRESU	5	What was the unit of the result?	Unit	Record or select the original unit in which these data were collected, if not preprinted on CRF.	Text	CVORRESU		(unit)			Prompt		

Example 2

This example represents the structure of the aortic valve evaluated during a transthoracic echocardiography procedure.

Title: Measurements of the Heart Chambers at Specific Points in the Cardiac Cycle

Record the date of the cardiovascular assessment, using this format (DD-MON-YYYY).	Collection Date CVDAT CVDTC	
Record the name of the cardiovascular system findings test.	What is the cardiovascular test name? CVTEST CVTESTCD	☐ Minor Axis Cross-sec Diameter ☐ Major Axis Cross-sec Diameter
	Category for Cardiovascular System Findings CVCAT <i>Hidden/pre-populated</i>	Valvular Structure, Common
	Method CVMETHOD <i>Hidden/pre-populated</i>	Transthoracic Echocardiography
Record or select location on body where the measurement was performed.	What was the anatomical location where the measurement was taken? CVLOC	☐ Heart ☐ Right Atrium Heart ☐ Left Ventricle
Result of the measurement or finding as originally received or collected.	What was the result of the measurement? CVORRES	
Record or select the original unit in which these data were collected.	Unit CVORRESU	 <unit codelist>

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-specified Values	Query Display	List Style	Hidden
CVDAT	1	What was the date of the	Collection Date	Record the date of the cardiovascular assessment, using	Date	CVDTC							

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-specified Values	Query Display	List Style	Hidden
		cardiovascular assessment?		this format (DD-MON-YYYY).									
CVCAT	3	What is the category for this cardiovascular system findings?	Category for Cardiovascular System Findings	Record the cardiovascular system finding category if not preprinted on the CRF.	Text	CVCAT				Valvular Structure, Common			Y
CVMETHOD	4	What was the method of test or examination?	Method	Record the method used for the cardiovascular test.	Text	CVMETHOD				Transthoracic Echocardiography			Y
CVLOC	5	What was the anatomical location where the measurement was taken?	Location of Cardiovascular System Findings	Record or select location on body where the measurement was performed.	Text	CVLOC			Heart; Right Atrium Heart; Left Ventricle				
CVTEST	2	What is the cardiovascular test name?	Cardiovascular System Findings Test Name	Record the name of the cardiovascular system findings test.	Text	CVTEST; CVTESTCD			Minor Axis Cross-sec Diameter; Major Axis Cross-sec Diameter;				
CVORRES	6	What was the result of the measurement?	Cardiovascular System Findings Result	Result of the measurement or finding as originally received or collected.	Text	CVORRES							
CVORRESU	7	What was the unit of the result?	Unit	Record or select the original unit in which these data were collected.	Text	CVORRESU		(unit)			Prompt		

8.3.4 DA - Product Accountability

Description/Overview for the CDASHIG DA - Product Accountability Domain

The CDASHIG DA domain is used to collect information about the accountability of study products, such as information on the receipt, dispensing, return, and packaging of study product materials used in a clinical trial.

The SDTMIG separates product accountability from the Exposure (EX) domain, which contains the data about a subject's actual exposure to study treatment. Per the SDTMIG, Product Accountability is "A findings domain that contains the accountability of study products, such as information on the receipt, dispensing, return, and packaging." The Exposure (EX) domain contains the details of a subject's exposure to protocol-specified study treatment. *Study treatment* may be any intervention that is prospectively defined as a test material within a study, and is typically but not always supplied to the subject. Examples of the latter include but are not limited to placebo, active comparators, and investigational products. Treatments that are not protocol-specified should be recorded in the Concomitant Medications (CM) domain. See the SDTMIG for more information on the CM, DA, and EX domains.

Care should be taken not to confuse product accountability with compliance or exposure. Comparing the amount of product dispensed to the subject and the amount returned by the subject does not necessarily mean the difference equates to the amount of product consumed by the subject or the subject's compliance with the treatment plan. For example, the subject could have dropped 2 tablets into the sink drain, which would not be reflected in the returned amount and could provide a false estimate of compliance.

Because the actual product name may not be known to the site at the time of dispensing or returning, the word *product* in the context of the CDASHIG DA domain refers to the identifier that references the product (e.g., bottle A, bottle B, drug A, drug B) rather than the actual (unblinded) product name.

The term *dispensed* refers to when the study product is provided to the subject, not when the subject uses or consumes the study product. The term *returned* refers to when the subject returns the unused study product to the investigational site.

In some cases sponsors may wish to link DA data to EX data. This may be accomplished by using the appropriate identifier variables and the relationship (RELREC) dataset as described in the SDTMIG. The CDASHIG DA domain is modeled in both normalized and denormalized structures to provide users with examples of how each structure could be implemented. Findings domains are typically represented in the vertical/normalized structure, which is usually the easiest and quickest way to collect, process, and clean data. However, users may have system constraints that prevent them from collecting data in the vertical/normalized manner. In such cases, the horizontal/denormalized version provides the structure necessary to collect the variables in another way.

Depending on the study design, the DA CRF/eCRF may not be required.

Specification for the CDASHIG DA - Product Accountability Domain

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings	DA	N/A	Horizontal-Generic	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included in the database or populated during SDTM-based dataset creation before submission.
Findings	DA	N/A	Horizontal-Generic	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be pre-preprinted on the CRFs that are shipped to each site. EDC: This should be prepopulated.
Findings	DA	N/A	Horizontal-Generic	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What [is/was] the (study) [subject/participant] identifier?	[Subject/Participant] (Identifier)	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system-generated. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Findings	DA	N/A	Horizontal-Generic	4	VISIT	Visit Name	The name of a clinical encounter that encompasses planned and unplanned trial interventions, procedures, and assessments that may be performed on a subject.	What is the visit name?	[Visit]	Char	R/C	N/A	VISIT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column..	N/A	N/A	The name of the clinical encounter is typically preprinted on the CRF or displayed within the EDC for any visit-based data collection, most often in Findings domains. This Visit text description is then available in any EDC data extract for that Findings domain.
Findings	DA	N/A	Horizontal-Generic	5	VISDAT	Visit Date	Date the clinical encounter occurred (or started).	What [is/was] the date of the visit?	(Visit) Date	Char	R/C	Record the [date/start date] of the visit using this format (DD-MON-YYYY).	N/A	This field is not an SDTM variable. The date of a measurement, test, observation can be determined from the date/time of visit (VISDAT/VISTIM) and	N/A	N/A	The date the drug accountability assessments were collected can be determined from the Visit Date variable (VISDAT) and applying that date to all of the observations at that visit, or the collection date

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
														then concatenating the CDASH VISDAT/VISTIM components and populating the SDTMIG variable DADTC in ISO 8601 format.			can be included on the DA CRF using the date (DADAT) field.
Findings	DA	N/A	Horizontal-Generic	6	DAGRPID	Product Accountability Group ID	A sponsor-defined identifier used to tie a block of related records in a single domain.	What is the test group identifier?	Test Group Identifier	Char	O	Record unique group identifier. Sponsor may insert additional instructions to ensure each record has a unique group identifier.	DAGRPID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	It can be beneficial to use an identifier in a data query to communicate clearly to the site the specific record in question. This group identifier ties together all the tests collected on this horizontal record. This field may be populated by the sponsor's data collection system.
Findings	DA	N/A	Horizontal-Generic	7	[DATESTCD]_DAPERF	Product Accountability Performed	An indication of whether a planned accountability assessment was performed.	Was [DATEST] collected?	[DATEST] Collected	Char	O	Indicate whether or not drug accountability was performed.	DASTAT	This does not map directly to an SDTMIG variable. May be used to derive a value into the SDTMIG variable DASTAT. If DAPERF="N", the value of DASTAT will be "NOT DONE". If DAPERF="Y", DASTAT should be null. A combination of SDTMIG variables (e.g., DACAT and DASCAT, DATPT) is used to indicate that multiple tests were not done. In this situation, the SDTM variable DATESTCD would be populated as DAALL and an appropriate test name (DATEST) provided. See SDTMIG for additional information.	(NY)	N/A	This general prompt question is used as a data management tool to verify that missing results are confirmed missing. This may be implemented for all tests collected on the same horizontal record or for each specific test. When mapped to SDTM, the value of DAPERF would apply to all tests on the same record. Use the CDASH variable [DATESTCD]_DAPERF when implemented on a specific test basis. This is an example of the type of CDASH variable names that can be used in a denormalized data structure.
Findings	DA	N/A	Horizontal-Generic	8	[DATESTCD]_DACAT	DA Category of Assessment	A grouping of topic-variable values based on user-defined characteristics.	What was the type of [treatment/study product/drug] for which accountability was assessed?	Treatment Type	Char	O	Record the type of study product for which accountability is assessed (e.g., STUDY MEDICATION, RESCUE MEDICATION, COMPARATOR, PLACEBO).	DACAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. If the protocol allows dispensing different types of study treatment (e.g., study medication, rescue medication, run-in medication) the CRF can capture the type of treatment using DACAT. This may be preprinted on the CRF. If DACAT is not collected (e.g., it is evident from the protocol design), it could be populated during the SDTM-based dataset creation process. The value of DACAT would apply to all measurements on that record when mapped to SDTM. If needed, the CDASH variable [DATESTCD]_DACAT may be used to collect a category for each DATEST. See SDTMIG for examples on populating DACAT and DASCAT. This is an example of the type of CDASH variable names that can be used in a denormalized data structure.
Findings	DA	N/A	Horizontal-Generic	9	[DATESTCD]_DASCAT	DA Subcategory of Assessment	A sub-division of the DACAT values based on user-defined characteristics.	What was the name of the [treatment/study product/drug] for which accountability was assessed?	[DATEST] [Treatment/Product] Name	Char	O	Record the name of the study product dispensed (e.g., DRUG A, DRUG B, BOTTLE 1).	DASCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a category value preprinted on the CRF, not a question to which the site would provide an answer. If a question is asked, the response

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Subcategory" can be included as the column header. If known at the time of data collection, the treatment name may be collected in DASCAT (with appropriate grouping values, but different from those for DACAT). The value of DASCAT would apply to all measurements on that record when mapped to SDTM. If needed, the CDASH variable [DATESTCD]_DASCAT may be used to collect a category for each DATEST. See SDTMIG for examples on populating DACAT and DASCAT. DASCAT can only be used if there is an DACAT, and it must be a subcategorization of DACAT.
Findings	DA	N/A	Horizontal-Generic	10	[DATESTCD]_DAREFID	DA Accountability Reference ID	An internal or external identifier such as study product label identifier (e.g., kit number, bottle label, vial identifier).	What is the [DATEST] label identifier?	[DSTEST] Label Identifier	Char	O	Record dispensed study product label identifier.	DAREFID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. May be used to create RELREC to link this record with a record in EX domain.	N/A	N/A	The packaging identifier (e.g., kit number, bottle label, vial identifier) may be collected in different ways (e.g., affixing label onto CRF, scanning a bar code). For some study dosing regimens, greater granularity for treatment identifiers may be needed. In this situation, sponsors may need to use additional variables. This is an example of the type of CDASH variable names that can be used in a denormalized data structure.
Findings	DA	N/A	Horizontal-Generic	11	[DATESTCD]_DADAT	DA Accountability Date of Assessment	The date the study product was dispensed or returned, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the date [DATEST] study product accountability was assessed?	[DATEST] Date	Char	R/C	Record the date study product accountability was performed, using this format (DD-MON-YYYY).	DADTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable DADTC in ISO 8601 format.	N/A	N/A	The date study treatment dispensed/returned should be recorded for each dispensation for a study with multiple periods or multiple products dispensed. A single date may be collected when all observations are performed on the same date. The date of each observation can also be collected using the CDASH variable [DATESTCD]_DADAT. The date of the observation may be determined from a collected date of visit and in such cases a separate measurement date field is not required. This is an example the type of CDASH variable names that can be used in a denormalized data structure.
Findings	DA	N/A	Horizontal-Generic	12	[DATESTCD]_DAORRES	DA Assessment Result in Original Units	Result of the study product accountability assessment (e.g., actual amount).	What is the amount of the [DATEST] accountability assessment?	[DATEST] Amount	Char	HR	Record the result of the study product accountability assessment.	DAORRES; DATEST; DATESTCD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. In addition to the SDTMIG variable DAORRES, create DATESTCD from the CDASH variable name and derive the value of DATEST from DATESTCD. The CDASH prompt may also contain DATEST. Use appropriate CDISC Controlled	N/A	N/A	Each test may be collected using the CDASH variable [TESTCD] (e.g., RETAMT) or [TESTCD]_DAORRES, where TESTCD is the appropriate CT for the DA test code (e.g., RETAMT_DAORRES). For a study with multiple periods or multiple products dispensed, drug accountability amounts should be assessed for each dispensation and return. For the SDTM submission dataset, DAREFID should be used to link related records. This is an example of the

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
														Terminology for the test and test code.			types of CDASH variable names that can be used in a denormalized data structure.
Findings	DA	N/A	Horizontal-Generic	13	[DATESTCD]_DAORRESU	DA Original Units	The unit of the result as originally received or collected.	What was the unit of the [DATEST] result?	[DATEST] Unit	Char	HR	Record or select the original units in which these data were collected, if not preprinted on CRF.	DAORRESU	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(UNIT)	(DAORRESU)	The unit should be preprinted on the CRF or a field provided on the CRF to capture it. This is an example of the types of CDASH variable names that can be used in a denormalized data structure.
Findings	DA	N/A	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included into the database or populated during SDTM-based dataset creation before submission.
Findings	DA	N/A	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted on the CRFs that are shipped to each site. EDC: This should be prepopulated.
Findings	DA	N/A	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What is the subject identifier?	Subject	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system generated. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Findings	DA	N/A	N/A	4	VISIT	Visit Name	The name of a clinical encounter that encompasses planned and unplanned trial interventions, procedures, and assessments that may be performed on a subject.	What is the visit name?	[Visit]	Char	R/C	N/A	VISIT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The name of the clinical encounter is typically preprinted on the CRF or displayed in the EDC for any visit-based data collection, most often in Findings domains. This Visit text description is then available in any EDC data extract for that Findings domain.
Findings	DA	N/A	N/A	5	VISDAT	Visit Date	Date the clinical encounter occurred (or started).	What [is/was] the date of the visit?	(Visit) Date	Char	R/C	Record the [date/start date] of the visit using this format (DD-MON-YYYY).	N/A	This field is not an SDTM variable. The date of a measurement, test, observation can be determined from the date/time of visit (VISDAT/VISTIM) and then concatenating the CDASH VISDAT/VISTIM components and populating the SDTMIG variable DADTC in ISO 8601 format.	N/A	N/A	The date the drug accountability assessments were collected can be determined from the Visit Date variable (VISDAT) and applying that date to all of the observations at that visit, or the collection date can be included on the DA CRF using the date (DADAT) field.
Findings	DA	N/A	N/A	6	DAPERF	Accountability Performed	An indication of whether a planned accountability assessment was performed.	Was drug accountability performed?	Accountability Performed	Char	O	Indicate whether or not study product accountability was performed.	DASTAT	This does not map directly to an SDTMIG variable. May be used to derive a value into the SDTMIG variable DASTAT. If DAPERF="N", the value of DASTAT will be "NOT DONE". If DAPERF="Y",	(NY)	N/A	This may be implemented on a CRF page level on a visit-by-visit basis. This general prompt question is used as a data management tool to verify that missing results are confirmed missing.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
														DASTAT should be null. A combination of SDTMIG variables (e.g., DACAT and DASCAT, DATPT) is used to indicate that multiple tests were not done. In this situation, the SDTMIG variable DATESTCD would be populated as DAALL and an appropriate test name (DATEST) provided. See SDTMIG for additional information.			
Findings	DA	N/A	N/A	7	DACAT	DA Category of Assessment	A grouping of topic-variable values based on user-defined characteristics.	What was the type of study product for which accountability was assessed?	[Study Product Type]; NULL	Char	O	Record the type of study product dispensed/returned.	DACAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be preprinted on the CRF or screen and prepopulated in the data management system. This is not typically a question to which the site would provide an answer. If the protocol allows dispensing different types of treatment (e.g., study medication, rescue medication, run-in medication) the CRF can capture the type of treatment using DACAT. This may be preprinted on the CRF. If DACAT is not collected (e.g., it is self-evident from the protocol design), it can be populated during the SDTM-based dataset creation process. See SDTMIG DA domain examples for populating DACAT and DASCAT.
Findings	DA	N/A	N/A	8	DASCAT	DA Subcategory of Assessment	A sub-division of the DACAT values based on user-defined characteristics.	What was the name of the study product for which accountability was assessed?	[Study Product Name]; NULL	Char	O	Record the name of the study product dispensed/returned (e.g., Bottle A, Bottle B).	DASCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be preprinted on the CRF or screen and prepopulated in the data management system. This is not typically a question to which the site would provide an answer. If known at the time of data collection, the treatment name may be collected in DASCAT (with appropriate grouping values, but different from those for DACAT). See SDTMIG DA domain examples for populating DACAT and DASCAT. DASCAT can only be used if there is an DACAT, and it must be a subcategorization of DACAT.
Findings	DA	N/A	N/A	9	DADAT	Drug Accountability Date	The date the study product was dispensed or returned, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the date the accountability assessment was performed?	Date	Char	R/C	Record the exact date the study treatment was (dispensed or returned), using this format (DD-MON-YYYY).	DADTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable DADTC in ISO 8601 format.	N/A	N/A	The date study treatment dispensed/returned should be recorded for each dispensation for a study with multiple periods or multiple products dispensed.
Findings	DA	N/A	N/A	10	DAREFID	Accountability Reference ID	An internal or external identifier such as study product label identifier (e.g., kit number, bottle	What was the study product label identifier?	Study Product Label Identifier	Char	O	Record treatment label identifier.	DAREFID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	For the SDTM submission dataset, DAREFID should be used to tie together a block of related records and to link dispensed product to returned product. The packaging identifier (e.g., kit number, bottle label, vial identifier) may be

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
							label, vial identifier).										collected in different ways (e.g., affixing label onto CRF, scanning a bar code). For some study dosing regimens, greater granularity for treatment identifiers may be needed. In this situation, sponsors may need to use additional identifier variables.
Findings	DA	N/A	N/A	11	DATEST	Name of Accountability Assessment	Descriptive name of the measurement or finding (e.g., dispensed, returned).	What was the study product accountability being assessed?	[Study Product Accountability Test Name]	Char	HR	Record the name of the study product accountability assessment if not preprinted on the CRF. If collected on the CRF, the sponsor may provide additional instructions to ensure the data is entered as intended.	DATEST; DATESTCD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The SDTMIG variable DATESTCD may be determined from the value collected in the CDASH field DATEST. The SDTMIG variables DATESTCD and DATEST are required in the SDTM submission datasets. Use appropriate CDISC Controlled Terminology for the test and test code.	(DATEST)	N/A	Required to identify which test the result is for. It is recommended that the test names preprinted on the CRF rather than collected in a field that requires the site to enter text. If the form is laid out as a grid, then words such as "Test" can be included as the column heading. For a study with multiple periods or multiple products dispensed, drug accountability amounts should be assessed for each dispensation.
Findings	DA	N/A	N/A	12	DAORRES	DA Assessment Result in Original Units	Result of the drug accountability assessment as originally dispensed or returned (e.g., actual amount).	What is the result of the accountability assessment?	Amount	Char	HR	Record the actual amount of treatment dispensed or returned.	DAORRES	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	For a study with multiple periods or multiple products dispensed, drug accountability amounts should be assessed for each dispensation.
Findings	DA	N/A	N/A	13	DAORRESU	DA Original Units	The unit of the result as originally received or collected.	What was the unit?	Unit	Char	HR	Record or select the original units in which these data were collected, if not preprinted on CRF.	DAORRESU	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(UNIT)	(DAORRESU)	Should be preprinted on the CRF with the associated test when possible, rather than collected in a free-text field.

Assumptions for the CDASHIG DA - Product Accountability Domain

1. The DA domain is only needed if this information will be collected for the study.
2. There may need to be a clear understanding of how the study products are identified (e.g., by subject, by masked ID) in order to set up data collection in a manner that makes sense. This is a cross-functional team issue that, if applicable, needs to be addressed early in planning.
3. Product accountability may be implemented for an entire study or on a visit-by-visit basis depending on the most logical approach for the protocol.
4. The DA panel can be used for studies that allow dispensing different types of study product (e.g., study medication, rescue medication, run-in medication) by using the DACAT variable to differentiate treatment types.

Example CRFs for the CDASHIG DA - Product Accountability Domain

Example 1

This example CRF shows normalized data collection for study product accountability information.

Title: Study Product Accountability

Indicate whether or not study product accountability was performed.

Was study product accountability performed?

DAPERF

 If "N" (No), then DASTAT = "NOT DONE" where DATESTCD = "DAALL". If "Y" (Yes), then NOT SUBMITTED.

☐ Yes

☐ No

<NY codelist>

Record the name of the study product dispensed/returned (e.g., Bottle A, Bottle B).

Study Product Type

DACAT

Pre-populated

STUDY MEDICATION

Record the exact date the study product was (dispensed or returned), using this format (DD-MON-YYYY).

Study Product Name

DASCAT

Record study product label identifier.

Date

DADAT

DADTC

Record the name of the study product accountability assessment if not prespecified on the CRF. If collected on the CRF, the sponsor may provide additional instructions to ensure the data is entered as intended.

Study Product Label Identifier

DAREFID

Record the actual amount of study product dispensed or returned.

What was the study product accountability being assessed?

DATEST

☐ Dispensed Amount

☐ Returned Amount

<DATEST codelist>

Record or select the original units in which these data were collected, if not preprinted on CRF.

Amount

DAORRES

Unit

DAORRESU

Select...

▼

<UNIT codelist>

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
DAPERF	1	Was study product accountability performed?	Study Product Accountability Performed	Indicate whether or not study product accountability was performed.	Text	DASTAT	If "N" (No), then DASTAT = "NOT DONE" where DATESTCD = "DAALL". If "Y" (Yes),	(NY)	Yes; No				

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
							then NOT SUBMITTED.						
DACAT	2	What was the type of study product for which drug accountability was assessed?	Study Product Type	Record the type of study product dispensed/returned.	Text	DACAT				STUDY MEDICATION	Prompt		
DASCAT	3	What was the name of the study product for which accountability was assessed?	Study Product Name	Record the name of the study product dispensed/returned (e.g., Bottle A, Bottle B).	Text	DASCAT					Prompt		
DADAT	4	What was the date the study product accountability assessment was performed?	Date	Record the exact date the study product was (dispensed or returned), using this format (DD-MON-YYYY).	Date	DADTC					Prompt		
DAREFID	5	What was the study product label identifier?	Study Product Label Identifier	Record study product label identifier.	Text	DAREFID					Prompt		
DATEST	6	What was the study product accountability being assessed?	Study Product Accountability Test Name	Record the name of the study product accountability assessment if not prespecified on the CRF. If collected on the CRF, the sponsor may provide additional instructions to ensure the data is entered as intended.	Text	DATEST		(DATEST)	Dispensed Amount; Returned Amount				
DAORRES	7	What is the result of the study product accountability assessment?	Amount	Record the actual amount of study product dispensed or returned.	Text	DAORRES					Prompt		
DAORRESU	8	What was the unit?	Unit	Record or select the original units in which these data were collected, if not preprinted on CRF.	Text	DAORRESU		(UNIT)	Bag Dosing Unit; Bottle Dosing Unit; Box Dosing Unit; Capsule Dosing Unit; Container Dosing Unit; Disk Dosing Unit; Gram; Milligram; Milliliter; Package Dosing Unit; Packet Dosing Unit; Patch Dosing Unit; Syringe Dosing Unit; Tablet Dosing Unit; Tube Dosing Unit; Vial Dosing Unit		Prompt		

Example 2

This example CRF shows denormalized data collection for study product accountability information.

Title: Study Product Accountability

Indicate whether or not dispensed study product accountability was performed.	Was dispensed amount collected? DISPAMT_DAPERF If N (No), then DASTAT = "NOT DONE" where DATESTCD = "DISPAMT". If Y (Yes), then NOT SUBMITTED.	☐ Yes ☐ No <NY codelist>
Record the exact date the study product was dispensed, using this format (DD-MON-YYYY).	Date Dispensed DISPAMT_DADAT DADTC where DATESTCD = "DISPAMT".	
	Study Product Type DISPAMT_DACAT DACAT Hidden/pre-populated	STUDY MEDICATION
Record dispensed treatment label identifier.	Dispensed Study Product Label Identifier DISPAMT_DAREFID DAREFID where DATESTCD = "DISPAMT".	
Record the actual amount of study treatment dispensed.	Dispensed Amount DISPAMT_DAOORRES DAOORRES where DATESTCD = "DISPAMT".	
Record or select the original units in which these data were collected, if not preprinted on CRF.	Unit DISPAMT_DAOORRESU DAOORRESU where DATESTCD = "DISPAMT".	Select... ▾ <UNIT codelist>
Indicate whether or not returned study product accountability was performed.	Was returned amount collected? RETAMT_DAPERF If N (No), then DASTAT = "NOT DONE" where DATESTCD = "RETAMT". If Y (Yes), then NOT SUBMITTED.	☐ Yes ☐ No <NY codelist>
Record the exact date the study product was returned, using this format (DD-MON-YYYY).	Date Returned RETAMT_DADAT DADTC where DATESTCD = "RETAMT".	
	Study Product Type RETAMT_DACAT DACAT Hidden/pre-populated	STUDY MEDICATION
Record returned study product label identifier.	Returned Study Product Label Identifier RETAMT_DAREFID DAREFID where DATESTCD = "RETAMT".	
Record the actual amount of study product returned.	Returned Amount RETAMT_DAOORRES DAOORRES where DATESTCD = "RETAMT".	
Record or select the original units in which these data were collected, if not preprinted on CRF.	Unit RETAMT_DAOORRESU DAOORRESU where DATESTCD = "RETAMT".	Select... ▾ <UNIT codelist>

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
DISPAMT_DAPERF	1	Was dispensed amount collected?	Dispensed Amount Collected	Indicate whether or not dispensed study product accountability was performed.	Text	DASTAT	If N (No), then DASTAT = "NOT DONE" where DATESTCD = "DISPAMT". If Y (Yes), then NOT SUBMITTED.	(NY)	Yes; No				
DISPAMT_DADAT	2	What was the date the study product accountability assessment was performed?	Date Dispensed	Record the exact date the study product was dispensed, using this format (DD-MON-YYYY).	Date	DADTC	DADTC where DATESTCD = "DISPAMT".						
DISPAMT_DACAT	3	What was the type of study product dispensed?	Study Product Type	Record the type of study product dispensed (e.g., STUDY MEDICATION, RESCUE MEDICATION, COMPARATOR, PLACEBO).	Text	DACAT				STUDY MEDICATION	Prompt		Yes
DISPAMT_DAREFID	4	What was the dispensed study product label identifier?	Dispensed Study Product Label Identifier	Record dispensed treatment label identifier.	Text	DAREFID	DAREFID where DATESTCD = "DISPAMT".				Prompt		
DISPAMT_DAORRES	5	What is the amount dispensed?	Dispensed Amount	Record the actual amount of study treatment dispensed.	Text	DAORRES; DATEST; DATESTCD	DAORRES where DATESTCD = "DISPAMT".				Prompt		
DISPAMT_DAORRESU	6	What was the unit?	Unit	Record or select the original units in which these data were collected, if not preprinted on CRF.	Text	DAORRESU	DAORRESU where DATESTCD = "DISPAMT".	(UNIT)	Bag Dosing Unit; Bottle Dosing Unit; Box Dosing Unit; Capsule Dosing Unit; Container Dosing Unit; Disk Dosing Unit; Gram; Milligram; Milliliter; Package Dosing Unit; Packet Dosing Unit; Patch Dosing Unit; Syringe Dosing Unit; Tablet Dosing Unit; Tube Dosing Unit; Vial Dosing Unit		Prompt		
RETAMT_DAPERF	7	Was returned amount collected?	Returned Amount Collected	Indicate whether or not returned study product accountability was performed.	Text	DASTAT	If N (No), then DASTAT = "NOT DONE" where DATESTCD = "RETAMT". If Y (Yes), then NOT SUBMITTED.	(NY)	Yes; No				
RETAMT_DADAT	8	What was the date the study product accountability assessment was performed?	Date Returned	Record the exact date the study product was returned, using this format (DD-MON-YYYY).	Date	DADTC	DADTC where DATESTCD = "RETAMT".						
RETAMT_DACAT	9	What was the type of study product returned?	Study Product Type	Record the type of study product returned (e.g., STUDY MEDICATION, RESCUE MEDICATION, COMPARATOR, PLACEBO).	Text	DACAT				STUDY MEDICATION	Prompt		Yes
RETAMT_DAREFID	10	What was the returned study product label identifier?	Returned Study Product Label Identifier	Record returned study product label identifier.	Text	DAREFID	DAREFID where DATESTCD = "RETAMT".				Prompt		

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
RETAMT_DAORRES	11	What is the amount returned?	Returned Amount	Record the actual amount of study product returned.	Text	DAORRES; DATEST; DATESTCD	DAORRES where DATESTCD = "RETAMT".				Prompt		
RETAMT_DAORRESU	12	What was the unit?	Unit	Record or select the original units in which these data were collected, if not preprinted on CRF.	Text	DAORRESU	DAORRESU where DATESTCD = "RETAMT".	(UNIT)	Bag Dosing Unit; Bottle Dosing Unit; Box Dosing Unit; Capsule Dosing Unit; Container Dosing Unit; Disk Dosing Unit; Gram; Milligram; Milliliter; Package Dosing Unit; Packet Dosing Unit; Patch Dosing Unit; Syringe Dosing Unit; Tablet Dosing Unit; Tube Dosing Unit; Vial Dosing Unit		Prompt		

8.3.5 DD - Death Details

Description/Overview for the CDASHIG DD - Death Details Domain

The CDASHIG DD domain is used to collect the additional data that are typically collected when a death occurs (e.g., official cause of death, when the death occurred, whether it was witnessed). This domain is not intended to replace or collate data collected on designated CRF pages (e.g., severe adverse event details in the AE domain) or details of disposition in the DS domain. Data on the DD domain may be linked to other domains that relate to death using the appropriate identifier variables and the related records (RELREC) dataset as described in the SDTMIG.

Specification for the CDASHIG DD - Death Details Domain

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings	DD	N/A	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included in the database or populated during SDTM-based dataset creation before submission.
Findings	DD	N/A	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted on the CRFs that are shipped to each site. EDC: This should be prepopulated.
Findings	DD	N/A	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What [is/was] the (study) [subject/participant] identifier?	[Subject/Participant] (Identifier)	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system generated. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Findings	DD	N/A	N/A	4	VISIT	Visit Name	The name of a clinical encounter that encompasses planned and unplanned trial interventions, procedures, and	What is the visit name?	[Visit]	Char	R/C	N/A	VISIT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The name of the clinical encounter is typically preprinted on the CRF or displayed in the EDC for any visit-based data collection, most often in Findings domains. This Visit text description is then available in any

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
							assessments that may be performed on a subject.										EDC data extract for that Findings domain.
Findings	DD	N/A	N/A	5	VISDAT	Visit Date	Date the clinical encounter occurred (or started).	What [is/was] the date of the visit?	(Visit) Date	Char	R/C	Record the [date/start date] of the visit using this format (DD-MON-YYYY).	N/A	This field is not an SDTM variable. The date of a measurement, test, observation can be determined from the date/time of visit (VISDAT/VISTIM) and then concatenating the CDASH VISDAT/VISTIM components and populating the SDTMIG variable DDDTC in ISO 8601 format.	N/A	N/A	The date the death details assessments were reported can be determined from the Visit Date variable (VISDAT) and applying that date to all of the observations at that visit or the collection date can be included on the Death Detail CRF using the date (DDDTC) field.
Findings	DD	N/A	N/A	6	DDYN	Any Death Detail Results	General prompt to establish whether any death details are available.	Were any death detail assessments collected?	Any Death Details	Char	O	Indicate if the death details are known. If Yes, include the appropriate details where indicated on the CRF.	N/A	Does not map to an SDTMIG variable. The SDTM annotated CRF indicates that this field is NOT SUBMITTED.	(NY)	N/A	The intent/purpose of collecting this field is to help with data cleaning and monitoring. It provides verification that all other fields on the CRF were deliberately left blank.
Findings	DD	N/A	N/A	7	DDDAT	Death Details Date of Collection	The date of collection, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the date death detail assessments were collected?	Collection Date	Char	R/C	Record the date of collection using this format (DD-MON-YYYY).	DDDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable DDDTC in ISO 8601 format.	N/A	N/A	A complete date is expected. The date of collection may be determined from the date of visit (VISDAT) and, if so, a separate assessment date field is not required.
Findings	DD	N/A	N/A	8	DDSPID	Death Details Sponsor-Defined Identifier	A sponsor-defined identifier. In CDASH, this is typically used for preprinted or auto-generated numbers on the CRF, or any other type of identifier that does not already have a defined CDASH identifier field.	[Sponsor-defined question]	[Sponsor defined]	Char	O	If collected on the CRF, sponsor may insert instructions to ensure each record has a unique identifier.	DDSPID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. May be used to create RELREC to link this record with a record in another domain.	N/A	N/A	Because SPID is a sponsor-defined identifier, conformance to Question Text or Item Prompt is not applicable. Typically used as an identifier in a data query to communicate clearly to the site the specific record in question or to reconcile data. May be used to record preprinted number (e.g. line number, record number) on the CRF. This field may be populated by the sponsor's data collection system.
Findings	DD	N/A	N/A	9	DTHDAT	Death Date	Date of death for any subject who died.	What was the subject's date of death?	Death Date	Char	O	Record the date of death.	DM.DTHDTC	This field does not map directly to an SDTMIG variable. For the SDTM dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTM variable DTHDTC in ISO 8601 format.	N/A	N/A	The CDASH Model defines Death Date as a timing variable; this is not included as a timing variable in the SDTMIG. It may be collected on any CRF deemed appropriate by the sponsor, but should only be collected once. The SDTMIG variable DTHDTC is mapped to the DM domain during the SDTM submission dataset creation process. The SDTMIG variable DM.DTHFLG is not a CDASH variable, but it is typically populated during the SDTM submission dataset creation process. Death Date may be mapped to other SDTM domains (e.g., DS), as deemed appropriate by the sponsor.
Findings	DD	N/A	N/A	10	DDTEST	Death Detail Assessment Name	Descriptive name for death details.	What was the death detail assessment test name?	[Death Detail Assessment (Test Name)]	Char	HR	Record the name of the death detail assessment, if not preprinted on the CRF. If collected on the CRF, the sponsor may provide additional instructions	DDTEST; DDTESTCD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The SDTMIG variable DDTESTCD may be determined from the value collected in DDTEST. Both DDTESTCD and DDTEST	(DTHDX)	N/A	Required to identify which test the result is for. It is recommended that the test names be preprinted on the CRF rather than collected in a free-text field. If the form is laid out as a grid, then words such as "Test" can be included as the column header.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
												to ensure the data is entered as intended.		are required in the SDTM submission datasets. Use appropriate CDISC Controlled Terminology for the test and test code.			
Findings	DD	N/A	N/A	11	DDORRES	Death Details Result or Finding	Result of the death detail assessment, as originally received or collected.	What was the result of the death detail assessment?	(Result)	Char	HR	Record the death detail response.	DDORRES	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	N/A
Findings	DD	N/A	N/A	12	DDRESCAT	Results Category for Death Details	A grouping of topic-variable values based on user-defined characteristics.	What is the category of the death detail results?	[Death Detail Results Category]; NULL	Char	O	Record the death detail results category, if not preprinted on the CRF.	DDRESCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be preprinted on the CRF or screen and prepopulated in the data management system.
Findings	DD	N/A	N/A	13	DDEVAL	Death Details Evaluator	The role of the person who provided the information.	Who provided the death detail assessment information?	[Evaluator/Reporter]	Char	O	Select the role of the person who provided the evaluation (e.g., INVESTIGATOR, ADJUDICATION COMMITTEE, VENDOR).	DDEVAL	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(EVAL)	N/A	Used only for results that are subjective (e.g., assigned by a person or a group). May be preprinted, or collected. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Findings	DD	N/A	Horizontal-Generic	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included in the database or populated during SDTM-based dataset creation before submission.
Findings	DD	N/A	Horizontal-Generic	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted on the CRFs that are shipped to each site. EDC: This should be prepopulated.
Findings	DD	N/A	Horizontal-Generic	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What [is/was] the (study) [subject/participant] identifier?	[Subject/Participant] (Identifier)	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system-generated. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Findings	DD	N/A	Horizontal-Generic	4	VISIT	Visit Name	The name of a clinical encounter that encompasses planned and unplanned trial interventions, procedures, and assessments that may be performed on a subject.	What is the visit name?	[Visit]	Char	R/C	N/A	VISIT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The name of the clinical encounter is typically preprinted on the CRF or displayed in the EDC for any visit-based data collection, most often in Findings domains. This Visit text description is then available in any EDC data extract for that Findings domain.
Findings	DD	N/A	Horizontal-Generic	5	VISDAT	Visit Date	Date the clinical encounter occurred (or started).	What [is/was] the date of the visit?	(Visit) Date	Char	R/C	Record the [date/start date] of the visit using this format (DD-MON-YYYY format).	N/A	This field is not an SDTM variable. The date of a measurement, test, observation can be determined from the date/time of visit (VISDAT/VISTIM) and then concatenating the CDASH VISDAT/VISTIM components and populating the SDTMIG	N/A	N/A	The date the death details assessments were reported can be determined from the Visit Date variable (VISDAT) and applying that date to all of the observations at that visit or the collection date can be included on the Death Detail CRF using the date (DDDAT) field.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
														variable DDDTC in ISO 8601 format.			
Findings	DD	N/A	Horizontal-Generic	6	DDYN	Any Death Detail Results	General prompt to establish whether any death details are available	Were any death detail assessments collected?	Any Death Detail Assessments	Char	O	Indicate if the death details are known. If Yes, include the appropriate details where indicated on the CRF.	N/A	Does not map to an SDTMIG variable. The SDTM annotated CRF indicates that this field is NOT SUBMITTED.	(NY)	N/A	The intent/purpose of collecting this field is to help with data cleaning and monitoring. It provides verification if all other fields on the CRF were deliberately left blank.
Findings	DD	N/A	Horizontal-Generic	7	DDCAT	Category for Death Details	A grouping of topic-variable values based on user defined characteristics	What is the category of the death detail assessment?	[Death Detail Assessment Category]; NULL	Char	O	Record the death detail category, if not preprinted on the CRF	DDCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading, or a category value preprinted on the CRF, not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Category" can be included as the column header.
Findings	DD	N/A	Horizontal-Generic	8	DDSCAT	Subcategory for Death Details	A sub-division of the DDCAT values based on user defined characteristics	What is the subcategory of the death detail assessment?	[Death Detail Assessment Subcategory]; NULL	Char	O	Record the death detail subcategory, if not preprinted on the CRF.	DDSCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a category value preprinted on the CRF, not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Subcategory" can be included as the column header DDSCAT can only be used if there is an DDCAT, and it must be a subcategorization of DDCAT.
Findings	DD	N/A	Horizontal-Generic	9	[DTHDXCD]_DDDAT	Death Details Date of Collection	The date of collection represented in an unambiguous date format (e.g., DD-MON-YYYY)	What was the date [DTHDX] assessment was collected?	[DTHDX] Date	Char	R/C	Record the date of collection using this format (DD-MON-YYYY).	DDDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable DDDTC in ISO 8601 format.	N/A	N/A	A single date may be collected for all death detail assessments when they are collected on the same date. The date of collection of each assessment can also be collected using a CDASH variable [DTHDXCD]_DDDAT. The date of the assessment may be determined from a collected date of visit and in such cases a separate assessment date field is not required.
Findings	DD	N/A	Horizontal-Generic	10	DTHDAT	Date of Death	Date of death for any subject who died	What was the subject's date of death?	Death Date	Char	O	Record the date of death.	DM.DTHDTC	This field does not map directly to an SDTMIG variable. For the SDTM dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTM variable DTHDTC in ISO 8601 format.	N/A	N/A	The CDASH model defines Death Date as a timing variable; this is not included as a timing variable in the SDTMIG. It may be collected on any CRF deemed appropriate by the sponsor, but should only be collected once. The SDTMIG variable DTHDTC is mapped to the DM domain during the SDTM submission dataset creation process. The SDTMIG variable DM.DTHFLG is not a CDASH variable, but it is typically populated during the SDTM submission dataset creation process. Death Date may be mapped to other SDTM domains (e.g., DS), as deemed appropriate by the sponsor.
Findings	DD	N/A	Horizontal-Generic	11	[DTHDXCD]_DDORRES	Death Details Result or Finding	Result of the death detail assessment, as originally received or collected	What was the death detail assessment result?	Result	Char	HR	Record the death detail response.	DDORRES; DDTEST; DDTESTCD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. In addition to the SDTMIG variable DDORRES, create	N/A	N/A	Each test may be collected using the CDASH variable [TESTCD] (e.g., PRCDTH) or [TESTCD]_DDORRES where TESTCD is the appropriate CT for the DD test code e.g., PRCDTH_DDORRES. This variable

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
														DDTESTCD from the CDASH variable name and determine the value of DDTEST from DDTESTCD. The CDASH prompt may also contain the DDTEST. Use appropriate CDISC Controlled Terminology for the test and test code.			name is an example of the types of CDASH variable names that can be used in a denormalized data structure.
Findings	DD	N/A	Horizontal-Generic	12	DDEVAL	Death Details Evaluator	The role of the person who provided the information	Who provided the death detail assessment information?	[Evaluator/Reporter]	Char	O	Select the role of the person who provided the evaluation (e.g., INVESTIGATOR, ADJUDICATION COMMITTEE, VENDOR).	DDEVAL	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(EVAL)	N/A	Used only for results that are subjective (e.g., assigned by a person or a group). May be preprinted or collected. Sponsors may collect the data using a subset list of controlled terminology on the CRF.

Assumptions for the CDASHIG DD - Death Details Domain

1. This domain captures information pertaining to the death of a subject, including the cause(s) of death and findings of an autopsy directly related to the death itself (e.g., cause of death). If more than 1 cause of death is obtained, these may be separated into primary and secondary causes and/or other appropriate designations.
2. This domain is not intended to include the details describing the autopsy (e.g., who conducted the autopsy or when). Autopsy information should be handled as per recommendations in the Procedures (PR) domain.
3. An autopsy is a procedure from which there will usually be findings. Results of the autopsy not specific to the death itself should be represented in the appropriate Findings domain(s).

Example CRF for the CDASHIG DD - Death Details Domain

Example 1

Title: Death Details

Indicate if the death details are known. If Yes, include the appropriate details where indicated on the CRF.

Were any death detail assessments collected?
DDYN Not Submitted

☐ Yes
☐ No
<NY codelist>

Record the date of collection using this format (DD-MON-YYYY).

Collection Date
DDDAT DDDTC

Record the date of death.

Death Date
DTHDAT DM.DTHDTC

Record the primary cause of death.

What is the primary cause of death?
PRCDTH_DDORRES DDORRES WHERE DDTTESTCD = "PRCDTH"

Record the secondary cause of death, if applicable.

What is the secondary cause of death?
SECDTH_DDORRES DDORRES WHERE DDTTESTCD = "SECDTH"

Record the location of death.

What is the location of death?
LOCDTH_DDORRES DDORRES WHERE DDTTESTCD = "LOCDTH"

☐ Hospital
☐ Out of Hospital-During Sleep
☐ During Routine Activities

Select the role of the person who provided the evaluation.

Who provided the death detail assessment information?
DDEVAL

☐ Adjudication Committee
☐ Health Care Professional
☐ Independent Assessor
<EVAL codelist>

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
DDYN	1	Were any death detail assessments collected?	Any Death Detail Assessments	Indicate if the death details are known. If Yes, include the appropriate details where indicated on the CRF.	Text	N/A		(NY)	Yes; No				
DDDAT	2	What was the date death detail assessments were collected?	Collection Date	Record the date of collection using this format (DD-MON-YYYY).	Date	DDDTC							
DTHDAT	3	What was the subject's date of death?	Death Date	Record the date of death.	Date	DM.DTHDTC					prompt		

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
PRCDTH_DDORRES	4	What is the primary cause of death?	Result	Record the primary cause of death.	Text	DDORRES; DDTEST; DDTESTCD;	DDORRES WHERE DDTESTCD = "PRCDTH"						
SECDTH_DDORRES	5	What is the secondary cause of death?	Result	Record the secondary cause of death, if applicable.	Text	DDORRES; DDTEST; DDTESTCD;	DDORRES WHERE DDTESTCD = "SECDTH"						
LOCDTH_DDORRES	6	What is the location of death?	Result	Record the location of death.	Text	DDORRES; DDTEST; DDTESTCD;	DDORRES WHERE DDTESTCD = "LOCDTH"		Hospital; Out of Hospital-During Sleep; During Routine Activities				
DDEVAL	7	Who provided the death detail assessment information?	[Evaluator/Reporter]	Select the role of the person who provided the evaluation.	Text	DDEVAL		(EVAL)	Adjudication Committee; Health Care Professional; Independent Assessor				


8.3.6 EG - ECG Test Results

Description/Overview for the CDASHIG EG - ECG Test Results Domain

The CDASHIG EG domain includes ECG data, including the position of the subject; method of evaluation; all cycle measurements; and all findings from the ECG, including an overall interpretation, if collected. This section provides EG domain metadata for 3 different data collection scenarios.


Scenario 1: Central Reading

In this scenario, results are captured directly by an electronic device and transmitted separately or read by a central vendor, rather than recorded on the CRF. The accession number and date collected on the CRF can be used as an aid in reconciliation of the electronic data.

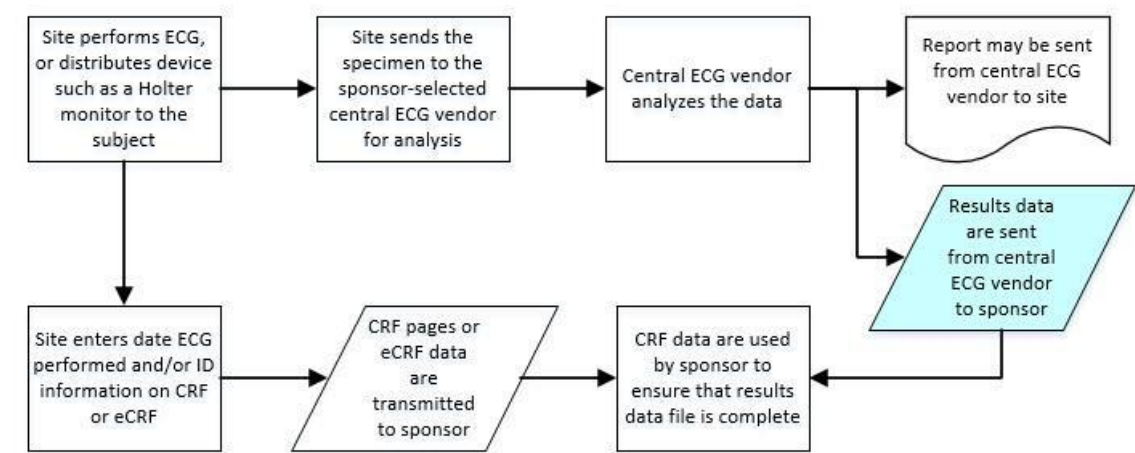


Scenario 2: Local Reading

In this scenario, subjects' ECGs are performed and analyzed, and then the results are recorded directly on the CRF.

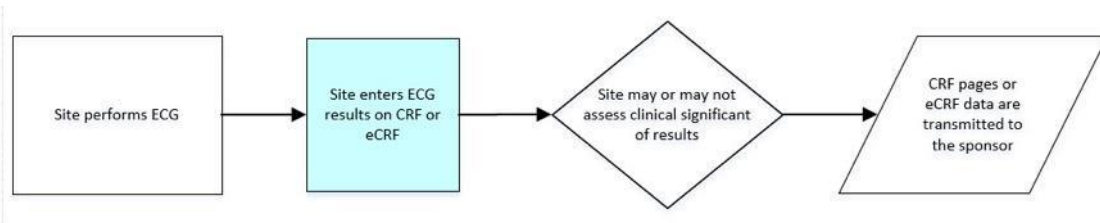**Scenario 3: Central Reading with Investigator Assessment of Clinical Significance Assessment and/or Overall Interpretation**

In this scenario, results are captured directly by an electronic device by a central vendor. The results are provided in an electronic file to the sponsor. In addition, the results are provided to the investigator for assessment of clinical significance for any abnormal values, and that information is provided to the sponsor on the CRF.

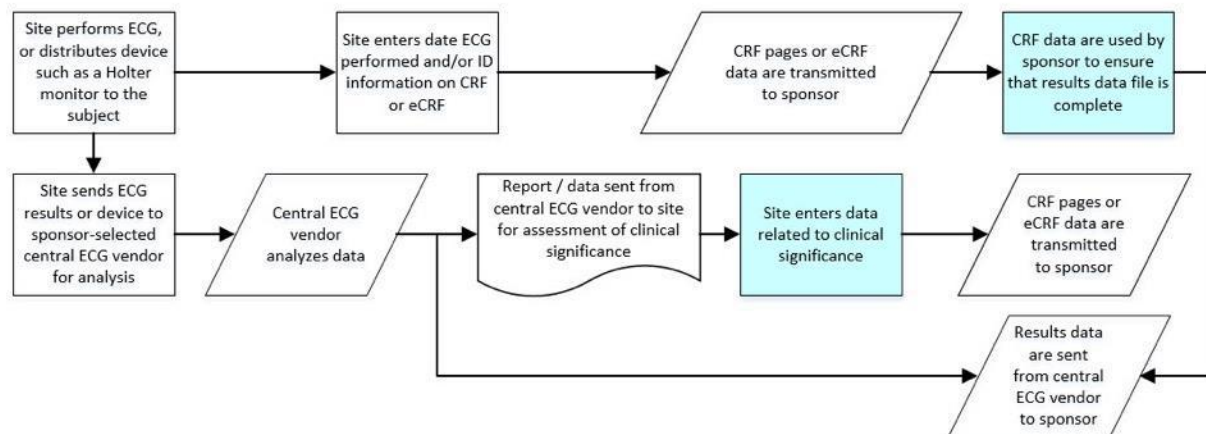

Specification for the CDASHIG EG - ECG Test Results Domain

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings	EG	Central Reading	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included in the database or populated during SDTM-based dataset creation before submission.
Findings	EG	Central Reading	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted on the CRFs that are shipped to each site. EDC: This should be prepopulated.
Findings	EG	Central Reading	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What [is/was] the (study) [subject/participant] identifier?	[Subject/Participant] (Identifier)	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system-generated. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Findings	EG	Central Reading	N/A	4	VISIT	Visit Name	The name of a clinical encounter that encompasses planned and unplanned trial interventions, procedures, and assessments that may be performed on a subject.	What is the visit name?	[Visit]	Char	R/C	N/A	VISIT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The name of the clinical encounter is typically preprinted or displayed within the EDC for any visit-based data collection, most often in Findings domains. This Visit text description is then available in any EDC data extract for that Findings domain.
Findings	EG	Central Reading	N/A	5	VISDAT	Visit Date	Date the clinical encounter occurred (or started).	What [is/was] the date of the visit?	(Visit) Date	Char	R/C	Record the [date/start date] of the visit using this format (DD-MON-YYYY).	N/A	This field is not an SDTM variable. The date of a measurement, test, observation can be determined from the date/time of visit (VISDAT/VISTIM) and then concatenating the CDASH VISDAT/VISTIM components and populating the SDTMIG variable EGDTC in ISO 8601 format.	N/A	N/A	The date the ECG measurements were collected can be determined from the visit date variable (VISDAT) and applying that date to all of the ECG measurements at that visit, or the collection date can be included on the ECG CRF using the date (EGDAT) field.
Findings	EG	Central Reading	N/A	6	EGCAT	Category for ECG	A grouping of topic-variable values based on user-defined characteristics.	What was the category of the ECG finding?	[ECG Category]; NULL	Char	O	Record the ECG finding category, if not preprinted on the CRF.	EGCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Category" can be included as the column header.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings	EG	Central Reading	N/A	7	EGSCAT	Subcategory for ECG	A sub-division of the EGCAT values based on user-defined characteristics.	What was the subcategory of the ECG finding?	[ECG Subcategory]; NULL	Char	O	Record the ECG finding subcategory, if not preprinted on the CRF.	EGSCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Subcategory" can be included as the column header. EGSCAT can only be used if there is an EGCAT, and it must be a subcategorization of EGCAT.
Findings	EG	Central Reading	N/A	8	EGPERF	ECG Performed	An indication of whether a planned ECG measurement, series of ECG measurements, tests, or observations was performed.	Was the ECG performed?	ECG Performed	Char	O	Indicate whether or not an ECG or specific ECG test was done.	EGSTAT	This does not map directly to an SDTMIG variable. May be used to derive a value into the SDTMIG variable EGSTAT. If the CDASH field EGPERF= "N", the value of EGSTAT will be "NOT DONE". If EGPERF = "Y", EGSTAT should be null. A combination of SDTMIG variables (e.g., EGCAT and EGSCAT, EGTPT) is used to indicate that multiple tests were not done. In this situation, the SDTMIG variable EGTESTCD would be populated as EGALL and an appropriate test name (EGTEST) provided. See SDTMIG for additional information.	(NY)	N/A	This may be implemented for an entire ECG, or a specific ECG test basis. General prompt question to be used as a data management tool to verify that missing results are confirmed missing.
Findings	EG	Central Reading	N/A	9	EGREPNUM	ECG Repetition Number	The incidence number of a test that is repeated within a given timeframe for the same test. The level of granularity can vary (e.g., within a timepoint, within a visit; multiple measurements of blood pressure, multiple analyses of a sample).	Which repetition of the ECG is this?	Repetition number	Num	O	Record which repetition of the ECG this is.	EGREPNUM	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	If there are multiple ECGs, this is used to record in which order this ECG occurred.
Findings	EG	Central Reading	N/A	10	EGREFID	ECG Reference ID	An internal or external identifier of the ECG (e.g., waveform number).	What was the (ECG) [reference identifier/accession number]?	(ECG) [Reference Identifier/Accession Number]	Char	O	Record the identifier number assigned.	EGREFID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. May be used to create RELREC to link this record with a record in another domain.	N/A	N/A	This can be used to confirm that the appropriate data record is present in the electronic transfer if this reference ID happens to be available to the site at the time of collection. It can also be used to link the clinical significance assessment to the proper record in the electronic data. (e.g., UUID for external waveform file, session number automatically generated by electronic equipment).
Findings	EG	Central Reading	N/A	11	EGMETHOD	Method of ECG Test	Method of the test or examination.	What was the method used for the ECG?	Method	Char	O	Record the method used for the ECG.	EGMETHOD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(EGMETHOD)	N/A	Results may be affected by whether conditions for ECG as specified in the protocol were properly met. One possible condition is the method used to collect or calculate the ECG data. If the protocol requires

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	this type of information, then this question may be included to confirm that the method used matches the protocol. The following are examples of when it is not necessary to collect these data on the CRF: - Method of ECG is provided as part of the electronic data. - Method of ECG is not pertinent to the protocol. - The protocol specifies only 1 possible method for collecting ECG measurements and the sponsor does not feel there is significant risk of the sites performing the ECG using the incorrect method.
Findings	EG	Central Reading	N/A	12	EGLEAD	ECG Lead Location Used for Measurement	The lead used for the measurement (e.g., "LEAD I", "LEAD II", "LEAD III", "LEAD rV2", "LEAD V1")	Which lead location was used for this measurement?	Lead Location	Char	O	Record which lead was used for this measurement.	EGLEAD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(EGLEAD)	N/A	This is used when more specificity for the location is desired for the ECG data.
Findings	EG	Central Reading	N/A	13	EGPOS	ECG Position of Subject	The position of the subject during the ECG measurement.	What was the position of the subject during the ECG measurement?	Position	Char	O	Record the position of the subject during the ECG.	EGPOS	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(POSITION)	N/A	Results may be affected by whether conditions for ECG as specified in the protocol were properly met. One common condition is the subject's position. If the protocol requires this type of information, then this question may be included to confirm that the subject's position matches the protocol. The following are examples of when it is not necessary to collect these data on the CRF: - Position of the subject is provided as part of the electronic data. - Position of the subject is not pertinent to the protocol. - The protocol specifies only 1 possible position and the sponsor does not feel there is significant risk of the sites performing the ECG with the subject in the wrong position.
Findings	EG	Central Reading	N/A	14	EGDAT	ECG Date	The date the ECG was performed, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the date of the ECG?	ECG Date	Char	R/C	Record the date the ECG was done using this format (DD-MON-YYYY).	EGDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable EGDTC in ISO 8601 format.	N/A	N/A	A complete date is expected. The date of collection may be determined from the date of visit (VISDAT) and, if so, a separate assessment date field is not required.
Findings	EG	Central Reading	N/A	15	EGTPT	ECG Planned Time Point Name	A text description of planned time point when measurements	What was the planned time point of	[Planned Time Point Name]	Char	R/C	Record the time point labels for when the ECG test should be	EGTPT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. See the SDTMIG	N/A	N/A	Planned time points are needed to differentiate multiple sequential assessments. It is

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
							should be taken as defined in the protocol.	the ECG measurement?				taken, if not preprinted on the CRF.		for additional information on representing time points. SDTMIG time-point anchors EGTPTREF (text description) and EGRFTDTC (date/time) may be needed, as well as SDTMIG variables EGTPTNUM, EGELTM.			recommended that time points should be preprinted on the CRF rather than collected in a free-text field. If the form is laid out as a grid, then words such as "Planned Time Point" can be included as the column header.
Findings	EG	Central Reading	N/A	16	EGTIM	ECG Time	Time of ECG, represented in an unambiguous time format (e.g., hh:mm:ss).	What was the time the ECG was collected?	ECG Time	Char	R/C	Record the time the ECG was done (as complete as possible).	EGDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable EGDTC in ISO 8601 format.	N/A	N/A	May be required when multiple assessments are done on 1 day or when the timing in relationship to study treatment is required for analysis.
Findings	EG	Local Reading	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included in the database or populated during SDTM-based dataset creation before submission.
Findings	EG	Local Reading	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted on the CRFs that are shipped to each site. EDC: This should be prepopulated.
Findings	EG	Local Reading	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What [is/was] the (study) [subject/participant] identifier?	[Subject/Participant] (Identifier)	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system-generated. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Findings	EG	Local Reading	N/A	4	VISIT	Visit Name	The name of a clinical encounter that encompasses planned and unplanned trial interventions, procedures, and assessments that may be performed on a subject.	What is the visit name?	[Visit]	Char	R/C	N/A	VISIT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The name of the clinical encounter is typically preprinted on the CRF or displayed within the EDC for any visit-based data collection, most often in Findings domains. This Visit text description is then available in any EDC data extract for that Findings domain.
Findings	EG	Local Reading	N/A	5	VISDAT	Visit Date	Date the clinical encounter occurred (or started).	What [is/was] the date of the visit?	(Visit) Date	Char	R/C	Record the [date/start date] of the visit using this format (DD-MON-YYYY).	N/A	This field is not an SDTM variable. The date of a measurement, test, observation can be determined from the date/time of visit (VISDAT/VISTIM) and then concatenating the CDASH VISDAT/VISTIM components and populating the SDTMIG variable EGDTC in ISO 8601 format.	N/A	N/A	The date the ECG measurements were collected can be determined from the visit date variable (VISDAT) and applying that date to all of the ECG measurements at that visit, or the collection date can be included on the ECG CRF using the date (EGDAT) field.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings	EG	Local Reading	N/A	6	EGCAT	Category for ECG	A grouping of topic-variable values based on user-defined characteristics.	What was the category of the ECG finding?	[ECG Category]; NULL	Char	O	Record the ECG finding category, if not preprinted on the CRF.	EGCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, and not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Category" can be included as the column header.
Findings	EG	Local Reading	N/A	7	EGSCAT	Subcategory for ECG	A sub-division of the EGCAT values based on user-defined characteristics.	What was the subcategory of the ECG finding?	[ECG Subcategory]; NULL	Char	O	Record the ECG finding subcategory, if not preprinted on the CRF.	EGSCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, and not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Subcategory" can be included as the column header EGSCAT can only be used if there is an EGCAT, and it must be a subcategorization of EGCAT.
Findings	EG	Local Reading	N/A	8	EGPERF	ECG Performed	An indication of whether a planned measurement, series of measurements, test, or observation was performed.	Was the ECG performed?	ECG Performed	Char	HR	Indicate whether or not ECG or specific ECG test was done.	EGSTAT	This does not map directly to an SDTMIG variable. May be used to derive a value into the SDTMIG variable EGSTAT. If the CDASH field EGPERF="N", the value of EGSTAT will be "NOT DONE". If EGPERF="Y", EGSTAT should be null. A combination of SDTMIG variables (e.g., EGCAT and EGSCAT, EGTPT) is used to indicate that multiple tests were not done. In this situation, the SDTMIG variable EGTESTCD would be populated as EGALL and an appropriate test name (EGTEST) provided. See SDTMIG for additional information.	(NY)	N/A	This may be implemented for an entire ECG, or a specific ECG test basis. General prompt question to be used as a data management tool to verify that missing results are confirmed missing.
Findings	EG	Local Reading	N/A	9	EGREPNUM	ECG Repetition Number	The incidence number of a test that is repeated within a given timeframe for the same test. The level of granularity can vary (e.g., within a timepoint, within a visit, multiple measurements of blood pressure, multiple analyses of a sample).	What repetition of the ECG is this?	Repetition Number	Num	O	Record which repetition of the ECG this is.	EGREPNUM	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	If there are multiple ECGs, this is used to record in which order this ECG occurred.
Findings	EG	Local Reading	N/A	10	EGMETHOD	Method of ECG Test	Method of the test or examination.	What was the method used for the ECG?	Method	Char	O	Record the method used for the ECG.	EGMETHOD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(EGMETHOD)	N/A	Results may be affected by whether conditions for ECG as specified in the protocol were properly met. One possible condition is the method used to collect or calculate the ECG data. If the protocol requires

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	this type of information, then this question may be included to confirm that the method used matches the protocol. The following are examples of when it is not necessary to collect these data on the CRF: - Method of ECG is provided as part of the electronic data. - Method of ECG is not pertinent to the protocol. - The protocol specifies only 1 possible method for collecting ECG measurements and the sponsor does not feel there is significant risk of the sites performing the ECG using the incorrect method.
Findings	EG	Local Reading	N/A	11	EGLEAD	ECG Lead Location Used for Measurement	The lead used for the measurement (e.g., "LEAD I", "LEAD II", "LEAD III", "LEAD rV2", "LEAD V1").	Which lead location was used for this measurement?	Lead Location	Char	O	Record which lead was used for this measurement.	EGLEAD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(EGLEAD)	N/A	This is used when more specificity for the location is desired for the ECG data.
Findings	EG	Local Reading	N/A	12	EGPOS	ECG Position of Subject	The position of the subject during the ECG measurement.	What was the position of the subject during the ECG measurement?	Position	Char	O	Record the position of the subject during the ECG.	EGPOS	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(POSITION)	N/A	Results may be affected by whether conditions for ECG as specified in the protocol were properly met. If the protocol requires this type of information, then this question may be included to confirm that the subject's position matches the protocol. The following are examples of when it is not necessary to collect these data on the CRF: - Position of the subject is provided as part of the electronic data. - Position of the subject is not pertinent to the protocol. - The protocol specifies only 1 possible position and the sponsor does not feel there is significant risk of the sites performing the ECG with the subject in the wrong position.
Findings	EG	Local Reading	N/A	13	EGDAT	Date of ECG	The date the ECG was performed, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the date of the ECG?	ECG Date	Char	R/C	Record the date ECG was done using this format (DD-MON-YYYY).	EGDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable EGDTC in ISO 8601 format.	N/A	N/A	A complete date is expected. The date of collection may be determined from the date of visit (VISDAT) and if so, a separate assessment date field is not required.
Findings	EG	Local Reading	N/A	14	EGTPT	ECG Planned Time Point Name	A text description of planned time point when measurements should be taken as	What was the planned time point of the ECG measurement?	[Planned Time Point Name]	Char	R/C	Record the time point labels for when the ECG test should be taken, if not	EGTPT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. See the SDTMIG for additional information on representing time points. SDTMIG	N/A	N/A	Planned time points are needed to differentiate multiple sequential assessments. It is recommended that time points should be preprinted on the

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
							defined in the protocol.					preprinted on the CRF.		time-point anchors EGTPTREF (text description) and EGRFTDTC (date/time) may be needed, as well as SDTMIG variables EGTPTNUM, EGELTM.			CRF rather than collected in a free-text field. If the form is laid out as a grid, then words such as "Planned Time Point" can be included as the column heading.
Findings	EG	Local Reading	N/A	15	EGTIM	Time of ECG	Time of ECG, represented in an unambiguous time format (e.g., hh:mm:ss).	What was the time the ECG was collected?	ECG Time	Char	R/C	Record the time the ECG was done (as complete as possible).	EGDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable EGDTC in ISO 8601 format.	N/A	N/A	May be required when multiple assessments are done on 1 day or when the timing in relationship to study treatment is required for analysis.
Findings	EG	Local Reading	N/A	16	EGTEST	ECG Test or Examination Name	Descriptive name of the measurement or finding.	What was the ECG test name?	[ECG Test Name]	Char	HR	Record the name of the ECG measurement or finding, if not preprinted on the CRF. If collected on the CRF, the sponsor may provide additional instructions to ensure the data is entered as intended.	EGTEST; EGTESTCD	Maps directly to the SDTMIG variable listed in the column with the heading SDTMIG Target. The SDTMIG variable EGTESTCD may be determined from the value collected in EGTEST. The SDTMIG variables EGTESTCD and EGTEST are required in the SDTM submission datasets. Use appropriate CDISC Controlled Terminology for the test and test code.	(EGTEST)	N/A	Required to identify which test the result is for. It is recommended that the test names be preprinted on the CRF rather than collected in a free-text field. If the form is laid out as a grid, then words such as "Test" can be included as the column heading.
Findings	EG	Local Reading	N/A	17	EGORRES	ECG Result or Finding in Original Units	Result of the measurement or finding as originally received or collected.	What was the result of the ECG?	(Result)	Char	HR	Record test results, interpretations or findings.	EGORRES	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Both quantitative results and interpretive findings or summaries may be recorded here.
Findings	EG	Local Reading	N/A	18	EGORRESU	ECG Original Units	The unit of the result as originally received or collected.	What was the unit of the ECG results?	Unit	Char	R/C	Record or select the original unit in which these data were collected, if not preprinted on CRF.	EGORRESU	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(UNIT)	(EGORRESU)	May be included if quantitative results are recorded. Because units for quantitative ECG results are typically limited, units should be preprinted on the CRF with the associated test when possible, rather than having sites record the units. This item is not necessary for qualitative results.
Findings	EG	Local Reading	N/A	19	EGCLSIG	ECG Clinical Significance	An indication of whether the ECG results were clinically significant.	Was the ECG clinically significant?	Clinically Significant	Char	O	Record whether ECG results were clinically significant.	EGCLSIG	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(NY)	N/A	Could apply to specific measurements or to overall interpretation.
Findings	EG	Central Reading with Investigator Assessment	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included in the database or populated during SDTM-based dataset creation before submission.
Findings	EG	Central Reading with Investigator Assessment	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be on the CRFs that are shipped to each site. EDC: This should be prepopulated.
Findings	EG	Central Reading with Investigator Assessment	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study	What [is/was] the (study) [subject/participant] identifier?	[Subject/Participant] (Identifier)	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system-generated. This CDASH

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Findings	EG	Central Reading with Investigator Assessment	N/A	4	VISIT	Visit Name	The name of a clinical encounter that encompasses planned and unplanned trial interventions, procedures, and assessments that may be performed on a subject	What is the visit name?	[Visit]	Char	R/C	N/A	VISIT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The name of the clinical encounter is typically on the CRF or displayed within the EDC for any visit-based data collection, most often in Findings domains. This Visit text description is then available in any EDC data extract for that Findings domain.
Findings	EG	Central Reading with Investigator Assessment	N/A	5	VISDAT	Visit Date	Date the clinical encounter occurred (or started)	What [is/was] the date of the visit?	(Visit) Date	Char	R/C	Record the [date/start date] of the visit using this format (DD-MON-YYYY).	N/A	This field is not an SDTM variable. The date of a measurement, test, observation can be determined from the date/time of visit (VISDAT/VISTIM) and then concatenating the CDASH VISDAT/VISTIM components and populating the SDTMIG variable EGDTC in ISO 8601 format.	N/A	N/A	The date the ECG measurements were collected can be determined from the visit date variable (VISDAT) and applying that date to all of the ECG measurements at that visit, or the collection date can be included on the ECG CRF using the date (EGDAT) field.
Findings	EG	Central Reading with Investigator Assessment	N/A	6	EGCAT	Category for ECG	A grouping of topic-variable values based on user-defined characteristics	What was the category of the ECG finding?	[ECG Category]; NULL	Char	O	Record the ECG finding category, if not on the CRF.	EGCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, and not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Category" can be included as the column heading.
Findings	EG	Central Reading with Investigator Assessment	N/A	7	EGSCAT	Subcategory for ECG	A sub-division of the EGCAT values based on user-defined characteristics	What was the subcategory of the ECG finding?	[ECG Subcategory]; NULL	Char	O	Record the ECG finding subcategory, if not on the CRF.	EGSCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, and not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Subcategory" can be included as the column heading. EGSCAT can only be used if there is an EGCAT, and it must be a subcategorization of EGCAT.
Findings	EG	Central Reading with Investigator Assessment	N/A	8	EGPERF	ECG Performed	An indication of whether a planned measurement, series of measurements, test, or observation was performed	Was the ECG performed?	ECG Performed	Char	HR	Indicate whether or not an ECG or specific ECG test was done.	EGSTAT	This does not map directly to an SDTMIG variable. May be used to derive a value into the SDTMIG variable EGSTAT. If the CDASH field EGPERF="N", the value of EGSTAT will be "NOT DONE". If EGPERF="Y", EGSTAT should be null. A combination of SDTMIG variables (e.g., EGCAT and EGSCAT, EGTPPT) is used to indicate that multiple tests were	(NY)	N/A	This may be implemented for an entire ECG, or a specific ECG test basis. General prompt question to be used as a data management tool to verify that missing results are confirmed missing.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
														not done. In this situation, the SDTMIG variable EGTESTCD would be populated as EGALL and an appropriate test name (EGTEST) provided. See the SDTMIG for additional information.			
Findings	EG	Central Reading with Investigator Assessment	N/A	9	EGREPNUM	ECG Repetition Number	The incidence number of a test that is repeated within a given timeframe for the same test. The level of granularity can vary (e.g., within a timepoint, within a visit; multiple measurements of blood pressure, multiple analyses of a sample).	Which repetition of the ECG is this?	Repetition Number	Num	O	Record which repetition of the ECG this is.	EGREPNUM	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	If there are multiple ECGs, this is used to record in which order this ECG occurred.
Findings	EG	Central Reading with Investigator Assessment	N/A	10	EGREFID	ECG Reference ID	An internal or external identifier of the ECG (e.g., waveform number)	What was the (ECG) [reference identifier/accession number]?	(ECG) [Reference Identifier/Accession Number]	Char	O	Record the identifier number assigned.	EGREFID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. May be used to create RELREC to link this record with a record in another domain.	N/A	N/A	This can be used to confirm that the appropriate data record is present in the electronic transfer if this reference ID happens to be available to the site at the time of collection. Examples: Universally unique identifier (UUID) for external waveform file, session number automatically generated by electronic equipment. This can also be used to link.
Findings	EG	Central Reading with Investigator Assessment	N/A	11	EGMETHOD	Method of ECG Test	Method of the test or examination	What was the method used for the ECG?	Method	Char	O	Record the method used for the ECG.	EGMETHOD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(EGMETHOD)	N/A	Results may be affected by whether conditions for ECG as specified in the protocol were properly met. If the protocol requires this type of information, then this question may be included to confirm that the method used matches the protocol. The following are examples of when it is not necessary to collect these data on the CRF: - Method of ECG is provided as part of the electronic data. - Method of ECG is not pertinent to the protocol. - The protocol specifies only 1 possible method for collecting ECG measurements and the sponsor does not feel there is significant risk of the sites performing the ECG using the incorrect method.
Findings	EG	Central Reading with Investigator Assessment	N/A	12	EGLEAD	ECG Lead Location Used for Measurement	The lead used for the measurement (e.g., "LEAD I", "LEAD II", "LEAD III", "LEAD rV2", "LEAD V1")	Which lead location was used for this measurement?	Lead Location	Char	O	Record which lead was used for this measurement.	EGLEAD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(EGLEAD)	N/A	This is used when more specificity for the location is desired for the ECG data.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings	EG	Central Reading with Investigator Assessment	N/A	13	EGPOS	ECG Position of Subject	The position of the subject during the ECG measurement	What was the position of the subject during the ECG measurement?	Position	Char	O	Record the position of the subject during the ECG.	EGPOS	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(POSITION)	N/A	Results may be affected by whether conditions for ECG as specified in the protocol were properly met. If the protocol requires this type of information, then this question may be included to confirm that the subject's position matches the protocol. The following are examples of when it is not necessary to collect these data on the CRF: - Position of the subject is provided as part of the electronic data. - Position of the subject is not pertinent to the protocol. - The protocol specifies only 1 possible position and the sponsor does not feel there is significant risk of the sites performing the ECG with the subject in the wrong position.
Findings	EG	Central Reading with Investigator Assessment	N/A	14	EGDAT	Date of ECG	The date the ECG was performed, represented in an unambiguous date format (e.g., DD-MON-YYYY)	What was the date of the ECG?	ECG Date	Char	R/C	Record the date ECG was done using this format (DD-MON-YYYY).	EGDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable EGDTC in ISO 8601 format.	N/A	N/A	A complete date is expected. The date of collection may be determined from the date of visit (VISDAT) and if so, a separate assessment date field is not required.
Findings	EG	Central Reading with Investigator Assessment	N/A	15	EGTPT	ECG Planned Time Point Name	A text description of planned time point when measurements should be taken as defined in the protocol	What was the planned time point of the ECG measurement?	[Planned Time Point Name]	Char	R/C	Record the time point labels for when the ECG test should be taken, if not on the CRF.	EGTPT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. See SDTMIG for additional information on representing time points. SDTMIG time point anchors EGTPTREF (text description) and EGRFTDTC (date/time) may be needed, as well as SDTMIG variables EGTPTNUM, EGELTM.	N/A	N/A	Planned time points are needed to differentiate multiple sequential assessments. It is recommended that time points should be on the CRF rather than collected in a free-text field. If the form is laid out as a grid, then words such as "Planned Time Point" can be included as the column heading.
Findings	EG	Central Reading with Investigator Assessment	N/A	16	EGTIM	Time of ECG	Time of ECG, represented in an unambiguous time format (e.g., hh:mm:ss)	What was the time the ECG was collected?	ECG Time	Char	R/C	Record the time the ECG was done (as complete as possible).	EGDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable EGDTC in ISO 8601 format.	N/A	N/A	May be required when multiple assessments are done on 1 day or when the timing in relationship to study treatment is required for analysis.
Findings	EG	Central Reading with Investigator Assessment	N/A	17	EGEVAL	ECG Evaluator	The role of the person who provided the evaluation	Who provided the information?; Who was the evaluator?	[Evaluator/Reporter]	Char	O	Select the role of the person who provided the evaluation (e.g., INVESTIGATOR, ADJUDICATION COMMITTEE, VENDOR).	EGEVAL	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(EVAL)	N/A	Used only for results that are subjective (e.g., assigned by a person or a group). May be preprinted or collected. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Findings	EG	Central Reading with Investigator Assessment	N/A	18	INTP_EGORRES	ECG Interpretation	Overall interpretation of the result of the measurement or finding	What was the interpretation of the ECG?	Interpretation	Char	O	Record overall interpretations of the ECG.	EGORRES	This does not map directly to an SDTM variable. For the SDTM submission dataset, the recorded interpretation is populated into the SDTMIG variable EGORRES where EGTEST= "Interpretation", and EGTESTCD="INTP".	N/A	N/A	The overall interpretation of an ECG is mapped into the appropriate SDTM test and result variables. See the SDTMIG EG Domain for details.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings	EG	Central Reading with Investigator Assessment	N/A	19	EGCLSIG	ECG Clinical Significance	An indication of whether the ECG results were clinically significant	Was the ECG clinically significant?	Clinically Significant	Char	HR	Record whether ECG results were clinically significant.	EGCLSIG	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(NY)	N/A	Could apply to specific measurements or to overall interpretation. In this scenario, clinical significance could be provided by the investigator.
Findings	EG	Central Reading with Investigator Assessment	N/A	20	EGMHNO	Related Medical History Event ID	Identifier for the medical history event that was reported as a clinically significant ECG finding	What was the identifier for the medical history event that was reported as a clinically significant ECG finding?	Medical History Event Identifier	Char	O	Record the identifier for the medical history event that was reported as a clinically significant ECG finding.	N/A	This does not map directly to an SDTMIG variable. For the SDTM submission datasets, may be used to create RELREC to link this record with a record in the MH domain.	N/A	N/A	Intent is to establish a link between the clinically significant ECG finding and the medical history event that was reported. EGMHNO can be used in RELREC to identify a relationship between records in EG dataset and records in the MH dataset. See the SDTMIG for information on creating RELREC.
Findings	EG	Central Reading with Investigator Assessment	N/A	21	EGAENO	Related Adverse Event ID	Identifier for the adverse event that was reported as a clinically significant ECG finding	What was the identifier for the adverse event(s) that was reported as a clinically significant ECG finding?	Adverse Event Identifier	Char	O	Record the identifier for the adverse event that was the reported as a clinically significant ECG finding.	N/A	This does not map directly to an SDTMIG variable. For the SDTM submission datasets, may be used to create RELREC to link this record with a record in the AE domain.	N/A	N/A	Intent is to establish a link between the clinically significant ECG finding and the AE that was reported. EGAENO can be used to identify a relationship between records in EG dataset and records in the AE dataset. See the SDTMIG for information on creating RELREC.

Assumptions for the CDASHIG EG - ECG Test Results Domain

1. The ECG tests that should be collected are not specified by CDASH; this is a medical and scientific decision that should be based on the needs of the protocol.
2. Sponsors should decide which scenario is appropriate for each protocol.
3. As required or defined by the study protocol, clinically significant results may need to be reported on the Adverse Event CRF.
4. As required or defined by the study protocol, changes that are worsening may need to be reported on the AE CRF.
5. As depicted in scenario 3, where the CRF includes site assessment of clinical significance and/or overall interpretation, results are returned to the sites, and the sites complete a CRF page of clinical significance for any abnormal/unexpected values and/or record an overall interpretation of the results. As in scenario 1, the actual testing results are transmitted electronically, but the CRF includes data necessary to identify and rate the clinical significance of the abnormal results.
6. EGBEATNO is sequence number that identifies the beat within an ECG. This variable is considered an Identifier in the CDASH Model (see CDASH Section 7, Identifiers.).

Example CRFs for the CDASHIG EG - ECG Test Results Domain**Example 1**

This example shows a CRF that collects electrocardiogram data utilizing a central reader.

Title: ECG Central Reading

Indicate whether or not an ECG or specific ECG test was done.	Was the ECG performed? EGPERF EGSTAT	☐ Yes ☐ No <NY codelist>
Record the identifier number assigned.	ECG Reference Identifier EGREFID	
Record the date the ECG was done using this format (DD-MON-YYYY).	ECG Date EGDAT EGDTC	
Record the time the ECG was done (as complete as possible).	ECG Time EGTIM EGDTC	
Record the method used for the ECG.	What was the method used for the ECG? EGMETHOD	☐ 6 Lead Standard ☐ 8 Lead Standard ☐ 10 Lead Standard ☐ 12 Lead Standard <EGMETHOD codelist>
Record the position of the subject during the ECG.	What was the position of the subject during the ECG measurement? EGPOS	☐ Supine ☐ Sitting <POSITION codelist>

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTM Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
EGPERF	1	Was the ECG performed?	ECG Performed	Indicate whether or not an ECG or specific ECG test was done.	Text	EGSTAT		(NY)	Yes; No				
EGREFID	2	What was the ECG reference identifier?	ECG Reference Identifier	Record the identifier number assigned.	Text	EGREFID					PROMPT		
EGDAT	3	What was the date of the ECG?	ECG Date	Record the date the ECG was done using this format (DD-MON-YYYY).	Date	EGDTC					PROMPT		
EGTIM	4	What was the ECG time?	ECG Time	Record the time the ECG was done (as complete as possible).	Time	EGDTC					PROMPT		
EGMETHOD	5	What was the method used for the ECG?	Method	Record the method used for the ECG.	Text	EGMETHOD		(EGMETHOD)	6 Lead Standard; 8 Lead Standard; 10 Lead Standard; 12 Lead Standard				
EGPOS	6	What was the position of the subject during the ECG measurement?	Position	Record the position of the subject during the ECG.	Text	EGPOS		(POSITION)	Supine; Sitting				

Example 2

This example shows a CRF that collects electrocardiogram data utilizing a local reader.

Title: ECG Local Reading

Indicate whether or not an ECG or specific ECG test was done.	Was the ECG performed? ☐ Yes ☐ No <NY codelist>
Record the method used for the ECG.	What was the method used for the ECG? ☐ 6 Lead Standard ☐ 8 Lead Standard ☐ 10 Lead Standard ☐ 12 Lead Standard <EGMETHOD codelist>
Record the position of the subject during the ECG.	What was the position of the subject during the ECG measurement? ☐ Supine ☐ Sitting <POSITION codelist>
Record the date ECG was done using this format (DD-MON-YYYY).	ECG Date
Record the time point labels for when the ECG test should be taken, if not pre-printed on the CRF.	What was the planned time point of the ECG measurement?

Record the time the ECG was done (as complete as possible).	ECG Time EGTIM EGDTC	
Record the test result.	What was the Aggregate PR Interval? PRAG_EGORRES EGORRES where EGTESTCD = "PRAG"	
	Unit PRAG_EGORRESU EGORRESU where EGTESTCD = "PRAG" Pre-populated	msecs <Unit codelist>
Record the test result.	What was the Aggregate QRS Duration? QRSAG_EGORRES EGORRES where EGTESTCD = "QRSAG"	
	Unit QRSAG_EGORRESU EGORRESU where EGTESTCD = "QRSAG" Pre-populated	msecs <Unit codelist>
Record the test result.	What was the Aggregate QT Interval? QTAG_EGORRES EGORRES where EGTESTCD = "QTAG"	
	Unit QTAG_EGORRESU EGORRESU where EGTESTCD = "QTAG" Pre-populated	msecs <Unit codelist>
Record the test result.	What was the Aggregate QTca Interval? QTCAAG_EGORRES EGORRES where EGTESTCD = "QTCAAG"	
	Unit QTCAAG_EGORRESU EGORRESU where EGTESTCD = "QTCAAG" Pre-populated	msecs <Unit codelist>
Record the the test result.	What was the overall interpretation of the ECG? INTP_EGORRES EGORRES where EGTESTCD = "INTP"	☐ Normal ☐ Abnormal <NORMABNM codelist>
Record whether ECG results were clinically significant.	Was the ECG clinically significant? EGCLSIG SUPPEG.QVAL where SUPPEG.QNAM = "EGCLSIG" and SUPPEG.QLABEL= "Clinically Significant" and EGTESTCD= "INTP"	☐ Yes ☐ No <NY codelist>

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTM Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
EGPERF	1	Was the ECG performed?	ECG Performed	Indicate whether or not an ECG or specific ECG test was done.	Text	EGSTAT		(NY)	Yes; No				

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTM Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
EGMETHOD	2	What was the method used for the ECG?	Method	Record the method used for the ECG.	Text	EGMETHOD		(EGMETHOD)	6 Lead Standard; 8 Lead Standard; 10 Lead Standard; 12 Lead Standard				
EGPOS	3	What was the position of the subject during the ECG measurement?	Position	Record the position of the subject during the ECG.	Text	EGPOS		(POSITION)	Supine; Sitting				
EGDAT	4	What was date of the ECG?	ECG Date	Record the date ECG was done using this format (DD-MON-YYYY).	Date	EGDTC							
EGTPT	5	What was the planned time point of the ECG measurement?	[Planned Time Point Name]	Record the time point labels for when the ECG test should be taken, if not pre-printed on the CRF.	Text	EGTPT							
EGTIM	6	What was the time the ECG was collected?	ECG Time	Record the time the ECG was done (as complete as possible).	Time	EGDTC							
PRAG_EGORRES	7	What was the Aggregate PR Interval?	PR Interval, Aggregate	Record the test result.	Text	EGORRES	EGORRES where EGTESTCD = "PRAG"						
PRAG_EGORRESU	8	What was the unit of the Aggregate PR Interval?	Unit	Record or select the original unit in which these data were collected, if not pre-printed on CRF.	Text	EGORRES	EGORRESU where EGTESTCD = "PRAG"	(Unit)		msecs			
QRSAG_EGORRES	9	What was the Aggregate QRS Duration?	QRS Duration, Aggregate	Record the test result.	Text	EGORRES	EGORRES where EGTESTCD = "QRSAG"						
QRSAG_EGORRESU	10	What was the unit of the Aggregate QRS Duration?	Unit	Record or select the original unit in which these data were collected, if not pre-printed on CRF.	Text	EGORRES	EGORRESU where EGTESTCD = "QRSAG"	(Unit)		msecs			
QTAG_EGORRES	11	What was the Aggregate QT Interval?	QT Interval, Aggregate	Record the test result.	Text	EGORRES	EGORRES where EGTESTCD = "QTAG"						
QTAG_EGORRESU	12	What was the unit of the Aggregate QT Interval result?	Unit	Record or select the original unit in which these data were collected, if not pre-printed on CRF.	Text	EGORRES	EGORRESU where EGTESTCD = "QTAG"	(Unit)		msecs			
QTCAAG_EGORRES	13	What was the Aggregate QTca Interval?	QTca Interval, Aggregate	Record the test result.	Text	EGORRES	EGORRES where EGTESTCD = "QTCAAG"						
QTCAAG_EGORRESU	14	What was the unit of the Aggregate QTca Interval?	Unit	Record or select the original unit in which these data were collected, if not pre-printed on CRF.	Text	EGORRES	EGORRESU where EGTESTCD = "QTCAAG"	(Unit)		msecs			

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTM Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
INTP_EGORRES	15	What was the overall interpretation of the ECG?	Interpretation	Record the the test result.	Text	EGORRES	EGORRES where EGTESTCD = "INTP"	(NORMABNM)	Normal; Abnormal				
EGCLSIG	16	Was the ECG clinically significant?	Clinically Significant	Record whether ECG results were clinically significant.	Text	SUPPEG.QVAL	SUPPEG.QVAL where SUPPEG.QNAM = "EGCLSIG" and SUPPEG.QLABEL = "Clinically Significant" and EGTESTCD = "INTP"	(NY)	Yes;No				

Example 3

This example CRF collects electrocardiogram data which is centrally processed.

Title: ECG Central Reading with Investigator Assessment

Indicate whether an ECG or specific ECG test was done.	Was the ECG performed? EGPERF EGSTAT	☐ Yes ☐ No <NY codelist>
Record the date ECG was done using this format (DD-MON-YYYY).	ECG Date EGDAT EGDTC	
Record the time the ECG was done (as complete as possible).	ECG Time EGTIM EGDTC	
Record the method used for the ECG.	What was the method used for the ECG? EGMETHOD	☐ 6-lead standard ☐ 8-lead standard ☐ 10-lead standard ☐ 12-lead standard <EGMETHOD codelist>
Record the position of the subject during the ECG.	What was the position of the subject during ECG measurement? EGPOS	☐ Supine ☐ Sitting <POSITION codelist>
Record overall interpretations of the ECG.	What was the interpretation of the ECG? INTP_EGORRES EGORRES where EGTESTCD = "INTP"	☐ Normal ☐ Abnormal <NORMABNM codelist>
Record whether ECG results were clinically significant.	Was the ECG clinically significant? EGCLSIG SUPPEG.QVAL where SUPPEG.QNAM = "EGCLSIG" and SUPPEG.QLABEL = "Clinically Significant" where EGTESTCD = "INTP"	☐ Yes ☐ No <NY codelist>

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTM Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
EGPERF	1	Was the ECG performed?	ECG Performed	Indicate whether an ECG or specific ECG test was done.	Text	EGSTAT		(NY)	Yes; No				
EGMETHOD	4	What was the method used for the ECG?	Method	Record the method used for the ECG.	Text	EGMETHOD		(EGMETHOD)	6-lead standard; 8-lead standard; 10-lead standard; 12-lead standard				
EGPOS	5	What was the position of the subject during ECG measurement?	Position	Record the position of the subject during the ECG.	Text	EGPOS		(POSITION)	Supine; Sitting				
EGDAT	2	What was the ECG date?	ECG Date	Record the date ECG was done using this format (DD-MON-YYYY).	Date	EGDTC					PROMPT		
EGTIM	3	What was the time the ECG was collected?	ECG Time	Record the time the ECG was done (as complete as possible).	Time	EGDTC					PROMPT		
INTP_EGORRES	7	What was the interpretation of the ECG?	Interpretation	Record overall interpretations of the ECG.	Text	EGORRES	EGORRES where EGTESTCD = "INTP"	(NORMABNM)	Normal; Abnormal				
EGCLSIG	8	Was the ECG clinically significant?	Clinically Significant	Record whether ECG results were clinically significant.	Text	SUPPEG.QVAL	SUPPEG.QVAL where SUPPEG.QNAM = "EGCLSIG" and SUPPEG.QLABEL = "Clinically Significant" where EGTESTCD = "INTP"	(NY)	Yes; No				

8.3.7 GF - Genomic Findings

Description/Overview for the CDASHIG GF - Genomic Findings Domain

The CDASHIG GF domain is a Findings domain that contains data related to the structure, function, evolution, mapping, and editing of subject and non-host organism genomic material of interest. This domain includes but is not limited to assessments and results for genetic variation and transcription, and summary measures derived from these assessments. The GF domain is used for findings from characteristics assessed from nucleic acids and may include subsequent inferences and/or predictions about related proteins/amino acids.

GF domain metadata are provided for 2 different data collection scenarios. It is up to the sponsor to determine which data collection scenario best meets the study needs. Best practice is for studies to collect genetic findings data via central processing. Local processing should only be used when collecting historical genetic findings data.

Data to be collected needs to be carefully determined from data providers. There are many new SDTM permissible variables that can be included to fully document tests and associated findings for a particular use case. It is anticipated that these new SDTM permissible variables would be provided by the testing laboratory and not collected by an investigator. The CDASH team has decided to include meta specifications that include only a minimum set of variables at this time. See Section 3.4, [How to Create New Data Collection Fields When No CDASHIG Field Has Been Defined](#), for information on extending CDASH as needed. Users should also consult the SDTMIG for more information on the use of this domain.

Scenario 1: Central Processing

In this scenario, subject specimens are taken at the site, sent out for processing, and results are provided directly to the sponsor (not recorded on the CRF). This scenario also applies when results are captured directly via an electronic device and not recorded on the CRF. CRF data are captured at the site for tracking/header reconciliation. The fields for test results are not defined here, as these data are not part of the CRF.

Scenario 2: Local Processing

In this scenario, subject specimens are taken and analyzed, and the results are recorded directly on the CRF.

Specification for the CDASHIG GF - Genomic Findings Domain

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings	GF	Central Processing	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included in the database or populated during SDTM-based dataset creation before submission.
Findings	GF	Central Processing	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted on the CRFs that are shipped to each site. EDC: This should be prepopulated.
Findings	GF	Central Processing	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What [is/was] the (study) [subject/participant] identifier?	[Subject/Participant] (Identifier)	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system-generated. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	SDTMIG DM domain. For more information, refer to the SDTMIG.
Findings	GF	Central Processing	N/A	4	VISIT	Visit Name	The name of a clinical encounter that encompasses planned and unplanned trial interventions, procedures, and assessments that may be performed on a subject.	What is the visit name?	[Visit]	Char	R/C	N/A	VISIT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The name of the clinical encounter is typically preprinted on the CRF or displayed in the EDC for any visit-based data collection, most often in Findings domains. This Visit text description is then available in any EDC data extract for that Findings domain.
Findings	GF	Central Processing	N/A	5	VISDAT	Visit Date	Date the clinical encounter occurred (or started).	What [is/was] the date of the visit?	(Visit) Date	Char	R/C	Record the [date/start date] of the visit using DD-MON-YYYY format.	N/A	This field is not an SDTM variable. The date of a measurement, test, observation, or specimen collection can be determined from the date/time of visit (VISDAT/VISTIM) and then concatenating the CDASH VISDAT/VISTIM components and populating the SDTMIG variable GFDTCT in ISO 8601 format.	N/A	N/A	The date the genomic specimen was collected can be determined from the visit date variable (VISDAT) and applying that date to all of the genomic tests at that visit, or the specimen collection date can be collected on the Genomic Finding CRF using the date (GFDTCT) field.
Findings	GF	Central Processing	N/A	6	GFCAT	Category for Genomic Test	A grouping of topic-variable values based on user-defined characteristics.	What is the category of the genomic test?	[Genomic Category]; NULL	Char	R/C	Record the genomic test category, if not preprinted on the CRF.	GFCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, and not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Category" can be included as the column heading.
Findings	GF	Central Processing	N/A	7	GFSCAT	Subcategory for Genomic Test	A sub-division of the GFCAT values based on user-defined characteristics.	What is the subcategory of the genomic test?	[Genomic Subcategory]; NULL	Char	R/C	Record the genomic test subcategory, if not preprinted on the CRF.	GFSCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be preprinted on the CRF or screen and prepopulated in the data management system. This is not typically a question to which the site would provide an answer. GFSCAT can only be used if there is a GFCAT, and it must be a subcategorization of GFCAT.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings	GF	Central Processing	N/A	8	GFPERF	Genomic Test Performed	An indication of whether a planned genomic measurement, series of genomic measurements, test, or observation was performed or specimens collected.	Was the (genomic) specimen collected?; Was the (genomic) test performed?	Genomic Test Performed; Specimen Collected	Char	O	Indicate whether or not the genomic specimen was collected or measurement performed.	GFSTAT	This does not map directly to an SDTMIG variable. May be used to derive a value into the SDTMIG variable GFSTAT. If the CDASH variable GFPERF="N", the value of GFSTAT will be "NOT DONE". If GFPERF="Y", GFSTAT should be null. A combination of SDTMIG variables (e.g., GFCAT and GFSCAT, GFTPT) is used to indicate that multiple tests were not done. In this situation, the SDTMIG variable GFTESTCD would be populated as GFALL and an appropriate test name (GFTEST) provided. See the SDTMIG for additional information.	(NY)	N/A	This may be implemented for an entire genomic category, or a specific genomic test. This general prompt question is used as a data management tool to verify that missing results are confirmed missing.
Findings	GF	Central Processing	N/A	9	GFREFID	Genomic Specimen Reference ID	An internal or external identifier (e.g., specimen identifier).	What was the (genomic specimen) [reference identifier/accession number]?	(Genomic specimen) [Reference identifier/Accession Number]	Char	R/C	Record the genomic specimen or accession number assigned.	GFREFID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. May be used to create RELREC to link this record with a record in another domain.	N/A	N/A	This can be used to confirm that the appropriate data record is present in the electronic transfer. May be included for linking back to genomic specimens (e.g., Specimen ID).
Findings	GF	Central Processing	N/A	10	GFTPT	Genomic Test Planned Time Point Name	A text description of planned time point when measurements should be taken, as defined in the protocol.	What was the planned time point of the collection?	[Planned Time Point Name]	Char	R/C	Record the planned time-point labels for the genomic test, if not preprinted on the CRF.	GFTPT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. See the SDTMIG for additional information on representing time points. SDTMIG time-point anchors GFTPTREF (text description) and GFRFTDTC (date/time) may be needed, as well as SDTMIG variables GFTPTNUM, GFELTM.	N/A	N/A	Planned time points are needed to differentiate multiple sequential assessments. It is recommended that time points should be preprinted on the CRF rather than collected in a free-text field. If the form is laid out as a grid, then words such as "Planned Time Point" can be included in the column heading.
Findings	GF	Central Processing	N/A	11	GFDAT	Genomic Specimen Collection Date	The date of genomic specimen collection, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the (start) date of the genomic specimen collection?	Genomic Specimen Collection (Start) Date	Char	R/C	Record the (start) date when the genomic specimen collection was done using this format (DD-MON-YYYY).	GFDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable GFDTC in ISO 8601 format.	N/A	N/A	A complete date is expected. The date of genomic specimen collection may be determined from the date of visit (VISDAT) and, if so, a separate collection date field is not required. The SDTMIG GFDTC variable contains either a date/time when a genomic specimen is collected at a point in time or the start date/time, when a genomic specimen is collected over time.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings	GF	Central Processing	N/A	12	GFTIM	Genomic Specimen Collection Time	The time of genomic specimen collection, represented in an unambiguous time format (e.g., hh:mm:ss).	What was the (start) time of the genomic specimen collection?	Genomic Specimen Collection (Start) Time	Char	R/C	Record the (start) time of collection (as complete as possible).	GFDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable GFDTC in ISO 8601 format.	N/A	N/A	May be required when multiple genomic specimens are collected on 1 day or when the timing in relationship to study treatment is required for analysis or a genomic specimen is collected over an extended time period.
Findings	GF	Local Processing	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included into the database or populated during SDTM-based dataset creation before submission.
Findings	GF	Local Processing	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted on the CRFs that are shipped to each site. EDC: This should be prepopulated.
Findings	GF	Local Processing	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What [is/was] the (study) [subject/participant] identifier?	[Subject/Participant] (Identifier)	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system generated. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Findings	GF	Local Processing	N/A	4	VISIT	Visit Name	The name of a clinical encounter that encompasses planned and unplanned trial interventions, procedures, and assessments that may be performed on a subject.	What is the visit name?	[Visit]	Char	R/C	N/A	VISIT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The name of the clinical encounter is typically preprinted on the CRF or displayed within the EDC for any visit-based data collection, most often in Findings domains. This Visit text description is then available in any EDC data extract for that Findings domain.
Findings	GF	Local Processing	N/A	5	VISDAT	Visit Date	Date the clinical encounter	What [is/was] the date of the visit?	(Visit) Date	Char	R/C	Record the [date/start date]	N/A	This field is not an SDTM variable. The date of a	N/A	N/A	The date the genomic specimen was collected

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
							occurred (or started).					of the visit using this format (DD-MON-YYYY).		measurement, test, observation, or specimen collection can be determined from the date/time of visit (VISDAT/VISTIM) and then concatenating the CDASH VISDAT/VISTIM components and populating the SDTMIG variable GFDTC in ISO 8601 format.			can be determined from the visit date variable (VISDAT) and applying that date to all of the genomic tests at that visit, or the specimen collection date can be collected on the Genomic Finding CRF using the date (GFDAT) field.
Findings	GF	Local Processing	N/A	6	GFCAT	Category for Genomic Test	A grouping of topic-variable values based on user-defined characteristics.	What is the category of the genomic test?	[Genomic Category]; NULL	Char	R/C	Record the genomic test category, if not preprinted on the CRF.	GFCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, and not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Category" can be included as the column heading.
Findings	GF	Local Processing	N/A	7	GFSCAT	Subcategory for Genomic Test	A sub-division of the GFCAT values based on user-defined characteristics.	What is the subcategory of the genomic test?	[Genomic Subcategory]; NULL	Char	R/C	Record the genomic test subcategory, if not preprinted on the CRF.	GFSCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, and not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Subcategory" can be included as the column heading. GFSCAT can only be used if there is an GFCAT, and it must be a subcategorization of GFCAT.
Findings	GF	Local Processing	N/A	8	GFPERF	Genomic Test Performed	An indication of whether a planned genomic measurement, series of genomic measurements, test, or observation was performed or specimens collected.	Was the (genomic) specimen collected?; Was the (genomic) test performed?	Genomic Test Performed; Specimen Collected	Char	HR	Indicate whether or not the genomic specimen was collected or measurement performed.	GFSTAT	This does not map directly to an SDTMIG variable. May be used to derive a value into the SDTMIG variable GFSTAT. If the CDASH variable GFPERF="N", the value of GFSTAT will be "NOT DONE". If GFPERF="Y", GFSTAT should be null. A combination of SDTMIG variables (e.g., GFCAT	(NY)	N/A	This may be implemented for an entire genomic category, or a specific genomic test. This general prompt question is used as a data management tool to verify that missing results are confirmed missing.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
														and GFSCAT, GFTPT) is used to indicate that multiple tests were not done. In this situation, the SDTMIG variable GFTESTCD would be populated as GFALL and an appropriate test name (GFTEST) provided. See SDTMIG for additional information.			
Findings	GF	Local Processing	N/A	9	GFNAM	Laboratory/Vendor Name	The name or identifier of the vendor (e.g., laboratory) that provided the genomic test results.	What was the name of the laboratory used?	Laboratory Name	Char	R/C	Record the laboratory name.	GFNAM	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Recommended to collect on the CRF if lab name was not collected at the site/study level or if multiple labs are used by a site.
Findings	GF	Local Processing	N/A	10	GFTEST	Name of Genomic Test	Descriptive name of the genomic test used to obtain the measurement or finding.	What was the name of the genomic test?	[Genomic Test Name]	Char	HR	Record the name of the genomic test, if not preprinted on the CRF. If collected on the CRF, the sponsor may provide additional instructions to ensure the data is entered as intended.	GFTEST; GFTESTCD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The SDTMIG variable GFTESTCD may be determined from the value collected in GFTEST. The SDTMIG variables GFTESTCD and GFTEST are required in the SDTM submission datasets. Use appropriate CDISC Controlled Terminology for the test and test code.	(GFTEST) (GFTESTCD)	N/A	Required to identify which genomic test the result is for. It is recommended that the genomic test names be preprinted on the CRF rather than collected in a free-text field that requires the site to enter text. If the form is laid out as a grid, then words such as "Genomic Test" can be included as the column heading.
Findings	GF	Local Processing	N/A	11	GFTSTDTL	Genomic Findings Test Detail	Detail of the genomic test used to obtain the measurement or finding.	What was the genomic test detail?	[Genomic Test Name Detail]	Char	O	Record the detail of the genomic test, if not preprinted on the CRF.	GFTSTDTL	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(GFTSDTL)	N/A	Provides additional details for the genomic test. It is recommended that the test detail be preprinted on the CRF. If the form is laid out as a grid, then words such as "Genomic Test Detail" can be included as the column heading.
Findings	GF	Local Processing	N/A	12	GFMETHOD	Method of Genomic Test	Method of the genomic test.	What was the method used for the genomic test?	Method of [Genomic Test]	Char	R/C	Record the method of the genomic test.	GFMETHOD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(METHOD)	N/A	This information may be collected when more than 1 method of genomic test is possible, and collecting the method used is necessary.
Findings	GF	Local Processing	N/A	13	GFTPT	Genomic Test Planned Time Point Name	A text description of planned time point when measurements should be taken as defined in the protocol.	What was the planned time point of the collection?	[Planned Time Point Name]	Char	R/C	Record the planned time-point labels for the genomic test, if not preprinted on the CRF.	GFTPT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. See the SDTMIG for additional information on representing time points. SDTMIG time-point anchors GFTPTREF (text description) and GFRFTDTC (date/time) may be needed, as well as SDTMIG variables GFTPTNUM, GFELTM.	N/A	N/A	Planned time points are needed to differentiate multiple sequential assessments. It is recommended that time points should be preprinted on the CRF rather than collected in a free-text field. If the form is laid out as a grid, then words such as "Planned Time Point" can be

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	included in the column heading.
Findings	GF	Local Processing	N/A	14	GFDAT	Genomic Specimen Collection Date	The date of genomic specimen collection, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the (start) date of the genomic specimen collection?	Genomic Specimen Collection (Start) Date	Char	R/C	Record the (start) date when the genomic specimen collection was done using this format (DD-MON-YYYY).	GFDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable GFDTC in ISO 8601 format.	N/A	N/A	A complete date is expected. The date of genomic specimen collection may be determined from the date of visit (VISDAT) and, if so, a separate collection date field is not required. The SDTMIG GFDTC variable contains either a date/time when a genomic specimen is collected at a point in time or the start date/time, when a genomic specimen is collected over time.
Findings	GF	Local Processing	N/A	15	GFTIM	Genomic Specimen Collection Time	The time of genomic specimen collection, represented in an unambiguous time format (e.g., hh:mm:ss).	What was the (start) time of the genomic specimen collection?	Genomic Specimen Collection (Start) Time	Char	R/C	Record the (start) time of collection (as complete as possible)	GFDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable GFDTC in ISO 8601 format.	N/A	N/A	May be required when multiple genomic specimens are collected on 1 day or when the timing in relationship to study treatment is required for analysis or a genomic specimen is collected over an extended time period.
Findings	GF	Local Processing	N/A	16	GFORRES	GF Result or Finding in Original Units	Result of the genomic test as originally received or collected.	What was the result of the genomic test?	(Result)	Char	HR	Record the genomic test result.	GFORRES	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Both quantitative results and interpretive findings or summaries may be recorded here.
Findings	GF	Local Processing	N/A	17	GFORRESU	Genomic Result or Finding Original Units	The unit of the genomic test result as originally received or collected.	What was the unit of the genomic test?	Unit	Char	R/C	Record or select the original unit in which these data were collected, if not preprinted on CRF.	GFORRESU	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(UNIT)	N/A	Should be preprinted on the CRF with the associated test when possible, rather than collected in a free-text field. Should be included if applicable and not available elsewhere. For some genomic tests the units may not be applicable.

Assumptions for the CDASHIG GF - Genomic Findings Domain

1. This domain is used for findings related to the structure, function, evolution, mapping, and editing of subject and non-host organism genomic material of interest. This domain includes but is not limited to assessments and results for genetic variation and transcription, and summary measures derived from these assessments. The GF domain is used for findings from characteristics assessed from nucleic acids and may include subsequent inferences and/or predictions about related proteins/amino acids. However, direct assessments of proteins (e.g., assessments of amino acids) are out of scope for this domain.
2. Regarding genetic testing on non-host organisms (including but not limited to bacteria, viruses, and parasites), the following additional assumptions apply:

- a. Tests that give genetic results (e.g., expressed in terms of genetic variation, specific sequence information) on non-host organisms that have been identified in subject samples should be represented in GF domain. To distinguish these findings from subject genetic data, the variable NHOID must be populated in SDTM to identify the non-host organism as the focus of the record (see SDTMIG Section 9.2, Non-host Organism Identifiers, assumption 2 for more information; available at <https://www.cdisc.org/standards/foundational/sdtmig>).
 - b. If the purpose of the test is to detect or determine the identity of a viable, non-host organism or infectious agent in a subject sample, data should be collected using the Microbiology Specimen (MB) domain.
 - c. Tests that are used to determine the resistance/susceptibility of a non-host organism to a drug on a genetic basis should be collected using the Microbiology Susceptibility (MS) domain.
 - d. If the test provides both genetic data and susceptibility/resistance data, genetic data should be collected in the GF domain and the susceptibility/resistance data should be collected in the MS domain (see SDTMIG Section 6.3.5.7.2, Microbiology Susceptibility, assumption 1b for more information).
3. The platform used to detect the finding may be represented in SPDEVID. Attributes used in conjunction with a platform (e.g., assay panel, reagents) may be represented in the SDTM Device Identifiers (DI) domain and other associated device domains. See the SDTM Implementation Guide for Medical Devices (SDTMIG-MD) for further information about SPDEVID and the device domains.
 4. Values populated in GFCAT and GFSCAT are sponsor-defined and there is no CDISC Controlled Terminology for these variables.
 5. Genomic symbols are represented in the SDTM variable GFSYM.
 - a. GFTESTCD and GFTEST should not include genomic names or symbols, including but not limited to official gene symbols.
 - b. For human genetic data, standard nomenclature populated in SDTM variable GFSYM must be obtained from the genomic symbol list maintained in the HUGO Gene Nomenclature Committee (HGNC) database (www.genenames.org).
 6. GFMETHOD lists wet lab techniques for the execution of genomics or genetic testing. Methods related to specimen processing or reagents are not collected in GFMETHOD.
 7. The following variables generally would not be used in GF: --POS, --BODSYS, --ORNRLO, ORNRHI, --STNRLO, --STNRHI, --STNRC, --NRIND, --CHRON, --DISTR, --ANTREG, --LOC, --LAT, --DIR, --PORTOT, --LEAD, --CSTATE, --SPCCND, --FAST, --TOX, --TOXGR, --SEV.
 8. This is a specimen-based domain. GFDAT is the date the genomic specimen was collected. An NSV may be used to collect the date the assay for genetic test was performed (e.g., GFASYDAT, Date Assay was Performed). Assay date may be collected when previous stored genetic specimen are re-assayed for some studies.

Example CRF for the CDASHIG GF - Genomic Findings Domain

Example 1

Title: Genomic Findings Scenario 1: Central Processing

	Planned Time Point GFTPT <i>Pre-populated</i>	PRE-DOSE
Indicate whether or not the genomic specimen was collected or measurement performed.	Was the genomic specimen collected? GFPERF GFSTAT = "NOT DONE" where GFPERF = "N" and GFSTAT = null where GFPERF = "Y"	☐ Yes ☐ No <NY codelist>
Record the date when the genomic specimen collection was done using this format (DD-MON-YYYY).	Genomic Specimen Collection Date GFDAT GFDTC	
Record the (start) time of collection (as complete as possible).	Genomic Specimen Collection Time GFTIM GFDTC	
Record the specimen or accession number assigned.	What was the genomic specimen accession number? GFREFID	

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTM Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
GFTPT	1	What was the planned time point of the collection?	Planned Time Point	Record the planned time-point labels for the genomic test, if not pre-printed on the CRF.	Text	GFTPT				PRE-DOSE	Prompt		
GFPERF	2	Was the genomic specimen collected?	Genomic Specimen Collected	Indicate whether or not the genomic specimen was collected or measurement performed.	Text	GFSTAT	GFSTAT = "NOT DONE" where GFPERF = "N" and GFSTAT = null where GFPERF = "Y"	(NY)	Yes; No			radio	
GFDAT	3	What was the date of the genomic specimen collection?	Genomic Specimen Collection Date	Record the date when the genomic specimen collection was done using this format (DD-MON-YYYY).	Date	GFDTC					Prompt		
GFTIM	4	What was the time of the genomic specimen collection?	Genomic Specimen Collection Time	Record the (start) time of collection (as complete as possible).	Time	GFDTC					Prompt		
GFREFID	5	What was the genomic specimen accession number?	Genomic Specimen Accession Number	Record the specimen or accession number assigned.	Text	GFREFID							

8.3.8 IE - Inclusion/Exclusion Criteria Not Met

Description/Overview for the CDASHIG IE - Inclusion/Exclusion Criteria Not Met Domain

The CDASHIG IE domain is recommended for collecting only inclusion/exclusion exceptions. In other words, those criteria that are "not met"; these are the data that are required to be in the SDTMIG IE domain. The CDASHIG IE domain is used to collect failures on or exceptions to the inclusion/exclusion criteria during the screening process before a subject is enrolled in a study. It is not intended to collect protocol deviations or violations that occur after enrollment; protocol deviations are collected using the DV domain.

The recommendation is that sites be given an entry criteria worksheet to be used for each subject, to record the results of eligibility review. This worksheet should be considered a source document, used in monitoring activities and maintained with the subject's site files. The worksheet should identify each criterion using a unique identifier, which can be easily recorded on the CRF if a subject does not meet that criterion. If criteria lists are numbered the same for both inclusion and exclusion criteria (e.g., inclusion 001-100, exclusion 001-100), then this identifier could include a means of identifying the type of criterion (e.g., I001-I100, E001-E100). Alternatively, the criteria could be collected in 2 separate sections on the CRF labeled "Inclusion" and "Exclusion," and the output records could include the values of Inclusion or Exclusion on each record. These are only examples; an organization's numbering scheme may be different, but some method that captures both the Inclusion or Exclusion category and the unique criterion identifier should be used.

The recommended collection method has been simplified to require the site to record a single "Y/N" value in the IEYN variable to indicate whether the subject met all of the criteria. If any criterion is not met, the site then records it in the CRF. The result value for each unmet criterion may then be derived in the SDTMIG IE domain from the collection of the specific criterion that was not met. In other words, if the collected criterion is an inclusion criterion that was not met, the value of "N" can be derived into IERRES and IESTRESC for that record in the SDTMIG IE domain. If it is an exclusion criterion, then "Y" can be derived into IERRES and IESTRESC to indicate that the subject met the conditions for that exclusion record in IE.

The rationale for the recommended collection method is that what is being collected in the IE CRF is aligned with the data that would be in the SDTMIG IE domain.

This design allows criteria to change over the life of a study or project (e.g., when adaptive trial designs are used, protocol amendments result in changes to the inclusion or exclusion criteria). If inclusion/exclusion criteria were amended during the trial, then each complete set of criteria must be included in the TI domain. TIVERS is used to distinguish between versions of eligibility criteria.

CDASH recommends the use of uniquely numbered entry criteria within a study to effectively manage protocol changes and to facilitate the collection and submission of IE data (see the current SDTMIG for more details). The Inclusion/Exclusion worksheet may need to be updated and renumbered/relettered whenever a protocol amendment changes 1 or more criteria. For example, if new versions of a criterion have not been given new numbers, separate values of IETESTCD might be created by appending letters (e.g., INCL003A, INCL003B). A field could be added to the CRF to capture the version number of the criteria being used; this can be mapped to the SDTMIG variable TI.TIVERS. This enables the retrieval of the full text of the criterion from the code used on the CRF.

Alternatively, an implementer may choose to include the full text of each criterion (IETEST) with a result field (IERRES) in the CRF and request the site to record explicitly the "Y" or the "N" for each criterion, but only the recommended, simplified method is presented in the IE example CRF.

Specification for the CDASHIG IE - Inclusion/Exclusion Criteria Not Met Domain

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings	IE	N/A	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included in the database or populated during SDTM-based dataset creation before submission.
Findings	IE	N/A	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted on the CRFs that are shipped to each site. EDC: This should be prepopulated.
Findings	IE	N/A	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What [is/was] the (study) [subject/participant] identifier?	[Subject/Participant] (Identifier)	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system-generated. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Findings	IE	N/A	N/A	4	VISIT	Visit Name	The name of a clinical encounter that encompasses planned and unplanned trial interventions, procedures, and assessments that may be performed on a subject.	What is the visit name?	[Visit]	Char	R/C	N/A	VISIT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The name of the clinical encounter is typically preprinted on the CRF or displayed within the EDC for any visit-based data collection, most often in Findings domains. This Visit text description is then available in any EDC data extract for that Findings domain.
Findings	IE	N/A	N/A	5	VISDAT	Visit Date	Date the clinical encounter occurred (or started).	What [is/was] the date of the visit?	(Visit) Date	Char	R/C	Record the [date/start date] of the visit using this format (DD-MON-YYYY).	N/A	This field is not an SDTM variable. The date of a measurement, test, observation can be determined from the date/time of visit (VISDAT/VISTIM) and then concatenating the CDASH VISDAT/VISTIM components and populating the SDTMIG variable	N/A	N/A	The date the inclusion and exclusion assessments were collected can be determined from the visit date variable (VISDAT) and applying that date to all of the observations at that visit or the collection date can be included on the Inclusion/Exclusion CRF using the date (IEDAT) field.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
														IEDTC in ISO 8601 format.			
Findings	IE	N/A	N/A	6	IEYN	Any Incl/Excl Criteria Findings	Indication whether the subject met all the eligibility requirements for this study at the time the subject was enrolled.	Were all eligibility criteria met?	Met Criteria	Char	HR	Record Yes if all eligibility criteria were met at the time the subject was enrolled. Record No if subject did not meet all criteria at the time the subject was enrolled.	N/A	Does not map to an SDTMIG variable. The SDTM annotated CRF indicates that this field is NOT SUBMITTED.	(NY)	N/A	The intent/purpose of collecting this field is to help with data cleaning and monitoring. It provides verification if all other fields on the CRF were deliberately left blank.
Findings	IE	N/A	N/A	7	IEDAT	Inclusion/Exclusion Collection Date	The date of collection of the inclusion/exclusion criteria represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the date the eligibility criteria assessment was performed?	Date	Char	O	Record complete date when the eligibility assessment was performed using this format (DD-MON-YYYY).	IEDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable IEDTC in ISO 8601 format.	N/A	N/A	A complete date is expected. The date of collection may be determined from the date of visit (VISDAT) and, if so, a separate assessment date field is not required.
Findings	IE	N/A	N/A	8	IECAT	Inclusion/Exclusion Category	A grouping category to denote whether the protocol entry criterion being assessed is inclusion criteria or exclusion criteria.	What was the category of the criterion?	Criterion Type	Char	R/C	Check the appropriate box to indicate whether the criterion exception was related to the subject's inclusion or exclusion.	IECAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(IECAT)	N/A	These categories have been defined in SDTM and have controlled terminology that must be used. Only records for criteria that are not met appear in the IE SDTMIG domain. IECAT must be populated. This criterion category may be collected on the CRF in a tick/checkbox format or it may be included as part of the criterion identification and mapped when the SDTM submission datasets are created.
Findings	IE	N/A	N/A	9	IESCAT	Inclusion/Exclusion Subcategory	A sub-division of the IECAT values based on user-defined characteristics.	What was the subcategory of the criterion?	[Criterion Subtype]; NULL	Char	O	If collected on the CRF, the sponsor provides instructions to ensure the data is entered as intended.	IESCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, and not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Subcategory" can be included as the column heading. This can be used to distinguish criteria for a sub-study or to categorize the criterion as a major or minor exception.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings	IE	N/A	N/A	10	IETESTCD	Inclusion/Exclusion Criterion Short Name	The unique identifier associated with the criterion that was the exception.	What was the identifier of the inclusion criterion the subject did not meet or the exclusion criterion the subject met?	Exception Criterion Identifier	Char	HR	If the subject was not eligible, record the identifying code for each criterion that was an exception.	IETESTCD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	This field is required to appear on the CRF, but may be null if there are no exceptions to the inclusion/exclusion criteria. The CRF should allow multiple exceptions to be recorded. See SDTMIG for assumptions regarding protocol versioning. Sponsors may provide a list of inclusion/exclusion criteria and the unique identifying codes to the site. The list provided should be versioned/updated when the protocol changes and the criteria are changed. Sponsors should use sponsor-developed controlled terminology for IETESTCD.
Findings	IE	N/A	N/A	11	IETEST	Inclusion/Exclusion Criterion	Descriptive name of the inclusion or exclusion criterion that was the exception.	What was the description of the inclusion criterion the subject did not meet or the exclusion criterion the subject met?	Exception Criterion Description	Char	O	Record the description of the criterion, if not preprinted on the CRF. If collected on the CRF, the sponsor may provide additional instructions to ensure the data is entered as intended.	IETEST	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The SDTMIG variable IETESTCD may be determined from the value collected in IETEST. The SDTMIG variables IETESTCD and IETEST are required in the SDTM submission datasets.	N/A	N/A	Sponsors could automatically populate the text in EDC systems when the criterion identifier is populated by the investigator. This can be verified by the PI to ensure the right exception identifier was selected.
Findings	IE	N/A	N/A	12	IEORRES	I/E Criterion Original Result	An indication of which inclusion criterion was not met or exclusion criterion was met.	What is the result?	(Result)	Char	HR	If collected on the CRF, the sponsor provides instructions to ensure the data is entered as intended.	IEORRES	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	(NY)	This is only a data collection field when a complete list of inclusion and exclusion criteria are included on the CRF with Yes/No response options. If the sponsor collects only the criteria that are not fulfilled, then, when an inclusion criterion is not met, IEORES is mapped to "N" and when an exclusion criterion is met, IEORES is mapped to "Y".

Assumptions for the CDASHIG IE - Inclusion/Exclusion Criteria Not Met Domain

1. The recommendation is for only those records for criteria that are not met to be collected on the IE CRF.
2. The complete list of inclusion/exclusion criteria and the version number of each of the criteria are provided in the SDTMIG TI dataset. The IETEST and IETESTCD values used to collect data on the IE CRF should match the values in the TI dataset.
3. Categories IECAT and IESCAT

- a. The SDTMIG variable IECAT must be populated with INCLUSION or EXCLUSION. This criterion category may be collected on the CRF in a checkbox format using the CDASHIG field IECAT, or it may be included as part of the criterion identification and populated when the SDTM submission datasets are created.
 - b. IESCAT may be used by the sponsor to further categorize the exception criteria within the larger categories of Inclusion or Exclusion (e.g., Major, Minor).
 - c. These categories may be collected on the CRF, or they may be used as titles on the CRF and hidden/defaulted in the operational system. If these categories are not collected on the CRF or created in the operational data management system, they are added when the SDTM submission datasets are created.
4. There should be a unique IETESTCD for each unique criterion text in IETEST, and these values must match the values in the TI domain.
5. It may be useful to collect the protocol version under which a subject was screened.
6. The collection date (IEDAT) is the date that the IE data were recorded for the study, and not the actual date the exception occurred. The visit date (VISDAT) may be used, instead, to populate the SDTMIG IEDTC variable.
7. The result (IEORRES)—"Y" or "N"—for each SDTMIG IETESTCD is derived or inferred from the collection of the specific criterion not met. IEORES must be populated in the SDTMIG IE domain because it is a Required variable. Sponsors will populate this in the operational data management system or in the creation of the SDTMIG submission datasets. When an inclusion criterion is not met, the SDTMIG variable IEORES is populated with "N"; when an exclusion criterion is not met, IEORES is populated with "Y".

Example CRF for the CDASHIG IE - Inclusion/Exclusion Criteria Not Met Domain

Example 1

Title: Inclusion/Exclusion Criteria

CRF Completion Instructions		
- All procedures must be performed and the subject's eligibility determined within <protocol-specified time period prior to study medication administration>. (If applicable, include the following instructions) Complete the Inclusion/Exclusion Worksheet as source document by recording a "Yes" or "No" response to each criterion. - Record the criterion identification that was an exception.		
Record Yes if all eligibility criteria were met at the time the subject was enrolled. Record No if the subject did not meet all criteria at the time the subject was enrolled.	Were all eligibility criteria met? ☐ IEYN ☐ Not Submitted	☐ Yes ☐ No <NY codelist>
Record whether the criterion exception was Inclusion or Exclusion.	What was the category of the criterion? ☐ IECAT	☐ Inclusion ☐ Exclusion <IECAT codelist>
If the subject was not eligible, record the identifying code for each criterion that was an exception.	What was the identifier of the inclusion criterion the subject did not meet or the exclusion criterion the subject met? ☐ IETESTCD	

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
IEYN	1	Were all eligibility criteria met?	Met Criteria	Record Yes if all eligibility criteria were met at the time the subject was enrolled. Record No if the subject did not meet all criteria at the time the subject was enrolled.	Text	N/A		(NY)	Yes; No			radio	
IECAT	2	What was the category of the criterion?	Criterion Type	Record whether the criterion exception was Inclusion or Exclusion.	Text	IECAT		(IECAT)	Inclusion; Exclusion			radio	

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
IETESTCD	3	What was the identifier of the inclusion criterion the subject did not meet or the exclusion criterion the subject met?	Exception Criterion Identifier	If the subject was not eligible, record the identifying code for each criterion that was an exception.	Text	IETESTCD							

8.3.9 LB - Laboratory Test Results


Description/Overview for the CDASHIG LB - Laboratory Test Results Domain

The CDASHIG LB domain contains laboratory test data, for tests and measurements performed on collected biological specimens. The LB domain includes but is not limited to hematology, clinical chemistry, and urinalysis data. The LB domain does not include microbiology or pharmacokinetic data, which are represented in separate domains (MB and PP, respectively). CDASH does not specify the actual lab parameters that should be collected.

This section describes 3 different data collection scenarios for laboratory test results. It is up to the sponsor to determine which data collection scenario best meets the study needs.


Scenario 1: Central Processing

In this scenario, subject specimens are taken at the site and sent out for processing. Results are provided in an electronic file; the sponsor has chosen to collect reconciliation data (e.g., LBDAT, LBTIM, VISITNUM, LBREFID) on the CRF. This scenario may also apply if the central lab results are imported into a sponsor's EDC system. The fields for test results are not defined here, as these data are not part of the CRF.

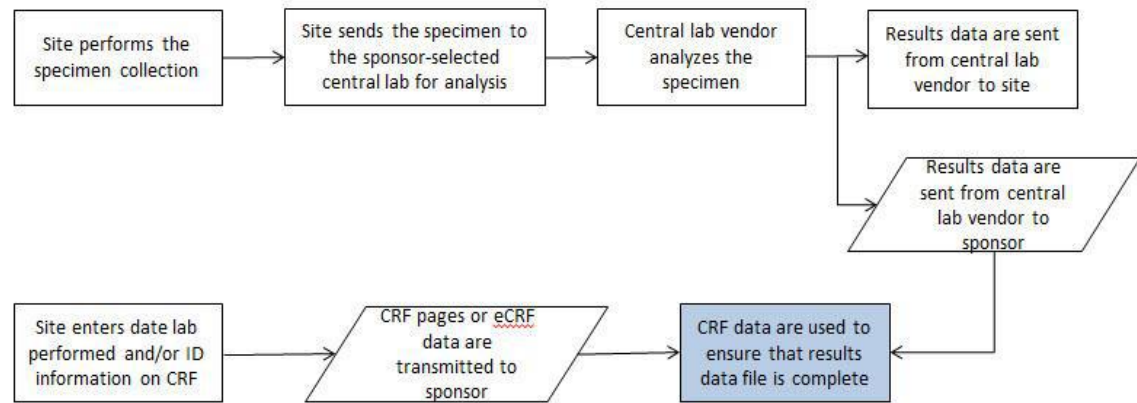


Scenario 2: Central Processing with Investigator Assessment of Clinical Significance Assessment for Abnormal Values

In this scenario, subject specimens are taken at the site and sent to a central lab for processing. The results are provided in an electronic file to the sponsor. In addition, the results are provided to the investigator for assessment of clinical significance for any abnormal values, and that information is provided to the sponsor on the CRF.

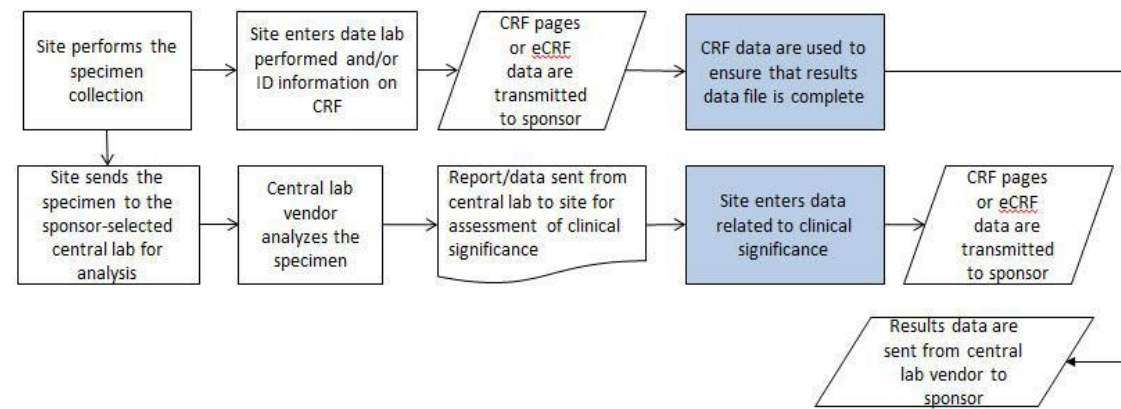

Scenario 3: Local Processing

In this scenario, subject specimens are taken and analyzed, and then the results are recorded directly on the CRF.

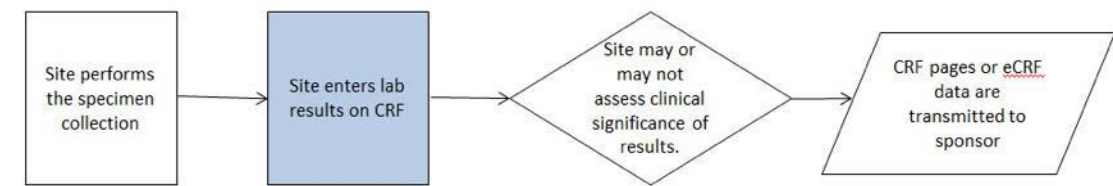

Specification for the CDASHIG LB - Laboratory Test Results Domain

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Code/Code List Name	Subset Controlled Terminology/CDASH Code/Code List Name	Implementation Notes
Findings	LB	Central Processing	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included in the database or populated during SDTM-based dataset creation before submission.
Findings	LB	Central Processing	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted on the

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	CRFs that are shipped to each site. EDC: This should be prepopulated.
Findings	LB	Central Processing	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What [is/was] the (study) [subject/participant] identifier?	[Subject/Participant] (Identifier)	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system-generated. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Findings	LB	Central Processing	N/A	4	VISIT	Visit Name	The name of a clinical encounter that encompasses planned and unplanned trial interventions, procedures, and assessments that may be performed on a subject.	What is the visit name?	[Visit]	Char	R/C	N/A	VISIT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The name of the clinical encounter is typically preprinted on the CRF or displayed in the EDC for any visit-based data collection, most often in Findings domains. This Visit text description is then available in any EDC data extract for that Findings domain.
Findings	LB	Central Processing	N/A	5	VISDAT	Visit Date	Date the clinical encounter occurred (or started).	What [is/was] the date of the visit?	(Visit) Date	Char	R/C	Record the [date/start date] of the visit using DD-MON-YYYY format.	N/A	This field is not an SDTM variable. The date of a measurement, test, observation, or specimen collection can be determined from the date/time of visit (VISDAT/VISTIM) and then concatenating the CDASH VISDAT/VISTIM components and populating the SDTMIG variable LBDTC in ISO 8601 format.	N/A	N/A	The date the laboratory specimens were collected can be determined from the visit date variable (VISDAT) and applying that date to all of the laboratory tests at that visit, or the specimen collection date can be collected on the Laboratory CRF using the date (LBDAT) field.
Findings	LB	Central Processing	N/A	6	LBPERF	Lab Performed	An indication of whether a planned lab measurement, series of lab measurements, tests, observations was performed or specimens collected.	Was the sample collected?; Was the lab performed?	Lab Performed; Sample Collected	Char	O	Indicate whether or not lab specimen was collected or measurement performed.	LBSTAT	This does not map directly to an SDTMIG variable. May be used to derive a value into the SDTMIG variable LBSTAT. If the CDASH variable LBPERF = "N", the value of LBSTAT will be "NOT DONE". If LBPERF = "Y", LBSTAT should be null. A combination of SDTMIG variables (e.g., LBCAT and LBSCAT, LBTPT) is used to indicate that multiple tests were not done. In this situation, the SDTMIG variable LBTESTCD would be populated as LBALL and an appropriate test name (LBTEST) provided. See SDTMIG for additional information.	(NY)	N/A	This may be implemented for an entire lab panel, or a specific lab test. General prompt question to be used as a data management tool to verify that missing results are confirmed missing.
Findings	LB	Central Processing	N/A	7	LBDAT	Specimen Collection Date	The date of specimen collection, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the (start) date of the lab specimen collection?	Specimen Collection (Start) Date	Char	R/C	Record the (start) date when specimen collection was done using this format (DD-MON-YYYY).	LBDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable LBDTC in ISO 8601 format.	N/A	N/A	A complete date is expected. The date of specimen collection may be determined from the date of visit (VISDAT) and, if so, a separate assessment date field is not required. The SDTMIG LBDTC variable contains either a date/time when a specimen is collected at a point in time or the start

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	date/time, when a specimen is collected over time.
Findings	LB	Central Processing	N/A	8	LBTIM	Specimen Collection Time	The time of specimen collection, represented in an unambiguous time format (e.g., hh:mm:ss).	What was the (start) time of the lab specimen collection?	Specimen Collection (Start) Time	Char	R/C	Record the (start) time of collection (as complete as possible).	LBDC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable LBDC in ISO 8601 format.	N/A	N/A	May be required when multiple assessments are done on 1 day or when the timing in relationship to study treatment is required for analysis or a specimen is collected over an extended time period.
Findings	LB	Central Processing	N/A	9	LBCAT	Category for Lab Test	A grouping of topic-variable values based on user-defined characteristics.	What was the name of the lab panel?	[Lab Panel Name]; NULL	Char	R/C	Record the lab test category, if not preprinted on the CRF.	LBCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, and not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Category" can be included in the column heading. Laboratory tests have commonly recognized categories and subcategories that should be used whenever appropriate. LBCAT and or LBSCAT should be included if lab status (NOT DONE) is collected for each lab category/subcategory (e.g., HEMATOLOGY, CHEMISTRY, URINALYSIS).
Findings	LB	Central Processing	N/A	10	LBSCAT	Subcategory for Lab Test	A sub-division of the LBCAT values based on user-defined characteristics.	What was the name of the lab sub-panel?	[Lab Sub-Panel Name]; NULL	Char	R/C	Record the lab test subcategory, if not preprinted on the CRF.	LBSCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology (e.g. electrolytes, liver function). This would most commonly be preprinted on the CRF or screen and prepopulated in the data management system. This is not typically a question to which the site would provide an answer. Laboratory tests have commonly recognized categories and subcategories that should be used whenever appropriate. LBSCAT can only be used if there is an LBCAT, and it must be a subcategorization of LBCAT.
Findings	LB	Central Processing	N/A	11	LBSPEC	LB Specimen Type	The type of sample material taken from a biological entity.	What is the specimen material type?	Specimen Type	Char	R/C	Record the specimen material type.	LBSPEC	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(SPECTYPE)	N/A	The type of specimen used for a measure. Should be collected if not available elsewhere, or if required to differentiate multiple specimens.
Findings	LB	Central Processing	N/A	12	LBTPT	Lab Planned Time Point Name	A text description of planned time point when measurements should be taken, as defined in the protocol.	What was the planned time point of the lab?	[Planned Time Point Name]	Char	R/C	Record the planned time point labels for the lab test, if not preprinted on the CRF.	LBTPT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. See the SDTMIG for additional information on representing time points. SDTMIG time-point anchors LBTPTREF (text description) and LBRFTDTC (date/time) may be needed, as well as SDTMIG variables LBTPTNUM, LBELTM.	N/A	N/A	Planned time points are needed to differentiate multiple sequential assessments. It is recommended that time points should be preprinted on the CRF rather than collected in a free-text field. If the form is laid out as a grid, then words such as "Planned Time Point" can be included in the column heading.
Findings	LB	Central Processing	N/A	13	LBCOND	Lab Test Condition Met	Indication whether the testing conditions	Were the protocol-defined testing conditions met?	Test Condition Met	Char	R/C	Record whether protocol defined testing	SUPPLB.QVAL	This does not map directly to an SDTMIG variable. This information could be submitted	(NY)	N/A	This information is collected when the laboratory test results may be affected by whether

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
							defined in the protocol were met (e.g., low-fat diet).					conditions were met.		in a SUPPLB dataset as the value of SUPPLB.QVAL where SUPPLB.QNAM ="LBCOND" and SUPPLB.LABEL="Test Condition Met". Refer to the current SDTM and SDTMIG for instructions on placement of non-standard variables (NSVs) in SDTM domains.			conditions for testing were properly met. The specific testing conditions required should be preprinted on the CRF. This may not be relevant for all tests.
Findings	LB	Central Processing	N/A	14	LBFAST	Lab Fasting Status	An indication that the subject has abstained from food/water for the specified amount of time.	Was the subject fasting?	Fasting	Char	R/C	Record whether the subject was fasting prior to the test being performed.	LBFAST	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(NY)	N/A	Results may be affected by whether the subject was fasting. This may not be relevant for all tests.
Findings	LB	Central Processing	N/A	15	LBREFID	Lab Specimen ID	An internal or external identifier (e.g., specimen identifier).	What was the (laboratory test) [reference identifier/accession number]?	(Laboratory) [Reference identifier/Accession Number]	Char	R/C	Record the specimen or accession number assigned.	LBREFID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. May be used to create RELREC to link this record with a record in another domain.	N/A	N/A	This can be used to confirm that the appropriate data record is present in the electronic transfer. May be included for linking back to specimens (e.g., Specimen ID).
Findings	LB	Central Processing with CS	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included in the database or populated during SDTM-based dataset creation before submission.
Findings	LB	Central Processing with CS	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted on the CRFs that are shipped to each site. EDC: This should be prepopulated.
Findings	LB	Central Processing with CS	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What [is/was] the (study) [subject/participant] identifier?	[Subject/Participant] (Identifier)	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system generated. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Findings	LB	Central Processing with CS	N/A	4	VISIT	Visit Name	The name of a clinical encounter that encompasses planned and unplanned trial interventions, procedures, and assessments that may be performed on a subject.	What is the visit name?	[Visit]	Char	R/C	N/A	VISIT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The name of the clinical encounter is typically preprinted on the CRF or displayed within the EDC for any visit-based data collection, most often in Findings domains. This Visit text description is then available in any EDC data extract for that Findings domain.
Findings	LB	Central Processing with CS	N/A	5	VISDAT	Visit Date	Date the clinical encounter	What [is/was] the date of the visit?	(Visit) Date	Char	R/C	Record the [date/start date] of the visit using	N/A	This field is not an SDTM variable. The date of a measurement, test,	N/A	N/A	The date of the laboratory specimens were collected can be determined from the visit

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
							occurred (or started).					DD-MON-YYYY format.		observation, or specimen collection can be determined from the date/time of visit (VISDAT/VISTIM) and then concatenating the CDASH VISDAT/VISTIM components and populating the SDTMIG variable LBDTC in ISO 8601 format.			date variable (VISDAT) and applying that date to all of the laboratory tests at that visit, or the collection date can be collected on the Laboratory CRF using the date (LBDAT) field
Findings	LB	Central Processing with CS	N/A	6	LBPERF	Lab Performed	An indication of whether a planned lab measurement, series of lab measurements, test, or observation was performed or specimens collected.	Was the sample collected?; Was the lab performed?	Lab Performed; Sample Collected	Char	HR	Indicate whether or not lab specimen was collected or measurement performed.	LBSTAT	This does not map directly to an SDTMIG variable. May be used to derive a value into the SDTMIG variable LBSTAT. If the CDASH variable LBPERF="N", the value of LBSTAT will be "NOT DONE". If LBPERF="Y", LBSTAT should be null. A combination of SDTMIG variables (e.g., LBCAT and LBSCAT, LBTPT) is used to indicate that multiple tests were not done. In this situation, the SDTMIG variable LBTESTCD would be populated as LBALL and an appropriate test name (LBTEST) provided. See SDTMIG for additional information.	(NY)	N/A	This may be implemented for an entire lab panel, or a specific lab test. This general prompt question is used as a data management tool to verify that missing results are confirmed missing.
Findings	LB	Central Processing with CS	N/A	7	LBDAT	Specimen Collection Date	The date of specimen collection, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the (start) date of the lab specimen collection	Specimen Collection (Start) Date	Char	R/C	Record the (start) date when the specimen collection was done using this format (DD-MON-YYYY).	LBDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable LBDTC in ISO 8601 format.	N/A	N/A	A complete date is expected. The date of specimen collection may be determined from the date of visit (VISDAT) and, if so, a separate assessment date field is not required. The SDTMIG LBDTC variable contains either a date/time when a specimen is collected at a point in time or the start date/time, when a specimen is collected over time.
Findings	LB	Central Processing with CS	N/A	8	LBTIM	Specimen Collection Time	The time of specimen collection, represented in an unambiguous time format (e.g., hh:mm:ss).	What was the (start) time of the lab specimen collection?	Specimen Collection (Start) Time	Char	R/C	Record the (start) time of collection (as complete as possible).	LBDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable LBDTC in ISO 8601 format.	N/A	N/A	May be required when multiple assessments are done on 1 day or when the timing in relationship to study treatment is required for analysis or a specimen is collected over an extended time period.
Findings	LB	Central Processing with CS	N/A	9	LBCAT	Category for Lab Test	A grouping of topic-variable values based on user-defined characteristics.	What was the name of the lab panel?	[Lab Panel Name]; NULL	Char	R/C	Record the lab test category, if not preprinted on the CRF.	LBCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, and not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Category" can be included as the column heading. Laboratory tests have commonly recognized categories and subcategories that should be used whenever appropriate. LBCAT and or LBSCAT should be included if lab status (NOT DONE) is collected for each lab

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	category (e.g., HEMATOLOGY, CHEMISTRY, URINALYSIS).
Findings	LB	Central Processing with CS	N/A	10	LBSCAT	Subcategory for Lab Test	A sub-division of the LBCAT values based on user-defined characteristics.	What was the name of the lab sub-panel?	[Lab Sub-Panel Name]; NULL	Char	R/C	Record the lab test subcategory, if not preprinted on the CRF.	LBSCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology (e.g. electrolytes, liver function). This would most commonly be preprinted on the CRF or screen and prepopulated in the data management system. This is not typically a question to which the site would provide an answer. Laboratory tests have commonly recognized categories and subcategories that should be used whenever appropriate. LBSCAT can only be used if there is an LBCAT, and it must be a subcategorization of LBCAT.
Findings	LB	Central Processing with CS	N/A	11	LBSPEC	LB Specimen Type	The type of sample material taken from a biological entity.	What is the specimen material type?	Specimen Type	Char	R/C	Record the specimen material type.	LBSPEC	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(SPECTYPE)	N/A	The type of specimen used for a measure. Should be collected if not available elsewhere, or if required to differentiate multiple specimens.
Findings	LB	Central Processing with CS	N/A	12	LBTPPT	Lab Planned Time Point Name	A text description of planned time point when measurements should be taken, as defined in the protocol.	What was the planned time point of the lab?	[Planned Time Point Name]	Char	R/C	Record the planned time-point labels for the lab test, if not preprinted on the CRF.	LBTPPT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. See the SDTMIG for additional information on representing time points. SDTMIG time-point anchors LBTPPTREF (text description) and LBRFTDTC (date/time) may be needed, as well as SDTMIG variables LBTPPTNUM, LBELTM.	N/A	N/A	Planned time points are needed to differentiate multiple sequential assessments. It is recommended that time points should be preprinted on the CRF rather than collected in a free-text field. If the form is laid out as a grid, then words such as "Planned Time Point" can be included in the column heading.
Findings	LB	Central Processing with CS	N/A	13	LBCOND	Lab Test Condition Met	Indication of whether the testing conditions defined in the protocol were met (e.g., low-fat diet).	Were the protocol-defined testing conditions met?	Test Condition Met	Char	O	Record whether protocol-defined testing conditions were met.	SUPPLB.QVAL	This does not map directly to an SDTMIG variable. This information could be submitted in a SUPPLB dataset as the value of SUPPLB.QVAL where SUPPLB.QNAM ="LBCOND" and SUPPLB.LABEL="Test Condition Met". Refer to the current SDTM and SDTMIG for instructions on placement of NSVs in SDTM domains.	(NY)	N/A	This information is collected when the laboratory test results may be affected by whether conditions for testing were properly met. The specific testing conditions required should be preprinted on the CRF (e.g., "Did subject meet diet requirements?"). This may not be relevant for all tests.
Findings	LB	Central Processing with CS	N/A	14	LBFAST	Lab Fasting Status	An indication that the subject has abstained from food/water for the specified amount of time.	Was the subject fasting?	Fasting	Char	R/C	Record whether the subject was fasting prior to the test being performed.	LBFAST	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(NY)	N/A	Results may be affected by whether the subject was fasting. This may not be relevant for all tests.
Findings	LB	Central Processing with CS	N/A	15	LBTEST	Lab Test or Examination Name	Descriptive name of the lab test or examination used to obtain the measurement or finding. Any test normally performed by a clinical laboratory is considered a lab test.	What was the lab test name?	[Laboratory Test Name]	Char	HR	Record the name of the lab measurement or finding, if not preprinted on the CRF. If collected on the CRF, the sponsor may provide additional instructions to ensure the data is entered as intended.	LBTEST; LBTESTCD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The SDTMIG variable LBTESTCD may be determined from the value collected in LBTEST. The SDTMIG variables LBTESTCD and LBTEST are required in the SDTM submission datasets. Use appropriate CDISC Controlled Terminology for the test and test code.	(LBTEST)	N/A	Required to identify which test the result is for. It is recommended that the test names be preprinted on the CRF rather than collected in a free-text field. If the form is laid out as a grid, then words such as "Test" can be included as the column heading.
Findings	LB	Central Processing with CS	N/A	16	LBORRES	Lab Result or Finding in	Result of the measurement or finding as	What was the result of the lab test?	(Result)	Char	HR	Record the laboratory test result.	LBORRES	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Optional if already provided from central lab.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
						Original Units	originally received or collected.										
Findings	LB	Central Processing with CS	N/A	17	LBORRESU	Lab Original Units	The unit of the result as originally received or collected.	What was the unit of the lab result?	Unit	Char	O	Record or select the original unit in which these data were collected.	LBORRESU	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(UNIT)	N/A	Optional if already provided from central lab or a sponsor stores units separately.
Findings	LB	Central Processing with CS	N/A	18	LBCLSIG	Lab Clinical Significance	An indication whether lab test results were clinically significant.	Was this result clinically significant?	Clinically Significant	Char	HR	Record whether laboratory test results were clinically significant.	LBCLSIG	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(NY)	N/A	Key data collected in this scenario.
Findings	LB	Central Processing with CS	N/A	19	LBREFID	Lab Specimen ID	An internal or external identifier (e.g., specimen identifier).	What was the (laboratory test) [reference identifier/accession number]?	(Laboratory test) [Reference identifier/Accession Number]	Char	R/C	Record the specimen or accession number assigned.	LBREFID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. May be used to create RELREC to link this record with a record in another domain.	N/A	N/A	This can be used to confirm that the appropriate data record is present in the electronic transfer. May be included for linking back to specimens (e.g., Specimen ID).
Findings	LB	Central Processing with CS	N/A	20	LBMETHOD	Lab Method of Test or Examination	Method of the test or examination.	What was the method used for the lab test or examination?	Method of Test or Examination	Char	O	Record the method of test or examination.	LBMETHOD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(METHOD)	N/A	This information may be collected when more than 1 method is possible, and collecting the method used is necessary.
Findings	LB	Local Processing	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included into the database or populated during SDTM-based dataset creation before submission.
Findings	LB	Local Processing	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted on the CRFs that are shipped to each site. EDC: This should be prepopulated.
Findings	LB	Local Processing	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What [is/was] the (study) [subject/participant] identifier?	[Subject/Participant] (Identifier)	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system generated. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Findings	LB	Local Processing	N/A	4	VISIT	Visit Name	The name of a clinical encounter that encompasses planned and unplanned trial interventions, procedures, and assessments that may be performed on a subject.	What is the visit name?	[Visit]	Char	R/C	N/A	VISIT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The name of the clinical encounter is typically preprinted on the CRF or displayed within the EDC for any visit-based data collection, most often in Findings domains. This Visit text description is then available in any EDC data extract for that Findings domain.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings	LB	Local Processing	N/A	5	VISDAT	Visit Date	Date the clinical encounter occurred (or started).	What [is/was] the date of the visit?	(Visit) Date	Char	R/C	Record the [date/start date] of the visit using this format (DD-MON-YYYY).	N/A	This field is not an SDTM variable. The date of a measurement, test, observation, or specimen collection can be determined from the date/time of visit (VISDAT/VISTIM) and then concatenating the CDASH VISDAT/VISTIM components and populating the SDTMIG variable LBDTC in ISO 8601 format.	N/A	N/A	The date of the laboratory specimens were collected can be determined from the visit date variable (VISDAT) and applying that date to all of the laboratory tests at that visit, or the collection date can be collected on the Laboratory CRF using the date (LBDAT) field.
Findings	LB	Local Processing	N/A	6	LBPERF	Lab Performed	An indication of whether a planned lab measurement, series of lab measurements, test, or observation was performed or specimens collected.	Was the sample collected?; Was the lab performed?	Sample Collected; Lab Performed	Char	HR	Indicate whether or not lab specimen was collected or measurement performed.	LBSTAT	This does not map directly to an SDTMIG variable. May be used to derive a value into the SDTMIG variable LBSTAT. If the CDASH variable LBPERF = "N", the value of LBSTAT will be "NOT DONE". If LBPERF = "Y", LBSTAT should be null. A combination of SDTMIG variables (e.g., LBCAT and LBSCAT, LBTPT) is used to indicate that multiple tests were not done. In this situation, the SDTMIG variable LBTESTCD would be populated as LBALL and an appropriate test name (LBTEST) provided. See SDTMIG for additional information.	(NY)	N/A	This may be implemented for an entire panel, or on a specific test basis. General prompt question to be used as a data management tool to verify that missing results are confirmed missing.
Findings	LB	Local Processing	N/A	7	LBDAT	Specimen Collection Date	The date of specimen collection, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the (start) date of the lab specimen collection?	Specimen Collection (Start) Date	Char	R/C	Record the (start) date of specimen collection using this format (DD-MON-YYYY).	LBDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable LBDTC in ISO 8601 format.	N/A	N/A	A complete date is expected. The date of collection may be determined from the date of visit (VISDAT) and, if so, a separate assessment date field is not required. The SDTMIG LBDTC variable contains either a date/time when a specimen is collected at a point in time or the start date/time, when a specimen is collected over time.
Findings	LB	Local Processing	N/A	8	LBTIM	Specimen Collection Time	The time of specimen collection, represented in an unambiguous time format (e.g., hh:mm:ss).	What was the (start) time of the lab specimen collection?	Specimen Collection (Start) Time	Char	R/C	Record the (start) time of collection (as complete as possible)	LBDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable LBDTC in ISO 8601 format.	N/A	N/A	May be required when multiple assessments are done on 1 day or when the timing in relationship to study treatment is required for analysis or a specimen is collected over an extended time period.
Findings	LB	Local Processing	N/A	9	LBCAT	Category for Lab Test	A grouping of topic-variable values based on user-defined characteristics.	What was the name of the lab panel?	[Lab Panel Name]; NULL	Char	R/C	Record the lab test category, if not preprinted on the CRF.	LBCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, and not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Category" can be included as the column heading. Laboratory tests have commonly recognized categories and subcategories that should be used whenever appropriate. LBCAT and or LBSCAT should be included if lab status (NOT

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	DONE) is collected for each lab category (e.g., HEMATOLOGY, CHEMISTRY, URINALYSIS).
Findings	LB	Local Processing	N/A	10	LBSCAT	Subcategory for Lab Test	A sub-division of the LBCAT values based on user defined characteristics.	What was the name of the lab sub-panel?	[Lab Sub-Panel Name]; NULL	Char	R/C	Record the lab test subcategory, if not preprinted on the CRF.	LBSCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, and not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Subcategory" can be included as the column heading. Laboratory tests have commonly recognized categories and subcategories that should be used whenever appropriate. LBSCAT can only be used if there is an LBCAT, and it must be a subcategorization of LBCAT.
Findings	LB	Local Processing	N/A	11	LBSPEC	LB Specimen Type	The type of sample material taken from a biological entity.	What is the specimen material type?	Specimen Type	Char	R/C	Record the specimen material type.	LBSPEC	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(SPECTYPE)	N/A	The type of specimen used for a measure. Should be collected if not available elsewhere, or if required to differentiate multiple specimens.
Findings	LB	Local Processing	N/A	12	LBTPPT	Lab Planned Time Point Name	A text description of planned time point when measurements should be taken as defined in the protocol.	What was the planned time point of the lab?	[Planned Time Point Name]	Char	R/C	Record the planned time-point labels for the lab test, if not preprinted on the CRF.	LBTPPT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. See the SDTMIG for additional information on representing time points. SDTMIG time-point anchors LBTPPTREF (text description) and LBRFTDTC (date/time) may be needed, as well as SDTMIG variables LBTPPTNUM, LBELTM.	N/A	N/A	Planned time points are needed to differentiate multiple sequential assessments. It is recommended that time points be preprinted on the CRF rather than collected in a free-text field. If the form is laid out as a grid, then words such as "Planned Time Point" can be included as the column heading.
Findings	LB	Local Processing	N/A	13	LBFAST	Lab Fasting Status	An indication that the subject has abstained from food/water for the specified amount of time.	Was the subject fasting?	Fasting	Char	R/C	Record whether the subject was fasting prior to the test being performed.	LBFAST	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(NY)	N/A	Results may be affected by whether the subject was fasting. This may not be relevant for all tests.
Findings	LB	Local Processing	N/A	14	LBCOND	Lab Test Condition Met	Indication of whether the testing conditions defined in the protocol were met (e.g., low-fat diet).	Were the protocol-defined testing conditions met?	Test Condition Met	Char	R/C	Record whether protocol-defined testing conditions were met.	SUPPLB.QVAL	This does not map directly to an SDTMIG variable. This information could be submitted in a SUPPLB dataset as the value of SUPPLB.QVAL where SUPPLB.QNAM = "LBCOND" and SUPPLB.LABEL="Test Condition Met". Refer to the current SDTM and SDTMIG for instructions on placement of NSVs in SDTM domains.	(NY)	N/A	This information is collected when the laboratory test results may be affected by whether conditions for testing were properly met. The specific testing conditions required should be preprinted on the CRF (e.g., "Did subject meet diet requirements?"). This may not be relevant for all tests.
Findings	LB	Local Processing	N/A	15	LBSPCCND	Lab Specimen Condition	Description of the condition of the specimen.	What was the condition of the specimen?	Specimen Condition	Char	O	Record the condition of specimen.	LBSPCCND	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(SPECCOND)	N/A	May be collected using free or standardized text. Results may be affected by whether conditions for specimen were properly met. When local processing is used, sponsors may not routinely collect specimen condition.
Findings	LB	Local Processing	N/A	16	LBTEST	Lab Test or Examination Name	Descriptive name of the lab test or examination used to obtain the	What was the lab test name?	[Laboratory Test Name]	Char	HR	Record the name of the lab measurement or finding, if not	LBTEST; LBTESTCD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The SDTMIG variable LBTESTCD may be	(LBTEST)	N/A	Required to identify which test the result is for. It is recommended that the test names be preprinted on the

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
							measurement or finding. Any test normally performed by a clinical laboratory is considered a lab test.					preprinted on the CRF. If collected on the CRF, the sponsor may provide additional instructions to ensure the data is entered as intended.		determined from the value collected in LBTEST. The SDTMIG variables LBTESTCD and LBTEST are required in the SDTM submission datasets. Use appropriate CDISC Controlled Terminology for the test and test code.			CRF rather than collected in a free-text field that requires the site to enter text. If the form is laid out as a grid, then words such as "Test" can be included as the column heading.
Findings	LB	Local Processing	N/A	17	LBORRES	Lab Result or Finding in Original Units	Result of the measurement or finding as originally received or collected.	What was the result of the lab test?	(Result)	Char	HR	Record the laboratory test result.	LBORRES	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Both quantitative results and interpretive findings or summaries may be recorded here.
Findings	LB	Local Processing	N/A	18	LBMETHOD	Lab Method of Test or Examination	Method of the test or examination.	What was the method used for the lab test or examination?	Method of [Test/Examination]	Char	O	Record the method of test or examination.	LBMETHOD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(METHOD)	N/A	This information may be collected when more than 1 method is possible, and collecting the method used is necessary.
Findings	LB	Local Processing	N/A	19	LBORRESU	Lab Original Units	The unit of the result as originally received or collected.	What was the unit of the lab result?	Unit	Char	R/C	Record or select the original unit in which these data were collected, if not preprinted on CRF.	LBORRESU	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(UNIT)	N/A	Should be preprinted on the CRF with the associated test when possible, rather than collected in a free-text field. Should be included if applicable and not available elsewhere. For some lab tests the units may not be applicable (e.g., urine color).
Findings	LB	Local Processing	N/A	20	LBCRESU	Lab Collected Non-Standard Unit	The unit of the result as originally received if it were collected as a non-standard unit.	What was the unit of the lab result?	Unit	Char	O	Record or select the original unit in which these data were collected, if not preprinted on CRF.	SUPPLB.QVAL	This does not map directly to an SDTMIG variable. The collected, non-standard unit(s) may be submitted in a supplemental qualifier dataset.	N/A	N/A	The collected, non-standard unit(s) should be reported as an equivalent standard unit in LBORRESU.
Findings	LB	Local Processing	N/A	21	LBTOXGR	Lab Standard Toxicity Grade	The toxicity grade, using a standard toxicity scale (e.g., NCI CTCAE).	What is the toxicity grade?	Toxicity Grade	Char	O	Record the toxicity grade.	LBTOXGR	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The sponsor is expected to provide the toxicity scale name and version used to map the terms utilizing the Define-XML external code list attributes.	N/A	N/A	This is commonly used in oncology trials but sponsors may not collect these toxicity grades on CRFs. Terminology codeslists (TOXGRV3, TOXGRV4) are available for use.
Findings	LB	Local Processing	N/A	22	LBTOX	Lab Toxicity	A description of toxicity quantified by LBTOXGR (e.g., NCI CTCAE Short Name).	What is the description of the toxicity?	Toxicity	Char	O	Record the description of the toxicity.	LBTOX	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The sponsor is expected to provide the toxicity scale name and version used to map the terms utilizing the Define-XML external code list attributes.	N/A	N/A	This would typically be the text description quantified by LBTOXGR (e.g., HYPERCALCEMIA, HYPOCALCEMIA)
Findings	LB	Local Processing	N/A	23	LBORNRL0	Lab Ref Range Lower Limit in Orig Unit	The lower end of normal range or reference range for continuous results stored in LBORRES.	What was the lower limit of the reference range for this lab test?	Normal Range Lower Limit	Char	R/C	Record the lower limit of the reference range of the lab test.	LBORNRL0	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	LBORNRL0 and LBORNRLHI should be populated only for continuous results; LBSTNRC should be populated only for non-continuous results. These data may be obtained from the lab or the electronic equipment. These data could be determined from a site or lab specific set of normal ranges stored in a look-up table. See the SDTMIG for details on mapping and selecting the proper variable name.
Findings	LB	Local Processing	N/A	24	LBORNRLHI	Lab Ref Range	The upper end of normal range or reference range	What was the high limit of the reference range for this lab test?	Normal Range Upper Limit	Char	R/C	Record the upper limit of the	LBORNRLHI	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	LBORNRL0 and LBORNRLHI should be populated only for continuous results; LBSTNRC

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
						Upper Limit in Orig Unit	for continuous results stored in LBORRES.					reference range of the lab test.					should be populated only for non-continuous results. These data may be obtained from the lab or the electronic equipment. These data could be determined from a site or lab specific set of normal ranges stored in a look-up table. See the SDTMIG for details on mapping and selecting the proper variable name.
Findings	LB	Local Processing	N/A	25	LBNRIND	Lab Reference Range Indicator	An indication or description of how the value compares to the normal range or reference range.	How [did/do] the reported values compare within the [reference/normal/expected] range?	Comparison to [Reference/Expected/Normal] Range	Char	R/C	Record where the lab result fell with respect to the reference range (e.g. HIGH, LOW, ABNORMAL).	LBNRIND	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(NRIND)	N/A	Reference ranges may be defined by LBORNRL0 and LBORNRL1 or other objective criteria. Typically for local processing, "Reference Range Indicator" may be derived or determined programmatically and is not collected on the CRF. Should not be used to indicate clinical significance.
Findings	LB	Local Processing	N/A	26	LBCLSIG	Lab Clinical Significance	An indication whether lab test results were clinically significant.	Was this result clinically significant?	Clinically Significant	Char	O	Record whether lab results were clinically significant.	LBCLSIG	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(NY)	N/A	May be included if required by the protocol.
Findings	LB	Local Processing	N/A	27	LBNAM	Vendor Name	The name or identifier of the vendor (e.g., laboratory) that provided the test results.	What was the name of the laboratory used?	Laboratory Name	Char	R/C	Record the laboratory name.	LBNAM	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Recommended to collect on the CRF if lab name was not collected at the site/study level or if multiple labs are used by a site.

Assumptions for the CDASHIG LB - Laboratory Test Results Domain

1. The lab parameters that should be collected are not specified by CDASH, as this is a medical and scientific decision that is based on the needs of the protocol.
2. Sponsors should decide which scenario is appropriate for each protocol.
3. As required or defined by the study protocol, clinically significant results may need to be reported on the Medical History or Adverse Event CRF.
4. As required or defined by the study protocol, changes that are worsening may need to be reported on the Adverse Events CRF.
5. All pertinent laboratory normal ranges/units and laboratory certification for all laboratories used during the study will be provided to the sponsor. This is required for regulatory and database purposes.
6. This is a specimen-based domain. LBDTC is the date the specimen was collected.
7. LOINC code should not be applied to local lab data by the sponsor. LOINC codes are intended to come directly from the central laboratory.
8. The variables LBTSTCND, LBCNDAGT, and LBBDAGNT may be used in this domain.

Example CRFs for the CDASHIG LB - Laboratory Test Results Domain

Example 1

Title: Laboratory Findings Scenario 1: Central Processing

Indicate whether or not lab specimen was collected or measurement performed.	Lab Panel Name LBCAT <i>Pre-populated</i>	CHEMISTRY
Record the date when specimen collection was done using this format (DD-MON-YYYY).	Lab Sub-Panel Name LBSCAT <i>Pre-populated</i>	LIPID PROFILE
Record time of collection (as complete as possible).	Planned Time Point Name LBTPT <i>Pre-populated</i>	PRE-DOSE
Record whether protocol-defined diet requirements were met.	Was the sample collected? LBPERF LBSTAT = "NOT DONE" where LBPERF = "N" and LBSTAT = null where LBPERF = "Y"	☐ Yes ☐ No <NY codelist>
Record whether the subject was fasting prior to the test being performed.	Specimen Collection Date LBDAT LBDTC	
Record the specimen or accession number assigned.	Specimen Collection Time LBTIM LBDTC	
	Did subject meet the protocol-defined diet requirements? LBCOND SUPPLB.QVAL where SUPPLB.QNAM = "LBCOND" and SUPPLB.LABEL = "Test Condition Met"	☐ Yes ☐ No <NY codelist>
	Was the subject fasting? LBFAST	☐ Yes ☐ No <NY codelist>
	What was the accession number? LBREFID	

RF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTM Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
LBCAT	1	What was the name of the lab panel?	Lab Panel Name	Record the lab test category, if not pre-printed on the CRF.	Text	LBCAT				CHEMISTRY	Prompt		

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTM Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
LBSCAT	2	What was name of the lab sub-panel?	Lab Sub-Panel Name	Record the lab test subcategory, if not pre-printed on the CRF.	Text	LBSCAT				LIPID PROFILE	Prompt		
LBTPPT	3	What was the planned time point of the lab?	Planned Time Point Name	Record the planned time point labels for the lab test, if not pre-printed on the CRF.	Text	LBTPPT				PRE-DOSE	Prompt		
LBPERF	4	Was the sample collected?	Sample Collected	Indicate whether or not lab specimen was collected or measurement performed.	Text	LBSTAT	LBSTAT = "NOT DONE" where LBPERF = "N" and LBSTAT = null where LBPERF = "Y"	(NY)	Yes; No			radio	
LBDAT	5	What was the date of the lab specimen collection?	Specimen Collection Date	Record the date when specimen collection was done using this format (DD-MON-YYYY).	Date	LBDTC					Prompt		
LBTIM	6	What was the time of the lab specimen collection?	Specimen Collection Time	Record time of collection (as complete as possible).	Time	LBDTC					Prompt		
LBCOND	7	Did subject meet the protocol-defined diet requirements?	Diet Requirements Met	Record whether protocol-defined diet requirements were met.	Text	SUPPLB.QVAL	SUPPLB.QVAL where SUPPLB.QNAM = "LBCOND" and SUPPLB.LABEL = "Test Condition Met"	(NY)	Yes; No			radio	
LBFAST	8	Was the subject fasting?	Fasting	Record whether the subject was fasting prior to the test being performed.	Text	LBFAST		(NY)	Yes; No			radio	
LBREFID	9	What was the accession number?	Accession Number	Record the specimen or accession number assigned.	Text	LBREFID							

Example 2

This is an example of a CRF used when laboratory test data is received electronically, and the site will assess clinical significance for any abnormal values from the lab data.

Title: Laboratory Findings Scenario 2: Central Processing with Investigator Assessment of Clinical Significance Assessment for Abnormal Values**Example CRF Completion Instructions**

For each abnormal finding on the lab report, please enter that lab test identification here and indicate whether the finding is clinically significant.

	Lab Panel Name LBCAT <i>Pre-populated</i>	CHEMISTRY
	Lab Sub-Panel Name LBSCAT <i>Pre-populated</i>	LIVER FUNCTION
Indicate whether or not lab specimen was collected or measurement performed.	Was the sample collected? LBPERF LBSTAT = "NOT DONE" where LBPERF = "N" and LBSTAT = null where LBPERF = "Y"	☐ Yes ☐ No <NY codelist>
Record the date when specimen collection was done using this format (DD-MON-YYYY).	Specimen Collection Date LBDAT LBDTC	
Record time of collection (as complete as possible).	Specimen Collection Time LBTIM LBDTC	
Record the specimen or accession number assigned.	What was the accession number? LBREFID	
	Line Number LBSPID <i>Pre-populated</i>	01
Record the name of the lab measurement or finding, if not preprinted on the CRF. If collected on the CRF, the sponsor may provide additional instructions to ensure the data is entered as intended.	What was the lab test name? LBTEST LBTESTCD	☐ Alkaline Phosphatase ☐ Alanine Aminotransferase ☐ Aspartate Aminotransferase ☐ Bilirubin ☐ Gamma Glutamyl Transferase <LBTEST codelist>
Record whether laboratory test results were clinically significant.	Was this result clinically significant? LBCLSIG SUPPLB.QVAL where SUPPLB.QNAM = "LBCLSIG" and SUPPLB.QLABEL = "Clinically Significant"	☐ Yes ☐ No <NY codelist>

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
LBCAT	1	What was the name of the lab panel?	Lab Panel Name	Record the lab test category, if not pre-printed on the CRF.	Text	LBCAT				CHEMISTRY	Prompt		
LBSCAT	2	What was name of the lab sub-panel?	Lab Sub-Panel Name	Record the lab test subcategory, if not pre-printed on the CRF.	Text	LBSCAT				LIVER FUNCTION	Prompt		
LBPERF	3	Was the sample collected?	Sample Collected	Indicate whether or not lab specimen was collected or measurement performed.	Text	LBSTAT	LBSTAT = "NOT DONE" where LBPERF = "N" and LBSTAT = null where LBPERF = "Y"	(NY)	Yes; No			radio	
LBDAT	4	What was the date of the lab specimen collection?	Specimen Collection Date	Record the date when specimen collection was done using this format (DD-MON-YYYY).	Date	LBDC					Prompt		
LBTIM	5	What was the time of the lab specimen collection?	Specimen Collection Time	Record time of collection (as complete as possible).	Time	LBDC					Prompt		
LBREFID	6	What was the accession number?	Accession Number	Record the specimen or accession number assigned.	Text	LBREFID							
LBSPID	7	What is the lab test identifier?	Line Number	If collected on the CRF, sponsor may insert instructions to ensure each record has a unique identifier.	Text	LBSPID				01	Prompt		
LBTEST	8	What was the lab test name?	Lab Test Name	Record the name of the lab measurement or finding, if not preprinted on the CRF. If collected on the CRF, the sponsor may provide additional instructions to ensure the data is entered as intended.	Text	LBTEST; LBTESTCD		(LBTEST)	Alkaline Phosphatase; Alanine Aminotransferase; Aspartate Aminotransferase; Bilirubin; Gamma Glutamyl Transferase			radio	
LBCLSIG	9	Was this result clinically significant?	Clinically Significant	Record whether laboratory test results were clinically significant.	Text	SUPPLB.QVAL	SUPPLB.QVAL where SUPPLB.QNAM = "LBCLSIG" and SUPPLB.QLABEL = "Clinically Significant"	(NY)	Yes; No			radio	

Example 3**Title: Laboratory Findings Scenario 3: Local Processing**

	Lab Panel Name LBCAT <i>Pre-populated</i>	HEMATOLOGY
	Lab Sub-Panel Name LBSCAT <i>Pre-populated</i>	COAGULATION
Indicate whether or not lab specimen was collected or measurement performed.	Was the lab performed? LBPERF LBSTAT = "NOT DONE" where LBPERF = "N" and LBSTAT = null where LBPERF = "Y"	☐ Yes ☐ No <NY codelist>
Record the date of specimen collection using this format (DD-MON-YYYY).	Specimen Collection Date LBDAT LBDTC	
Record time of collection (as complete as possible).	Specimen Collection Time LBTIM LBDTC	
Record condition of specimen.	What was the condition of the specimen? LBSPCCND	☐ FRESH ☐ FROZEN ☐ REFRIGERATED <SPECCOND codelist>
Record the laboratory name.	What was the name of the laboratory used? LBNAM	
Record the name of the lab measurement or finding, if not pre-printed on the CRF. If collected on the CRF, the sponsor may provide additional instructions to ensure the data is entered as intended.	Lab Test Name LBTEST LBTEST and LBTESTCD	☐ Prothrombin Intl. Normalized Ratio ☐ Activated Partial Thromboplastin Time ☐ Prothrombin Time ☐ Thrombin Time ☐ Fibrinogen ☐ D-Dimer ☐ Factor V ☐ Factor VIII <LBTEST codelist>

Record the method of the test or examination.	What was the method used for the lab test or examination? LBMETHOD	☐ CLAUSS METHOD ☐ CLOT DETECTION ☐ MANUAL CLOT DETECTION ☐ MECHANICAL CLOT DETECTION ☐ PHOTOMETRIC CLOT DETECTION <METHOD codelist>
Record laboratory test result.	Result LBORRES	
Record or select the original unit in which these data were collected, if not pre-printed on CRF.	Unit LBORRESU	☐ g/L ☐ mg/dL ☐ mg/L ☐ U/mL ☐ ug/L ☐ sec ☐ RATIO <UNIT codelist>
Record the lower limit of the reference range of the lab test.	Normal Range Lower Limit LBORNRL0	
Record the upper limit of the reference range of the lab test.	Normal Range Upper Limit LBORNRI	
Record where the lab result fell with respect to the reference range (i.e., HIGH, NORMAL, LOW).	Comparison to Reference Range LBNRIND	☐ High ☐ Normal ☐ Low <NRIND codelist>
Record whether lab results were clinically significant.	Was this result clinically significant? LBCLSIG SUPPLB.QVAL where SUPPLB.QNAM = "LBCLSIG" and SUPPLB.QLABEL = "Clinically Significant"	☐ Yes ☐ No <NY codelist>
Record the toxicity grade.	What is the Toxicity Grade? LBTOXGR	☐ 0 ☐ 1 ☐ 2 ☐ 3 ☐ 4
Record the description of the toxicity.	What is the description of the toxicity? LBTOX	

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
LBCAT	1	What was the name of the lab panel?	Lab Panel Name	Record the lab test category, if not pre-printed on the CRF.	Text	LBCAT				HEMATOLOGY	Prompt		
LBSCAT	2	What was name of the lab sub-panel?	Lab Sub-Panel Name	Record the lab test subcategory, if not pre-printed on the CRF.	Text	LBSCAT				COAGULATION	Prompt		
LBPERF	3	Was the lab performed?	Lab Performed	Indicate whether or not lab specimen was collected or measurement performed.	Text	LBSTAT	LBSTAT = "NOT DONE" where LBPERF = "N" and LBSTAT = null where LBPERF = "Y"	(NY)	Yes; No			Radio	
LBDAT	4	What was the date of the lab specimen collection?	Specimen Collection Date	Record the date of specimen collection using this format (DD-MON-YYYY).	Date	LBDTC					Prompt		
LBTIM	5	What was the time of the lab specimen collection?	Specimen Collection Time	Record time of collection (as complete as possible).	Time	LBDTC					Prompt		
LBSPCCND	6	What was the condition of the specimen?	Specimen Condition	Record condition of specimen.	Text	LBSPCCND		(SPECCOND)	FRESH; FROZEN; REFRIGERATED			Radio	
LBNAM	7	What was the name of the laboratory used?	Laboratory Name	Record the laboratory name.	Text	LBNAM							
LBTEST	8	What is the lab test name?	Lab Test Name	Record the name of the lab measurement or finding, if not pre-printed on the CRF. If collected on the CRF, the sponsor may provide additional instructions to ensure the data is entered as intended.	Text	LBTEST; LBTESTCD	LBTEST and LBTESTCD	(LBTEST)	Prothrombin Intl. Normalized Ratio; Activated Partial Thromboplastin Time; Prothrombin Time; Thrombin Time; Fibrinogen; D-Dimer; Factor V; Factor VIII		Prompt	Radio	
LBMETHOD	9	What was the method used for the lab test or examination?	Method of Test	Record the method of the test or examination.	Text	LBMETHOD		(METHOD)	CLAUSS METHOD; CLOT DETECTION; MANUAL CLOT DETECTION; MECHANICAL CLOT DETECTION; PHOTOMETRIC CLOT DETECTION			Radio	
LBORRES	10	What was the result of the lab test?	Result	Record laboratory test result.	Text	LBORRES					Prompt		
LBORRESU	11	What was the unit of the lab result?	Unit	Record or select the original unit in which these data were collected, if not pre-printed on CRF.	Text	LBORRESU		(UNIT)	g/L; mg/dL; mg/L; U/mL; ug/L; sec; RATIO		Prompt	Radio	
LBORNRLO	12	What was the lower limit of the reference range for this lab test?	Normal Range Lower Limit	Record the lower limit of the reference range of the lab test.	Text	LBORNRLO					Prompt		
LBORNRHI	13	What was the high limit of the reference range for this lab test?	Normal Range Upper Limit	Record the upper limit of the reference range of the lab test.	Text	LBORNRHI					Prompt		
LBNRIND	14	How do the reported values compare within the reference range?	Comparison to Reference Range	Record where the lab result fell with respect to the reference range (i.e., HIGH, NORMAL, LOW).	Text	LBNRIND		(NRIND)	High; Normal; Low		Prompt	Radio	
LBCLSIG	15	Was this result clinically significant?	Clinically Significant	Record whether lab results were clinically significant.	Text	SUPPLB.QVAL	SUPPLB.QVAL where SUPPLB.QNAM = "LBCLSIG" and SUPPLB.QLABEL = "Clinically Significant"	(NY)	Yes; No			Radio	

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
LBTOXGR	16	What is the Toxicity Grade?	Toxicity Grade	Record the toxicity grade.	Text	LBTOXGR			0; 1; 2; 3; 4			Radio	
LBTOX	17	What is the description of the toxicity?	Toxicity	Record the description of the toxicity.	Text	LBTOX							

8.3.10 MB - Microbiology Specimen

Description/Overview for the CDASHIG MB - Microbiology Specimen Domain

The CDASHIG MB domain is used to represent microbiology findings from tests or measurements performed on collected biological specimens, such as the identification, quantification, and other characterization of microorganisms. Any drug susceptibility testing is represented in the Microbiology Susceptibility (MS) domain. The MB domain typically includes organisms found (e.g., non-host organisms such as bacteria, viruses, parasites, protozoa, and fungi), gram stain results, and organism growth status. Culture characteristics may also be included (e.g., growth/no growth, colony quantification measures, colony color, colony morphology).

The SDTMIG provides examples and recommendations on how to represent (1) tests that target an organism, group of organisms, or antigen for identification; (2) tests that are non-targeted identification of organisms (i.e., tests that have the ability to identify a range of organisms without specifically targeting any); and (3) tests about organisms being characterized. Examples are also included as to how the variable MBTSTDTL may be used as a further description of the MBTESTCD/MBTEST (e.g., MBTSTDTL = “DETECTION” or “COLONY COUNT” when MBTESTCD/MBTEST equals the name of the organism targeted by the identification assay).

This section describes 2 different data collection scenarios for test results; it is up to the sponsor to determine which data collection scenario best meets the study needs.

Scenario 1: Central Processing

In this scenario, biological specimens are taken at the site, sent out for processing, and results are provided directly to the sponsor (not recorded on the CRF). This scenario also applies when results are captured directly via an electronic device and not recorded on the CRF. CRF data are captured at the site for tracking/header reconciliation. The fields for test results are not defined here, as these data are not part of the CRF.

Scenario 2: Local Processing

In this scenario, biological specimens are taken and analyzed, and the results are recorded directly on the CRF.

Specification for the CDASHIG MB - Microbiology Specimen Domain

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings	MB	Central Processing	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included into the database or populated during SDTM-based dataset creation before submission.
Findings	MB	Central Processing	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	preprinted on the CRFs that are shipped to each site. EDC: This should be prepopulated.
Findings	MB	Central Processing	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What [is/was] the (study) [subject/participant] identifier?	[Subject/Participant] (Identifier)	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system-generated. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Findings	MB	Central Processing	N/A	4	VISIT	Visit Name	The name of a clinical encounter that encompasses planned and unplanned trial interventions, procedures, and assessments that may be performed on a subject.	What is the visit name?	[Visit]	Char	R/C	N/A	VISIT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The name of the clinical encounter is typically preprinted on the CRF or displayed within the EDC for any visit-based data collection, most often in Findings domains. This Visit text description is then available in any EDC data extract for that Findings domain.
Findings	MB	Central Processing	N/A	5	VISDAT	Visit Date	Date the clinical encounter occurred (or started).	What [is/was] the date of the visit?	(Visit) Date	Char	R/C	Record the [date/start date] of the visit using this format (DD-MON-YYYY).	N/A	This field is not an SDTM variable. The date of a measurement, test, observation or specimen collection date can be determined from the date/time of visit (VISDAT/VISTIM) and then concatenating the CDASH VISDAT/VISTIM components and populating the SDTMIG variable MBDTC in ISO 8601 format.	N/A	N/A	The date that the microbiology specimens were collected can be determined from the visit date variable (VISDAT) and applying that date to all of the microbiology findings at that visit, or the specimen collection date can be included on the Microbiology Findings CRF using the date (MBDAT) field.
Findings	MB	Central Processing	N/A	6	MBPERF	Microbiology Sampling Performed	An indication of whether a planned measurement or series of measurements, tests, or observations was performed, or specimen was collected.	Was the [microbiology test] performed? Was the [microbiology specimen/sample] collected?	[Microbiology Test] Performed; [Microbiology Specimen/Sample] Collected;	Char	O	Indicate whether or not the planned measurement, series of measurements, tests, or observations was performed or specimen was collected.	MBSTAT	This does not map directly to an SDTMIG variable. May be used to derive a value into the SDTM variable MBSTAT. If MBPERF = "N", the value of MBSTAT will be "NOT DONE". If MBPERF = "Y", MBSTAT should be null. A combination of SDTMIG variables (e.g., MBCAT and MBSCAT, MBTPT) is used to indicate that multiple tests were not done. In this situation, the SDTMIG variable MBTESTCD would be populated as MBALL and an appropriate test name (MBTEST) provided. See SDTMIG for additional information.	(NY)	N/A	This may be implemented for an entire panel. General prompt question to be used as a data management tool to verify that missing results are confirmed missing. For the SDTM submission dataset, the SDTMIG variable MBSTAT is populated using the CDASH field MBPERF. The question text used might be reflected in the reason not done (MBREASND).
Findings	MB	Central Processing	N/A	7	MBREFID	MB Reference ID	An internal or external identifier such as specimen identifier.	What was the (microbiology test) [reference identifier/accession number]?	(Microbiology Test) [Reference Identifier/Accession Number]	Char	O	Record the specimen [accession/reference] number assigned.	MBREFID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. May be used to create RELREC to link this	N/A	N/A	This can be used to confirm that the appropriate data record is present in the electronic transfer. May be included for linking back to

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
														record with a record in another domain.			specimens (e.g., Specimen ID).
Findings	MB	Central Processing	N/A	8	MBGRPID	MB Group ID	A group identifier used to link together a block of related records within a subject in a domain.	What [is/was] the [test/procedure/observation] group identifier?	[Test/Procedure/Observation] Group Identifier	Char	O	If collected on the CRF, the sponsor may insert instructions as to when it may be appropriate to group MB specimen records within a subject and how to indicate the specific MBGRPID.	MBGRPID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Used to link together a block of related records within a subject. Should not be used to link detection records in MB to the associated susceptibility results in the MS domain. NHOID should be used to identify the non-host organism.
Findings	MB	Central Processing	N/A	9	MBDAT	MB Specimen Collection Date	The date of specimen collection, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the (start) date of the (microbiology) specimen collection?	Specimen Collection (Start) Date	Char	R/C	Record the (start) date when specimen collection occurred using this format (DD-MON-YYYY).	MBDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable MBDTC in ISO 8601 format.	N/A	N/A	A complete date is expected. The date of specimen collection may be determined from the date of visit (VISDAT) and if so, a separate assessment date field is not required. The SDTMIG MBDTC variable contains either a date/time when a specimen is collected at a point in time or the start date/time, when a specimen is collected over time.
Findings	MB	Central Processing	N/A	10	MBTIM	MB Specimen Collection Time	The time of specimen collection, represented in an unambiguous time format (e.g., hh:mm:ss).	What was the (start) time of the (microbiology) specimen collection?	Specimen Collection (Start) Time	Char	R/C	Record the (start) time of collection (as complete as possible).	MBDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable MBDTC in ISO 8601 format.	N/A	N/A	May be required when multiple assessments are done on 1 day or when the timing in relationship to study treatment is required for analysis.
Findings	MB	Central Processing	N/A	11	MBCAT	MB Category for Microbiology Finding	A grouping of topic-variable values based on user-defined characteristics.	What was the category of the microbiology finding?	[Microbiology Category]; NULL	Char	O	Record the microbiology finding category, if not pre-printed on the CRF.	MBCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Category" can be included as the column heading.
Findings	MB	Central Processing	N/A	12	MBSCAT	MB Subcategory for Microbiology Finding	A sub-division of the MBCAT values based on user-defined characteristics.	What was the subcategory of the microbiology finding?	[Microbiology Subcategory]; NULL	Char	O	Record the microbiology finding subcategory, if not preprinted on the CRF.	MBSCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Subcategory" can be included as the column heading. MBSCAT can only be used if there is an MBCAT, and it must be a subcategorization of MBCAT.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings	MB	Central Processing	N/A	13	MBSPEC	MB Specimen Type	The type of sample material taken from a biological entity.	What is the specimen material type?	Specimen Type	Char	R/C	Record the specimen material type.	MBSPEC	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(SPECTYPE)	N/A	The type of specimen used for a measure. Should be collected if not available elsewhere, or if required to differentiate multiple specimens.
Findings	MB	Central Processing	N/A	14	MBSPCCND	MB Specimen Condition	Description of the condition of the specimen.	What was the condition of the specimen?	Specimen Condition	Char	R/C	Record condition of specimen.	MBSPCCND	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(SPECCOND)	N/A	May be collected using free or standardized text. This can be used when results may be affected by whether conditions for specimen were properly met.
Findings	MB	Central Processing	N/A	15	MBLOC	MB Specimen Collection Location	A description of the anatomical location of the subject relevant to the collection of specimen.	What was the anatomical location where the specimen was collected?	Anatomical Location	Char	O	Record or select the anatomical location of specimen collection.	MBLOC	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(LOC)	N/A	Collected or preprinted when the sponsor needs to identify the specific anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF. LAT, DIR, PORTOT are used to further describe the anatomical location.
Findings	MB	Central Processing	N/A	16	MBLAT	MB Specimen Collection Laterality	Qualifier for anatomical location, further detailing the side of the body.	What was the side of the anatomical location of the specimen collection?	Side	Char	O	Record the side of the anatomical location of the specimen collection.	MBLAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(LAT)	N/A	May be preprinted or collected when the sponsor needs to identify the specific side of the anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Findings	MB	Central Processing	N/A	17	MBDIR	MB Specimen Collection Directionality	Qualifier further detailing the position of the anatomical location, relative to the center of the body, organ, or specimen.	What was the directionality of the anatomical location of the specimen collection?	Directionality	Char	O	Record the directionality of the anatomical location of the specimen collection.	MBDIR	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(DIR)	N/A	May be preprinted or collected when the sponsor needs to identify the directionality of the anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Findings	MB	Local Processing	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included in the database or populated during SDTM-based dataset creation before submission.
Findings	MB	Local Processing	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted on the CRFs that are shipped to each site. EDC: This should be prepopulated.
Findings	MB	Local Processing	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What [is/was] the (study) [subject/participant] identifier?	[Subject/Participant] (Identifier)	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system-generated. This CDASH variable is typically collected in all CDASH domains. However, this

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Findings	MB	Local Processing	N/A	4	VISIT	Visit Name	The name of a clinical encounter that encompasses planned and unplanned trial interventions, procedures, and assessments that may be performed on a subject.	What is the visit name?	[Visit]	Char	R/C	N/A	VISIT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The name of the clinical encounter is typically preprinted on the CRF or displayed within the EDC for any visit-based data collection, most often in Findings domains. This Visit text description is then available in any EDC data extract for that Findings domain.
Findings	MB	Local Processing	N/A	5	VISDAT	Visit Date	Date the clinical encounter occurred (or started).	What [is/was] the date of the visit?	(Visit) Date	Char	R/C	Record the [date/start date] of the visit using the format (DD-MON-YYYY).	N/A	This field is not an SDTM variable. The date of a measurement, test, observation or specimen collection date can be determined from the date/time of visit (VISDAT/VISTIM) and then concatenating the CDASH VISDAT/VISTIM components and populating the SDTMIG variable MBDTC in ISO 8601 format.	N/A	N/A	The date that the microbiology specimens were collected can be determined from the visit date variable (VISDAT) and applying that date to all of the microbiology findings at that visit, or the specimen collection date can be included on the Microbiology Findings CRF using the date (MBDAT) field.
Findings	MB	Local Processing	N/A	6	MBPERF	Microbiology Sampling Performed	An indication of whether a planned measurement or series of measurements, test, or observations was performed, or specimen was collected.	Was the [microbiology test] performed? Was the [microbiology specimen/sample] collected?;	[Microbiology Test] Performed; [Microbiology Specimen/Sample] Collected;	Char	O	Indicate whether or not microbiology examination was performed.	MBSTAT	This does not map directly to an SDTMIG variable. May be used to derive a value into the SDTM variable MBSTAT. If MBPERF="N", the value of MBSTAT will be "NOT DONE". If MBPERF="Y", MBSTAT should be null. A combination of SDTMIG variables (e.g., MBCAT and MBSCAT, MBTPT) is used to indicate that multiple tests were not done. In this situation, the SDTMIG variable MBTESTCD would be populated as MBALL and an appropriate test name (MBTEST) provided. See the SDTMIG.	(NY)	N/A	This may be implemented for an entire panel. General prompt question to be used as a data management tool to verify that missing results are confirmed missing.
Findings	MB	Local Processing	N/A	7	MBREFID	MB Reference ID	An internal or external identifier (e.g., specimen identifier).	What was the (microbiology test) [reference identifier/accession number]?	(Microbiology Test) [Reference identifier/Accession Number]	Char	O	Record the specimen [accession/reference] number assigned.	MBREFID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. May be used to create RELREC to link this record with a record in another domain.	N/A	N/A	This can be used to reconcile CRF data. May be included for linking back to specimens (e.g., Specimen ID).
Findings	MB	Local Processing	N/A	8	MBSPID	MB Sponsor-Defined Identifier	A sponsor-defined identifier. In CDASH, this is typically used for preprinted or auto-generated numbers on the CRF, or any other type of identifier that does not already have a	[Sponsor-defined question]	[Sponsor defined]	Char	O	If collected on the CRF, the sponsor may insert instructions to ensure each record has a unique identifier.	MBSPID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. May be used to create RELREC to link this record with a record in another domain.	N/A	N/A	Because SPID is a sponsor-defined identifier, conformance to Question Text or Item Prompt is not applicable. Typically used as an identifier in a data query to communicate clearly to the site the specific record in question or to reconcile data. May be used to record preprinted

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
							defined CDASH identifier field.										number (e.g., line number, record number) on the CRF. This field may be populated by the sponsor's data collection system.
Findings	MB	Local Processing	N/A	9	MBGRPID	MB Group ID	A group identifier used to link together a block of related records within a subject in a domain.	What [is/was] the [test/procedure/observation] group identifier?	[Test/Procedure/Observation] Group Identifier	Char	O	If collected on the CRF, the sponsor may insert instructions as to where it may be appropriate to group MB specimen records within a subject and how to indicate a specific MBGRPID..	MBGRPID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Used to link together a block of related records within a subject. Should not be used to link detection records in MB to the associated susceptibility results in the MS domain. NHOID should be used to identify the non-host organism.
Findings	MB	Local Processing	N/A	10	MBLNKID	MB Link ID	An identifier used to link related records across domains.	What [is/was] the [test/procedure/observation] link identifier?	[Domain/Observation] Link Identifier	Char	O	If collected on the CRF, the sponsor may insert instructions to ensure each microbiology specimen or result record has a unique identifier that will link records across domains.	MBLNKID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. May be used to create RELREC to link this record with a record in another domain.	N/A	N/A	This may be a one-to-one or a one-to-many relationship. May be used to link to susceptibility records (in MS) if needed.
Findings	MB	Local Processing	N/A	11	MBDAT	MB Specimen Collection Date	The date of specimen collection, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the (start) date of the (microbiology) specimen collection?	Specimen Collection (Start) Date	Char	R/C	Record the (start) date of specimen collection using this format (DD-MON-YYYY).	MBDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable MBDTC in ISO 8601 format.	N/A	N/A	A complete date is expected. The date of specimen collection may be determined from the date of visit (VISDAT) and, if so, a separate assessment date field is not required.
Findings	MB	Local Processing	N/A	12	MBTIM	MB Specimen Collection Time	The time of specimen collection, represented in an unambiguous time format (e.g., hh:mm:ss).	What was the (start) time of the (microbiology) specimen collection?	Specimen Collection (Start) Time	Char	R/C	Record the (start) time of collection (as complete as possible).	MBDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable MBDTC in ISO 8601 format.	N/A	N/A	May be required when multiple assessments are done on one day or when the timing in relationship to study treatment is required for analysis.
Findings	MB	Local Processing	N/A	13	MBCAT	MB Category for Microbiology Finding	A grouping of topic-variable values based on user-defined characteristics.	What was the category of the microbiology finding?	[Microbiology Category]; NULL	Char	O	Record the microbiology finding category, if not preprinted on the CRF.	MBCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Category" can be included as the column heading.
Findings	MB	Local Processing	N/A	14	MBSCAT	MB Subcategory for Microbiology Finding	A sub-division of the MBCAT values based on user-defined characteristics.	What was the subcategory of the microbiology finding?	[Microbiology Subcategory]; NULL	Char	O	Record the microbiology finding subcategory, if not preprinted on the CRF.	MBSCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Subcategory" can be

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	included as the column heading. MBSCAT can only be used if there is an MBCAT , and it must be a subcategorization of MBCAT .
Findings	MB	Local Processing	N/A	15	MBTEST	Microbiology Test or Finding Name	Descriptive name of the microbiology test or examination used to obtain the measurement or finding.	What was the microbiology examination test name?	[Microbiology Test Name]	Char	HR	Record the type or name of the microbiology examination, if not preprinted on the CRF. If collected on the CRF, the sponsor may provide additional instructions to ensure the data is entered as intended.	MBTEST; MBTESTCD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The SDTMIG variable MBTESTCD may be determined from the value collected in MBTEST. Both MBTESTCD and MBTEST are required in the SDTM submission datasets. Use appropriate CDISC Controlled Terminology for the test and test code.	(MBTEST)	N/A	Required to identify which test the result is for. It is recommended that the test names be preprinted on the CRF rather than collected in a free-text field. If the form is laid out as a grid, then words such as "Test" can be included as the column heading.
Findings	MB	Local Processing	N/A	16	MBTSTDTL	Microbiology Examination Detail	Detail of the microbiology examination used to obtain the measurement or finding.	What was the microbiology examination detail?	[Examination Name Detail]	Char	O	Record the detail of the microbiology examination, if not preprinted on the CRF.	MBTSTDTL	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Provides additional details for the microbiology examination. It is recommended that the test detail be preprinted on the CRF. If the form is laid out as a grid, then words such as "Test Detail" can be included as the column heading.
Findings	MB	Local Processing	N/A	17	MBORRES	MB Result or Finding in Original Units	Result of the measurement or finding as originally received or collected.	What was the result of the examination?	(Result)	Char	HR	Record test result, interpretation, or finding.	MBORRES	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Both quantitative results and interpretive findings or summaries may be recorded here.
Findings	MB	Local Processing	N/A	18	MBORRESU	MB Original Units	The unit of the result as originally received or collected.	What was the unit of the result?	Unit	Char	R/C	Record or select the original unit in which these data were collected, if not preprinted on CRF.	MBORRESU	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(UNIT)	N/A	Should be preprinted on the CRF with the associated test when possible, rather than collected in a free-text field. Should be included if applicable and not available elsewhere. For some tests the units may not be applicable (e.g., where MBTEST="Microbial Organism Identification").
Findings	MB	Local Processing	N/A	19	MBCLSIG	MB Clinical Significance	An indication of whether the test results were clinically significant.	Was the result clinically significant?	Clinically Significant	Char	O	Indicate whether the results were clinically significant.	MBCLSIG	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(NY)	N/A	N/A
Findings	MB	Local Processing	N/A	20	MBRESCAT	MB Result Category	Used to categorize the result of a finding.	What was the result category?	Result Category	Char	O	Record the category of the test results.	MBRESCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Used to categorize the results of a finding (e.g., INFECTING, COLONIZER).
Findings	MB	Local Processing	N/A	21	MBNAM	MB Vendor Name	The name or identifier of the vendor (e.g., laboratory) that provided the test results.	What was the name of the vendor used?	Vendor Name	Char	O	Record the laboratory name.	MBNAM	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Recommended to collect on the CRF if the vendor name was not collected at the site/study level or if multiple vendors are used by a site.
Findings	MB	Local Processing	N/A	22	MBSPEC	MB Specimen Type	The type of specimen used for a measurement.	What is the specimen material type?	Specimen Type	Char	O	Record the specimen material type.	MBSPEC	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(SPECTYPE)	N/A	The type of specimen used for a measure. Should be collected if not available elsewhere, or if required to differentiate multiple specimens.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings	MB	Local Processing	N/A	23	MBSPCCND	MB Specimen Condition	Describes the condition of the specimen.	What was the condition of the specimen?	Specimen Condition	Char	O	Record the condition of specimen.	MBSPCCND	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(SPECCOND)	N/A	May be collected using free or standardized text. This can be used when results may be affected by whether conditions for specimen were properly met.
Findings	MB	Local Processing	N/A	24	MBLOC	MB Specimen Collection Location	A description of the anatomical location, relevant to the collection of specimen.	What was the anatomical location where the specimen was collected?	Anatomical Location	Char	O	Record or select the anatomical location of specimen collection.	MBLOC	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(LOC)	N/A	Collected or preprinted when the sponsor needs to identify the specific anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF. LAT, DIR, and PORTOT are used to further describe the anatomical location.
Findings	MB	Local Processing	N/A	25	MBLAT	MB Specimen Collection Laterality	Qualifier for anatomical location, further detailing the side of the body.	What was the side of the anatomical location of the specimen collection?	Side	Char	O	Record the side of the anatomical location of the specimen collection.	MBLAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(LAT)	N/A	May be preprinted or collected when the sponsor needs to identify the specific side of the anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Findings	MB	Local Processing	N/A	26	MBDIR	MB Specimen Collection Directionality	Qualifier further detailing the position of the anatomical location, relative to the center of the body, organ, or specimen.	What was the directionality of the anatomical location of the specimen collection?	Directionality	Char	O	Record the directionality of the anatomical location of the specimen collection.	MBDIR	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(DIR)	N/A	May be preprinted or collected when the sponsor needs to identify the directionality of the anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Findings	MB	Local Processing	N/A	27	MBMETHOD	MB Method of Test or Examination	Method of the test or examination.	What was the method used for the test or examination?	Method	Char	O	Record the method of test or examination.	MBMETHOD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(METHOD)	N/A	This information may be collected when more than 1 method is possible, and collecting the method used is necessary. This could include technique or type of staining used for the slides.
Findings	MB	Local Processing	N/A	28	MBEVAL	MB Evaluator	The role of the person who provided the evaluation.	Who was the evaluator?	[Evaluator/Reporter]	Char	O	Select the role of the person who provided the evaluation (e.g., INVESTIGATOR, ADJUDICATION COMMITTEE, VENDOR).	MBEVAL	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(EVAL)	N/A	Used only for results that are subjective (e.g., assigned by a person or a group). May be a preprinted or collected. Sponsors may collect the data using a subset list of controlled terminology on the CRF.

Assumptions for the CDASHIG MB - Microbiology Specimen Domain

1. The MB domain is used to represent identification, quantification, and other characterizations of microorganisms in subject samples. Culture characteristics such as growth/no growth, colony quantification measures, colony color, and colony morphology are also represented in this domain.
2. Drug susceptibility testing is **not** represented in the MB domain.
3. Data about actions taken that affect or may affect a specimen (e.g., specimen collection, freezing and thawing, aliquoting, transportation) are not included in this domain; these are included in the SDTMIG Biospecimen Events (BE) domain.
4. The CDASHIG MB domain is a specimen-based domain. MBDTC is the date the specimen was collected.

Example CRFs for the CDASHIG MB - Microbiology Specimen Domain

Example 1: Acute Respiratory Infection-Pathogen Testing

Title: Acute Respiratory Infection-Pathogen Testing

	Microbiology Category MBCAT <i>Hidden/pre-populated</i>	ACUTE RESPIRATORY INFECTION
Indicate whether any pathogen testing was performed.	Was any pathogen testing performed? MBPERF If MBPERF = "N", then MBSTAT = "NOT DONE" and MBTESTCD = "MBALL". If MBPERF = "Y", MBSTAT is NULL.	☐ Yes ☐ No <NY codelist>
Record the date when specimen collection occurred using this format (DD-MON-YYYY).	What was the date the specimen was collected? MBDAT MBDTC	
Record the specimen material type.	What is the specimen material type? MBSPEC	☐ Nasal/NP Swab ☐ Throat swab ☐ Sputum <SPECTYPE codelist>
	Microbiology Test Name MBTEST MBTEST="Microbial Organism Identification" where MBTESTCD="MCORGIDN" <i>Hidden/pre-populated</i>	Identification <MBTEST codelist>
Record test result, interpretation or finding.	What was the result of the test? MBRES MBORRES="NO GROWTH" when MBRES="NO GROWTH"	☐ Growth ☐ No Growth
If growth, record the specific pathogen identified.	What was the specific pathogen identified? MBDESC MBORRES=MBDESC when MBRES="GROWTH"	
Record the method of test or examination.	What was the method used for the test? MBMETHOD	☐ CULTURE ☐ OTHER <METHOD codelist>

CRF Metadata

Order Number	CDASH Variable	Question Text	Prompt	Type	CRF Completion Instructions	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Codelist Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
1	MBCAT	What was the category of the microbiology finding?	Microbiology Category	Text	Record the microbiology finding category, if not pre-printed on the CRF.	MBCAT		N/A		ACUTE RESPIRATORY INFECTION			y
2	MBPERF	Was any pathogen testing performed?	Pathogen Testing Performed	Text	Indicate whether any pathogen testing was performed.	MBSTAT	If MBPERF = "N", then MBSTAT = "NOT DONE" and MBTESTCD = "MBALL". If MBPERF = "Y", MBSTAT is NULL.	(NY)	Yes;No				
3	MBDAT	What was the date the specimen was collected?	Collection Date	Text	Record the date when specimen collection occurred using this format (DD-MON-YYYY).	MBDTC		N/A					
4	MBSPEC	What is the specimen material type?	Specimen Type	Text	Record the specimen material type.	MBSPEC		(SPECTYPE)	Nasal/NP Swab;Throat swab;Sputum				
5	MBTEST	What was the Microbiology examination test name?	Microbiology Test Name	Text	Record the type or name of the microbiology test, if not pre-printed on the CRF. If collected on the CRF, the sponsor may provide additional instructions to ensure the data is entered as intended.	MBTEST; MBTESTCD	MBTEST="Microbial Organism Identification" where MBTESTCD="MCOGIDN"	(MBTEST)		Identification			Y
6	MBRES	What was the result of the test?	Result	Text	Record test result, interpretation or finding.	MBORRES	MBORRES="NO GROWTH" when MBRES="NO GROWTH"	N/A	Growth;No Growth				
7	MBDESC	What was the specific pathogen identified?	Pathogen Identified	Text	If growth, record the specific pathogen identified.	MBORRES	MBORRES=MBDESC when MBRES="GROWTH"	N/A					
8	MBMETHOD	What was the method used for the test?	Method	Text	Record the method of test or examination.	MBMETHOD		(METHOD)	CULTURE;OTHER				

Example 2: Tuberculosis Pathogen Testing

Title: Tuberculosis Pathogen Testing

Indicate if a sputum sample was collected.	Was a sputum sample collected? SAMPLE_MBYN Not Submitted	☐ Yes ☐ No <NY codelist>
Record the date when specimen collection occurred using this format (DD-MON-YYYY).	What was the date the sputum specimen was collected? MBDAT MBDTC	
Indicate whether an AFB smear was performed.	Was an AFB smear performed ? AFB_MBPERF If MBPERF="N", the value of MBSTAT will be "NOT DONE".	☐ Yes ☐ No <NY codelist>
Indicate the reason the AFB smear was not performed.	What was the reason the AFB smear was not done? AFB_MBREASND MBREAS where MBSTAT="NOT DONE"	
Record the AFB smear result.	What was the AFB smear result? AFB_MBORRES MBORRES where MBTESTCD="AFB"	☐ Negative ☐ +1 Rare ☐ +2 Few ☐ +3 Moderate ☐ +4 Many
Method AFB_MBMETHOD MBMETHOD Hidden/pre-populated		SMEAR<METHOD codelist>
Specimen Type AFB_MBSPEC MBSPEC Hidden/pre-populated		SPUTUM<SPECTYPE codelist>
Microbiology Test Name AFB_MBTEST MBTEST="Acid-Fast Bacilli " where MBTESTCD="AFB" Hidden/pre-populated		Acid-Fast Bacilli<MBTEST codelist>
Microbiology Test Detail AFB_MBTSTDTL MBTSTDTL Hidden/pre-populated		Quantification, Categorical
Indicate whether the B-D MGIT culture was performed.	Was a B-D MGIT culture performed? MGIT_MBPERF MBSTAT="NOT DONE" when MGIT_MBPERF='No'	☐ Yes ☐ No
Record the date the sample was inoculated.	What was the date the specimen was inoculated? MGIT_BESTDT BESTDTC where BETERM="INOCULATION"	

Record the date the culture results were reported.

What was the date the B-D MGIT culture result was reported?

MGIT_MBRUNDAT

SUPPMS.QVAL where SUPPMS.QNAM = "MBRUNDT" and SUPPMS.QLABEL="RUN DATE"

Indicate the culture results.

What were the B-D MGIT culture results?

MGIT_MBORRES

MBORRES where MBTESTCD="MTB"

☐ Negative for MTB complex

☐ Positive for MTB complex

☐ No TB growth, but positive for other mycobacteria

☐ Postive for MTB complex but contaminated

Microbiology Test Name

MGIT_MBTEST

MBTEST="Mycobacterium Tuberculosis"

Hidden/pre-populated

Microbiology Test Detail

MGIT_MBTSTDTL

MBTSTDTL where MBTESTCD="MTB"

Hidden/pre-populated

Method

MGIT_MBMETHOD

MBMETHOD

Hidden/pre-populated

Mycobacterium Tuberculosis

Identification

B-D MGIT<METHOD codelist>

CRF Metadata

Order Number	CDASHIG Variable	Question Text	Prompt	Type	CRF Completion Instructions	SDTMIG Target	SDTMIG Variable Mapping	Controlled Terminology Codelist Name	CRF Implementation Notes	Permissible Values	Pre-specified Value	Query Display	List Style	Hidden
1	SAMPLE_MBYN	Was a sputum sample collected?	Sample Collected	Text	Indicate if a sputum sample was collected.			(NY)		Yes;No				
2	MBDAT	What was the date the sputum specimen was collected?	Collection Date	Text	Record the date when specimen collection occurred using this format (DD-MON-YYYY).	MBDTC		N/A						
3	AFB_MBPERF	Was an AFB smear performed ?	AFB Smear	Text	Indicate whether an AFB smear was performed.	MBSTAT	If MBPERF="N", the value of MBSTAT will be "NOT DONE".	(NY)		Yes;No				
4	AFB_MBREASND	What was the reason the AFB smear was not done?	Reason	Text	Indicate the reason the AFB smear was not performed.	MBREAS	MBREAS where MBSTAT="NOT DONE"							
7	AFB_MBORRES	What was the AFB smear result?	Smear Result	Text	Record the AFB smear result.	MBORRES	MBORRES where MBTESTCD="AFB"	N/A		Negative; +1 Rare; +2 Few; +3 Moderate; +4 Many				
8	AFB_MBMETHOD	What was the method?	Method	Text	Indicate the method used for the smear.	MBMETHOD		(METHOD)			SMEAR			Y
9	AFB_MBSPEC	What is the specimen material type?	Specimen Type	Text	Record the specimen material type.	MBSPEC		(SPECTYPE)			SPUTUM			Y
5	AFB_MBTEST	What was the Microbiology examination test name?	Microbiology Test Name	Text	Record the type or name of the microscopic examination, if not preprinted on the CRF. If collected on the CRF, the sponsor may provide additional instructions to ensure the data is entered as intended.	MBTEST; MBTESTCD	MBTEST="Acid-Fast Bacilli " where MBTESTCD="AFB"	(MBTEST)			Acid-Fast Bacilli			Y

© 2023 Clinical Data Interchange Standards Consortium, Inc. All rights reserved
2023-09-28

Page 336

Order Number	CDASHIG Variable	Question Text	Prompt	Type	CRF Completion Instructions	SDTMIG Target	SDTMIG Variable Mapping	Controlled Terminology Codelist Name	CRF Implementation Notes	Permissible Values	Pre-specified Value	Query Display	List Style	Hidden
6	AFB_MBTSTDTL	What was the test detail?	Microbiology Test Detail	Text	N/A	MBTSTDTL					Quantification, Categorical			Y
7	MGIT_MBPERF	Was a B-D MGIT culture performed?	B-D MGIT Performed	Text	Indicate whether the B-D MGIT culture was performed.	MBSTAT	MBSTAT="NOT DONE" when MGIT_MBPERF="No"			Yes;No				
8	MGIT_BESTDT	What was the date the specimen was inoculated?	Innoulation Date	Text	Record the date the sample was inoculated.		BESTDTC where BETERM="INOCULATION"							
	MGIT_MBRUNDAT	What was the date the B-D MGIT culture result was reported?	Culture Result Date	Text	Record the date the culture results were reported.	SUPPMB.QVAL	SUPPMS.QVAL where SUPPMS.QNAM = "MBRUNDT" and SUPPMS.QLABEL="RUN DATE"							
	MGIT_MBORRES	What were the B-D MGIT culture results?	Result	Text	Indicate the culture results.	MBORRES	MBORRES where MBTESTCD="MTB"			Negative for MTB complex;Positive for MTB complex;No TB growth, but positive for other mycobacteria;Postive for MTB complex but contaminated				
7	MGIT_MBTEST	What was the Microbiology examination test name?	Microbiology Test Name	Text	Record test result, interpretation or finding.	MBTEST;MBTESTCD;	MBTEST="Mycobacterium Tuberculosis"	N/A			Mycobacterium Tuberculosis			Y
	MGIT_MBTSTDTL	What was the test detail?	Microbiology Test Detail	Text	N/A	MBTSTDTL	MBTSTDTL where MBTESTCD="MTB"				Identification			Y
8	MGIT_MBMETHOD	What was the method used for the test?	Method	Text	Record the method of test or examination.	MBMETHOD		(METHOD)			B-D MGIT			Y

8.3.11 MI - Microscopic Findings

Description/Overview for the CDASHIG MI - Microscopic Findings Domain

The CDASHIG MI domain collects histopathology findings and microscopic evaluations of tests and measurements performed on collected biological specimens which do not have specialized domains (e.g., MB, MS) for their results.

MI domain metadata are provided for 2 different data collection scenarios. It is up to the sponsor to determine which data collection scenario best meets the study needs. Sponsors also may implement a third scenario, central processing with investigator assessment of clinical significance assessment for abnormal values, following the example in Section 8.3.6, [LB - Laboratory Test Results](#), even though such an example is not provided in the CDASHIG metadata table.

Scenario 1: Central Processing

In this scenario, subject specimens are taken at the site, sent out for processing, and results are provided directly to the sponsor (not recorded on the CRF). This scenario also applies when results are captured directly via an electronic device and not recorded on the CRF. CRF data are captured at the site for tracking/header reconciliation. The fields for test results are not defined here, as these data are not part of the CRF.

Scenario 2: Local Processing

In this scenario, subject specimens are taken and analyzed, and the results are recorded directly on the CRF.

Specification for the CDASHIG MI - Microscopic Findings Domain

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings	MI	Central Processing	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included in the database or populated during SDTM- based dataset creation before submission.
Findings	MI	Central Processing	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted on the CRFs that are shipped to each site. EDC: This should be prepopulated.
Findings	MI	Central Processing	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What [is/was] the (study) [subject/participant] identifier?	[Subject/Participant] (Identifier)	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system-generated. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Findings	MI	Central Processing	N/A	4	VISIT	Visit Name	The name of a clinical encounter that encompasses planned and unplanned trial interventions, procedures, and assessments that	What is the visit name?	[Visit]	Char	R/C	N/A	VISIT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The name of the clinical encounter is typically preprinted or displayed within the EDC for any visit-based data collection, most often in Findings

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
							may be performed on a subject.										domains. This Visit text description is then available in any EDC data extract for that Findings domain.
Findings	MI	Central Processing	N/A	5	VISDAT	Visit Date	Date the clinical encounter occurred (or started).	What [is/was] the date of the visit?	(Visit) Date	Char	R/C	Record the [date/start date] of the visit using this format (DD-MON-YYYY).	N/A	This field is not an SDTM variable. The date of a measurement, test, observation, or specimen collection can be determined from the date/time of visit (VISDAT/VISTIM) and then concatenating the CDASH VISDAT/VISTIM components and populating the SDTMIG variable MIDTC in ISO 8601 format.	N/A	N/A	The date the microscopic findings specimens were collected can be determined from the visit date variable (VISDAT) and applying that date to all of the microscopic findings at that visit, or the specimen collection date can be included on the MI CRF using the date (MIDAT) field.
Findings	MI	Central Processing	N/A	6	MIPERF	Microscopic Examination Performed	An indication of whether a planned microbiology measurement, series of microbiology measurements, test, or observation was performed or specimens collected.	Was the microscopic examination performed? Was the sample collected?	Microscopic Examination Performed; Sample Collected	Char	O	Indicate whether or not microscopic examination performed or measurement performed.	MISTAT	This does not map directly to an SDTMIG variable. May be used to derive a value into the SDTM variable MISTAT. If MIPERF="N", the value of MISTAT will be "NOT DONE". If MIPERF="Y", MISTAT should be null. A combination of SDTMIG variables (e.g., MICAT and MISCAT, MITPT) is used to indicate that multiple tests were not done. In this situation, the SDTMIG variable MITESTCD would be populated as MIALL and an appropriate test name (MITEST) provided. See SDTMIG for additional information.	(NY)	N/A	This may be implemented for an entire panel. This general prompt question is used as a data management tool to verify that missing results are confirmed missing. For the SDTM submission dataset, the SDTMIG variable MISTAT is populated using the CDASH field MIPERF. The question text used might be reflected in the reason not done (MIREASND).
Findings	MI	Central Processing	N/A	7	MIREFID	MI Reference ID	An internal or external identifier, such as specimen identifier.	What was the (microscopic test) [reference identifier/accession number]?	(Microscopic test) [Reference Identifier/Accession Number]	Char	O	Record the specimen [accession/reference] number assigned.	MIREFID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. May be used to create RELREC to link this record with a record in another domain.	N/A	N/A	This can be used to confirm that the appropriate data record is present in the electronic transfer. May be included for linking back to specimens (e.g., Specimen ID).
Findings	MI	Central Processing	N/A	8	MIDAT	Specimen Collection Date	The date of specimen collection, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the (start) date of the specimen collection?	Specimen Collection (Start) Date	Char	R/C	Record the (start) date when specimen collection occurred using this format (DD-MON-YYYY).	MIDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate	N/A	N/A	A complete date is expected. The date of specimen collection may be determined from the date of visit (VISDAT) and if

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
														the SDTMIG variable MIDTC in ISO 8601 format.			so, a separate assessment date field is not required.
Findings	MI	Central Processing	N/A	9	MITIM	Specimen Collection Time	The time of specimen collection, represented in an unambiguous time format (e.g., hh:mm:ss).	What was the (start) time of the specimen collection?	Specimen Collection (Start) Time	Char	R/C	Record the (start) time of collection (as complete as possible).	MIDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable MIDTC in ISO 8601 format.	N/A	N/A	May be required when multiple assessments are done on 1 day or when the timing in relationship to study treatment is required for analysis.
Findings	MI	Central Processing	N/A	10	MICAT	Category for Microscopic Finding	A grouping of topic-variable values based on user-defined characteristics.	What was the category of the microscopic finding?	[Microscopic Category]; NULL	Char	O	Record the microscopic finding category, if not preprinted on the CRF.	MICAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, and not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Category" can be included as the column header.
Findings	MI	Central Processing	N/A	11	MISCAT	Subcategory for Microscopic Finding	A sub-division of the MICAT values based on user-defined characteristics.	What was the subcategory of the microscopic finding?	[Microscopic Subcategory]; NULL	Char	O	Record the microscopic finding subcategory, if not preprinted on the CRF.	MISCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, and not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Subcategory" can be included as the column header. MISCAT can only be used if there is an MICAT, and it must be a

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	subcategorization of MICAT.
Findings	MI	Central Processing	N/A	12	MISPEC	MI Specimen Material Type	Defines the type of specimen used for a measurement.	What is the specimen material type?	Specimen Type	Char	R/C	Record the specimen material type.	MISPEC	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(SPECTYPE)	N/A	The type of specimen used for a measure. Should be collected if not available elsewhere, or if required to differentiate multiple specimens.
Findings	MI	Central Processing	N/A	13	MISPCOND	MI Specimen Condition	Describes the condition of the specimen.	What was the condition of the specimen?	Specimen Condition	Char	R/C	Record the condition of the specimen.	MISPCOND	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(SPECCOND)	N/A	May be collected using free or standardized text. This can be used when results may be affected by whether conditions for specimen were properly met.
Findings	MI	Central Processing	N/A	14	MILOC	MI Specimen Collection Location	A description of the anatomical location of the subject, relevant to the collection of specimen.	What was the anatomical location from which the specimen was collected?	Anatomical Location	Char	O	Record or select the anatomical location of specimen collection.	MILOC	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(LOC)	N/A	Collected or preprinted when the sponsor needs to identify the specific anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF. LAT, DIR, and PORTOT are used to further describe the anatomical location.
Findings	MI	Central Processing	N/A	15	MILAT	MI Specimen Laterality within Subject	Qualifier for anatomical location, further detailing the side of the body.	What was the side of the anatomical location of the specimen collection?	Side	Char	O	Record the side of the anatomical location of the specimen collection.	MILAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(LAT)	N/A	May be preprinted or collected when the sponsor needs to identify the specific side of the anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Findings	MI	Central Processing	N/A	16	MIDIR	MI Specimen Directionality within Subjt	Qualifier further detailing the position of the anatomical location, relative to the center of the body, organ, or specimen.	What was the directionality of the anatomical location of the specimen collection?	Directionality	Char	O	Record the directionality of the anatomical location of the specimen collection.	MIDIR	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(DIR)	N/A	May be preprinted or collected when the sponsor needs to identify the directionality of the anatomical location. Sponsors may collect the data using a subset list of controlled

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	terminology on the CRF.
Findings	MI	Local Processing	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included in the database or populated during SDTM- based dataset creation before submission.
Findings	MI	Local Processing	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted on the CRFs that are shipped to each site. EDC: This should be prepopulated.
Findings	MI	Local Processing	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What [is/was] the (study) [subject/participant] identifier?	[Subject/Participant] (Identifier)	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system-generated. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Findings	MI	Local Processing	N/A	4	VISIT	Visit Name	The name of a clinical encounter that encompasses planned and unplanned trial interventions, procedures, and assessments that may be performed on a subject.	What is the visit name?	[Visit]	Char	R/C	N/A	VISIT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The name of the clinical encounter is typically preprinted on the CRF or displayed within the EDC for any visit-based data collection, most often in Findings

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	domains. This Visit text description is then available in any EDC data extract for that Findings domain.
Findings	MI	Local Processing	N/A	5	VISDAT	Visit Date	Date the clinical encounter occurred (or started).	What [is/was] the date of the visit?	(Visit) Date	Char	R/C	Record the [date/start date] of the visit using this format (DD-MON-YYYY).	N/A	This field is not an SDTM variable. The date of a measurement, test, observation, or specimen collection can be determined from the date/time of visit (VISDAT/VISTIM) and then concatenating the CDASH VISDAT/VISTIM components and populating the SDTMIG variable MIDTC in ISO 8601 format.	N/A	N/A	The date the microscopic findings specimens were collected can be determined from the visit date variable (VISDAT) and applying that date to all of the microscopic findings at that visit, or the collection date can be included on the MI CRF using the date (MIDAT) field.
Findings	MI	Local Processing	N/A	6	MIPERF	Microscopic Examination Performed	An indication of whether a planned microbiology measurement, series of microbiology measurements, test, or observation was performed or specimens collected.	Was the microscopic examination performed? Was the sample collected?	Microscopic Examination Performed; Sample Collected	Char	O	Indicate whether or not microscopic examination was performed.	MISTAT	This does not map directly to an SDTMIG variable. May be used to derive a value into the SDTM variable MISTAT. If MIPERF="N", the value of MISTAT will be "NOT DONE". If MIPERF="Y", MISTAT should be null. A combination of SDTMIG variables (e.g., MICAT and MISCAT, MITPT) is used to indicate that multiple tests were not done. In this situation, the SDTMIG variable MITESTCD would be populated as MIALL and an appropriate test name (MITEST) provided. See SDTMIG for additional information.	(NY)	N/A	This may be implemented for an entire panel. This general prompt question is used as a data management tool to verify that missing results are confirmed missing.
Findings	MI	Local Processing	N/A	7	MIREFID	MI Reference ID	An internal or external identifier, such as specimen identifier.	What was the (microscopic test) [reference identifier/accession number]?	(Microscopic test) [Reference identifier/Accession Number]	Char	O	Record the specimen [accession/reference] number assigned.	MIREFID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. May be used to create RELREC to link this record with a record in another domain.	N/A	N/A	This can be used to reconcile CRF data. May be included for linking back to specimens (e.g., Specimen ID).
Findings	MI	Local Processing	N/A	8	MISPID	MI Sponsor-Defined Identifier	A sponsor-defined identifier. In CDASH, this is typically used for preprinted or auto-generated numbers on the CRF, or any other type of identifier that does not already have a defined CDASH identifier field.	[Sponsor-defined question]	[Sponsor defined]	Char	O	If collected on the CRF, the sponsor may insert instructions to ensure each record has a unique identifier.	MISPID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. May be used to create RELREC to link this record with a record in another domain.	N/A	N/A	Because SPID is a sponsor-defined identifier, conformance to Question Text or Item Prompt is not applicable. Typically used as an identifier in a data query to communicate clearly to the site the specific record in question or to

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	reconcile data. May be used to record preprinted number (e.g. line number, record number) on the CRF. This field may be populated by the sponsor's data collection system.
Findings	MI	Local Processing	N/A	9	MIDAT	Specimen Collection Date	The date of specimen collection, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the (start) date of the specimen collection?	Specimen Collection (Start) Date	Char	R/C	Record the (start) date of specimen collection using this format (DD-MON-YYYY).	MIDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable MIDTC in ISO 8601 format.	N/A	N/A	A complete date is expected. The date of specimen collection may be determined from the date of visit (VISDAT) and, if so, a separate assessment date field is not required.
Findings	MI	Local Processing	N/A	10	MITIM	Specimen Collection Time	The time of specimen collection, represented in an unambiguous time format (e.g., hh:mm:ss).	What was the (start) time of the specimen collection?	Specimen Collection (Start) Time	Char	R/C	Record the (start) time of collection (as complete as possible).	MIDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable MIDTC in ISO 8601 format.	N/A	N/A	May be required when multiple assessments are done on one day or when the timing in relationship to study treatment is required for analysis.
Findings	MI	Local Processing	N/A	11	MICAT	Category for Microscopic Finding	A grouping of topic-variable values based on user-defined characteristics.	What was the category of the microscopic finding?	[Microscopic Category]; NULL	Char	O	Record the microscopic finding category, if not preprinted on the CRF.	MICAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, and not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Category" can be included as the column header.
Findings	MI	Local Processing	N/A	12	MISCAT	Subcategory for Microscopic Finding	A sub-division of the MICAT values based on user-defined characteristics.	What was the subcategory of the microscopic finding?	[Microscopic Subcategory]; NULL	Char	O	Record the microscopic finding subcategory, if not preprinted on the CRF.	MISCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading, or a preprinted category value on the CRF and not a question to

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Subcategory" can be included as the column header. MISCAT can only be used if there is an MICAT, and it must be a subcategorization of MICAT.
Findings	MI	Local Processing	N/A	13	MITEST	Microscopic Examination Name	Descriptive name of the microscopic test or examination used to obtain the measurement or finding.	What [is/was] the name (of the microscopic [measurement/test/examination])?	[Microscopic Measurement/Test/Examination Name]	Char	HR	Record the type or name of the microscopic examination, if not preprinted on the CRF. If collected on the CRF, the sponsor may provide additional instructions to ensure the data is entered as intended.	MITEST; MITESTCD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The SDTMIG variable MITESTCD may be determined from the value collected in MITEST. Both MITESTCD and MITEST are required in the SDTM submission datasets. Use appropriate CDISC Controlled Terminology for the test and test code.	(MITS)	N/A	Required to identify which test the result is for. It is recommended that the test names be preprinted on the CRF rather than collected in a free-text field. If the form is laid out as a grid, then words such as "Test" can be included as the column header.
Findings	MI	Local Processing	N/A	14	MITSTDTL	Microscopic Examination Detail	Detail of the microscopic examination used to obtain the measurement or finding.	What [is/was] the [microscopic measurement/test/examination] detail name?	[Examination Name Detail]	Char	O	Record the detail of the microscopic examination, if not preprinted on the CRF.	MITSTDTL	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(MIFTSDTL)	N/A	Provides additional details for the microscopic examination. It is recommended that the test detail be preprinted on the CRF. If the form is laid out as a grid, then words such as "Test Detail" can be included as the column header.
Findings	MI	Local Processing	N/A	15	MIORRES	MI Result or Finding in Original Units	Result of the measurement or finding as originally received or collected.	What was the result of the examination?	(Result)	Char	HR	Record the test result, interpretation, or finding.	MIORRES	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Both quantitative results and interpretive findings or summaries may be recorded here.
Findings	MI	Local Processing	N/A	16	MIORRESU	MI Original Units	The unit of the result as originally received or collected.	What was the unit of the result?	Unit	Char	R/C	Select the original unit in which these data were collected, or record if not preprinted on CRF.	MIORRESU	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(UNIT)	N/A	Should be preprinted on the CRF with the associated test when possible, rather than collected in a

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	free-text field. Should be included if applicable and not available elsewhere. For some tests, the units may not be applicable (e.g., reaction score for HER2).
Findings	MI	Local Processing	N/A	17	MICLSIG	MI Clinical Significance	An indication of whether the test results were clinically significant.	Was the result clinically significant?	Clinically Significant	Char	O	Indicate whether the results were clinically significant.	SUPPMI.QVAL	This does not map directly to an SDTMIG variable. This information could be submitted in a SUPPMI dataset as the value of SUPPMI.QVAL where SUPPMI.QNAM="MICLSIG" and SUPPMI.QLABEL="Clinically Significant". Refer to the current SDTM and SDTMIG for instructions on placement of non-standard variables in SDTM domains.	(NY)	N/A	N/A
Findings	MI	Local Processing	N/A	18	MIRESCAT	MI Result Category	Used to categorize the result of a finding.	What was the result category?	Result Category	Char	O	Record the category of the test results.	MIRESCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Used to categorize the results of a finding (e.g., MALIGNANT or BENIGN, RESISTANCE VARIANT for genetic variation)
Findings	MI	Local Processing	N/A	19	MINAM	Laboratory/Vendor Name	The name or identifier of the vendor (e.g., laboratory) that provided the test results.	What was the name of the vendor used?	Vendor Name	Char	O	Record the laboratory name.	MINAM	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Recommended to collect on the CRF if lab name was not collected at the site/study level or if multiple labs are used by a site
Findings	MI	Local Processing	N/A	20	MISPEC	MI Specimen Material Type	Defines the type of specimen used for a measurement.	What is the specimen material type?	Specimen Type	Char	R/C	Record the specimen material type.	MISPEC	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(SPECTYPE)	N/A	The type of specimen used for a measure. Should be collected if not available elsewhere, or if required to differentiate multiple specimens.
Findings	MI	Local Processing	N/A	21	MISPCOND	MI Specimen Condition	Describes the condition of the specimen.	What was the condition of the specimen?	Specimen Condition	Char	R/C	Record the condition of the specimen.	MISPCOND	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(SPECCOND)	N/A	May be collected using free or standardized text. This can be used when results may be affected by whether conditions for specimen were properly met.
Findings	MI	Local Processing	N/A	22	MILOC	MI Specimen Collection Location	A description of the anatomical location of the subject, relevant to the	What was the anatomical location from which the specimen was collected?	Anatomical Location	Char	O	Record or select the anatomical location of specimen collection.	MILOC	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(LOC)	N/A	Collected or preprinted when the sponsor needs to identify the specific

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
							collection of specimen.										anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF. LAT, DIR, and PORTOT are used to further describe the anatomical location.
Findings	MI	Local Processing	N/A	23	MILAT	MI Specimen Laterality within Subject	Qualifier for anatomical location, further detailing the side of the body.	What was the side of the anatomical location of the specimen collection?	Side	Char	O	Record the side of the anatomical location of the specimen collection.	MILAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(LAT)	N/A	May be preprinted or collected when the sponsor needs to identify the specific side of the anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Findings	MI	Local Processing	N/A	24	MIDIR	MI Specimen Directionality within Subject	Qualifier further detailing the position of the anatomical location, relative to the center of the body, organ, or specimen.	What was the directionality of the anatomical location of the specimen collection?	Directionality	Char	O	Record the directionality of the anatomical location of the specimen collection.	MIDIR	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(DIR)	N/A	May be preprinted or collected when the sponsor needs to identify the directionality of the anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Findings	MI	Local Processing	N/A	25	MIMETHOD	MI Method of Test or Examination	Method of the test or examination.	What was the method used for the test or examination?	Method	Char	O	Record the method of test or examination.	MIMETHOD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(METHOD)	N/A	This information may be collected when more than 1 method is possible, and collecting the method used is necessary. This could include technique or type of staining used for the slides.
Findings	MI	Local Processing	N/A	26	MIEVAL	MI Evaluator	The role of the person providing the evaluation.	Who was the evaluator?	[Evaluator/Reporter]	Char	O	Select the role of the person who provided the evaluation (e.g., INVESTIGATOR, ADJUDICATION COMMITTEE, VENDOR).	MIEVAL	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(EVAL)	N/A	Used only for results that are subjective (e.g., assigned by a person or a group). May be a preprinted or collected. Sponsors may collect the data using a subset list of controlled terminology on the CRF.

Assumptions for the CDASHIG MI - Microscopic Findings Domain

1. This domain is used for findings resulting from the microscopic examination of tissue samples. These examinations are performed on a specimen which has been prepared with some type of stain. Some examinations of cells in fluid specimens (e.g., blood, urine) are classified as lab tests and should be represented in the LB domain. Tests classified as pathology or cytology should be represented in the MI domain. Biomarkers assessed by histologic or histopathological examination (by employing cytochemical/immunocytochemical stains) will be represented in the MI domain.
2. Sponsors should decide which scenario is appropriate for each protocol.
3. The variable MITSTDTL is used when biomarker tests are represented in the MI domain. It represents test parameter details descriptive of slide stain results (e.g., cells at 1+ intensity cytoplasm stain, H-score, nuclear reaction score).
4. This is a specimen-based domain. MIDTC is the date the specimen was collected.
5. The CDASHIG variables --POS, --MODIFY, --ORNRLO, --ORNRHI, and --LEAD are generally not used for this domain.

Example CRFs for the CDASHIG MI - Microscopic Findings Domain

Example 1: Central Processing Scenario

Title: Histopathology-Lung Specimen Collection

	Microscopic Category MICAT <i>Hidden/pre-populated</i>	HISTOPATHOLOGY
Indicate whether or not microscopic examination performed.	Was the microscopic examination performed? MIPERF <i>If MIPERF = "N", then MISTAT = "NOT DONE" and MITESTCD = "MIAL". If MIPERF = "Y", then MISTAT is NULL.</i>	☐ Yes ☐ No <NY codelist>
Record the date when specimen collection occurred using this format (DD-MON-YYYY).	Specimen Collection Date MIDAT MIDTC	
Record time of collection (as complete as possible).	Specimen Collection Time MITIM MIDTC	
Record the specimen accession number assigned.	What was the accession number? MIREFID	
	Specimen Type MISPEC <i>Pre-populated</i>	Tissue <SPECTYPE codelist>
	Anatomical Location MILOC <i>Pre-populated</i>	Lung <LOC codelist>
Record the side of the anatomical location of the specimen collection.	What was the side of the anatomical location of the specimen collection? MILAT	☐ Left ☐ Right <LAT codelist>
Record condition of specimen.	What was the condition of the specimen? MISPCOND	☐ Fresh ☐ Frozen <SPECCOND codelist>

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
MICAT	1	What was the category of the microscopic finding?	Microscopic Category	Record the microscopic finding category, if not pre-printed on the CRF.	Text	MICAT				HISTOPATHOLOGY	Prompt		Y
MIPERF	2	Was the microscopic examination performed?	Microscopic Examination Performed	Indicate whether or not microscopic examination performed.	Text	MISTAT	If MIPERF = "N", then MISTAT = "NOT DONE" and MITESTCD = "MIAL". If MIPERF = "Y", then MISTAT is NULL.	(NY)	Yes; No			Radio	
MIDAT	3	What was the specimen collection date?	Specimen Collection Date	Record the date when specimen collection occurred using this format (DD-MON-YYYY).	Date	MIDTC					Prompt		
MITIM	4	What was the time of the specimen collection?	Specimen Collection Time	Record time of collection (as complete as possible).	Time	MIDTC					Prompt		
MIREFID	5	What was the accession number?	Accession Number	Record the specimen accession number assigned.	Text	MIREFID							
MISPEC	6	What is the specimen material type?	Specimen Type	Record the specimen material type.	Text	MISPEC		(SPECTYPE)		Tissue		Radio	
MISPCOND	9	What was the condition of the specimen?	Specimen Condition	Record condition of specimen.	Text	MISPCOND		(SPECCOND)	Fresh; Frozen			Radio	
MILOC	7	What was the anatomical location where the specimen was collection?	Anatomical Location	Record or select the anatomical location of specimen collection.	Text	MILOC		(LOC)		Lung	Prompt	Radio	
MILAT	8	What was the side of the anatomical location of the specimen collection?	Side	Record the side of the anatomical location of the specimen collection.	Text	MILAT		(LAT)	Left; Right			Radio	

Example 2: Local Processing Scenario: Programmed Death Ligand 1**Title: Microscopic Findings-Programmed Death Ligand**

Indicate whether or not the microscopic examination was performed.

Was the microscopic examination performed?

MIPERF If MIPERF = "N", then MISTAT = "NOT DONE" and MITESTCD = "MIALL". If MIPERF = "Y", then MISTAT is NULL.

☐ Yes
☐ No
<NY codelist>

Specimen Type

MISPEC Hidden/pre-populated

TISSUE<SPECTYPE codelist>

Anatomical Location

MILOC Hidden/pre-populated

LUNG<LOC codelist>

Method

MIMETHOD Hidden/pre-populated

IHC<METHOD codelist>

Microscopic Test Name

MITEST
Pre-populated

Programmed Death Ligand 1
<MITEST codelist>

Record the date when specimen collection occurred using this format (DD-MON-YYYY).

Specimen Collection Date

MIDAT **MIDTC**

If collected on the CRF, the sponsor may insert instructions to ensure each record has a unique identifier.

What is the microscopic test identifier?

MISPID

Record test result, interpretation, or finding.

What is the PDL1 Tumor Proportion Score?

MIORRES_PDL1 MIORRES where MITESTCD = "PDL1" and MITSTDTL = "TUMOR PROPORTION SCORE."

Unit

MIORRESU_PDL1 **MIORRESU**
Pre-populated

%
<UNIT codelist>

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
MIPERF	1	Was the microscopic examination performed?	Microscopic Examination Performed	Indicate whether or not the microscopic examination was performed.	Text	MISTAT	If MIPERF = "N", then MISTAT = "NOT DONE" and MITESTCD = "MIALL". If MIPERF = "Y", then MISTAT is NULL.	(NY)	Yes; No		Qtext		
MIDAT	6	What was the specimen collection date?	Specimen Collection Date	Record the date when specimen collection occurred	Date	MIDTC							

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
				using this format (DD-MON-YYYY).									
MILOC	3	What was the anatomical location where the specimen was collection?	Anatomical Location	Record or select the anatomical location of specimen collection.	Text	MILOC		(LOC)		LUNG			Y
MIMETHOD	4	What was the method used for the test or examination?	Method	Record the method of test or examination.	Text	MIMETHOD		(METHOD)		IHC			Y
MITEST	5	What was the microscopic examination test name?	Microscopic Test Name	Record the type or name of the microscopic examination, if not pre-printed on the CRF. If collected on the CRF, the sponsor may provide additional instructions to ensure the data is entered as intended.	Text	MITEST		(MITEST)		Programmed Death Ligand 1	Y		
MISPEC	2	What is the specimen material type?	Specimen Type	Record the specimen material type.	Text	MISPEC		(SPECTYPE)		TISSUE			Y
MISPID	7	What is the microscopic test identifier?	[Line Number/ MI Number]	If collected on the CRF, the sponsor may insert instructions to ensure each record has a unique identifier.	Text	MISPID							
MIORRES_PDL1	9	What is the PDL1 Tumor Proportion Score?	Result	Record test result, interpretation, or finding.	integer	MIORRES	MIORRES where MITESTCD = "PDL1" and MITSTDTL = "TUMOR PROPORTION SCORE."						
MIORRESU_PDL1	10	What was the unit of the result?	Unit	Record or select the original unit in which these data were collected, if not pre-printed on CRF.	Text	MIORRESU		(UNIT)		%			

8.3.12 MK - Musculoskeletal System Findings

Description/Overview for the CDASHIG MK - Musculoskeletal System Findings Domain

The CDASHIG MK domain is a findings domain that contains physiological and morphological findings related to the system of muscles, tendons, ligaments, bones, joints, and associated tissues.

Specification for the CDASHIG MK - Musculoskeletal System Findings Domain

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings	MK	N/A	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTM variable listed in the SDTM Target column .	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included in the database or populated during SDTM-based dataset creation.
Findings	MK	N/A	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted on the CRFs that are shipped to each site.
Findings	MK	N/A	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What is the subject identifier?	Subject	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be provided to the site using a prepopulated list in the system. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Findings	MK	N/A	N/A	4	VISIT	Visit Name	The name of a clinical encounter that encompasses planned and unplanned trial interventions, procedures, and assessments that may be performed on a subject.	What is the visit name?	[Visit]	Char	R/C	N/A	VISIT	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	The name of the clinical encounter is typically preprinted on the CRF or displayed in the EDC for any visit-based data collection, most often in Findings domains. This Visit text description is then available in any EDC data extract for that Findings domain.
Findings	MK	N/A	N/A	5	VISDAT	Visit Date	Date the clinical encounter occurred (or started).	What [is/was] the date of the visit?	(Visit) Date	Char	R/C	Record the [date/start date] of the visit using this format (DD-MON-YYYY).	N/A	This field is not an SDTM variable. The date of a measurement, test, observation can be determined from the date/time of visit (VISDAT/VISTIM) and then concatenating the CDASH VISDAT/VISTIM components and populating the SDTMIG variable VSDTC in ISO 8601 format.	N/A	N/A	The date the musculoskeletal system findings assessments were collected can be determined from the visit date variable (VISDAT) and applying that date to all of the observations at that visit, or the collection date can be included on the MK CRF using the Collection Date (MKDAT) field.
Findings	MK	N/A	N/A	6	MKPERF	MK Test Performed	An indication of whether a planned measurement, test,	Was a musculoskeletal system findings	Musculoskeletal System Findings Collected	Char	O	Indicate whether or not a	MKSTAT	This field does not map directly to an SDTM variable. May	(NY)	N/A	This field is used to capture a response to whether or not a planned

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Code list Name	Subset Controlled Terminology/CDASH Code list Name	Implementation Notes
							observation or specimen was performed/collected.	[measurement/examination] collected?				musculoskeletal system findings assessment was done.		be used to populate a value into the SDTM variable MKSTAT. If the CDASH variable MKPERF="N", the value of the SDTM variable MKSTAT is "NOT DONE". If MKPERF= "Y", MKSTAT is null. A combination of SDTM variables (e.g., MKCAT and MKSCAT, MKTPT) is used to indicate that multiple tests were not done. In this situation, the SDTM variable MKTESTCD would be populated with MKALL and an appropriate test name (MKTEST) provided. See SDTMIG for additional information.			measurement, test or observation was performed. A negative response can be collected as "N" and mapped to the -STAT variable in SDTM as " NOT DONE".
Findings	MK	N/A	N/A	7	MKDAT	MK Collection Date	The date the musculoskeletal system findings assessment was performed, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the date the musculoskeletal system findings assessment was collected?	Collection Date	Char	R/C	Record date of measurements using this format (DD-MON-YYYY).	MKDTC	This field does not map directly to an SDTM variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTM variable MKDTC in ISO 8601 format.	N/A	N/A	The date the musculoskeletal system findings assessments were collected can be determined from the visit date variable (VISDAT) and applying that date to all of the observations at that visit, or the collection date can be included on the MK CRF using the Collection Date (MKDAT) field.
Findings	MK	N/A	N/A	8	MKTIM	MK Collection Time	The time the musculoskeletal system findings assessment was performed, represented in an unambiguous time format (e.g., hh:mm:ss).	What was the time the musculoskeletal system findings [measurement/examination] was collected?	Collection Time	Char	R/C	Record time of measurement (as complete as possible).	MKDTC	This field does not map directly to an SDTM variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTM variable MKDTC in ISO 8601 format.	N/A	N/A	A single collection time (e.g., MKTIM) may be collected for all the measurements when they are performed at the same time. The time of each measurement can also be collected using a CDASH variable [MKTESTCD]_MKTIM.
Findings	MK	N/A	N/A	9	MKTPT	MK Planned Time Point Name	A text description of planned time points when measurements should be taken, as defined in the protocol.	What is the planned time point for this musculoskeletal system findings [measurement/examination] collection?	[Planned Time Point Name]	Char	R/C	Record the planned time-point labels for respiratory assessment, if not preprinted on the CRF.	MKTPT	Maps directly to the SDTM variable listed in the SDTM Target column. See the SDTMIG for additional information on representing time points. The SDTM time-point anchors MKTPTREF (text description) and MKRFTDTC (date/time) may be needed, as well as SDTMIG variables MKTPTNUM, MKELTM.	N/A	N/A	Planned time points are needed to differentiate multiple sequential assessments. It is recommended that time points should be preprinted on the CRF rather than collected in a free-text field. If the form is laid out as a grid, then terms such as "Planned Time Point" can be included in the column heading.
Findings	MK	N/A	N/A	10	MKTEST	Name of Musculoskeletal Test	Descriptive name of the test or examination used to	What is the musculoskeletal system findings test name?	[Musculoskeletal System Findings Test Name]	Char	HR	Record the name of the musculoskeletal	MKTEST; MKTESTCD	Maps directly to the SDTM variable listed in the SDTM Target	(MUSCTS)	N/A	The test name will usually be preprinted on the CRF, and not solicited as a

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
							obtain the measurement or finding.					system findings test, if not preprinted on the CRF.		column. The SDTM variable MKTESTCD may be determined from the value collected in MKTEST using the Controlled Terminology List MUSCTSCD. The SDTMIG variables MKTESTCD and MKTEST are required in SDTM.			question. If the form is laid out as a grid, then "Test" or "Test Name" can be included in the column heading. MKTEST is most useful as the PROMPT on the field in which the RESULT for that test is collected.
Findings	MK	N/A	N/A	11	MKCAT	Category for Musculoskeletal Test	A grouping of topic-variable values based on user-defined characteristics.	What is the category of the musculoskeletal system findings [measurement/examination]?	[Musculoskeletal System Findings Category]; NULL	Char	O	Record the musculoskeletal system findings category, if not preprinted on the CRF.	MKCAT	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be a heading on the CRF or screen, not a question to which the site would provide an answer. MKSCAT can only be used if there is a MKCAT. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Category" can be included in the column heading.
Findings	MK	N/A	N/A	12	MKSCAT	Subcategory for Musculoskeletal Test	A sub-division of the MKCAT values based on user-defined characteristics.	What was the subcategory of the musculoskeletal system findings [measurement/examination]?	[Musculoskeletal System Findings Subcategory]; NULL	Char	O	Record the musculoskeletal system findings subcategory, if not preprinted on the CRF.	MKSCAT	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Subcategory" can be included in the column heading. MKSCAT can only be used if there is a MKCAT, and it must be a subcategorization of MKCAT.
Findings	MK	N/A	N/A	13	MKORRES	MK Test Result in Original Units	Result of the measurement or finding as originally received or collected.	What was the result of the test?	[MKTEST] Result	Char	HR	Record the musculoskeletal system findings test result.	MKORRES	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	Both quantitative results and interpretive findings or summaries may be recorded here.
Findings	MK	N/A	N/A	14	MKORRESU	MK Test Original Unit	The unit of the result as originally received or collected.	What was the unit of the result?	Unit	Char	R/C	Record or select the original unit in which these data were collected, if not preprinted on CRF.	MKORRESU	Maps directly to the SDTM variable listed in the SDTM Target column.	(UNIT)	N/A	Should be preprinted on the CRF with the associated test when possible, rather than collected in a free-text field. Should be included if applicable and not available elsewhere.
Findings	MK	N/A	N/A	15	MKRES	MK Test Result or Finding	The result of the measurement or finding as originally received or collected.	Was the result (normal/abnormal/absent/present/ [sponsored-defined response])?	(Result)	Char	O	Indicate the overall assessment for [MKTEST].	MKORRES	This does not map directly to an SDTM variable. The mapping instructions depend on the implementation; for example:	N/A	N/A	The CDASH field MKRES is used when the collected results are not mapped directly to the SDTM variable MKORRES and must be transformed. For example,

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
														1. Where MKRES is to used collect normal/abnormal or similar type classifications (e.g., absent/present) with a description of the abnormal result using the CDASH field MKDESC. For SDTM submission datasets, if the CDASH field MKRES = "NORMAL", populate the SDTM variables MKORRES and MKSTRESC with the value of the CDASH field MKRES. If the CDASH field MKRES is "ABNORMAL", populate the SDTM variable MKORRES with the CDASH field MKDESC. If the reported findings in MKDESC are coded using a dictionary, then the SDTM variable MKSTRESC is populated with the dictionary preferred term and MKMODIFY is populated with the modified text used for coding. If the reported findings in MKDESC are not coded, then the SDTM variable MKSTRESC is populated with the CDASH MKDESC field. The SDTM variable MKNRIND may be populated with "NORMAL" or "ABNORMAL" if appropriate. 2. Where MKRES is used to collect standardized (e.g., codelist) values on the			1. MKRES is used to collect standardized values on the CRF and the value of "OTHER" is included and "Specify Other" is collected. 2. MKORRES is collected using "Normal", "Abnormal", and a description of the abnormality is collected.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Code-list Name	Subset Controlled Terminology/CDASH Code-list Name	Implementation Notes
														CRF and the value of "OTHER" is included, the CDASH field MKRESOTH can be used to collect free-text values for "Specify Other". When using this field, the "OTHER" value recorded in the CDASH field MKRES field is mapped to the SDTM variable MKSTRESC and the value in the CDASH field MKRESOTH is mapped to the SDTM variable MKORRES. See SDTMIG for additional information.			
Findings	MK	N/A	N/A	16	MKDESC	Musculoskeletal Findings Descriptions	Text description of musculoskeletal system findings.	What was the description of the (abnormality/observed finding/[Sponsor-defined])?	(Abnormal) Findings	Char	O	Record all abnormal findings for the musculoskeletal system in the space provided.	MKORRES	This does not map directly to an SDTM variable. May be used to populate a value into the SDTM variable MKORRES. If MKRES="Normal", populate MKORRES with the value of MKRES. If MKRES="Abnormal", populate MKORRES with the value of MKDESC.	N/A	N/A	MKRES and MKDESC are used when a question is asked to collect the finding result, with a follow-up question for a description of the finding. See Section 8.3.1, General CDASH Assumptions for Findings Domains .
Findings	MK	N/A	N/A	17	MKRESOTH	Musculoskeletal Findings Result Other	A free-text result which provides further information about the original received or collected result.	If other is selected, [explain/specify/provide more detail].	[Specify Other/Explain/Specify Details]	Char	O	Provide more detail for the "Other" result.	MKORRES	When using this CDASH field, the "OTHER" value collected in the CDASH field MKRES is mapped to the SDTM variable MKSTRESC and the value in the CDASH field MKRESOTH is mapped to the SDTM variable MKORRES.	N/A	N/A	In cases where MKRES is used to collect standardized values on the CRF and the value of "OTHER" is included, the CDASH field MKRESOTH can be used to collect free-text values for "Specify Other".
Findings	MK	N/A	N/A	18	MKNRIND	MK Findings Reference Range Indicator	An indication or description about how the value compares to the normal range or reference range.	How do the reported values compare within the [reference/normal/expected] range?	Comparison to [Reference/Expected/Normal] Range	Char	O	Record where the measurement or examination result fell with respect to the reference range.	MKNRIND	Maps directly to the SDTM variable listed in the SDTM Target column.	(NRIND)	N/A	Reference ranges may be defined by MKSTNRC or other objective criteria. Reference Range Indicator (e.g., Y, N; HIGH, LOW; NORMAL, ABNORMAL) may be included if not derived or determined programmatically after data collection. Should not be used to indicate clinical significance.
Findings	MK	N/A	N/A	19	MKSTAT	MK System Findings	This variable is used to indicate that data are not available, by having the site	Indicate if the [MKTEST] was not [answered/done/performed].	Not Done	Char	O	Indicate if the musculoskeletal system	MKSTAT	Maps directly to the SDTM variable listed in the SDTM Target	(ND)	N/A	Used only when the response value is collected as NOT DONE or NULL in

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
						Completion Status	recording the value as "Not Done".					measurement or examination was not done.		column. If collected, the Origin (a column in the Define-XML) ="CRF"; if populated from other sources such as free text or sponsor-defined listing for MKREASND, the Origin ="DERIVED".			lieu of or in addition to the CDASH MKPERF field. Typically a checkbox which indicates the measurement or examination was NOT DONE. This field can be useful when multiple questions are asked to confirm that a blank result field is meant to be blank.
Findings	MK	N/A	N/A	20	MKREASND	MK System Findings Reason Not Done	An explanation for why the data are not available.	Was the was the reason that the musculoskeletal system (measurement/examination/ [MKTEST]) was not [collected / answered / done]?	Reason Not [Answered/Collected/Done/ Available]	Char	O	Provide the reason the measurement or examination was not done.	MKREASND	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	Sponsor-defined controlled terminology may be used. The reason the data are not available may be chosen from a sponsor-defined codelist (e.g., broken equipment, subject refused) or entered as free text. When MKREASND is used, MKSTAT should also be populated in the SDTM-based dataset.
Findings	MK	N/A	N/A	21	MKPOS	MK System Findings Position of Subject	The position of the subject during a measurement or examination.	What was the position of the subject during the [measurement/ examination]?	Position	Char	O	Record the position of subject at time of measurement or examination.	MKPOS	Maps directly to the SDTM variable listed in the SDTM Target column.	(POSITION)	N/A	Results may be affected by whether conditions for musculoskeletal measurement or examination, as specified in the protocol, were properly met. One common condition is the subject's position. If the protocol requires this type of information, then a CDASH variable [MKTESTCD]_MKPOS may be created for each MKTESTCD and added to the CRF, if needed.
Findings	MK	N/A	N/A	22	MKLOC	Musculoskeletal Findings Location	Location used for the measurement.	What was the anatomical location where the [measurement/ examination] was [collected/done]?	Anatomical Location	Char	O	Record or select location on body where the measurement was performed.	MKLOC	Maps directly to the SDTM variable listed in the SDTM Target column.	(LOC)	N/A	Collected or preprinted when the sponsor needs to identify the specific anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF.LAT, DIR, and PORTOT are used to further describe the anatomical location.
Findings	MK	N/A	N/A	23	MKLAT	Musculoskeletal Findings Laterality	Qualifier for anatomical location, further detailing the side of the body.	What was the side of the anatomical location of the [measurement/ examination]?	Side	Char	O	Record the side of the anatomical location of the musculoskeletal test or measurement.	MKLAT	Maps directly to the SDTM variable listed in the SDTM Target column.	(LAT)	N/A	May be preprinted or collected when the sponsor needs to identify the specific side of the anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Findings	MK	N/A	N/A	24	MKDIR	Musculoskeletal Findings Directionality	Qualifier further detailing the position of the anatomical location, relative to the center of the body, organ, or specimen.	What was the directionality of the anatomical location of the [measurement/ examination]?	Directionality	Char	O	Record the directionality of the anatomical location of the musculoskeletal test.	MKDIR	Maps directly to the SDTM variable listed in the SDTM Target column.	(DIR)	N/A	May be preprinted or collected when the sponsor needs to identify the directionality of the anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings	MK	N/A	N/A	25	MKMETHOD	MK Method of Test or Examination	The method of the test or examination.	What was the method (used for the [measurement/examination])?	Method	Char	O	Record the method used for the musculoskeletal test.	MKMETHOD	Maps directly to the SDTM variable listed in the SDTM Target column.	(METHOD)	N/A	This information may be collected when more than 1 method is possible, and collecting the method used is necessary.
Findings	MK	N/A	N/A	26	MKEVAL	Musculoskeletal Test Evaluator	The role of the person who provided the evaluation.	Who was the evaluator?	Evaluator	Char	O	Select the role of the person who provided the evaluation.	MKEVAL	Maps directly to the SDTM variable listed in the SDTM Target column.	(EVAL)	N/A	Used only for results that are subjective (e.g., assigned by a person or a group). May be a preprinted or collected. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Findings	MK	N/A	N/A	27	MKEVALID	Musculoskeletal Test Evaluator ID	An identifier used to distinguish multiple evaluators with the same role recorded in MKEVAL.	What is the identifier of the evaluator?	Evaluator Identifier	Char	O	Record the unique identifier assigned to the person making the evaluation.	MKEVALID	Maps directly to the SDTM variable listed in the SDTM Target column.	(MEDEVAL)	N/A	Collect if multiple evaluators are used in the study (may be omitted if multiple evaluators are not used); values should follow controlled terminology.
Findings	MK	N/A	N/A	28	MKACPTFL	MK Accepted Record Flag	An indication that the evaluation is considered, by an independent assessor, to be the accepted or final evaluation.	Was this record considered to be the accepted evaluation?	Accepted Evaluation	Char	O	Indicate whether or not the evaluation is considered, by an independent assessor, to be the accepted or final evaluation.	MKACPTFL	Maps directly to the SDTM variable listed in the SDTM Target column.	(NY)	N/A	Use where more than one assessor provides an evaluation of a result or response. Typically a checkbox with the value of "Y" or "NULL", which indicates the evaluation was accepted.
Findings	MK	N/A	N/A	29	MKREPNUM	Musculoskeletal Test Repetition Number	The instance number of a test that is repeated within a given timeframe for the same test. The level of granularity can vary (e.g., within a time point, within a visit).	What was the repetition number within the time point for this [measurement/examination]?	Repetition Number	Char	O	Record the repetition number of the measurement within the time point.	MKREPNUM	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	The repetition number of the examination/measurement within the time point may be preprinted on the CRF.

Assumptions for the CDASHIG MK - Musculoskeletal System Findings Domain

1. This domain should not be used for oncology data related to the musculoskeletal system (e.g., bone lesions). Such data should be placed in the appropriate oncology domains: Tumor/Lesion Identification (TU), Tumor/Lesion Results (TR), and/or Disease Response and Clin Classification (RS).
2. Musculoskeletal assessment examples that may have results represented in the MK domain include morphology/physiology observations such as swollen/tender joint count, limb movement, and strength/grip measurements.
3. Any Identifiers, Timing variables, or Findings general observation class qualifiers may be added to the MK domain, but the following qualifiers would generally not be used in MK: --MODIFY, --BODSYS, --LOINC, --TOX, --TOXGR, --FAST, --ORNRLO, --ORNRHI, --STNRLO, --STNRHI, --ORREF, --STREFC, --STREFN.

Example CRFs for the CDASHIG MK - Musculoskeletal System Findings Domain

Example 1: Swollen/Tender Joint Count Assessment

This CRF shows a 68-joint count assessment. It is important that joint assessors are properly trained in how to perform joint counts for clinical research, because the approach is simpler and more systematic than what is done in clinical practice. In the 68-joint count assessment, 68 joints are assessed for tenderness and 66 for swelling (the 2 hip joints are excluded). Note that due to the large number of joint locations included in this assessment, only a subset of applicable locations were included from the LOC codelist. Additional joint locations can be obtained from the LOC CT codelist.

Title: Swollen/Tender Joint Count Assessment CRF

CRF Completion Instructions		
- For each location specified, indicate if the joint is swollen and/or tender. The 2 hip joints will not be assessed for swelling. - If the joint is not able to be assessed due to meeting 1 of the protocol-specified conditions (e.g., infection of the overlying tissue or skin, grossly edematous, fused), then mark the joint as Joint Not Evaluable. - If a joint was overlooked or missed during the assessment, then mark the joint Not Done.		
Indicate whether the joint count assessment was performed or not.	Was the 68-Joint Count assessment performed? MKPERF If MKPERF = "N", then MKSTAT = "NOT DONE" and MKTESTCD = "MKALL". If MKPERF = "Y" then NOT SUBMITTED.	☐ Yes ☐ No <NY codelist>
Record the date of the joint count assessment, using this format (DD-MON-YYYY).	Collection Date MKDAT MKDTC	
Select the anatomical location of the assessment.	Anatomical Location MKLOC	☐ Temporomandibular Joint ☐ Sternoclavicular Joint ☐ Acromioclavicular Joint ☐ Shoulder Joint ☐ Elbow Joint ☐ Wrist Joint <LOC codelist>
Select the side of the anatomical location of the assessment.	Side MKLAT	☐ Right ☐ Left <LAT codelist>
Record the tender assessment response for the specified joint location/laterality.	Tender TNDRIIND_MKORRES MKORRES where MKTESTCD = "TNDRIIND"	☐ Yes ☐ No <NY codelist>
Indicate if the specified joint location/laterality was not evaluable for the tender assessment.	Indicate if the joint was not evaluable for the tender assessment. TNDRIIND_MKREASND MKREASND where MKSTAT = "NOT DONE" and MKTESTCD = "TNDRIIND"	☐ Joint Not Evaluable
Indicate if the tender assessment was not done for the specified joint location/laterality.	Indicate if the tender assessment was not done. TNDRIIND_MKSTAT MKSTAT where MKTESTCD = "TNDRIIND"	☐ Not Done <ND codelist>
Record the swollen assessment response for the specified joint location/laterality.	Swollen SWLLIIND_MKORRES MKORRES where MKTESTCD = "SWLLIIND"	☐ Yes ☐ No <NY codelist>
Indicate if the specified joint location/laterality was not evaluable for the swollen assessment.	Indicate if the joint was not evaluable for the swollen assessment. SWLLIIND_MKREASND MKREASND where MKSTAT = "NOT DONE" and MKTESTCD = "SWLLIIND"	☐ Joint Not Evaluable
Indicate if the swollen assessment was not done for the specified joint location/laterality.	Indicate if the swollen assessment was not done. SWLLIIND_MKSTAT MKSTAT where MKTESTCD = "SWLLIIND"	☐ Not Done <ND codelist>

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
MKPERF	1	Was the 68-Joint Count assessment performed?	Collected	Indicate whether the joint count assessment was performed or not.	Text	MKSTAT	If MKPERF = "N", then MKSTAT = "NOT DONE" and MKTESTCD = "MKALL". If MKPERF = "Y" then NOT SUBMITTED.	(NY)	Yes; No		Qtext		
MKDAT	2	What was the date of the 68-Joint Count assessment?	Collection Date	Record the date of the joint count assessment, using this format (DD-MON-YYYY).	Date	MKDTC					Prompt		
MKLOC	3	What was the anatomical location of the assessment?	Anatomical Location	Select the anatomical location of the assessment.	Text	MKLOC		(LOC)	Temporomandibular Joint; Sternoclavicular Joint; Acromioclavicular Joint; Shoulder Joint; Elbow Joint; Wrist Joint		Prompt		
MKLAT	4	What was the side of the assessment?	Side	Select the side of the anatomical location of the assessment.	Text	MKLAT		(LAT)	Right; Left		Prompt		
TNDRIND_MKORRES	5	What was the result of the tender assessment?	Tender	Record the tender assessment response for the specified joint location/laterality.	Text	MKORRES	MKORRES where MKTESTCD = "TNDRIND"	(NY)	Yes; No		Prompt		
TNDRIND_MKREASND	6	Indicate if the joint was not evaluable for the tender assessment.	Joint Not Evaluable	Indicate if the specified joint location/laterality was not evaluable for the tender assessment.	Text	MKSTAT; MKREASND	MKREASND where MKSTAT = "NOT DONE" and MKTESTCD = "TNDRIND"		Joint Not Evaluable		Qtext		
TNDRIND_MKSTAT	7	Indicate if the tender assessment was not done.	Not Done	Indicate if the tender assessment was not done for the specified joint location/laterality.	Text	MKSTAT	MKSTAT where MKTESTCD = "TNDRIND"	(ND)	Not Done		Qtext		
SWLLIND_MKORRES	8	What was the result of the swollen assessment?	Swollen	Record the swollen assessment response for the specified joint location/laterality.	Text	MKORRES	MKORRES where MKTESTCD = "SWLLIND"	(NY)	Yes; No		Prompt		
SWLLIND_MKREASND	9	Indicate if the joint was not evaluable for	Joint Not Evaluable	Indicate if the specified joint location/laterality	Text	MKSTAT; MKREASND	MKREASND where MKSTAT =		Joint Not Evaluable		Qtext		

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
		the swollen assessment.		was not evaluable for the swollen assessment.			"NOT DONE" and MKTESTCD = "SWLLIND"						
SWLLIND_MKSTAT	10	Indicate if the swollen assessment was not done.	Not Done	Indicate if the swollen assessment was not done for the specified joint location/laterality.	Text	MKSTAT	MKSTAT where MKTESTCD = "SWLLIND"	(ND)	Not Done		Qtext		

8.3.13 MS - Microbiology Susceptibility

Description/Overview for the CDASHIG MS - Microbiology Susceptibility Domain

The CDASHIG MS domain is used to represent data from drug susceptibility testing performed on collected biological specimens. This includes phenotypic testing (i.e., drug is added directly to a culture of organisms) and genotypic tests that provide results in terms of susceptible or resistant. Drug susceptibility testing may occur on a wide variety of non-host organisms, including bacteria, viruses, fungi, protozoa, and parasites. Phenotypic drug susceptibility testing may involve determining susceptibility/resistance (qualitative) at a defined concentration of antibiotic or sponsor drug, or may involve determining a specific dose (quantitative) at which a drug inhibits organism growth or some other process associated with virulence (e.g., minimum inhibitory concentration, MIC). The MS domain is appropriate for both of these types of drug susceptibility tests.

The SDTMIG provides an a detailed approach as to how microbiology susceptibility results may be submitted.

When data are submitted to a health authority or regulatory agency using an older version of the SDTMIG (e.g., prior to Version 3.3), sponsors may still elect to use the newer approach for representing drug susceptibility testing, albeit identifying the newer variables as “non-standard.” Using this approach, sponsors would define NHOID, MSAGENT, MSCONC, and MSCONCU as NSVs. For example, If submitting in SDTMIG v3.2, sponsors can continue to show the agent with which the organism is being evaluated against for susceptibility in MSTESTCD/MSTEST.

The current Controlled Terminology for MSTESTCD assumes that the test may not be agent-specific but points to a broader use of the overall MSTESTCD/MSTEST as defined in the most current version of CT.

This section describes 2 different data collection scenarios for test results; it is up to the sponsor to determine which data collection scenario best meets the study needs.

Scenario 1: Central Processing

In this scenario, biological specimens are taken at the site, sent out for processing, and results are provided directly to the sponsor (not recorded on the CRF). This scenario also applies when results are captured directly via an electronic device and not recorded on the CRF. CRF data are captured at the site for tracking/header reconciliation. The fields for test results are not defined here, as these data are not part of the CRF.

Scenario 2: Local Processing

In this scenario, biological specimens are taken and analyzed, and the results are recorded directly on the CRF.

Specification for the CDASHIG MS - Microbiology Susceptibility Domain

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings	MS	Central Processing	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included in the database or populated during SDTM-based dataset creation before submission.
Findings	MS	Central Processing	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted on the CRFs that are shipped to each site. EDC: This should be prepopulated.
Findings	MS	Central Processing	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What [is/was] the (study) [subject/participant] identifier?	[Subject/Participant] (Identifier)	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system-generated. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Findings	MS	Central Processing	N/A	4	VISIT	Visit Name	The name of a clinical encounter that encompasses planned and unplanned trial interventions, procedures, and assessments that may be performed on a subject.	What is the visit name?	[Visit]	Char	R/C	N/A	VISIT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The name of the clinical encounter is typically preprinted on the CRF or displayed within the EDC for any visit-based data collection, most often in Findings domains. This Visit text description is then available in any EDC data extract for that Findings domain.
Findings	MS	Central Processing	N/A	5	VISDAT	Visit Date	Date the clinical encounter occurred (or started).	What [is/was] the date of the visit?	(Visit) Date	Char	R/C	Record the [date/start date] of the visit using this format (DD-MON-YYYY).	N/A	This field is not an SDTM variable. The date of a measurement, test, observation or specimen collection can be determined from the date/time of visit (VISDAT/VISTIM) and then concatenating the CDASH VISDAT/VISTIM components and populating the SDTMIG variable MIDTC in ISO 8601 format.	N/A	N/A	The date the microbiology specimens were collected can be determined from the visit date variable (VISDAT) and applying that date to all of the microbiology susceptibility findings at that visit, or the specimen collection date can be included on the MS CRF using the date (MSDAT) field.
Findings	MS	Central Processing	N/A	6	MSPERF	MS Test Performed	An indication of whether a planned measurement or series of measurements, tests, or	Was the [microbiology susceptibility test] performed? Was the [microbiology susceptibility specimen/sample] collected?	[Microbiology Susceptibility Test] Performed; [Microbiology Susceptibility Specimen/Sample] Collected;	Char	O	Indicate whether or not a microbiology susceptibility test was performed.	MSSTAT	This does not map directly to an SDTMIG variable. May be used to derive a value into the SDTM variable MSSTAT. If MSPERF="N", the value of MSSTAT will be "NOT DONE". If MSPERF="Y", MSSTAT	(NY)	N/A	This may be implemented for an entire panel. General prompt question to be used as a data management tool to verify that missing results are confirmed missing. For the SDTM submission dataset,

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
							observations was performed, or specimen was collected.							should be null. A combination of SDTMIG variables (e.g., MSCAT and MSSCAT, MSTPT) is used to indicate that multiple tests were not done. In this situation, the SDTMIG variable MSTESTCD would be populated as MSALL and an appropriate test name (MSTEST) provided. See the SDTMIG for additional information.			the SDTMIG variable MSSTAT is populated using the CDASH field MSPERF. The question text used might be reflected in the reason not done (MSREASND).
Findings	MS	Central Processing	N/A	7	MSREFID	MS Reference ID	An internal or external identifier, such as specimen identifier.	What was the (microbiology susceptibility test) [reference identifier/accession number]?	[Microbiology Susceptibility Test] [Reference Identifier/Accession Number]	Char	O	Record the specimen [accession/reference] number assigned.	MSREFID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. May be used to create RELREC to link this record with a record in another domain.	N/A	N/A	This can be used to confirm that the appropriate data record is present in the electronic transfer. May be included for linking back to specimens (e.g., Specimen ID).
Findings	MS	Central Processing	N/A	8	MSDAT	MS Specimen Collection Date	The date of specimen collection, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the (start) date of the (microbiology) specimen collection?	Specimen Collection (Start) Date	Char	R/C	Record the (start) date when specimen collection occurred using this format (DD-MON-YYYY).	MSDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable MSDTC in ISO 8601 format.	N/A	N/A	A complete date is expected. The date of specimen collection may be determined from the date of visit (VISDAT) and if so, a separate assessment date field is not required. The SDTMIG MSDTC variable contains either a date/time when a specimen is collected at a point in time or the start date/time, when a specimen is collected over time.
Findings	MS	Central Processing	N/A	9	MSTIM	MS Specimen Collection Time	The time of specimen collection, represented in an unambiguous time format (e.g., hh:mm:ss).	What was the (start) time of the (microbiology) specimen collection?	Specimen Collection (Start) Time	Char	R/C	Record the (start) time of susceptibility test (as complete as possible).	MSDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable MSDTC in ISO 8601 format.	N/A	N/A	May be required when multiple assessments are done on 1 day or when the timing in relationship to study treatment is required for analysis.
Findings	MS	Central Processing	N/A	10	MSCAT	MS Category for Organism Findings	A grouping of topic-variable values based on user-defined characteristics.	What was the category of the microbiology susceptibility test?	[Microbiology Susceptibility Category]; NULL	Char	O	Select the microbiology susceptibility category, or record if not preprinted on the CRF.	MSCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, and not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Category" can be included as the column header.
Findings	MS	Central Processing	N/A	11	MSSCAT	MS Subcategory for Organism Findings	A sub-division of the MSCAT values based on user-defined characteristics.	What was the subcategory of the microbiology susceptibility finding?	[Microbiology Susceptibility Subcategory]; NULL	Char	O	Select the microbiology susceptibility subcategory, or record if not pre-printed on the CRF.	MSSCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, and not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Subcategory" can be included as the column

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	header. MSSCAT can only be used if there is an MSCAT, and it must be a subcategorization of MSCAT.
Findings	MS	Central Processing	N/A	12	MSSPEC	MS Specimen Type	Defines the type of specimen used for a measurement.	What is the specimen material type?	Specimen Type	Char	R/C	Record the specimen material type.	MSSPEC	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(SPECTYPE)	N/A	The type of specimen used for a measure. Should be collected if not available elsewhere, or if required to differentiate multiple specimens.
Findings	MS	Central Processing	N/A	13	MSSPCCND	MS Specimen Condition	Description of the condition of the specimen.	What was the condition of the specimen?	Specimen Condition	Char	R/C	Record the condition of the specimen.	MSSPCCND	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(SPECCOND)	N/A	May be collected using free or standardized text. This can be used when results may be affected by whether conditions for specimen were properly met.
Findings	MS	Central Processing	N/A	14	MSLOC	MS Specimen Collection Location	A description of the anatomical location of the subject relevant to the collection of specimen.	What was the anatomical location where the specimen was collected?	Anatomical Location	Char	O	Record or select the anatomical location of specimen collection.	MSLOC	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(LOC)	N/A	Collected or preprinted when the sponsor needs to identify the specific anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF. LAT, DIR, and PORTOT are used to further describe the anatomical location.
Findings	MS	Central Processing	N/A	15	MSLAT	MS Specimen Collection Laterality	Qualifier for anatomical location, further detailing the side of the body.	What was the side of the anatomical location of the specimen collection?	Side	Char	O	Record the side of the anatomical location of the specimen collection.	MSLAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(LAT)	N/A	May be preprinted or collected when the sponsor needs to identify the specific side of the anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Findings	MS	Central Processing	N/A	16	MSDIR	MS Specimen Collection Directionality	Qualifier further detailing the position of the anatomical location, relative to the center of the body, organ, or specimen.	What was the directionality of the anatomical location of the specimen collection?	Directionality	Char	O	Record the directionality of the anatomical location of the specimen collection.	MSDIR	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(DIR)	N/A	May be preprinted or collected when the sponsor needs to identify the directionality of the anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Findings	MS	Local Processing	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included in the database or populated during SDTM-based dataset creation before submission.
Findings	MS	Local Processing	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted on the CRFs that are shipped to each site. EDC: This should be prepopulated.
Findings	MS	Local Processing	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What [is/was] the (study) [subject/participant] identifier?	[Subject/Participant] (Identifier)	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system generated. This

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Findings	MS	Local Processing	N/A	4	NHOID	Non-host Organism ID	The identifier for a non-host organism, which should only be used when the organism is the subject of the test.	What was the non-host organism ID?	Non-host Organism ID	Char	O	Record the identifier for the non-host organism that is the subject of the test.	NHOID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined identifier for a non-host organism, which should only be used when the organism is the subject of the test
Findings	MS	Local Processing	N/A	5	VISIT	Visit Name	The name of a clinical encounter that encompasses planned and unplanned trial interventions, procedures, and assessments that may be performed on a subject.	What is the visit name?	[Visit]	Char	R/C	N/A	VISIT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The name of the clinical encounter is typically preprinted on the CRF or displayed within the EDC for any visit-based data collection, most often in Findings domains. This Visit text description is then available in any EDC data extract for that Findings domain.
Findings	MS	Local Processing	N/A	6	VISDAT	Visit Date	Date the clinical encounter occurred (or started).	What [is/was] the date of the visit?	(Visit) Date	Char	R/C	Record the [date/start date] of the visit using this format (DD-MON-YYYY).	N/A	This field is not an SDTM variable. The date of a measurement, test, observation or specimen collection can be determined from the date/time of visit (VISDAT/VISTIM) and then concatenating the CDASH VISDAT/VISTIM components and populating the SDTMIG variable MIDTC in ISO 8601 format.	N/A	N/A	The date the microbiology specimens were collected can be determined from the visit date variable (VISDAT) and applying that date to all of the microbiology susceptibility findings at that visit, or the specimen collection date can be included on the MS CRF using the date (MSDAT) field.
Findings	MS	Local Processing	N/A	7	MSPERF	MS Susceptibility Test Performed	An indication of whether a planned measurement or series of measurements, tests, or observations was performed, or specimen was collected	Was the [microbiology susceptibility test] performed? Was the [microbiology susceptibility specimen/sample] collected?	[Microbiology Susceptibility Test] Performed; [Microbiology Susceptibility Specimen/Sample] Collected;	Char	O	Indicate whether or not microbiology susceptibility test was performed.	MSSTAT	This does not map directly to an SDTMIG variable. May be used to derive a value into the SDTM variable MSSTAT. If MSPERF = "N", the value of MSSTAT will be "NOT DONE". If MSPERF = "Y", MSSTAT should be null. A combination of SDTMIG variables (e.g., MSCAT and MSSCAT, MSTPT) is used to indicate that multiple tests were not done. In this situation, the SDTMIG variable MTESTCD would be populated as MSALL and an appropriate test name (MSTEST) provided. See the SDTMIG for additional information.	(NY)	N/A	This may be implemented for an entire panel. General prompt question to be used as a data management tool to verify that missing results are confirmed missing.
Findings	MS	Local Processing	N/A	8	MSREFID	MS Reference ID	An internal or external identifier, such as specimen identifier.	What was the (microbiology susceptibility test) [reference identifier/accession number]?	(Microbiology Susceptibility test) [Reference identifier/Accession Number]	Char	O	Record the specimen [accession/reference] number assigned.	MSREFID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. May be used to create RELREC to link this record with a record in another domain.	N/A	N/A	This can be used to reconcile CRF data. May be included for linking back to specimens (e.g., Specimen ID).

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings	MS	Local Processing	N/A	9	MSSPID	MS Sponsor-Defined Identifier	A sponsor-defined identifier. In CDASH, this is typically used for preprinted or auto-generated numbers on the CRF, or any other type of identifier that does not already have a defined CDASH identifier field.	[Sponsor-defined question]	[Sponsor defined]	Char	O	If collected on the CRF, the sponsor may insert instructions to ensure each record has a unique identifier.	MSSPID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. May be used to create RELREC to link this record with a record in another domain.	N/A	N/A	Because SPID is a sponsor-defined identifier, conformance to Question Text or Item Prompt is not applicable. Typically used as an identifier in a data query to communicate clearly to the site the specific record in question or to reconcile data. May be used to record preprinted number (e.g. line number, record number) on the CRF. This field may be populated by the sponsor's data collection system.
Findings	MS	Local Processing	N/A	10	MSGRPID	MS Group ID	A group identifier used to link together a block of related records within a subject in a domain.	What [is/was] the [test/procedure/observation] group identifier?	[Test/Procedure/Observation] Group Identifier	Char	O	If collected on the CRF, the sponsor may insert instructions to ensure each microbiology susceptibility test or result record has a unique identifier that will group records within a subject within the domain.	MSGRPID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Used to link together a block of related records within a subject. Should not be used to link detection records in MB to the associated susceptibility results in the MS domain. NHOID should be used to identify the non-host organism.
Findings	MS	Local Processing	N/A	11	MSLNKID	MS Link ID	An identifier used to link related records across domains.	What [is/was] the [test/procedure/observation] link identifier?	[Domain/Observation] Link Identifier	Char	O	If collected on the CRF, the sponsor may insert instructions to ensure each microbiology susceptibility result has an identifier that will link records across domains.	MSLNKID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. May be used to create RELREC to link this record with a record in another domain.	N/A	N/A	This may be a one-to- one or a one-to-many relationship. For example, a single microbiology specimen or result may have multiple measurements/assessments performed (e.g., susceptibility testing).
Findings	MS	Local Processing	N/A	12	MSDAT	MS Specimen Collection Date	The date of specimen collection ,represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the (start) date of the (microbiology) specimen collection?	Specimen Collection (Start) Date	Char	R/C	Record the (start) date of specimen collection using this format (DD-MON-YYYY).	MSDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable MSDTC in ISO 8601 format.	N/A	N/A	A complete date is expected. The date of specimen collection may be determined from the date of visit (VISDAT) and, if so, a separate assessment date field is not required.
Findings	MS	Local Processing	N/A	13	MSTIM	MS Specimen Collection Time	The time of specimen collection, represented in an unambiguous time format (e.g., hh:mm:ss).	What was the (start) time of the the (microbiology) collection?	Specimen Collection (Start) Time	Char	R/C	Record the (start) time of collection (as complete as possible).	MSDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable MSDTC in ISO 8601 format.	N/A	N/A	May be required when multiple assessments are done on 1 day or when the timing in relationship to study treatment is required for analysis.
Findings	MS	Local Processing	N/A	14	MSCAT	MS Category for Organism Findings	A grouping of topic-variable values based on user-defined characteristics.	What was the category of the microbiology susceptibility finding?	[Microbiology Susceptibility Category]; NULL	Char	O	Select the microscopic finding category, or record if not preprinted on the CRF.	MBCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading, or a preprinted category value on the CRF and not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Category" can be included as the column header.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings	MS	Local Processing	N/A	15	MSSCAT	MS Subcategory for Organism Findings	A sub-division of the MSCAT values based on user-defined characteristics.	What was the subcategory of the microbiology susceptibility finding?	[Microbiology Susceptibility Subcategory]; NULL	Char	O	Select the microscopic finding subcategory, or record if not preprinted on the CRF.	MSSCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, and not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Subcategory" can be included as the column header. MSSCAT can only be used if there is an MSCAT, and it must be a subcategorization of MSCAT.
Findings	MS	Local Processing	N/A	16	MSTEST	MS Organism Test or Finding Name	Descriptive name of the microbiology susceptibility test or examination used to obtain the measurement or finding.	What was the microbiology susceptibility test name?	[Microbiology Susceptibility Test Name]	Char	HR	Record the type or name of the microbiology susceptibility test or examination, if not preprinted on the CRF. If collected on the CRF, the sponsor may provide additional instructions to ensure the data is entered as intended.	MSTEST; MSTESTCD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The SDTMIG variable MSTESTCD may be determined from the value collected in MSTEST. Both MSTESTCD and MSTEST are required in the SDTM submission datasets. Use appropriate CDISC Controlled Terminology for the test and test code.	(MSTEST)	N/A	Required to identify which test the result is for. It is recommended that the test names be preprinted on the CRF rather than collected in a free-text field. If the form is laid out as a grid, then words such as "Test" can be included as the column header.
Findings	MS	Local Processing	N/A	17	MSTSTDTL	Microbiology Susceptibility Test Detail	Detail of the microbiology susceptibility test used to obtain the measurement or finding. Helps to establish a unique record.	What was the microbiology susceptibility test detail?	Test Detail	Char	O	Record the detail of the microbiology susceptibility test, if not preprinted on the CRF.	MSTSTDTL	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Provides additional details for the microbiology susceptibility test if necessary to define a unique record. It is recommended that the test detail be preprinted on the CRF. If the form is laid out as a grid, then words such as "Test Detail" can be included as the column header.
Findings	MS	Local Processing	N/A	18	MSAGENT	Microbiology Susceptibility Agent	The name of the agent for which resistance is tested.	What was the name of the agent for which resistance is being tested?	Microbiology Susceptibility Agent	Char	O	Record the name of the agent for which resistance is being tested.	MSAGENT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The name of the agent for which resistance is tested. The agent specified may be based on genetic markers or direct phenotypic drug sensitivity testing.
Findings	MS	Local Processing	N/A	19	MSCONC	MS Agent Concentration	The concentration of the agent for which resistance is tested.	What was the concentration of the agent?	Agent Concentration	Char	O	Record the concentration of the agent.	MSCONC	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Numeric concentration of agent listed in MSAGENT
Findings	MS	Local Processing	N/A	20	MSCONCU	MS Agent Concentration Unit	The concentration unit of the agent for which resistance is tested.	What was the agent concentration unit?	Agent Concentration Unit	Char	O	Record the concentration unit of the agent.	MSCONCU	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Units for value of the agent concentration listed in MSCONC
Findings	MS	Local Processing	N/A	21	MSORRES	MS Result or Finding in Original Units	Result of the measurement or finding as originally received or collected.	What was the result of the examination?	(Result)	Char	HR	Record test result, interpretation, or finding.	MSORRES	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Both quantitative results and interpretive findings or summaries may be recorded here.
Findings	MS	Local Processing	N/A	22	MSORRESU	MS Original Units	The unit of the result as originally received or collected.	What was the unit of the result?	Unit	Char	R/C	Select the original unit in which these data were collected, or record if not	MSORRESU	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(UNIT)	N/A	Should be preprinted on the CRF with the associated test when possible, rather than collected in a free-text field. Should be included if

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
												preprinted on the CRF.					applicable and not available elsewhere. For some tests, the units may not be applicable (e.g., where MSTEST requires simply a qualitative result).
Findings	MS	Local Processing	N/A	23	MSCLSIG	MS Clinical Significance	An indication whether the test results were clinically significant.	Was the result clinically significant?	Clinically Significant	Char	O	Indicate whether the results were clinically significant.	SUPPMS.QVAL	This does not map directly to an SDTMIG variable. This information could be submitted in a SUPPMS dataset as the value of SUPPMS.QVAL where SUPPMS.QNAM="MSCLSIG" and SUPPMS.QLABEL="Clinically Significant". Refer to the current SDTM and SDTMIG for instructions on placement of non-standard variables in SDTM domains.	(NY)	N/A	N/A
Findings	MS	Local Processing	N/A	24	MSRESCAT	MS Result Category	Used to categorize the result of a finding.	What was the result category?	Result Category	Char	O	Record the category of the test results.	MSRESCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Used to categorize the results of a finding (e.g., "SUSCEPTIBLE", "RESISTANT")
Findings	MS	Local Processing	N/A	25	MSNAM	MS Vendor Name	The name or identifier of the vendor (e.g., laboratory) that provided the test results.	What was the name of the vendor used?	Vendor Name	Char	O	Record the laboratory name.	MSNAM	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Recommended to collect on the CRF if lab name was not collected at the site/study level, or if multiple labs are used by a site
Findings	MS	Local Processing	N/A	26	MSSPEC	MS Specimen Type	Defines the type of specimen used for a measurement.	What is the specimen material type?	Specimen Type	Char	R/C	Record the specimen material type.	MSSPEC	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(SPECTYPE)	N/A	The type of specimen used for a measure. Should be collected if not available elsewhere, or if required to differentiate multiple specimens.
Findings	MS	Local Processing	N/A	27	MSSPCCND	MS Specimen Condition	Describes the condition of the specimen.	What was the condition of the specimen?	Specimen Condition	Char	O	Record the condition of the specimen.	MSSPCCND	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(SPECCOND)	N/A	May be collected using free or standardized text. This can be used when results may be affected by whether conditions for specimen were properly met.
Findings	MS	Local Processing	N/A	28	MSLOC	MS Specimen Collection Location	A description of the anatomical location of the subject, relevant to the collection of specimen.	What was the anatomical location where the specimen was collected?	Anatomical Location	Char	O	Record or select the anatomical location of specimen collection.	MSLOC	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(LOC)	N/A	Collected or preprinted when the sponsor needs to identify the specific anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF. LAT, DIR, and PORTOT are used to further describe the anatomical location.
Findings	MS	Local Processing	N/A	29	MSLAT	MS Specimen Collection Laterality	Qualifier for anatomical location, further detailing the side of the body.	What was the side of the anatomical location of the specimen collection?	Side	Char	O	Record the side of the anatomical location of the specimen collection.	MSLAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(LAT)	N/A	May be preprinted or collected when the sponsor needs to identify the specific side of the anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Findings	MS	Local Processing	N/A	30	MSDIR	MS Specimen Collection Directionality	Qualifier further detailing the position of the anatomical location, relative to the center of the body, organ, or specimen.	What was the directionality of the anatomical location of the specimen collection?	Directionality	Char	O	Record the directionality of the anatomical location of the specimen collection.	MSDIR	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(DIR)	N/A	May be preprinted or collected when the sponsor needs to identify the directionality of the anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings	MS	Local Processing	N/A	31	MSMETHOD	MS Method of Test or Examination	Method of the test or examination.	What was the method used for the test or examination?	Method	Char	O	Record the method of test or examination.	MSMETHOD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(METHOD)	N/A	This information may be collected when more than one method is possible, and collecting the method used is necessary. This could include technique or type of staining used for the slides.
Findings	MS	Local Processing	N/A	32	MSEVAL	MS Evaluator	The role of the person providing the evaluation.	Who was the evaluator?	[Evaluator/Reporter]	Char	O	Select the role of the person who provided the evaluation (e.g., INVESTIGATOR, ADJUDICATOR, COMMITTEE, VENDOR).	MSEVAL	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(EVAL)	N/A	Used only for results that are subjective (e.g., assigned by a person or a group). May be preprinted or collected. Sponsors may collect the data using a subset list of controlled terminology on the CRF.

Assumptions for the CDASHIG MS - Microbiology Susceptibility Domain

1. This domain is used only to represent drug susceptibility testing results.
2. The CDASHIG MS domain is a specimen-based domain. MSDTC is the date the specimen was collected.
3. Information on processing of the biospecimen, including collection and storage information (e.g., culture start and end date), are represented in the Biospecimen Events (BE) domain.
4. If used, the variable NHOID (an NSV in SDTMIG prior to v3.3) is an intuitive name of the non-host organism being tested. It should only be populated with values representing what is known about the identity of the organism before the results of the test are determined. It should therefore never be used as a result qualifier.
5. Genotypic tests that provide results in terms of specific changes to nucleotides, codons, or amino acids of genes/gene products associated with resistance should be represented in the Pharmacogenomics/Genetics Findings (PF) domain.
6. The variables MSAGENT, MSCONC, MSCONCU are to be used only in the MS domain.

Example CRF for the CDASHIG MS - Microbiology Susceptibility Domain

Example 1

A CRF such as this one may be set up as a table with 1 row for each microbiology susceptibility agent, or 1 record can be included for each microbiology susceptibility finding. The variable NHOID (Non-Host Organism Identifier) can be included and populated with the name of the organism that is the subject of the test.

Title: Tuberculosis Drug Susceptibility

Indicate whether or not tuberculosis drug susceptibility was performed.	Was TB drug susceptibility testing performed? MSPERF If MSPERF = "N", then MSSTAT = "NOT DONE" and MTESTCD = "MSALL". If MSPERF = "Y", MSSTAT is NULL.	☐ Yes ☐ No <NY codelist>
	Microbiology Susceptibility Category MSCAT Hidden/pre-populated	TUBERCULOSIS DRUG SUSCEPTIBILITY
	Non-host Organism ID NHOID Hidden/pre-populated	Mycobacterium tuberculosis
	Microbiology Susceptibility Test Name MSTEST MSTESTCD Hidden/pre-populated	Drug Susceptibility <MBTEST codelist>
Record the name of the agent for which resistance is tested	What was the name of the agent for which resistance is being tested? MSAGENT	☐ Isoniazid ☐ Rifampicin ☐ Streptomycin ☐ Amikacin
Record the concentration of the agent.	What was concentration of the agent? MSCONC	
	Agent Concentration Unit MSCONCU Pre-populated	ug/mL
Record test result, interpretation, or finding.	What was the result of the susceptibility test? MSORRES MSORRES where MSTEST="Drug Susceptibility"	☐ Sensitive ☐ Resistant

CRF Metadata

Order Number	CDASH Variable	Question Text	Prompt	Type	Case Report Form Completion Instructions	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Codelist Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
1	MSPERF	Was TB drug susceptibility testing performed?	TB Drug Susceptibility Performed	Text	Indicate whether or not tuberculosis drug susceptibility was performed.	MSSTAT	If MSPERF = "N", then MSSTAT = "NOT DONE" and MTESTCD = "MSALL". If MSPERF = "Y", MSSTAT is NULL.	(NY)	Yes; No;				
2	MSCAT	What was the category of the microbiology	Microbiology Susceptibility Category	Text	Record the microbiology susceptibility category, if not	MSCAT		N/A		TUBERCULOSIS DRUG SUSCEPTIBILITY			y

Order Number	CDASH Variable	Question Text	Prompt	Type	Case Report Form Completion Instructions	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Codelist Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
		susceptibility test?			pre-printed on the CRF.								
3	NHOID	What was the Non-host Organism ID?	Non-host Organism ID	Text	Record the identifier for a non-host organism that is the subject of the test.	NHOID				Mycobacterium tuberculosis			Y
4	MSTEST	What was the Microbiology Susceptibility test name?	Microbiology Susceptibility Test Name	Text	Record the type or name of the microscopic examination, if not pre-printed on the CRF. If collected on the CRF, the sponsor may provide additional instructions to ensure the data is entered as intended.	MSTEST; MSTESTCD		(MBTEST)		Drug Susceptibility			Y
5	MSAGENT	What was the name of the agent for which resistance is being tested?	Agent	Text	Record the name of the agent for which resistance is tested	MSAGENT			Isoniazid; Rifampicin; Streptomycin; Amikacin				
6	MSCONC	What was concentration of the agent?	Agent Concentration	Text	Record the concentration of the agent.	MSCONC							
7	MSCONCU	What was agent concentration unit?	Agent Concentration Unit	Text	Record the concentration unit of the agent.	MSCONCU				ug/mL			
8	MSORRES	What was the result of the susceptibility test?	Result	Text	Record test result, interpretation, or finding.	MSORRES	MSORRES where MSTEST="Drug Susceptibility"	N/A	Sensitive; Resistant				

8.3.14 NV - Nervous System Findings

Description/Overview for the CDASHIG NV - Nervous System Findings Domain

The CDASHIG NV domain is a findings domain that contains physiological and morphological findings related to the nervous system, including the brain, spinal cord, the cranial and spinal nerves, autonomic ganglia, and plexuses.

Specification for the CDASHIG NV - Nervous System Findings Domain

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings	NV	N/A	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTM variable listed in the SDTM Target column .	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included in the database or populated during SDTM-based dataset creation.
Findings	NV	N/A	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted on the CRFs that are shipped to each site. EDC: This should be prepopulated.
Findings	NV	N/A	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What is the subject identifier?	Subject	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be provided to the site using a prepopulated list in the system. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Findings	NV	N/A	N/A	4	VISIT	Visit Name	The name of a clinical encounter that encompasses planned and unplanned trial interventions, procedures, and assessments that may be performed on a subject.	What is the visit name?	[Visit]	Char	R/C	N/A	VISIT	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	The name of the clinical encounter is typically preprinted on the CRF or displayed in the EDC for any visit-based data collection, most often in Findings domains. This Visit text description is then available in any EDC data extract for that Findings domain.
Findings	NV	N/A	N/A	5	VISDAT	Visit Date	Date the clinical encounter occurred (or started).	What [is/was] the date of the visit?	(Visit) Date	Char	R/C	Record the [date/start date] of the visit using this format (DD-MON-YYYY).	N/A	This field is not an SDTM variable. The date of a measurement, test, observation can be determined from the date/time of visit (VISDAT/VISTIM) and then	N/A	N/A	The date the NV measurements were collected can be determined from the visit date variable (VISDAT) and applying that date to all of the observations at that visit, or the

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
														concatenating the CDASH VISDAT/VISTIM components and populating the SDTMIG variable NVDTC in ISO 8601 format.			collection date can be included on the NV CRF using the Nervous System Assessments (NVDAT) field.
Findings	NV	N/A	N/A	6	NVPERF	Neurology Assessment Performed	An indication of whether a planned measurement, test, observation or specimen was performed/collected.	Was a neurology assessment performed?	Neurology Assessment Performed	Char	O	Indicate whether or not a neurology assessment was done.	NVSTAT	This field does not map directly to an SDTM variable. May be used to populate a value into the SDTM variable NVSTAT. If the CDASH variable NVPERF="N", the value of the SDTM variable NVSTAT is "NOT DONE". If NVPERF= "Y", NVSTAT is null. A combination of SDTM variables (e.g., NVCAT and NVSCAT, NVTPT) is used to indicate that multiple tests were not done. In this situation, the SDTM variable NVTESTCD would be populated with NVALL and an appropriate test name (NVTEST) provided. See the SDTMIG for additional information.	(NY)	N/A	This field is used to capture a response to whether or not a planned measurement, test or observation was performed. A negative response can be collected as "N" and mapped to the -STAT variable in SDTM as " NOT DONE".
Findings	NV	N/A	N/A	7	NVDAT	Neurology Assessment Date	The date the neurology measurement was performed, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the date the neurology measurement was taken?	Date	Char	R/C	Record date of measurements using this format (DD-MON-YYYY).	NVDTC	This field does not map directly to an SDTM variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTM variable NVDTC in ISO 8601 format.	N/A	N/A	The date the NV measurements were collected can be determined from the visit date variable (VISDAT) and applying that date to all of the observations at that visit, or the collection date can be included on the NV CRF using the Date of Collection (NVDAT) field.
Findings	NV	N/A	N/A	8	NVTIM	Neurology Assessment Time	The time of measurement, represented in an unambiguous time format (e.g., hh:mm:ss).	What was the time of the neurology measurement?	Time	Char	R/C	Record time of measurement (as complete as possible).	NVDTC	This field does not map directly to an SDTM variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTM variable NVDTC in ISO 8601 format.	N/A	N/A	May be required when multiple assessments are done on 1 day or when the timing in relationship to study treatment is required for analysis
Findings	NV	N/A	N/A	9	NVTPT	NV Planned Time Point Name	A text description of planned time points when	What is the planned time point for this neurology assessment measurement?	[Planned Time Point Name]	Char	R/C	Record the planned time-point labels for	NVTPT	Maps directly to the SDTM variable listed in the SDTM Target	N/A	N/A	Planned time points are needed to differentiate multiple

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
							measurements should be taken, as defined in the protocol.					neurology assessment, if not preprinted on the CRF.		column. See the SDTMIG for additional information on representing time points. The SDTM time-point anchors NVTPTREF (text description) and NVRFTDTC (date/time) may be needed, as well as SDTMIG variables NVTPTNUM, NVELTM.			sequential assessments. It is recommended that time points should be preprinted on the CRF rather than collected in a free-text field. If the form is laid out as a grid, then terms such as "Planned Time Point" can be included in the column heading.
Findings	NV	N/A	N/A	10	NVTEST	Neurology Test Name	Descriptive name of the test or examination used to obtain the measurement or finding.	What is the neurology test name?	[Neurology Test Name]	Char	HR	Record the name of the neurology test, if not preprinted on the CRF.	NVTEST; NVTESTCD	Maps directly to the SDTM variable listed in the SDTM Target column. The SDTM variable NVTESTCD may be determined from the value collected in NVTEST using the Controlled Terminology List NVTESTCD. The SDTMIG variables NVTESTCD and NVTEST are required in SDTM.	(NVTEST)	N/A	The test name will usually be preprinted on the CRF, and not solicited as a question. If the form is laid out as a grid, then "Test" or "Test Name" can be included in the column heading. NVTEST is most useful as the PROMPT on the field in which the RESULT for that test is collected.
Findings	NV	N/A	N/A	12	NVCAT	Category for Neurology Test	A grouping of topic-variable values based on user-defined characteristics.	What was the category of the neurology assessment?	[Neurology Assessment Category]; NULL	Char	O	Record the neurology assessment category, if not preprinted on the CRF.	NVCAT	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Category" can be included as the column header.
Findings	NV	N/A	N/A	13	NVSCAT	Subcategory for Neurology Test	A sub-division of the NVCAT values based on user-defined characteristics.	What was the subcategory of the neurology assessment?	[Neurology Assessment Subcategory]; NULL	Char	O	Record the neurology assessment subcategory, if not preprinted on the CRF.	NVSCAT	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Subcategory" can be included in the column heading. NVSCAT can only be

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	used if there is a NVCAT, and it must be a subcategorization of NVCAT.
Findings	NV	N/A	N/A	14	NVORRES	Neurology Test Result in Original Units	Result of the measurement or finding as originally received or collected.	What was the result of the measurement?	[NVTEST] Result	Char	HR	Record the neurology test result.	NVORRES	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	Both quantitative results and interpretive findings or summaries may be recorded here.
Findings	NV	N/A	N/A	15	NVORRESU	Neurology Test Original Unit	The unit of the result as originally received or collected.	What was the unit of the result?	Unit	Char	R/C	Record or select the original unit in which these data were collected, if not preprinted on CRF.	NVORRESU	Maps directly to the SDTM variable listed in the SDTM Target column.	(UNIT)	N/A	Should be preprinted on the CRF with the associated test when possible, rather than collected in a free-text field. Should be included if applicable and not available elsewhere.
Findings	NV	N/A	N/A	16	NVRES	Neurology Test Result or Finding	The result of the measurement or finding as originally received or collected.	Was the result (normal/abnormal/absent/present/[sponsored defined response])?	(Result)	Char	O	Indicate the overall assessment for [NVTEST].	NVORRES	This does not map directly to an SDTM variable. The mapping instructions depend on the implementation; for example: 1. Where NVRES is to be used collect Normal, Abnormal or similar type classifications (e.g., Absent/Present) with a description of the abnormal result using the CDASH field NVDESC. For SDTM submission datasets, If the CDASH field NVRES = "NORMAL", populate the SDTM variables NVORRES and NVSTRESC with the value of the CDASH field NVRES. If the CDASH field NVRES is "ABNORMAL", populate the SDTM variable NVORRES with the CDASH field NVDESC. If the reported findings in NVDESC are coded using a dictionary, then the SDTM variable NVSTRESC is	N/A	N/A	The CDASH field NVRES is used when the collected results are not mapped directly to the SDTM variable NVORRES and must be transformed. For example, 1. NVRES is used to collect standardized values on the CRF and the value of "OTHER" is included and "Specify Other" is collected. 2. NVORRES is collected using "Normal", "Abnormal", and a description of the abnormality is collected.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
														populated with the dictionary preferred term and NVMODIFY is populated with the modified text used for coding. If the reported findings in NVDESC are not coded, then the SDTM variable NVSTRESC is populated with the CDASH NVDESC field. The SDTM variable NVNRIND may be populated with "NORMAL" or "ABNORMAL" if appropriate. 2. Where NVRES is used to collect standardized values (e.g. a codelist) on the CRF and the value of "OTHER" is included, the CDASH field NVRESOTH can be used to collect free-text values for "Specify Other". When using this field, the "OTHER" value recorded in the CDASH field NVRES field is mapped to the SDTM variable NVSTRESC and the value in the CDASH field NVRESOTH is mapped to the SDTM variable NVORRES. See the SDTMIG for additional information.			
Findings	NV	N/A	N/A	17	NVDESC	Description of Neurology Test Finding	Text description of neurology test findings.	What was the description of the (abnormality/observed finding/[Sponsor-defined])?	(Abnormal) Findings	Char	O	Record all abnormal findings for the neurology test in the space provided.	NVORRES	This does not map directly to an SDTM variable. May be used to populate a value into the SDTM variable NVORRES. If NVRES="Normal", populate NVORRES	N/A	N/A	NVRES and NVDESC are used when a question is asked to collect the finding result, with a follow-up question for a description of the finding. See CDASH

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
														with the value of NVRES. If NVRES="Abnormal", populate NVORRES with the value of NVDESC.			General finding Assumptions
Findings	NV	N/A	N/A	18	NVRESOTH	Neurology Test Result Other	A free-text result which provides further information about the original received or collected result.	If other is selected, [explain/specify/ provide more detail].	[Specify Other/Explain/Specify Details]	Char	O	Provide more detail for the "Other" result.	NVORRES	When using this CDASH field, the "OTHER" value collected in the CDASH field NVRESOTH is mapped to the SDTM variable NVSTRESC and the value in the CDASH field NVRESOTH is mapped to the SDTM variable NVORRES.	N/A	N/A	In cases where NVRES is used to collect standardized values on the CRF and the value of "OTHER" is included, the CDASH field NVRESOTH can be used to collect free-text values for "Specify Other".
Findings	NV	N/A	N/A	19	NVORNULO	NV Ref Range Lower Limit-Original Unit	The lower end of normal range or reference range for continuous results stored in NVORRES.	What was the lower limit of the reference range?	Normal Range Lower Limit	Char	O	Record the lower limit of the reference range of the neurology test.	NVORNULO	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	NVORNULO should be populated only for continuous findings. The SDTM variable NVSTNRC should be populated only for noncontinuous results. These data may be obtained from the lab or the electronic equipment. These data could be derived from a site or lab specific set of normal ranges stored in a look-up table.
Findings	NV	N/A	N/A	20	NVORNRIHI	NV Ref Range Upper Limit-Original Unit	The upper end of normal range or reference range for continuous results stored in NVORRES.	What was the upper limit of the reference range?	Normal Range Upper Limit	Char	O	Record the upper limit of the reference range of the neurology test.	NVORNRIHI	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	NVORNRIHI should be populated only for continuous findings. The SDTM variable NVSTNRC should be populated only for noncontinuous results. These data may be obtained from the lab or the electronic equipment. These data could be derived from a site or lab specific set of normal ranges stored in a look-up table.
Findings	NV	N/A	N/A	21	NVNRIND	NV Reference Range Indicator	An indication or description about how the value compares to the normal range or reference range.	How do the reported values compare within the [reference/normal/expected] range?	Comparison to [Reference/Expected/Normal] Range	Char	O	Record where the test result fell with respect to the reference range.	NVNRIND	Maps directly to the SDTM variable listed in the SDTM Target column.	(NRIND)	N/A	Reference ranges may be defined by NVORNULO, NVORNRIHI, NVSTNRC or other objective criteria. Reference Range Indicator (e.g., Y, N; HIGH, LOW; NORMAL, ABNORMAL) may be included if not derived or determined programmatically after data collection. Should not be used to

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	indicate clinical significance.
Findings	NV	N/A	N/A	22	NVSTAT	Neurology Test Completion Status	This variable is used to indicate that data are not available, by having the site recording the value as "Not Done".	Indicate if the [NVTEST] was not [answered/assessed/done/evaluated/performed].	Not Done	Char	O	Indicate if the neurology assessment or measurement was not done.	NVSTAT	Maps directly to the SDTM variable listed in the SDTM Target column. If collected, the Origin (a column in the Define-XML) ="CRF"; if populated from other sources such as free text or sponsor-defined listing for NVREASND, the Origin ="DERIVED".	(ND)	N/A	Used only when the response value is collected as NOT DONE or NULL in lieu of or in addition to the CDASH NVPERF field. Typically a checkbox which indicates the test was NOT DONE. This field can be useful when multiple questions are asked to confirm that a blank result field is meant to be blank.
Findings	NV	N/A	N/A	23	NVREASND	Neurology Test Reason Not Done	An explanation for why the data are not available.	Was the was the reason that the neurology (assessment/[NVTEST]) was not [collected / answered / done / assessed / evaluated]?	Reason Not [Answered/Collected/Done/Evaluated/ Assessed/Available]	Char	O	Provide the reason the measurement or test was not done.	NVREASND	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	Sponsor-defined controlled terminology may be used. The reason the data are not available may be chosen from a sponsor-defined codelist (e.g., broken equipment, subject refused) or entered as free text. When NVREASND is used, NVSTAT should also be populated in the SDTM-based dataset.
Findings	NV	N/A	N/A	24	NVPOS	Position of Subject During Observation	The position of the subject during a measurement or examination.	What was the position of the subject during the assessment?	Position	Char	O	Record the position of subject at time of test.	NVPOS	Maps directly to the SDTM variable listed in the SDTM Target column.	(POSITION)	N/A	Results may be affected by whether conditions for neurology test, as specified in the protocol, were properly met. One common condition is the subject's position. If the protocol requires this type of information, then a CDASH variable [NVTESTCD]. NVPOS may be created for each NVTESTCD and added to the CRF, if needed.
Findings	NV	N/A	N/A	25	NVLOC	Location	Location used for the measurement.	What was the anatomical location where the measurement was taken?	Anatomical Location	Char	O	Record or select location on body where the measurement was performed.	NVLOC	Maps directly to the SDTM variable listed in the SDTM Target column.	(LOC)	N/A	Collected or preprinted when the sponsor needs to identify the specific anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF.LAT, DIR, and PORTOT are used to further describe the anatomical location.
Findings	NV	N/A	N/A	26	NVLAT	Laterality	Qualifier for anatomical location, further detailing the side of the body.	What was the side of the anatomical location of the [measurement/test/examination]?	Side	Char	O	Record the side of the anatomical location of the neurology test	NVLAT	Maps directly to the SDTM variable listed in the SDTM Target column.	(LAT)	N/A	May be preprinted or collected when the sponsor needs to identify the specific side of the anatomical

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
												or measurement.					location. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Findings	NV	N/A	N/A	27	NVDIR	Directionality	Qualifier further detailing the position of the anatomical location, relative to the center of the body, organ, or specimen.	What was the directionality of the anatomical location of the neurology test?	Directionality	Char	O	Record the directionality of the anatomical location of the neurology test.	NVDIR	Maps directly to the SDTM variable listed in the SDTM Target column.	(DIR)	N/A	May be preprinted or collected when the sponsor needs to identify the directionality of the anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Findings	NV	N/A	N/A	28	NVMETHOD	Method of Neurology Test	The method of the test or examination.	What was the method (used for the [measurement/test/examination])?	Method	Char	O	Record the method used for the neurology test.	NVMETHOD	Maps directly to the SDTM variable listed in the SDTM Target column.	(METHOD)	N/A	This information may be collected when more than 1 method is possible, and collecting the method used is necessary.
Findings	NV	N/A	N/A	29	NVEVAL	Neurology Test Evaluator	The role of the person who provided the evaluation.	Who was the evaluator?	Evaluator	Char	O	Select the role of the person who provided the evaluation.	NVEVAL	Maps directly to the SDTM variable listed in the SDTM Target column.	(EVAL)	N/A	Used only for results that are subjective (e.g., assigned by a person or a group). May be a preprinted or collected. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Findings	NV	N/A	N/A	30	NVEVALID	Neurology Test Evaluator Identifier	An identifier used to distinguish multiple evaluators with the same role recorded in NVEVAL.	What is the identifier of the evaluator?	Evaluator Identifier	Char	O	Record the unique identifier assigned to the person making the evaluation.	NVEVALID	Maps directly to the SDTM variable listed in the SDTM Target column.	(MEDEVAL)	N/A	Collect if multiple evaluators are used in the study (may be omitted if multiple evaluators are not used); values should follow controlled terminology.
Findings	NV	N/A	N/A	31	NVREPNUM	Neurology Test Repetition Number	The instance number of a test that is repeated within a given timeframe for the same test. The level of granularity can vary (e.g., within a time point, within a visit).	What was the repetition number within the time point for this measurement?	Repetition Number	Char	O	Record the repetition number of the measurement within the time point.	NVREPNUM	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	The repetition number of the test/measurement within the time point may be preprinted on the CRF.
Findings	NV	N/A	N/A	32	NVCLSIG	Neurology Test Clinical Significance	An indication of whether the test results were clinically significant.	Was this result clinically significant?	Clinically Significant	Char	O	Record whether neurology test results were clinically significant.	NVCLSIG	Maps directly to the SDTM variable listed in the SDTM Target column.	(NY)	N/A	Could apply to specific measurements or to overall interpretation, as required by the protocol.

Assumptions for the CDASHIG NV - Nervous System Findings

1. Methods of assessment for nervous system findings may include nerve conduction studies, electroencephalogram, electromyography, and imaging.
2. Additional Findings Qualifiers
 - a. Any Identifiers, Timing variables, or Findings general observation class qualifiers may be added to the NV domain, but the following qualifiers would not generally be used in NV: --MODIFY, --BODSYS, --LOINC, --TOX, --TOXGR.

Example CRF for the CDASHIG NV - Nervous System Findings Domain

Example 1: Nervous System Assessment

This CRF shows nervous systems assessment. This CRF collects components of a pattern-reversal visual evoked-potential (VEP) test elicited by checkerboard stimuli for a subject with optic neuritis. Information about the VEP device was specified in the protocol. Any identifying information would be represented using the Device Identifiers (DI) domain, and any properties of the device that may change between assessments would be represented in the Device Properties (DO) and Device In Use (DU) domains. See the SDTMIG-MD (available at <https://www.cdisc.org/standards/foundational/medical-devices-sdtmig/>) for examples of these domains.

Title: Pattern-reversal Visual Evoked-potential (VEP) Test

CRF Completion Instructions																			
Use the visual evoked-potential (VEP) equipment instructions provided in the protocol.																			
	<table border="1"> <thead> <tr> <th>Category</th> <th></th> </tr> </thead> <tbody> <tr> <td>NVCAT <i>Hidden/pre-populated</i></td> <td>VISUAL EVOKED POTENTIAL</td> </tr> <tr> <td>What was the method used for the pattern-reversal VEP test? NVMETHOD <i>Pre-populated</i></td> <td>EEG <METHOD codelist></td> </tr> <tr> <td>Indicate whether the pattern-reversal VEP test was performed. NVPERF <i>If NVPERF = "N", then NVSTAT = "NOT DONE" and NVTESTCD = "NVALL". If NVPERF = "Y" then NOT SUBMITTED.</i></td> <td> ☐ Yes ☐ No <NY codelist> </td> </tr> <tr> <td>Provide the reason the pattern-reversal VEP test was not done. NVREASND</td> <td> </td> </tr> <tr> <td>Record the date of the blood sample collection, using this format (DD-MON-YYYY). NVDAT NVDTC</td> <td> </td> </tr> <tr> <td>Location NVLOC <i>Pre-populated</i></td> <td>EYE <LOC codelist></td> </tr> <tr> <td>Record which eye was tested. NVLAT</td> <td> ☐ RIGHT ☐ LEFT <LAT codelist> </td> </tr> <tr> <td>Record the result. N75LAT_NVORRES <i>NVORRES where NVTESTCD = "N75LAT"</i></td> <td> </td> </tr> </tbody> </table>	Category		NVCAT <i>Hidden/pre-populated</i>	VISUAL EVOKED POTENTIAL	What was the method used for the pattern-reversal VEP test? NVMETHOD <i>Pre-populated</i>	EEG <METHOD codelist>	Indicate whether the pattern-reversal VEP test was performed. NVPERF <i>If NVPERF = "N", then NVSTAT = "NOT DONE" and NVTESTCD = "NVALL". If NVPERF = "Y" then NOT SUBMITTED.</i>	☐ Yes ☐ No <NY codelist>	Provide the reason the pattern-reversal VEP test was not done. NVREASND		Record the date of the blood sample collection, using this format (DD-MON-YYYY). NVDAT NVDTC		Location NVLOC <i>Pre-populated</i>	EYE <LOC codelist>	Record which eye was tested. NVLAT	☐ RIGHT ☐ LEFT <LAT codelist>	Record the result. N75LAT_NVORRES <i>NVORRES where NVTESTCD = "N75LAT"</i>	
Category																			
NVCAT <i>Hidden/pre-populated</i>	VISUAL EVOKED POTENTIAL																		
What was the method used for the pattern-reversal VEP test? NVMETHOD <i>Pre-populated</i>	EEG <METHOD codelist>																		
Indicate whether the pattern-reversal VEP test was performed. NVPERF <i>If NVPERF = "N", then NVSTAT = "NOT DONE" and NVTESTCD = "NVALL". If NVPERF = "Y" then NOT SUBMITTED.</i>	☐ Yes ☐ No <NY codelist>																		
Provide the reason the pattern-reversal VEP test was not done. NVREASND																			
Record the date of the blood sample collection, using this format (DD-MON-YYYY). NVDAT NVDTC																			
Location NVLOC <i>Pre-populated</i>	EYE <LOC codelist>																		
Record which eye was tested. NVLAT	☐ RIGHT ☐ LEFT <LAT codelist>																		
Record the result. N75LAT_NVORRES <i>NVORRES where NVTESTCD = "N75LAT"</i>																			

Record the unit.	What was the unit? N75LAT_NVORRES NVORRES where NVTESTCD = "N75LAT"	☐ msec ☐ uV <UNIT codelist>
Record the result.	What was the P100 latency? P100LAT_NVORRES NVORRES where NVTESTCD = "P100LAT"	
Record the unit.	What was the unit? P100LAT_NVORRES NVORRES where NVTESTCD = "P100LAT"	☐ msec ☐ uV <UNIT codelist>
Record the result.	What was the 100 amplitude? P100AMP_NVORRES NVORRES where NVTESTCD = "P100AMP"	
Record the unit.	What was the unit? P100LAT_NVORRES NVORRES where NVTESTCD = "P100AMP"	☐ msec ☐ uV <UNIT codelist>
Record the result.	What was the Interpretation? INTP__NVORRES NVORRES where NVTESTCD = "INTP"	☐ NORMAL ☐ ABNORMAL

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
NVCAT	1	What is the category?	Category			NVCAT				VISUAL EVOKED POTENTIAL			Y
NVMETHOD	2	What was the method used for the pattern-reversal VEP test?	Method	Select the method used for the pattern-reversal VEP test.	Text	NVMETHOD		(METHOD)		EEG	Qtext		
NVPERF	3	Was the pattern-reversal VEP test performed?	Performed	Indicate whether the pattern-reversal VEP test was performed.	Text	NVSTAT	If NVPERF = "N", then NVSTAT = "NOT DONE" and NVTESTCD = "NVALL". If NVPERF = "Y" then NOT SUBMITTED.	(NY)	Yes; No		Qtext		
NVREASND	4	What was the reason the pattern-reversal VEP test was not done?	Reason Not Done	Provide the reason the pattern-reversal VEP test was not done.	Text	NVREASND					Qtext		
NVDAT	5	What was the date of collection?	Collection Date	Record the date of the blood sample collection, using	Date	NVDTC							

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
				this format (DD-MON-YYYY).									
NVLOC	6	What was the anatomical location where the assessment was performed?	Location		Text	NVLOC		(LOC)		EYE			
NVLAT	7	What eye was tested?	Side	Record which eye was tested.	Text	NVLAT		(LAT)	RIGHT; LEFT				
N75LAT_NVORRES	8	What was the N75 latency?	N75 Latency Result	Record the result.	Text	NVORRES	NVORRES where NVTESTCD = "N75LAT"						
N75LAT_NVORRESU	9	What was the unit?	Unit	Record the unit.	Text	NVORRESU	NVORRESU where NVTESTCD = "N75LAT"	(UNIT)	msec; uV				
P100LAT_NVORRES	10	What was the P100 latency?	P100 Latency Result	Record the result.	Text	NVORRES	NVORRES where NVTESTCD = "P100LAT"						
P100LAT_NVORRESU	11	What was the unit?	Unit	Record the unit.	Text	NVORRESU	NVORRESU where NVTESTCD = "P100LAT"	(UNIT)	msec; uV				
P100AMP_NVORRES	12	What was the 100 amplitude?	P100 Amplitude	Record the result.	Text	NVORRES	NVORRES where NVTESTCD = "P100AMP"						
P100LAT_NVORRESU	13	What was the unit?	Unit	Record the unit.	Text	NVORRESU	NVORRESU where NVTESTCD = "P100AMP"	(UNIT)	msec; uV				
INTP_NVORRES	14	What was the Interpretation?	Interpretation	Record the result.	Text	NVORRES	NVORRES where NVTESTCD = "INTP"		NORMAL; ABNORMAL				

8.3.15 OE - Ophthalmic Examinations

Description/Overview for the CDASHIG OE - Ophthalmic Examinations Domain

The CDASHIG OE domain contains tests that measure a person's ocular health and visual status, to detect abnormalities in the components of the visual system and to determine how well the person can see.

Specification for the CDASHIG OE - Ophthalmic Examinations Domain

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings	OE	N/A	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included in the database or populated during SDTM-based dataset creation before submission.
Findings	OE	N/A	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted on the CRFs that are shipped to each site. EDC: This should be prepopulated.
Findings	OE	N/A	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What is the subject identifier?	Subject	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be provided to the site using a prepopulated list in the system. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTM.
Findings	OE	N/A	N/A	4	VISIT	Visit Name	The name of a clinical encounter that encompasses planned and unplanned trial interventions, procedures, and assessments that may be performed on a subject.	What is the visit name?	[Visit]	Char	R/C	N/A	VISIT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The name of the clinical encounter is typically preprinted or displayed within the EDC for any visit-based data collection, most often in Findings domains. This Visit text description is then available in

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	any EDC data extract for that Findings domain.
Findings	OE	N/A	N/A	5	VISDAT	Visit Date	Date the clinical encounter occurred (or started).	What [is/was] the date of the visit?	(Visit) Date	Char	R/C	Record the [date/start date] of the visit using this format (DD-MON-YYYY).	N/A	This field is not an SDTM variable. The date of a measurement, test, observation can be determined from the date/time of visit (VISDAT/VISTIM) and then concatenating the CDASH VISDAT/VISTIM components and populating the SDTMIG variable OEDTC in ISO 8601 format.	N/A	N/A	The date the OE measurements were collected can be determined from the visit date variable (VISDAT) and applying that date to all of the observations at that visit, or the collection date can be included on the OE CRF using the Ophthalmic Examinations (OEDAT) field.
Findings	OE	N/A	N/A	6	FOCID	Focus of Study-specific Interest	An identifier used for the identification of a focus of study-specific interest on or within a subject or specimen (as described in the protocol), for which a measurement, test, or examination was performed, such as a drug application site (e.g., "Injection site 1", "Biopsy site 1", "Treated site 1"), or a more specific focus (e.g., "OD" (right eye), "Upper left quadrant of the back"). The value in this variable should have inherent semantic meaning.	Which eye/eyes?	Eye/Eyes	Char	HR	Record which [eye was/eyes were] the focus of the finding or observation.	FOCID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(OEFOCUS)	N/A	This variable is expected to be populated for ophthalmic studies. It is used as the key identifying variable to denote the focus (which eye or eyes) of the test finding or observation.
Findings	OE	N/A	N/A	7	OEPERF	Ophthalmic Examination Performed	An indication of whether a planned measurement, test, observation or specimen was performed/collected.	Was an ophthalmic examination performed?	Ophthalmic Examination Performed	Char	O	N/A	OESTAT	This field does not map directly to an SDTM variable. May be used to populate a value into the SDTM variable OESTAT. If the CDASH variable OEPERF="N", the value of the SDTM variable OESTAT is "NOT DONE". If OEPERF= "Y", OESTAT is null. A combination of SDTM variables (e.g., OECAT and OESCAT, OETPT) is used to indicate that multiple tests were not done. In this situation, the SDTM variable	(NY)	N/A	This field is used to capture a response regarding whether a planned measurement, test, or observation was performed. A negative response can be collected as "N" and mapped to the --STAT variable in SDTM as "NOT DONE".

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
														OETESTCD would be populated with OEALL and an appropriate test name (OETEST) provided. See SDTMIG v3.3 Section 4.5.1.2.			
Findings	OE	N/A	N/A	8	OEDAT	Ophthalmic Examination Date	The date of the ophthalmic examination measurement, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the date of the ophthalmic examination measurement?	Date	Char	R/C	Record date of measurements using this format (DD-MON-YYYY).	OEDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable OEDTC in ISO 8601 format.	N/A	N/A	The date of measurement can be determined from a collected date of visit (VISDAT); in such cases, a separate measurement date field is not required.
Findings	OE	N/A	N/A	9	OETIM	Ophthalmic Examination Time	The time of the measurement, represented in an unambiguous time format (e.g., hh:mm:ss).	What was the time the ophthalmic examination measurement?	Time	Char	R/C	Record time of measurement (as complete as possible).	OEDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable VSDTC in ISO 8601 format.	N/A	N/A	May be required when multiple assessments are done on 1 day or when the timing in relationship to study treatment is required for analysis
Findings	OE	N/A	N/A	10	OETEST	Name of Measurement, Test or Examination	Descriptive name for the test being performed.	What was the name of the ophthalmic [measurement/test/examination]?	[Ophthalmic Examination] Test Name	Char	HR	N/A	OETEST	Maps directly to the SDTM variable listed in the SDTM Target column. The SDTM variable OETESTCD may be determined from the value collected in OETEST. The SDTMIG variables OETESTCD and OETEST are required in SDTM.	(OETEST)	N/A	The test name will usually be preprinted on the CRF, and not solicited as a question. If the form is laid out as a grid, then "Test" or "Test Name" can be included as the column heading. OETEST is most useful as the PROMPT on the field in which the RESULT for that test is collected. See CDASHIG metadata tables for domain-specific TEST codelist names (e.g. EGTEST, FATEST).
Findings	OE	N/A	N/A	11	OETSTDTL	Measurement, Test or Examination Detail	A further description of OETESTCD and OETEST.	What was the [measurement/test/examination] detail name?	[Measurement/Test/Examination] Detail (Name)	Char	O	N/A	OETSTDTL	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	It is recommended that the test detail name be preprinted on the CRF. If the form is laid out as a grid, then "Test" or "Test Name" can

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	be included in the column heading.
Findings	OE	N/A	N/A	12	OECAT	Category	A grouping of topic-variable values based on user-defined characteristics.	What was the [type/category] of the ophthalmic examination?	[Ophthalmic Examination Category]; NULL	Char	O	N/A	OECAT	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Category" can be included as the column header.
Findings	OE	N/A	N/A	13	OESCAT	Subcategory	A sub-division of the OECAT values based on user-defined characteristics.	What was the [subtype/subcategory] of the ophthalmic examination?	[Ophthalmic Examination Subcategory]; NULL	Char	O	N/A	OESCAT	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be a heading on the CRF or screen, not a question to which the site would provide an answer. OESCAT can only be used if there is a OECAT. Examples are provided in the CDASHIG metadata table and in the SDTMIG. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Subcategory" can be included in the column heading. OESCAT can only be used if there is a OECAT.
Findings	OE	N/A	N/A	14	OEORRES	Result of Finding in Original Unit	Result of the measurement or finding as originally received or collected.	What was the result of the ophthalmic examination test?	[(Result/Amount] of) [value from OETEST]; NULL	Char	HR	N/A	OEORRES	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	Both quantitative results and interpretive findings or summaries may be recorded here.
Findings	OE	N/A	N/A	15	OEORRESU	Original Unit	The unit of the result as originally received or collected.	What was the unit (of the [measurement/test/examination])?	Unit	Char	R/C	N/A	OEORRESU	Maps directly to the SDTM variable listed in the SDTM Target column.	(UNIT)	N/A	Should be preprinted on the CRF with the associated test

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	when possible, rather than collected in a free-text field. Should be included if applicable and not available elsewhere.
Findings	OE	N/A	N/A	16	OERES	Collected Result or Finding	The result of the measurement or finding as originally received or collected.	What [is/was] the [result/amount] (of the [measurement/test/examination])?; [is/Was] the result [normal/abnormal/absent/ present/ sponsored defined response]?	([Result/Amount] of) [value from OETEST]	Char	O	N/A	OEORES	This does not map directly to an SDTM variable. The mapping instructions depend on the implementation, for example: Where OERES Normal, Abnormal or other similar type classifications (e.g., absent/present) with a description of the abnormal result using the CDASH field OEDESC. For SDTM submission datasets, if the CDASH field OERES = "NORMAL", populate the SDTM variables OEORES and OESTRESC with the value of the CDASH field OERES. If the CDASH field OERES is "ABNORMAL", populate the SDTM variable OEORES with the CDASH field OEDESC. If the reported findings in OEDESC are coded using a dictionary, then the SDTM variable OESTRESC is populated with the dictionary preferred term and OEMODIFY is populated with the modified text used for coding. If the reported findings in OEDESC are not coded, then the SDTM variable OESTRESC is populated with the CDASH OEDESC field. The SDTM variable OENRIND	N/A	N/A	The CDASH field OERES is used when the collected results are not mapped directly to the SDTM variable OEORES and must be mapped, for example: OERES is used to collect standardized values on the CRF and the value of "OTHER" is included and "Specify Other" is collected. OERES is collected using Normal, Abnormal and a description of the abnormality is collected.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
														may be populated with "NORMAL" or "ABNORMAL" if appropriate. Where OERES is used to collect standardized values (e.g., a codelist) on the CRF and the value of "OTHER" is included, the CDASH field OERESOTH can be used to collect free-text values for "Specify Other". When using this field, the "OTHER" value recorded in the CDASH field OERES field is mapped to the SDTM variable OESTRESC and the value in the CDASH field OERESOTH is mapped to the SDTM variable OEOORRES. See the SDTMIG for additional information.			
Findings	OE	N/A	N/A	17	OERESOTH	Result Other	A free-text result which provides further information about the original received or collected result.	If other is selected, [explain/specify/provide more detail].	Specify ([Other/Details])	Char	O	N/A	OEOORRES	When using this CDASH field, the "OTHER" value collected in the CDASH field OERES is mapped to the SDTM variable OESTRESC and the value in the CDASH field OERESOTH is mapped to the SDTM variable OEOORRES. See the SDTMIG for additional information.	N/A	N/A	In a case where OERES is used to collect standardized values on the CRF and the value of "OTHER" is included, the CDASH field OERESOTH can be used to collect free-text values for "Specify Other".
Findings	OE	N/A	N/A	18	OEORNRLO	Normal Range Lower Limit- Original Unit	The lower end of normal range or reference range for continuous results stored in OEOORRES.	What was the lower limit of the reference range (for the [measurement/test/ examination]?)	Normal Range Lower Limit	Char	O	N/A	OEORNRLO	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	OEORNRLO should be populated only for continuous findings. The SDTM variable OESTNRC should be populated only for noncontinuous results. These data may be obtained from the lab or the electronic equipment. These data could be derived from a

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	site- or lab-specific set of normal ranges stored in a look-up table.
Findings	OE	N/A	N/A	19	OEORNRHI	Normal Range Upper Limit-Original Unit	The upper end of normal range or reference range for continuous results stored in OEORRES.	What was the upper limit of the reference range (for the [measurement/test/ examination])?	Normal Range Upper Limit	Char	O	N/A	OEORNRHI	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	OEORNRHI should be populated only for continuous findings. The SDTM variable OESTNRC should be populated only for noncontinuous results. These data may be obtained from the lab or the electronic equipment. These data could be derived from a site- or lab-specific set of normal ranges stored in a look-up table.
Findings	OE	N/A	N/A	20	OECSTNRC	Collected Character/Ordinal Normal Range	Normal references ranges that are expressed as characters ("Negative to Trace") or ordinal (-1 to 1).	What was the normal reference range (for this [measurement/test/ examination])?	Normal Reference Range	Char	O	N/A	OESTNRC	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	Should be populated for normal ranges that are reported as character in ordinal scale or if categorical ranges were supplied. These data may be obtained from the lab or the electronic equipment. These data could be derived from a site- or lab-specific set of normal ranges stored in a look-up table.
Findings	OE	N/A	N/A	21	OENRIND	Normal/Reference Range Indicator	An indication or description about how the value compares to the normal range or reference range.	How do the reported values compare within the [reference/normal/expected] range?	Comparison to [Reference/Expected/Normal] Range	Char	O	N/A	OENRIND	Maps directly to the SDTM variable listed in the SDTM Target column.	(NRIND)	N/A	Reference ranges may be defined by OEORNRLO, OEORNRHI, OESTNRC, or other objective criteria. Reference Range Indicator (e.g., Y, N; HIGH, LOW; NORMAL, ABNORMAL) may be included if not derived or determined programmatically after data collection. Should not be used to indicate clinical significance.
Findings	OE	N/A	N/A	22	OERESCAT	Result Category	An indicator of the result of a finding or medical status per interpretation of test results.	What is the the category for the reported values?	Result Category	Char	O	N/A	OESTRESC	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	Used to categorize the result of a finding or medical status per interpretation of

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	test results (e.g., "POSITIVE", "NEGATIVE"). The variable OERESCAT is not meant to replace the use of OENRIND for cases where normal ranges are provided.
Findings	OE	N/A	N/A	23	OEREASND	Reason Not Done	An explanation of why the data are not available.	What was the reason that the [ophthalmic examination finding] was not [collected/answered/done/assessed/evaluated]?	Reason Not [Answered/Collected/Done/Evaluated/Assessed/Available]	Char	O	N/A	OEREASND	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	Sponsor-defined controlled terminology may be used. The reason data are not available may be chosen from a sponsor-defined codelist (e.g., broken equipment, subject refused) or entered as free text. When OEREASND is used, OESTAT should also be populated in the SDTM-based dataset.
Findings	OE	N/A	N/A	24	OELOC	Location	The anatomical location of the subject, relevant to the collection of the measurement.	What was the anatomical location of the ophthalmic examination?	Anatomical Location	Char	O	N/A	OELOC	Maps directly to the SDTM variable listed in the SDTM Target column.	(LOC)	N/A	For the OE domain, this value is prepopulated as "EYE". It does not need to be preprinted on the CRF or collected.
Findings	OE	N/A	N/A	25	OELAT	Laterality	Qualifier for anatomical location, further detailing the side of the body.	What was the side of the anatomical location of the [measurement/test/examination]?	Side	Char	O	N/A	OELAT	Maps directly to the SDTM variable listed in the SDTM Target column.	(LAT)	N/A	Further detailing the laterality of the location of the OETEST within a given eye. It should never be used to designate "Right Eye" versus "Left Eye". OEFOCID is used to denote which eye is the focus of the observation. This may be preprinted or collected.
Findings	OE	N/A	N/A	26	OEDIR	Directionality	Qualifier further detailing the position of the anatomical location, relative to the center of the body, organ, or specimen.	What was the directionality (of the anatomical location of the [measurement/test/examination])?	Directionality	Char	O	N/A	OEDIR	Maps directly to the SDTM variable listed in the SDTM Target column.	(DIR)	N/A	Further detailing the directionality of the location of the OETEST (e.g., ANTERIOR, LOWER, PROXIMAL). This may be preprinted or collected. Sponsors may collect the data using a subset list of CT on the CRF.
Findings	OE	N/A	N/A	27	OEPOROT	Portion or Totality	Qualifier for anatomical location, further detailing the	What was the portion or totality (of the anatomical location of the [measurement/test/examination])?	Portion or Totality	Char	O	N/A	OEPOROT	Maps directly to the SDTM variable	(PORTOT)	N/A	Further detailing the portion or totality of the

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
							distribution (i.e., arrangement of, apportioning of).							listed in the SDTM Target column.			location of the OETEST. This may be preprinted or collected.
Findings	OE	N/A	N/A	28	OEMETHOD	Method of Test or Examination	The method of the test or examination.	What was the method (used for the [measurement/test/examination])?	Method	Char	R/C	N/A	OEMETHOD	Maps directly to the SDTM variable listed in the SDTM Target column.	(METHOD)	N/A	N/A
Findings	OE	N/A	N/A	29	OEEVAL	Evaluator	The role of the person who provided the evaluation.	Who was the evaluator?	Evaluator	Char	O	N/A	OEEVAL	Maps directly to the SDTM variable listed in the SDTM Target column.	(EVAL)	N/A	Used only for results that are subjective (e.g., assigned by a person or a group). May be a preprinted, or collected. Sponsors may collect the data using a subset list of CT on the CRF.
Findings	OE	N/A	N/A	30	OEEVALID	Evaluator Identifier	An identifier used to distinguish multiple evaluators with the same role recorded in OEEVAL.	What is the identifier of the evaluator?	Evaluator Identifier	Char	O	N/A	OEEVALID	Maps directly to the SDTM variable listed in the SDTM Target column.	(MEDEVAL)	N/A	N/A
Findings	OE	N/A	N/A	31	OEACPTFL	Accepted Record Flag	An indication that the evaluation is considered, by an independent assessor, to be the accepted or final evaluation.	Is this record considered to be the [accepted/final] evaluation?	[Accepted/Final] Evaluation	Char	O	N/A	OEACPTFL	Maps directly to the SDTM variable listed in the SDTM Target column.	(NY)	N/A	Used where more than 1 assessor provides an evaluation of a result or response. Typically a checkbox with the value of "Y" or "NULL", which indicates the evaluation was accepted.
Findings	OE	N/A	N/A	32	OEREPNUM	Ophthalmic Examination Repetition Number	The instance number of a test that is repeated within a given timeframe for the same test. The level of granularity can vary (e.g., within a time point, within a visit).	What was the repetition number within the time point for this measurement?	Repetition Number	Char	O	N/A	OEREPNUM	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	The repetition number of the test/measurement within the time point may be preprinted on the CRF (e.g., multiple measurements of blood pressure, multiple analyses of a sample).

Assumptions for the CDASHIG OE - Ophthalmic Examinations Domain

1. In ophthalmic studies, the eyes are usually sites of treatment. It is appropriate to identify sites using the variable FOCID. When FOCID is used to identify the eyes, it is recommended that the values "OD", "OS", and "OU" be used. These are the exclusively preferred terms used by the ophthalmology community as abbreviations for the expanded Latin terms, and are included in the nonextensible Ophthalmic Focus of Study-specific Interest (OEFOCUS) CDISC codelist (see <http://evs.nci.nih.gov/>). The meaning for each term is included in parenthesis.
- OD: Oculus dexter (right eye)

• OS: Oculus sinister (left eye)

• OU: Oculus uterque (both eyes)

- In any study that uses FOCID, FOCID would be included in records in any subject-level domain representing findings, interventions, or events (e.g., AE) related to the eyes. Whether or not FOCID is used in a study, --LOC and --LAT should be populated in records related to the eyes. The value in OELOC may be "EYE" but may also be a part of the eye (e.g., "RETINA", "CORNEA").
- Any identifiers, timing variables, or Findings general observation class qualifiers may be added to the OE domain, but the following qualifiers would not generally be used in OE: --MODIFY, --NSPCES, --POS, --BODSYS, --ORREF, --STREFC, --STREFN, --CHRON, --DISTR, --ANTREG, --LEAD, --FAST, --TOX, --TOXGR, --LLOQ, --ULOQ.

Example CRFs for the CDASHIG OE - Ophthalmic Examinations Domain

Example 1: Cup to Disc Ratio

Title: Cup to Disc Ratio

Indicate which eye was the focus of the finding or observation.	OEMETHOD <i>Hidden/pre-populated</i>	OPHTHALMOSCOPY
	OELOC <i>Hidden/pre-populated</i>	OPTIC DISC
Record the ratio of the diameter of the optic cup compared to the diameter of the optic disc.	Which eye was measured? OEFOCID OELAT and OEFOCID	☐ OD ☐ OS
	Cup to Disc Ratio CUPDISC_OEORRES OEORES where OETESTCD = "CUPDISC"	

CRF Metadata

CDASHIG Variable	Order	Question Text	Prompt	Type	CRF Completion Instructions	SDTMIG Target	SDTMIG Variable Mapping	Controlled Terminology Codelist Name	Permissible Values	Pre-specified Value	Query Display	List Style	Hidden
OEMETHOD	1	N/A	N/A	Text	N/A	OEMETHOD				OPHTHALMOSCOPY			Y
OELOC	2	N/A	N/A	Text	Indicate which eye was the focus of the finding or observation.	OELOC				OPTIC DISC	prompt		Y
OEFOCID	3	Which eye was measured?	Eye	Text	Indicate which eye was the focus of the finding or observation.	OELAT; OEFOCID	OELAT and OEFOCID		OD;OS				
CUPDISC_OEORRES	4	What was the cup to disc ratio?	Cup to Disc Ratio	Text	Record the ratio of the diameter of the optic cup compared to the diameter of the optic disc.	OEORES; OETEST; OETESTCD	OEORES where OETESTCD = "CUPDISC"	N/A	N/A		prompt		

Example 2: Intraocular Pressure

Title: Intraocular Pressure

Record the date of the IOP was measurement using this format (DD-MON-YYYY).

Date

OEDAT

OEDTC

Record time of the IOP measurement as complete as possible.

Time

OETIM

OEDTC

Intraocular Pressure Unit

OEORRESU

Hidden/pre-populated

mmHg<UNIT codelist>

OELOC

Hidden/pre-populated

EYE<LOC codelist>

Method

OEMETHOD

Hidden/pre-populated

TONOMETRY<METHOD codelist>

Record the intraocular pressure in the right eye in mmHg.

Intraocular Pressure (OD)

IOP_OD_OEORRES

OEORRES where OETESTCD = "IOP" and FOCID = "OD" and OELAT="RIGHT"

Record the intraocular pressure in the left eye in mmHG.

Intraocular Pressure (OS)

IOP_OS_OEORRES

OEORRES where OETESTCD = "IOP" and FOCID = "OS" and OELAT="LEFT"

CRF Metadata

CDASHIG Variable	Order	Question Text	Prompt	Type	CRF Completion Instructions	SDTMIG Target	SDTMIG Variable Mapping	Controlled Terminology Codelist Name	Permissible Values	Pre-specified Value	Query Display	List Style	Hidden	CRF Implementation Notes
OEDAT	1	What was the date of the IOP measurement?	Date	Text	Record the date of the IOP was measurement using this format (DD-MON-YYYY).	OEDTC					prompt			Concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable OEDTC in ISO 8601 format.
OETIM	2	What was the time of the IOP measurement?	Time	Text	Record time of the IOP measurement as complete as possible.	OEDTC					prompt			Concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable OEDTC in ISO 8601 format.
OEORRESU	3	What was the unit?	Intraocular Pressure Unit	Text	N/A	OEORRESU		(UNIT)		mmHg	prompt		yes	
OELOC	4	N/A	N/A	Text		OELOC		(LOC)		EYE			Y	
OEMETHOD	5	What was the method used for measuring interocular pressure?	Method	Text	Record the method used to measure IOP.	OEMETHOD		(METHOD)		TONOMETRY	prompt		Y	
IOP_OD_OEORRES	6	What was the IOP in the right eye?	Intraocular Pressure (OD)	Text	Record the intraocular pressure in the right eye in mmHg.	OEORRES; OETEST; OETESTCD	OEORRES where OETESTCD = "IOP" and FOCID = "OD" and OELAT="RIGHT"				prompt			
IOP_OS_OEORRES	7	What was the IOP in the left eye?	Intraocular Pressure (OS)	Text	Record the intraocular pressure in the left eye in mmHG.	OEORRES; OETEST; OETESTCD	OEORRES where OETESTCD = "IOP" and FOCID = "OS" and OELAT="LEFT"				prompt			

8.3.16 PC - Pharmacokinetics Concentrations (Sampling)

Description/Overview for the CDASHIG PC - Pharmacokinetics Concentrations (Sampling) Domain

Information about sampling for pharmacokinetic (PK) concentration is collected on CRFs with the goal to reconcile or link sampling information (e.g., collection timing and specimen volumes) with PK concentration results provided by the laboratory. SDTMIG PC records are compiled when joining CRF sampling information and PK concentration results. This is similar to scenario 1 in Section 8.3.6, [LB - Laboratory Test Results](#).

The goals of the CDASHIG PC domain are:

- To standardize specimen collection details in the CRF for PK samples collected at fixed time points or over timed intervals
- To provide CDASHIG examples as to the collection of data that is closely related to PK sampling (e.g., subject's most recent exposure to study treatment, exposure record considered to be the reference for timed PK samples)
- To document the data flow from the CDASHIG CRF to the SDTMIG PC dataset

The CDASHIG PC domain defines fields for:


1. The date and time of PK sample collections for the scenarios listed below. Note that the sampling approach may depend on how the body metabolizes and clears the analyte.
 - a. Fixed defined time points (e.g., 4 HRS POSTDOSE)
 - b. Across a collection interval (e.g., 2-4 HRS POSTDOSE)
2. Sample properties (e.g., pH, sample volume)

Note that samples collected to measure drug concentration at an instant in time are generally associated with specimen types such as plasma, serum, or whole blood. Samples collected over a timed interval are generally associated with specimen types such as urine or feces.

PK Sample Collection at Fixed Time Points

In the case of fixed time points, the date (PCDAT) and time (PCTIM) of collection for each sample is recorded on the CRF. The protocol defines the time points at which samples are to be collected in relation to an intervention such as a dose of study treatment. This "reference" is depicted in Figure 1 by the longer vertical line and would correspond to a date and time in the Exposure as Collected (EC) or Exposure (EX) domain.


Figure 1. PK Sample Collection at Fixed Time Points

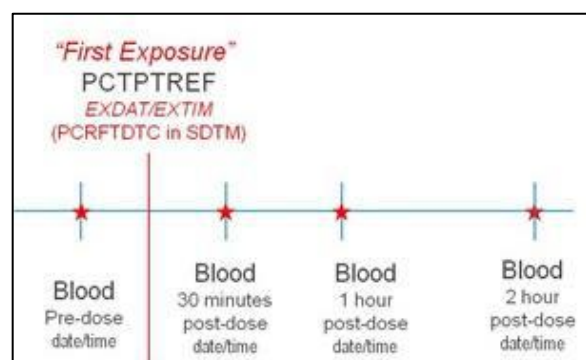


PK Sample Collection Over a Time Interval

Similarly, for PK specimens collected to measure drug excretion over a time interval, PCDAT and PCTIM capture the start date and time of the interval collection. End date (PCENDAT) and end time (PCENTIM) capture the end of the timed interval collection. As with fixed-time point collections, these timed intervals are performed in relation to an intervention such as a dose of study treatment. This "reference" is depicted in Figure 2 by the longer vertical line and would correspond to a date and time in the EC or EX domain.

Figure 2. PK Sample Collection Over a Time Interval

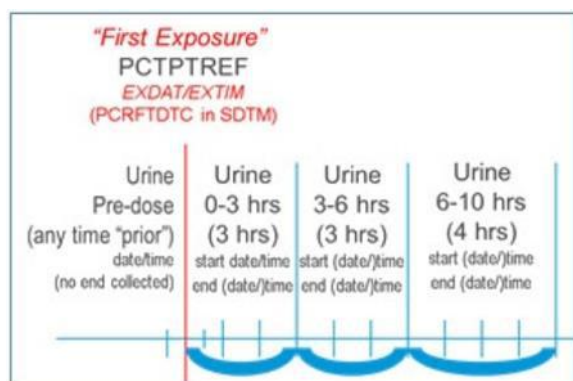**CM.CDASHIG-SDTMIG PK Data Flow**

The concept map in Figure 3 illustrates the data flow from PK sample collection at the site through the tabulation of PK concentration and PK parameter results.

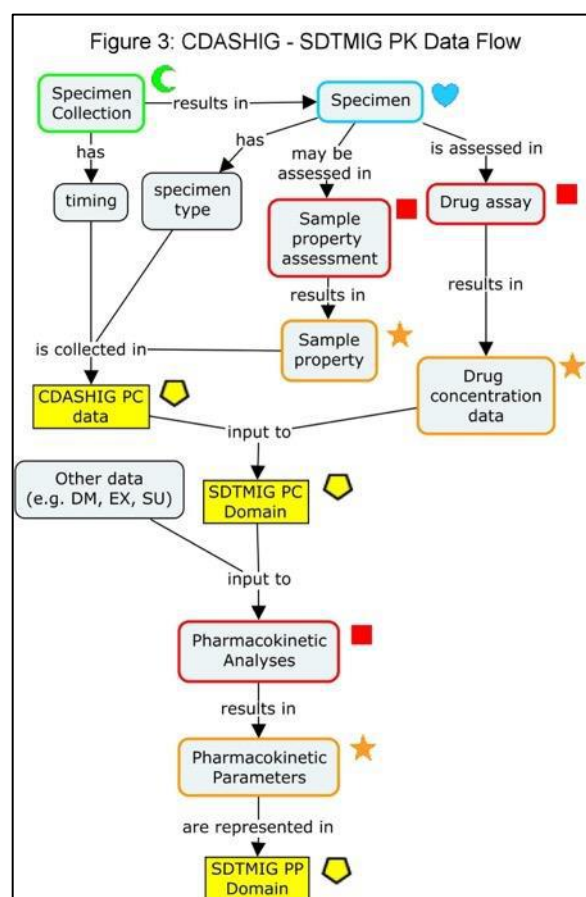

Specification for the CDASHIG PC - Pharmacokinetics Concentrations (Sampling) Domain

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings	PC	PK Sample Collection at Fixed Time Points	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included in the database or populated during SDTM-based dataset creation before submission.
Findings	PC	PK Sample Collection at Fixed Time Points	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted on the CRFs that are shipped to each site. EDC: This should be prepopulated.
Findings	PC	PK Sample Collection at Fixed Time Points	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What [is/was] the (study) [subject/participant] identifier?	[Subject/Participant] (Identifier)	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system-generated. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Findings	PC	PK Sample Collection at Fixed Time Points	N/A	4	VISIT	Visit Name	The name of a clinical encounter that encompasses planned and unplanned trial interventions, procedures, and assessments that may be performed on a subject.	What is the visit name?	[Visit]	Char	R/C	N/A	VISIT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The name of the clinical encounter is typically preprinted on the CRF or displayed within the EDC for any visit-based data collection, most often in Findings domains. This Visit text description is then available in any EDC data extract for that Findings domain.
Findings	PC	PK Sample Collection at Fixed Time Points	N/A	5	VISDAT	Visit Date	Date the clinical encounter occurred (or started).	What [is/was] the date of the visit?	(Visit) Date	Char	R/C	Record the [date/start date] of the visit using this format (DD-MON-YYYY).	N/A	This field is not an SDTM variable. The date of a measurement, test, observation can be determined from the date/time of visit (VISDAT/VISTIM) and then concatenating the CDASH VISDAT/VISTIM components and populating the SDTMIG variable PCDTC in ISO 8601 format.	N/A	N/A	The date the PK samples were collected can be determined from the visit date variable (VISDAT) and applying that date to all of the PK samples at that visit, or the collection date can be collected on the PK CRF using the date (PCDAT) field.
Findings	PC	PK Sample Collection at Fixed Time Points	N/A	6	PCPERF	PK Sampling Performed	An indication of whether PK samples were collected.	Were PK samples collected?	Collected	Char	O	Check "No" if none of the samples were collected.	PCSTAT	This does not map directly to an SDTMIG variable. May be used to derive a value into the SDTMIG variable PCSTAT. If PCPERF="N", the value of PCSTAT will be "NOT DONE". If PCPERF="Y", PCSTAT should be null. PCTEST and PCTESTCD must reflect what tests were not done. A combination of SDTMIG variables (e.g., PCCAT and PCSCAT, PCTPT) is used to indicate that multiple tests were not done. In this situation, the SDTMIG variable PCTESTCD would be populated as PCALL and an appropriate test name (PCTEST)	(NY)	N/A	General prompt question to be used as a data management tool to verify that missing results are confirmed missing. This may be implemented at form level or sample level. These may be all samples of a particular type or all samples taken for some purpose and may need to be identified by the organization of the data on the form. Each sample collected could result in 1 or more tests performed, so there can be a one-to-one or one-to-many relationship between samples and tests/results.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
														provided. See SDTMIG for additional information.			
Findings	PC	PK Sample Collection at Fixed Time Points	N/A	7	PCSTAT	PK Sampling Completion Status	This variable used to indicate that data are not available, by having the site record the value as "Not Done".	Record "Not Done" if the PK sample was not collected.	Not Done	Char	HR	Indicate if the specimen was not done.	PCSTAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(ND)	N/A	A Not Done checkbox, which indicates the test was "NOT DONE". Typically, there would be 1 checkbox for each measurement. This field can be useful on individual sample collections to confirm that a blank result field is meant to be blank.
Findings	PC	PK Sample Collection at Fixed Time Points	N/A	8	PCREASND	PK Sampling Reason Not Done	An explanation for why the data are not available.	What was the reason the PK sample was not collected?	Reason Not Collected	Char	O	Provide the reason why a PK sample was not collected.	PCREASND	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The reason the data are not available may be chosen from a sponsor-defined list (e.g., broken equipment, subject refused) or entered as free text. When PCREASND is used, the SDTMIG variable PCSTAT should also be populated in the SDTM-based dataset.
Findings	PC	PK Sample Collection at Fixed Time Points	N/A	9	PCDAT	PK Sample Collection Date	The date of PK sample collection or the start date of PK sample collection over a period of time (protocol-defined time-point range), represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the date of the PK sample collection?	Collection Date	Char	HR	Record the date when PK sample collection occurred using this format (DD-MON-YYYY). If left blank, "PCDATFL" for this specimen must be populated (or "PCPERF" must be flagged to indicate this sample was not collected).	PCDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable PCDTC in ISO 8601 format.	N/A	N/A	A complete date is expected. The date of collection may be determined from the date of visit (VISDAT); if so, a separate assessment date field is not required. The SDTMIG PCDTC variable contains either a date/time when a specimen is collected at a point in time or the start date/time, when a specimen is collected over time.
Findings	PC	PK Sample Collection at Fixed Time Points	N/A	10	PCDATFL	PK Sampling Date Flag	Flag indicating that the PK date (or start date) is the same as the previous specimen collection date (or start date).	Was the specimen/sample collected on the same date as the [last/previous specimen/sample] [collected/collection ended]?	Same as Previous (Specimen/Sample Collection End) Date	Char	O	Select when the date of this specimen collection is the same as the date of the previous specimen collected. If left blank, "PCDAT" for this specimen must be populated. (or "PCPERF" must be flagged to indicate this sample was not collected)	N/A	Does not map to an SDTMIG variable. The SDTM annotated CRF indicates that this field is NOT SUBMITTED.	N/A	N/A	When a series of specimens are collected on a single form, this field is tied to the collection date to allow for the flag to be used as a surrogate for the date field. Its selection means that the date of this specimen is the same as the date of the last specimen collected (in the series). This variable may be used when collecting PK data and re-entering dates is more cumbersome than selecting the checkbox.
Findings	PC	PK Sample Collection at Fixed Time Points	N/A	11	PCTIM	PK Sample Collection Time	The time of PK sample collection or start time for a specimen collected over a period of time (protocol-defined time-point range), represented in an unambiguous time format (e.g., hh:mm:ss).	What was the time of the PK sample collection?	Collection Time	Char	HR	Record time of collection (as complete as possible).	PCDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable PCDTC in ISO 8601 format.	N/A	N/A	A complete time is expected. The SDTMIG PCDTC variable contains either a date/time, when a specimen is collected at a point in time, or the start date/time, when a specimen is collected over time.
Findings	PC	PK Sample Collection at Fixed Time Points	N/A	12	PCTPT	PK Sampling Planned Time Point Name	A text description of planned time points when measurements should be taken, as defined in the protocol.	What was the planned time point of the PK sample collection?	[Planned Time Point Name]	Char	R/C	Record the planned time-point labels for the PK sample collection, if not preprinted on the CRF. Note: Planned time points are often described as relative to the dosing of the study drug.	PCTPT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. See the SDTMIG for additional information on representing time points. The SDTMIG time-point anchors PCTPTREF (text description) and PCRTDTC (date/time) may be needed, as well as SDTMIG variables PCTPTNUM, PCELTMT.	N/A	N/A	Planned time points are needed to differentiate multiple sequential assessments. It is recommended that time points should be preprinted on the CRF rather than collected in a free-text field. If the form is laid out as a grid, then terms such as "Planned Time Point" can be included in the column heading.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings	PC	PK Sample Collection at Fixed Time Points	N/A	13	PCFAST	PK Sampling Fasting Status	An indication that the subject has abstained from food/water for the specified amount of time.	Was the subject fasting?	Fasting	Char	R/C	Record whether the subject was fasting prior to the test being performed.	PCFAST	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(NY)	N/A	Results may be affected by whether the subject was fasting. Some study treatments may have a food effect, and it is important to know whether the dose was taken after the subject had fasted.
Findings	PC	PK Sample Collection at Fixed Time Points	N/A	14	PCCOND	PK Sampling Test Condition Met	Indication of whether the testing conditions defined in the protocol were met (e.g., low-fat diet).	Were the protocol-defined testing conditions met?	Test Condition Met	Char	R/C	Record whether protocol-defined testing conditions were met.	SUPPPC.QVAL	This does not map directly to an SDTMIG variable. This information could be submitted in a SUPPPC dataset as the value of SUPPPC.QVAL where SUPPPC.QNAM = "PCCOND" and SUPP.PCLABEL= "Test Condition Met". Refer to the current SDTM and SDTMIG for instructions on placement of non-standard variables in SDTM domains.	(NY)	N/A	This information is collected when the test results may be affected by whether conditions for testing were properly met. The specific testing conditions required should be preprinted on the CRF (e.g., "Did subject meet diet requirements?"). This may not be relevant for all tests. Examples of conditions imposed may include calorie fast, fluid fast, high-fat meal, low-fat meal, and exercise.
Findings	PC	PK Sample Collection at Fixed Time Points	N/A	15	PCREFID	PK Sampling Reference ID	An internal or external identifier (e.g., specimen identifier).	What was the (PK) [reference identifier/accession number]?	(PK) [Reference Identifier/Accession Number]	Char	O	Record the specimen or accession number assigned.	PCREFID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. May be used to create RELREC to link this record with a record in another domain.	N/A	N/A	This can be used to reconcile CRF data. May be included for linking back to specimens (e.g., Specimen ID).
Findings	PC	PK Sample Collection at Fixed Time Points	N/A	16	PCSPEC	PK Sampling Specimen Type	The type of specimen used for a PK sample.	What was the specimen (material) type?	[Specimen Type]	Char	HR	Record the specimen material type, if not preprinted on the CRF.	PCSPEC	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(SPECTYPE)	N/A	The type of specimen used for a measure. Should be collected if not available elsewhere, or if required to differentiate multiple specimens.
Findings	PC	PK Sample Collection at Fixed Time Points	N/A	17	PCTEST	PK Sampling Test Name	Descriptive name of the analyte or specimen characteristics used to obtain the PK measurement or finding.	What was the test name?	[Test Name]	Char	O	Record the name of the measurement or finding, if not preprinted on the CRF. If collected on the CRF, the sponsor may provide additional instructions to ensure the data is entered as intended.	PCTEST; PCTESTCD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The SDTMIG variable PCTESTCD may be determined from the value collected in PCTEST. The SDTMIG variables PCTESTCD and PCTEST are required in the SDTM submission datasets. Use appropriate CDISC Controlled Terminology for the test and test code.	N/A	N/A	Sponsors typically collect tests related to the specimen characteristics on the CRF (e.g., volume, pH). Results for tests on an analyte (e.g., concentration) would typically be populated when creating SDTM-based datasets. If the analyte test results are collected on the CRF, the test would be the analyte name. It is recommended that the test names be preprinted on the CRF rather than collected in a free-text field. If the form is laid out as a grid, then words such as "Test" can be included in the column heading.
Findings	PC	PK Sample Collection at Fixed Time Points	N/A	18	PCORRES	PK Sampling Result in Original Units	Result of the measurement or finding as originally received or collected.	What was the result of the test?	(Result)	Char	O	Record the test result, interpretation, or finding.	PCORRES	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Should be preprinted on the CRF with the associated test when possible, rather than collected in a free-text field.
Findings	PC	PK Sample Collection at Fixed Time Points	N/A	19	PCORRESU	PK Sampling Original Units	The unit of the result as originally received or collected.	What was the unit of the result?	Unit	Char	O	Select the original unit in which these data were collected, or record if not preprinted on CRF.	PCORRESU	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(UNIT)	N/A	Should be preprinted on the CRF with the associated test when possible, rather than collected in a free-text field.
Findings	PC	PK Sample Collection over a Time Interval	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included in the database or populated during SDTM-based dataset creation before submission.
Findings	PC	PK Sample Collection over a Time Interval	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites,

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	this field may be left blank so that the number can be recorded by the site, or it may be preprinted on the CRFs that are shipped to each site. EDC: This should be prepopulated.
Findings	PC	PK Sample Collection over a Time Interval	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study	What is the subject identifier?	Subject	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system-generated. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Findings	PC	PK Sample Collection over a Time Interval	N/A	4	VISIT	Visit Name	The name of a clinical encounter that encompasses planned and unplanned trial interventions, procedures, and assessments that may be performed on a subject	What is the visit name?	[Visit]	Char	R/C	N/A	VISIT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The name of the clinical encounter is typically preprinted on the CRF or displayed within the EDC for any visit-based data collection, most often in Findings domains. This Visit text description is then available in any EDC data extract for that Findings domain.
Findings	PC	PK Sample Collection over a Time Interval	N/A	5	VISDAT	Visit Date	Date the clinical encounter occurred (or started)	What [is/was] the date of the visit?	(Visit) Date	Char	R/C	Record the [date/start date] of the visit using this format (DD-MON-YYYY).	N/A	This field is not an SDTM variable. The date of a measurement, test, or observation can be determined from the date/time of visit (VISDAT/VISTIM) and then concatenating the CDASH VISDAT/VISTIM components and populating the SDTMIG variable PCDTCT in ISO 8601 format.	N/A	N/A	The date the PK samples were collected can be determined from the visit date variable (VISDAT) and applying that date to all of the PK samples at that visit, or the collection date can be collected on the PK CRF using the date (PCDAT) field.
Findings	PC	PK Sample Collection over a Time Interval	N/A	6	PCPERF	PK Sampling Performed	An indication of whether PK samples were collected	Were PK samples collected?	Collected	Char	O	Indicate whether all of the PK samples in this group were collected.	PCSTAT	This does not map directly to an SDTMIG variable. May be used to derive a value into the SDTMIG variable PCSTAT. If PCPERF="N", the value of PCSTAT will be "NOT DONE". If PCPERF="Y", PCSTAT should be null. PCTEST and PCTESTCD must reflect what tests were not done. A combination of SDTMIG variables (e.g., PCCAT and PCSCAT, PCTPT) is used to indicate that multiple tests were not done. In this situation, the SDTMIG variable PCTESTCD would be populated as PCALL and an appropriate test name (PCTEST) provided. See SDTMIG for additional information.	(NY)	N/A	This general prompt question is used as a data management tool to verify that missing results are confirmed missing. This may be implemented at form level or sample level. These may be all samples of a particular type, or all samples taken for some purpose, and may need to be identified by the organization of the data on the form. Each sample collected could result in 1 or more tests performed, so there can be a one-to-one or one-to-many relationship between samples and tests/results.
Findings	PC	PK Sample Collection over a Time Interval	N/A	7	PCREASND	PK Sampling Reason Not Done	An explanation for why the data are not available	What was the reason the PK sample was not collected?	Reason Not Collected	Char	O	Provide the reason why a PK sample was not collected.	PCREASND	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The reason the data are not available may be chosen from a sponsor-defined list (e.g., broken equipment, subject refused) or entered as free text. When PCREASND is used, the SDTMIG variable PCSTAT should also be populated in the SDTM-based dataset.
Findings	PC	PK Sample Collection over a Time Interval	N/A	8	PCDAT	PK Sample Collection Date	The date of PK sample collection or the start date of PK sample collection over a period of time	What was the date of the PK sample collection?	Collection Date	Char	HR	Record the date when PK sample collection occurred using this format (DD-MON-YYYY). If	PCDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the	N/A	N/A	A complete date is expected. The SDTMIG PCDTC variable contains either a date/time when a specimen is collected at a point in time or the start

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
							(protocol-defined time-point range), represented in an unambiguous date format (e.g., DD-MON-YYYY)					left blank, "PCDATFL" for this specimen must be populated (or "PCPERF" must be flagged to indicate this sample was not collected).		SDTMIG variable PCDTC in ISO 8601 format.			date/time, when a specimen is collected over time.
Findings	PC	PK Sample Collection over a Time Interval	N/A	9	PCTIM	PK Sample Collection Time	The time of PK sample collection or start time for a specimen collected over a period of time (protocol-defined time-point range), represented in an unambiguous time format (e.g., hh:mm:ss)	What was the start time of the PK sample collection?	Collection Start Time	Char	HR	Record start time of collection (as complete as possible).	PCDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable PCDTC in ISO 8601 format.	N/A	N/A	A complete time is expected. In interval collection, start can be added as needed to the question text, prompt and CRF directions. The SDTMIG PCDTC variable contains either a date/time when a specimen is collected at a point in time or the start date/time, when a specimen is collected over time.
Findings	PC	PK Sample Collection over a Time Interval	N/A	10	PCENDAT	PK Sample Collection End Date	The end date of the specimen collection, represented in an unambiguous date format (e.g., DD-MON-YYYY)	What was the end date of the specimen collection?	(Collection) End Date	Char	HR	Record the date when PK sample collection stopped using this format (DD-MON-YYYY)	PCENDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH END DATE and TIME components and populate the SDTMIG variable PCENDTC in ISO 8601 format.	N/A	N/A	The end date of specimen collection may be determined from the date of visit and, if so, a separate assessment date field is not required.
Findings	PC	PK Sample Collection over a Time Interval	N/A	11	PCENTIM	PK Sample Collection End Time	The end time of the specimen collection, represented in an unambiguous time format (e.g., hh:mm:ss)	What was the specimen collection end time?	(Collection) End Time	Char	HR	Record end time of collection (as complete as possible).	PCENDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH END DATE and TIME components and populate the SDTMIG variable PCENDTC in ISO 8601 format.	N/A	N/A	A complete end time is expected. The SDTMIG variable PCENDTC variable contains the end date/time, when a specimen is collected over time. If there is no end date/time, the SDTMIG variable PCENDTC should be null.
Findings	PC	PK Sample Collection over a Time Interval	N/A	12	PCTPT	PK Sampling Planned Time Point Name	A text description of planned time points when measurements should be taken, as defined in the protocol	What was the planned time point of the PK sample collection?	[Planned Time Point Name]	Char	R/C	Record the planned time-point labels for the PK sample collection, if not preprinted on the CRF. Note: Planned time points are often described as relative to the dosing of the study drug.	PCTPT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. See the SDTMIG for additional information on representing time points. The SDTMIG time-point anchors PCTPTREF (text description) and PCRFTDTC (date/time) may be needed, as well as SDTMIG variables PCTPTNUM, PCELTMT.	N/A	N/A	Planned time points are needed to differentiate multiple sequential assessments. It is recommended that time points should be preprinted on the CRF rather than collected in a free-text field. If the form is laid out as a grid, then terms such as "Planned Time Point" can be included in the column heading.
Findings	PC	PK Sample Collection over a Time Interval	N/A	13	PCFAST	PK Sampling Fasting Status	An indication that the subject has abstained from food/water for the specified amount of time	Was the subject fasting?	Fasting	Char	R/C	Record whether the subject was fasting prior to the test being performed.	PCFAST	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(NY)	N/A	Results may be affected by whether the subject was fasting. Some study treatments may have a food effect, and it is important to know whether the dose was taken after the subject had fasted.
Findings	PC	PK Sample Collection over a Time Interval	N/A	14	PCCOND	PK Sampling Test Condition Met	Indication of whether the testing conditions defined in the protocol were met (e.g., low fat diet)	Were the protocol-defined testing conditions met?	Test Condition Met	Char	R/C	Record whether protocol-defined testing conditions were met.	SUPPPC.QVAL	This does not map directly to an SDTMIG variable. This information could be submitted in a SUPPPC dataset as the value of SUPPPC.QVAL where SUPPPC.QNAM ="PCCOND" and SUPP.PCLABEL="Test Condition Met". Refer to the current SDTM and SDTMIG for instructions on placement of NSVs in SDTM domains.	(NY)	N/A	This information is collected when the test results may be affected by whether conditions for testing were properly met. The specific testing conditions required should be preprinted on the CRF (e.g., "Did subject meet diet requirements?"). Examples: calorie fast, fluid fast, high-fat meal, low-fat meal, exercise. This may not be relevant for all tests.
Findings	PC	PK Sample Collection over a Time Interval	N/A	15	PCREFID	PK Sampling Reference ID	An internal or external identifier (e.g., specimen identifier)	What was the (PK) [reference identifier/accession number]?	(PK) [Reference Identifier/Accession Number]	Char	O	Record the specimen or accession number assigned.	PCREFID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. May be used to create RELREC to link this record with a record in another domain.	N/A	N/A	This can be used to reconcile CRF data. May be included for linking back to specimens (e.g., Specimen ID).

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings	PC	PK Sample Collection over a Time Interval	N/A	16	PCSPEC	PK Sampling Specimen Type	The type of specimen used for a PK sample	What was the specimen (material) type?	Specimen Type	Char	HR	Record the specimen material type, if not preprinted on the CRF.	PCSPEC	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(SPECTYPE)	N/A	The type of specimen used for a measure. Should be collected if not available elsewhere, or if required to differentiate multiple specimens.
Findings	PC	PK Sample Collection over a Time Interval	N/A	17	PCTEST	PK Sampling Test Name	Descriptive name of the analyte or specimen characteristics used to obtain the PK measurement or finding	What was the test name?	[Test Name]	Char	O	Record the name of the measurement or finding, if not preprinted on the CRF. If collected on the CRF, the sponsor may provide additional instructions to ensure the data is entered as intended.	PCTEST; PCTESTCD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The SDTMIG variable PCTESTCD may be determined from the value collected in PCTEST. The SDTMIG variables PCTESTCD and PCTEST are required in the SDTM submission datasets. Use appropriate CDISC CT for the test and test code.	N/A	N/A	Sponsors typically collect tests related to the specimen characteristics on the CRF (e.g., Volume, pH). Results for tests on an analyte (e.g., Concentration) would typically be populated when the SDTM-based datasets are created. If analyte test results are collected on the CRF, the test would be the analyte name. It is recommended that test names be preprinted on the CRF rather than collected in a free-text field. If the form is laid out as a grid, then words such as "Test" can be included in the column heading.
Findings	PC	PK Sample Collection over a Time Interval	N/A	18	PCORRES	PK Sampling Result in Original Units	Result of the measurement or finding as originally received or collected	What was the result of the test?	(Result)	Char	O	Record the PK sampling test result.	PCORRES	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Both quantitative results and interpretive findings or summaries may be recorded here.
Findings	PC	PK Sample Collection over a Time Interval	N/A	19	PCORRESU	PK Sampling Original Units	The unit of the result as originally received or collected	What was the unit of the result?	Unit	Char	O	Record the PK sampling test result.	PCORRESU	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Both quantitative results and interpretive findings or summaries may be recorded here.

Assumptions for the CDASHIG PC - Pharmacokinetics Concentrations (Sampling) Domain

1. This domain contains details regarding the collection of PK samples from subjects (e.g., timing of sample collection, associated specimen properties) at the investigational site. Typically, the CDASHIG PC domain does not include concentration results generated by a bioanalytical laboratory. However, if the sponsor has occasion to collect concentration results on the same CRF, variables may be created based on CDASH Model variables, using the rules previously discussed.
2. Other data (e.g., demographics, vital signs, substance use, exposure) may be needed for PK analysis. See the CDASHIG sections for these related domains.

Example CRFs for the CDASHIG PC - Pharmacokinetics Concentrations (Sampling) Domain

Example 1

Title: Pharmacokinetics

	Visit Name (defaulted) VISIT <i>Pre-populated</i>	Day 1
Indicate if the specimen was not done.	Not Done PCSTAT	☐ Not Done <ND codelist>
Provide the reason why a PK sample was not collected.	Reason Not Collected PCREASND	
Record the specimen or accession number assigned.	Accession Number PCREFID	
Record the planned time point labels for the PK sample collection, if not pre-printed on the CRF. Note: Planned time points are often described as relative to the dosing of the study drug.	Planned Time Point Name PCTPT	☐ Pre-dose ☐ Hour 1 ☐ Hour 2 ☐ Hour 3
Select when the date of this specimen collection is the same as the date of the previous specimen collected. If left blank, "PCDAT" for this specimen must be populated.	Same as Previous (Specimen Collection) Date PCDATFL Not Submitted	☐ Same as Previous Date
Record the date when PK sample collection occurred using this format (DD-MON-YYYY). If left blank, "PCDATFL" for this specimen must be populated.	Collection Date PCDAT PCDTC	
Record time of collection as complete as possible.	Collection Time PCTIM PCDTC	
Record the specimen material type, if not pre-printed on the CRF.	Specimen Type PCSPEC	☐ BLOOD ☐ PLASMA ☐ URINE <SPECTYPE codelist>
Record the result of the volume measurement.	Volume PCORRES PCORRES where PCTESTCD = "VOLUME"	
Record or select the original unit in which these data were collected, if not pre-printed on the CRF.	Unit PCORRESU PCORRESU where PCTESTCD = "VOLUME"	☐ mL ☐ L <UNIT codelist>

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
VISIT	1	What is the visit name?	Visit Name (defaulted)	N/A	Text	VISIT				Day 1	Prompt		
PCSTAT	2	Indicate if the PK sample was not done.	Not Done	Indicate if the specimen was not done.	Text	PCSTAT		(ND)	Not Done		Prompt	checkbox	
PCREASND	3	What was the reason the PK sample was not collected?	Reason Not Collected	Provide the reason why a PK sample was not collected.	Text	PCREASND					Prompt		
PCREFID	4	What was the PK accession number?	Accession Number	Record the specimen or accession number assigned.	Text	PCREFID					Prompt		
PCTPT	5	What was the planned time point of the PK sample collection?	Planned Time Point Name	Record the planned time point labels for the PK sample collection, if not pre-printed on the CRF. Note: Planned time points are often described as relative to the dosing of the study drug.	Text	PCTPT			Pre-dose; Hour 1; Hour 2; Hour 3		Prompt	radio	
PCDATFL	6	Check if the specimen was collected on the same date as the previous specimen collected.	Same as Previous (Specimen Collection) Date	Select when the date of this specimen collection is the same as the date of the previous specimen collected. If left blank, "PCDAT" for this specimen must be populated.	Text	N/A			Same as Previous Date		Prompt	checkbox	
PCDAT	7	What was the date of the PK sample collection?	Collection Date	Record the date when PK sample collection occurred using this format (DD-MON-YYYY). If left blank, "PCDATFL" for this specimen must be populated.	Date	PCDTC					Prompt		
PCTIM	8	What was the time of the PK sample collection?	Collection Time	Record time of collection as complete as possible.	Time	PCDTC					Prompt		
PCSPEC	9	What was the specimen material type?	Specimen Type	Record the specimen material type, if not pre-printed on the CRF.	Text	PCSPEC		(SPECTYPE)	BLOOD; PLASMA; URINE		Prompt		
PCORRES	10	What was the result of the volume measurement?	Volume	Record the result of the volume measurement.	Float	PCORRES	PCORRES where PCTESTCD = "VOLUME"				Prompt		
PCORRESU	11	What was the unit of the result?	Unit	Record or select the original unit in which these data were collected, if not pre-printed on the CRF.	Text	PCORRESU	PCORRESU where PCTESTCD = "VOLUME"	(UNIT)	mL; L		Prompt	radio	

Example 2**Title: Pharmacokinetics**

Record the accession number assigned.	Accession Number PCREFID	
Record the planned time point labels for the PK sample collection, if not pre-printed on the CRF. Note: Planned time points are often described as relative to the dosing of the study drug.	Planned Time Point Name PCTPT	☐ 0-4 Hours Post Dose ☐ 4-8 Hours Post Dose ☐ 8-12 Hours Post Dose ☐ 12-16 Hours Post Dose ☐ 16-20 Hours Post Pose ☐ 20-24 Hours Post Dose
Indicate if the specimen was not done.	Indicate if the PK sample was not done. PCSTAT	☐ Not Done <ND codelist>
Record the date when PK sample collection occurred using this format (DD-MON-YYYY).	Collection Start Date PCDAT PCDTC	
Record start time of collection (as complete as possible).	Collection Start Time PCTIM PCDTC	
Record the date when PK sample collection stopped using this format (DD-MON-YYYY).	Collection End Date PCENDAT PCENDTC	
Record end time of collection (as complete as possible).	Collection End Time PCENTIM PCENDTC	
Record the specimen material type, if not preprinted on the CRF.	Specimen Type PCSPEC	Select... <SPECTYPE codelist>
Record the result of the volume measurement.	Volume PCORRES PCORRES where PCTESTCD = "VOLUME"	
Record or select the original unit in which these data were collected, if not preprinted on CRF.	Unit PCORRESU PCORRES where PCTESTCD = "VOLUME"	☐ mL ☐ L <UNIT codelist>

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
PCREFID	1	What was the (PK) [reference identifier/accession number]?	Accession Number	Record the accession number assigned.	Text	PCREFID					Prompt		

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
PCTPT	2	What was the planned time point of the PK sample collection?	Planned Time Point Name	Record the planned time point labels for the PK sample collection, if not pre-printed on the CRF. Note: Planned time points are often described as relative to the dosing of the study drug.	Text	PCTPT			0-4 Hours Post Dose; 4-8 Hours Post Dose; 8-12 Hours Post Dose; 12-16 Hours Post Dose; 16-20 Hours Post Pose; 20-24 Hours Post Dose		Prompt	radio	
PCSTAT	3	Indicate if the PK sample was not done.	Not Done	Indicate if the specimen was not done.	Text	PCSTAT		(ND)	Not Done			checkbox	
PCDAT	4	What was the date of the PK sample collection?	Collection Start Date	Record the date when PK sample collection occurred using this format (DD-MON-YYYY).	Date	PCDTC					prompt		
PCTIM	5	What was the (start) time of the PK sample collection?	Collection Start Time	Record start time of collection (as complete as possible).	Time	PCDTC					prompt		
PCENDAT	6	What was the end date of the specimen collection?	Collection End Date	Record the date when PK sample collection stopped using this format (DD-MON-YYYY).	Date	PCENDTC					prompt		
PCENTIM	7	What was the specimen collection end time?	Collection End Time	Record end time of collection (as complete as possible).	Time	PCENDTC					prompt		
PCSPEC	8	What was the specimen material type?	Specimen Type	Record the specimen material type, if not preprinted on the CRF.	Text	PCSPEC		(SPECTYPE)	Blood; Plasma; Urine		prompt	dropdown	
PCORRES	9	What was the result of the volume measurement?	Volume	Record the result of the volume measurement.	Float	PCORRES	PCORRES where PCTESTCD = "VOLUME"				prompt		
PCORRESU	10	What was the unit of the result?	Unit	Record or select the original unit in which these data were collected, if not preprinted on CRF.	Text	PCORRESU	PCORRES where PCTESTCD = "VOLUME"	(UNIT)	mL; L		prompt	radio	

8.3.17 PE - Physical Examination

Description/Overview for the CDASHIG PE - Physical Examination Domain

The scope of the metadata for the CDASHIG Physical Examination (PE) domain is limited to general physical examinations as part of overall safety data collection. The data collection fields defined in the CDASHIG Metadata Tables may not fit the needs of targeted body system evaluations as part of therapeutic area-specific assessments.

There are 3 scenarios that may be used for collecting physical exam data:

- **Scenario 1 (Best Practice):** The PE CRF is used only to record whether or not the exam was performed and, if so, the date of the examination. Sites are instructed to record baseline abnormalities on a medical history (MH) form, a targeted MH form (e.g., a study-specific form requesting assessment of a predefined set of medical and/or surgical history events), or a baseline conditions form. Sites are typically instructed to record any post-baseline abnormalities or baseline conditions that worsened post-baseline on the adverse effects (AE) form.
- **Scenario 2 (Traditional):** The PE CRF is used at baseline and post-baseline visits.
- **Scenario 3 (Traditional):** The PE CRF is used at baseline, but not at post-baseline visits. Sites are instructed to record any post-baseline abnormalities or baseline conditions that worsened post-baseline on the AE form.

In Scenarios 2 and 3, similar fields are captured: date of exam, body system/code, normal/abnormal, and description of abnormality. Scenario 1 is recommended as the best practice for the following reasons:

1. It eliminates collection and reconciliation of duplicate data by capturing abnormal data in one central location. Abnormalities identified during a physical examination must also be recorded on an AE form, an MH form, or other similar form.
2. It reduces number of queries, thus reducing workload for data managers and site personnel.
3. It supports consistency and standardization for data reporting purposes. Physical examination data are rarely summarized, only tabulated in listing format. Any trend analysis or summarization of abnormalities is performed on AE data, and MH data are available for reference.
4. It reduces coding needs (if PE abnormalities are coded).

Best Practice Domain Model

Specification for the CDASHIG - Scenario 1 (Best Practice) Physical Examination

Scenario 1 is a change from the more traditional approach for the submission of physical examination data. In this approach, the SDTMIG PE domain is not submitted. The physical examination results are submitted in the appropriate SDTMIG domain using the following conventions:

- Screening/baseline results are submitted in the SDTMIG MH domain.
- Post-baseline abnormalities or baseline conditions that worsened are submitted in the SDTMIG AE domain.
- Sponsors may submit information on whether physical examinations were performed and when they were performed in the SDTMIG Procedures (PR) domain.

Note: There is no CDASH PE domain specification for this approach in the CDASHIG Metadata Table.

Assumptions for the CDASHIG - Scenario 1 (Best Practice) Physical Examination

1. Because the data from a general physical examination are not required for safety or efficacy evaluations, a sponsor may decide not to collect them on a separate PE CRF. The data would be collected on other CRFs, typically the AE and MH CRFs.
2. If the sponsor chooses to create a physical examination CRF to capture only the information "Was the physical examination performed?" and Date/Time of Examination, these may be considered as optional fields intended for monitoring and data cleaning only. However, the sponsor could elect to submit this information in the SDTMIG PR domain.

Example CRF for the CDASHIG - Scenario 1 (Best Practice) Physical Examination

Example 1: Best Practice Recommendation

CDASH best practice recommends not submitting physical examination data in the SDTM PE domain. The record of a physical examination being performed may be recorded in the PR domain, as annotated below. Findings from a physical examination should be reported in the AE or MH domains, depending on whether the finding/abnormality started before or after a protocol-specified time period.

Title: Physical Examination-Scenario 1 (Best Practice)

Example CRF Completion Instructions If the physical finding/abnormality started prior to [protocol-specific time period], then it must be recorded as Medical History. If the physical finding started after [protocol-specific time period], it must be recorded as an Adverse Event.	
Indicate if the physical examination was performed by checking Yes or No.	Was the physical examination performed? ☐ Yes ☐ No <NY codelist>
Indicate why the procedure was not performed.	Reason Not Performed
Record the date the procedure was performed using this format (DD-MON-YYYY).	Date

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
PROCCUR	1	Was the physical examination performed?	Physical Examination Performed	Indicate if the physical examination was performed by checking Yes or No.	Text	PROCCUR	PROCCUR where PRTRT = "PHYSICAL EXAMINATION"	(NY)	Yes; No			radio	
PRREASOC	2	What was the reason that the procedure was not performed?	Reason Not Performed	Indicate why the procedure was not performed.	Text	SUPPPR.QVAL	SUPPPR.QVAL where SUPPPR.QNAM = "PRREASOC" and SUPPPR.QLABEL = "Reason for Occur Value"				prompt		
PRSTDAT	3	What was the procedure date?	Date	Record the date the procedure was performed using this format (DD-MON-YYYY).	Date	PRSTDTC					prompt		

Traditional Domain Models

Specification for the CDASHIG PE -Scenarios 2 and 3 (Traditional) Physical Examination Domain

In Scenarios 2 and 3, the sponsor may elect to submit physical exam results in the SDTMIG PE domain, following the more traditional approach for data collection. The CDASHIG Metadata Table includes this traditional PE scenario.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings	PE	PE-Traditional	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included in the database or populated during SDTM-based dataset creation before submission.
Findings	PE	PE-Traditional	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically pre-printed in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be pre-printed on the CRFs that are shipped to each site. EDC: This should be pre-populated.
Findings	PE	PE-Traditional	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What [is/was] the (study) [subject/participant] identifier?	[Subject/Participant] (Identifier)	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system-generated. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Findings	PE	PE-Traditional	N/A	4	VISIT	Visit Name	The name of a clinical encounter that encompasses planned and unplanned trial interventions, procedures, and assessments that may be performed on a subject.	What is the visit name?	[Visit]	Char	R/C	N/A	VISIT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The name of the clinical encounter is typically pre-printed or displayed within the EDC for any visit-based data collection, most often in Findings domains. This Visit text description is then available in any EDC data extract for that Findings domain.
Findings	PE	PE-Traditional	N/A	5	VISDAT	Visit Date	Date the clinical encounter occurred (or started).	What [is/was] the date of the visit?	(Visit) Date	Char	R/C	Record the [date/start date] of the visit using this format (DD-MON-YYYY).	N/A	This field is not an SDTM variable. The date of a measurement, test, observation can be determined from the date/time of visit (VISDAT/VISTIM) and then concatenating the CDASH	N/A	N/A	The date of the physical examination can be determined from the visit date variable (VISDAT) and applying that date to all of the physical examination findings at that visit, or the collection date can be included

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
														VISDAT/VISTIM components and populating the SDTMIG variable PEDTC in ISO 8601 format.			collected on the PE CRF using the date (PEDAT) field.
Findings	PE	PE-Traditional	N/A	6	PEPERF	Physical Examination Performed	An indication of whether a planned physical examination was performed.	Was the physical examination performed?	Physical Exam Performed	Char	O	If the physical examination was performed as planned, select Yes; otherwise, select No.	PESTAT	This does not map directly to an SDTMIG variable. May be used to derive a value into the SDTMIG variable PESTAT. If PEPERF="N" the value of PESTAT="NOT DONE". If PEPERF="Y", then the actual physical exam results would be reported by body system (see PERES). PECAT, PESCAT, PETEST and PETESTCD must reflect what tests were not done. If used for an entire CRF or other set of multiple tests with PECAT and PESCAT, PETESTCD=PEALL.	(NY)	N/A	This general prompt question is used as a data management tool to verify that missing results are confirmed missing. Used to ask if the physical exam was performed at the overall subject level at the specified time point. If this field is used, the result should only be mapped to PESTAT if the overall examination (at the subject level) was not performed. If the overall examination was performed, then the value of PESTAT would be null for each examined body systems and "NOT DONE" for any body systems not examined (see PERES).
Findings	PE	PE-Traditional	N/A	7	PECAT	Category for Examination	A grouping of topic-variable values based on user-defined characteristics.	What was the category of the physical examination?	[PE Category]; NULL	Char	O	Select the physical examination category, or record if not pre-printed on the CRF.	PECAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. The CRF can capture different types of physical exams using PECAT (e.g., GENERAL, OPHTHAMOLOGIC, NEUROLOGICAL). This may be pre-printed on the CRF. If PECAT is not collected (e.g., it is evident from the protocol design), it could be populated when creating SDTM-based datasets.
Findings	PE	PE-Traditional	N/A	8	PESCAT	Subcategory for Examination	A sub-division of the PECAT values based on user-defined characteristics.	What was subcategory of the physical examination?	[PE Subcategory]; NULL	Char	O	Select the physical examination subcategory, or record if not pre-printed on the CRF.	PESCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. The CRF can capture the different subtypes of PE categories using PESCAT. This may be pre-printed on the CRF. If PESCAT is not collected (e.g. it is evident from the protocol design), it could be populated when creating SDTM-based datasets. PESCAT can only be used if there is a PECAT, and it must be a subcategorization of PECAT.
Findings	PE	PE-Traditional	N/A	9	PEDAT	Physical Examination Date	The date when the physical examination was performed, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the date of the physical examination?	Exam Date	Char	R/C	Record complete date of examination using this format (DD-MON-YYYY).	PEDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable PEDTC in ISO 8601 format.	N/A	N/A	The date of examination may be determined from the date of the visit (VISDAT); if so, a separate assessment date field is not required.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings	PE	PE-Traditional	N/A	10	PETIM	Physical Examination Time	The time of examination, represented in an unambiguous time format (e.g., hh:mm:ss).	What was the time of the physical examination?	Exam Time	Char	O	Record the time of examination (as complete as possible).	PEDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable PEDTC in ISO 8601 format.	N/A	N/A	Collect time if it is relevant for the analysis.
Findings	PE	PE-Traditional	N/A	11	PESPID	Physical Exam Sponsor-Defined Identifier	A sponsor-defined identifier. In CDASH, this is typically used for pre-printed or auto-generated numbers on the CRF, or any other type of identifier that does not already have a defined CDASH identifier field.	[Sponsor-defined question]	[Sponsor defined]	Char	O	If collected on the CRF, the sponsor may insert instructions to ensure each record has a unique identifier.	PESPID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. May be used to create RELREC to link this record with a record in another domain.	N/A	N/A	Because SPID is a sponsor-defined identifier, conformance to Question Text or Item Prompt is not applicable. Typically used as an identifier in a data query to communicate clearly to the site the specific record in question or to reconcile data. May be used to record pre-printed number (e.g. line number, record number) on the CRF. This field may be populated by the sponsor's data collection system.
Findings	PE	PE-Traditional	N/A	12	PETEST	Body System Examined	Name of the body system.	What was the body system examined?	[Body System]	Char	HR	Per protocol, perform physical examinations of specified body systems.	PETEST; PETESTCD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The SDTMIG variable PETESTCD may be determined from the value collected in PETEST.	N/A	N/A	Sponsors should preprint all body systems to be examined on the CRF. The use of a complete list of body systems eliminates the need for an Other, Specify category; any abnormalities identified would fall under 1 of the specified categories. If the form is laid out as a grid, then words such as "Body System" can be included in the column heading.
Findings	PE	PE-Traditional	N/A	13	PERES	Physical Exam Verbatim Finding	Overall assessment of examined body system.	Were the results normal, abnormal, or not done?	(Result)	Char	HR	Indicate the overall assessment for each exam category/body system listed.	PEORRES	This does not map directly to an SDTMIG variable. May be used to populate a value into the SDTMIG variable PEORRES. If PERES="Normal", populate PEORRES with the value of PERES. If PERES="Abnormal", populate PEORRES with the value of PEDESC.	N/A	N/A	If the examined body system is normal, then the value in PEORRES should be "NORMAL". If the body system is not examined, then the value in PEORRES should be Null and the value in PESTAT should be "NOT DONE". If the examined body system is abnormal, then the value of PEORRES should contain the text of the abnormal findings (PEDESC). If the sponsor's data collection system allows for up-front recording of the abnormality and status using a single variable, then the SDTM variable name PEORRES may be used in place of CDASH variable names PERES and PEDESC. When creating SDTM-based datasets, PESTRESC is the standardized value for

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	PEORRES is populated for any record where PEORRES is not null. If the abnormal findings are coded using a dictionary, then PESTRESC should be the dictionary preferred term; if not coded, PEORRES.
Findings	PE	PE-Traditional	N/A	14	PEDESC	Physical Exam Abnormal Findings	Text description of any abnormal findings.	If the result was abnormal, what were the findings?	Abnormal Findings	Char	HR	Record all abnormal findings for the given body system in the space provided.	PEORRES	This does not map directly to an SDTMIG variable. May be used to populate a value into the SDTMIG variable PEORRES. If PERES="Normal", populate PEORRES with the value of PERES. If PERES="Abnormal", populate PEORRES with the value of PEDESC.	N/A	N/A	If the examined body system is normal, then the value in PEORRES should be "NORMAL". If the body system is not examined, then the value in PEORRES should be Null and the value in PESTAT should be "NOT DONE". If the examined body system is abnormal, then the value of PEORRES should contain the text of the abnormal findings (PEDESC). If the sponsor's data collection system allows for up-front recording of the abnormality and status using a single variable, then the SDTM variable name PEORRES may be used in place of CDASH variable names PERES and PEDESC.
Findings	PE	PE-Traditional	N/A	15	PECLSIG	Physical Exam Clinical Significance	An indication of whether the physical examination abnormality is clinically significant.	Was the physical examination result clinically significant?	Clinically Significant	Char	O	Was the physical examination result clinically significant? Select Yes or No.	PECLSIG	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(NY)	N/A	If this level of information is needed for reconciliation with adverse events, this field may be added to the CRF.
Findings	PE	PE-Traditional	N/A	16	PEEVAL	Physical Exam Evaluator	The role of the person who provided the evaluation.	Who was the evaluator?	[Evaluator/Reporter]	Char	O	Select the role of the person who provided the evaluation (e.g., INVESTIGATOR, ADJUDICATION COMMITTEE, VENDOR).	PEEVAL	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(EVAL)	N/A	Used only for results that are subjective (e.g., assigned by a person or a group). May be pre-printed or collected. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Findings	PE	PE-Traditional	N/A	17	PEREASND	Physical Exam Reason Not Examined	An explanation of why the data are not available.	What is the reason that data were not collected?	Reason Not Done	Char	O	Provide the reason the assessment was not done.	PEREASND	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Captures the reason why the measurement or test was not done. The reason may be chosen from a sponsor-defined list (e.g., broken equipment, subject refused) or entered as free text.
Findings	PE	PE-Traditional	N/A	18	PEBODSYS	Body System or Organ Class	Body system or organ class that is involved for a finding from the standard hierarchy for dictionary-coded results.	What is/was the [body system/ organ system]?	[Body System/Organ System]	Char	O	N/A	PEBODSYS	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	PEBODSYS should be assigned using a coding system. If included on the CRF, it is prepopulated and must be paired by the sponsor with specific verbatim terms. If not included on the CRF, PEBODSYS is assigned through the coding process.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings	PE	PE-Traditional	N/A	19	PEMODIFY	Physical Exam Modified Reported Term	If the value for PEORRES is modified for coding purposes, then the modified text is placed here.	N/A	N/A	Char	O	N/A	PEMODIFY	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	This is not a data collection field that would appear on the CRF. Sponsors will populate this through the coding process. PEMODIFY contains any modified text used for coding. Used only when the reported abnormalities in PEORRES are coded to a dictionary. This is in contrast to Events and Interventions domains, where the topic variable (TERM or TRT) is modified for coding.
Findings	PE	PE-Traditional	N/A	20	PELOC	Location of Physical Exam Finding	A description of the anatomical location of the subject, relevant to the collection of physical examination.	What was the anatomical location of the body system examined or the finding?	Anatomical Location	Char	O	Indicate the anatomical location of the abnormal finding.	PELOC	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(LOC)	N/A	Collected or pre-printed when the sponsor needs to identify the specific anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF. LAT, DIR, and PORTOT are used to further describe the anatomical location.
Findings	PE	PE-Traditional	N/A	21	PELAT	Physical Exam Laterality	Qualifier for anatomical location, further detailing the side of the body.	What was the side of the anatomical location of the body system examined or the finding?	Side	Char	O	Record the side of the anatomical location of the abnormal finding.	PELAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(LAT)	N/A	May be pre-printed or collected when the sponsor needs to identify the specific side of the anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Findings	PE	PE-Traditional	N/A	22	PEDIR	Physical Exam Directionality	Qualifier further detailing the position of the anatomical location, relative to the center of the body, organ, or specimen.	What was the directionality of the anatomical location of the of the body system examined or the finding?	Directionality	Char	O	Record the directionality of the anatomical location of the abnormal finding.	PEDIR	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(DIR)	N/A	May be pre-printed or collected when the sponsor needs to identify the directionality of the anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Findings	PE	PE-Traditional	N/A	23	PEPORTOT	PE Location Portion or Totality	Qualifier for anatomical location, further detailing the distribution (i.e., arrangement of, apportioning of).	What was the portion or totality of the anatomical location of the body system examined or the finding?	Portion or Totality	Char	O	Indicate the proportionality of the anatomical location of the of the abnormal finding.	PEPORTOT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(PORTOT)	N/A	Collected when the sponsor needs to identify the specific portionality for the anatomical locations. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Findings	PE	PE-Traditional	N/A	24	PEMETHOD	PE Method of Test or Examination	Method of the test or examination.	What was the method used for the test or examination?	Method	Char	O	Record the method of test or examination.	PEMETHOD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(METHOD)	N/A	This information may be collected when more than 1 method is possible, and collecting the method used is necessary.

Assumptions for the CDASHIG PE - Scenarios 2 and 3 (Traditional) Physical Examination Domain

1. If the sponsor chooses to create a traditional PE CRF, PEYN is still considered an optional field intended for monitoring and data cleaning only. If a sponsor wants to document information about overall physical examinations at the subject level that were not performed in the SDTM submission, this field is mapped to PESTAT. If PEPERF="N", then PECAT="GENERAL", PETEST="PHYSICAL EXAMINATION", PETESTCD="PEALL", and PESTAT="NOT DONE". If PEPERF="Y", then the actual physical examination results would be reported by body system (see PERES).
2. Original and Standardized Results
 - a. The CDASHIG variable PERES is used to collect test results or findings in the original units in character format as well as to collect the information on what specific body systems were not examined.
 - b. When the results of a test or examination are reported as Normal or Abnormal, a description of the abnormal finding may also be collected using the CDASHIG element PEDESC.
 - c. Information on what body system reviews were not done is mapped to the appropriate SDTMIG variables (i.e., PETEST, PETESTCD, PESTAT, with ORRES being NULL). The value of "NOT DONE" in the CDASHIG variable PERES should not be mapped to the SDTMIG variable PEORRES.
 - d. The standardization of the original findings results is expected to be performed when the SDTM submission datasets are created. The SDTM mapping rules are provided in the CDASHIG Metadata Table.
3. Date of Collection is the date that the examination was performed. The SDTMIG variable PEDTC can be populated from the date of visit.

Example CRF for the CDASHIG PE - Scenarios 2 and 3 (Traditional) Physical Examination Domain**Example 1: Traditional Body System PE****Title: Body System Physical Examination****Example CRF Completion Instructions**

The physical examination must be performed by a qualified health care professional (i.e., MD, PA or NP) listed on the FDA form 1572.

If the physical finding/abnormality started prior to/at [protocol-specific time period], then it must be recorded on the medical history page. If the physical finding/abnormality started after [protocol-specific time period], it must be recorded as an Adverse Event.

If physical examination was performed as planned then select Yes, otherwise, select No.

Was the physical examination performed?

PEPERF If PEPERF="N" the value of PESTAT="NOT DONE". If PEPERF="Y", PESTAT= NULL.

☐ Yes

☐ No

<NY codelist>

[PE Category]; NULL

PECAT Hidden/pre-populated

Sponsor Defined

Record complete date of examination using this format (DD-MON-YYYY).

Exam Date

PEDAT PEDTC

If collected on the CRF, sponsor may insert instructions to ensure each record has a unique identifier.

[Sponsor defined question]

PESPID

Per protocol, perform physical examinations of specified body systems.

What was the body system examined?

PETEST PETESTCD

Indicate the overall assessment for each exam category/body system listed.	Were the results normal, abnormal or not done? PERES If PERES="Normal", populate PEORRES with the value of PERES. If PERES="Abnormal", populate PEORRES with the value of PEDESC. ☐ NORMAL ☐ ABNORMAL ☐ NOT DONE
Record all abnormal findings for the given body system in the space provided.	If the result was abnormal, what were the findings? PEDESC If PERES="Normal", populate PEORRES with the value of PERES. If PERES="Abnormal", populate PEORRES with the value of PEDESC.
Was the physical examination result clinically significant? If Yes select Yes, otherwise, select No.	Was the physical examination result clinically significant? PECLSIG SUPPPE.QVAL where SUPPPE.QNAM ="PECLSIG" and SUPPPE.QLABEL="Clinically Significant". ☐ Yes ☐ No <NY codelist>
Select the role of the person who provided the evaluation (e.g., INVESTIGATOR, ADJUDICATION COMMITTEE, VENDOR).	Who was the evaluator? PEEVAL <EVAL codelist>
Provide the reason the assessment was not done.	What is the reason that data was not collected? PEREASND
	What was the body system/ organ system? PEBODSYS
Indicate the anatomical location of the abnormal finding.	What was the anatomical location of the body system examined or the finding? PELOC <LOC codelist>
Record the side of the anatomical location of the abnormal finding.	What was the side of the anatomical location of the body system examined or the finding? PELAT ☐ RIGHT ☐ LEFT ☐ BILATERAL <LAT codelist>
Record the directionality of the anatomical location of the abnormal finding.	What was the directionality of the anatomical location of the of the body system examined or the finding? PEDIR ☐ UPPER ☐ LOWER <DIR codelist>
Record the method of test or examination.	What was the method used for the test or examination? PEMETHOD ☐ CLINICAL EVALUATION ☐ PATHOLOGICAL EVALUATION <METHOD codelist>

CRF Metadata

CDASHIG Variable	Order Number	Question Text	Prompt	Case Report Form Completion Instructions	Data Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Codelist Name	CRF Implementation Notes	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
PEPERF	1	Was the physical examination performed?	Physical Exam Performed	If physical examination was performed as planned then select Yes, otherwise, select No.	text	PESTAT	If PEPERF="N" the value of PESTAT="NOT DONE". If PEPERF="Y", PESTAT= NULL.	(NY)	If used for an entire CRF or other set of multiple tests with PECAT and PESCAT, PETESTCD=PEALL.	Yes; No				
PECAT	2	What was category of the physical examination?	[PE Category]; NULL	Record the physical examination category, if not pre-printed on the CRF.	text	PECAT		N/A			Sponsor Defined			Y
PEDAT	4	What was the date of the physical examination?	Exam Date	Record complete date of examination using this format (DD-MON-YYYY).	text	PEDTC		N/A				prompt		

CDASHIG Variable	Order Number	Question Text	Prompt	Case Report Form Completion Instructions	Data Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Codelist Name	CRF Implementation Notes	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
PESPID	6	[Sponsor defined question]	[Sponsor defined]	If collected on the CRF, sponsor may insert instructions to ensure each record has a unique identifier.	text	PESPID		N/A						
PETEST	7	What was the body system examined?	[Body System]	Per protocol, perform physical examinations of specified body systems.	text	PETEST; PETESTCD		N/A						
PERES	8	Were the results normal, abnormal or not done?	(Result)	Indicate the overall assessment for each exam category/body system listed.	text	PEORRES	If PERES="Normal", populate PEORRES with the value of PERES. If PERES="Abnormal", populate PEORRES with the value of PEDESC.	N/A		NORMAL; ABNORMAL; NOT DONE				
PEDESC	9	If the result was abnormal, what were the findings?	Abnormal Findings	Record all abnormal findings for the given body system in the space provided.	text	PEORRES	If PERES="Normal", populate PEORRES with the value of PERES. If PERES="Abnormal", populate PEORRES with the value of PEDESC.	N/A						
PECLSIG	10	Was the physical examination result clinically significant?	Clinically Significant	Was the physical examination result clinically significant? If Yes select Yes, otherwise, select No.	text	SUPPPE.QVAL	SUPPPE.QVAL where SUPPPE.QNAM ="PECLSIG" and SUPPPE.QLABEL="Clinically Significant".	(NY)		Yes; No				
PEEVAL	11	Who was the evaluator?	[Evaluator/Reporter]	Select the role of the person who provided the evaluation (e.g., INVESTIGATOR, ADJUDICATION COMMITTEE, VENDOR).	text	PEEVAL		(EVAL)						
PEREASND	12	What is the reason that data was not collected?	Reason Not Done	Provide the reason the assessment was not done.	text	PEREASND		N/A						
PEBODSYS	13	What was the body system/ organ system?	[Body System/Organ System]	N/A	text	PEBODSYS		N/A						
PELOC	15	What was the anatomical location of the body system examined or the finding?	Anatomical Location	Indicate the anatomical location of the abnormal finding.	text	PELOC		(LOC)						
PELAT	16	What was the side of the anatomical location of the body system examined or the finding?	Side	Record the side of the anatomical location of the abnormal finding.	text	PELAT		(LAT)		RIGHT; LEFT; BILATERAL				
PEDIR	17	What was the directionality of the anatomical location of the of the body system examined or the finding?	Directionality	Record the directionality of the anatomical location of the abnormal finding.	text	PEDIR		(DIR)		UPPER; LOWER				
PEMETHOD	19	What was the method used for the test or examination?	Method	Record the method of test or examination.	text	PEMETHOD		(METHOD)		CLINICAL EVALUATION; PATHOLOGICAL EVALUATION				

8.3.18 QRS - Questionnaires, Ratings, and Scales

Description/Overview for the CDASHIG QRS - Questionnaires, Ratings, and Scales Domain

Questionnaires, ratings, and scales (QRS) are standardized and often validated instruments, and the data collected using them are represented in SDTMIG domains including Questionnaires (QS), Disease Response and Clin Classification (RS), and Functional Tests (FT). See the SDTMIG or the QRS web page (<https://www.cdisc.org/foundational/qrs>) for complete information on these domains. CDISC publishes supplemental specifications called QRS supplements, including example annotated CRFs (aCRFs) for many of these instruments.

The CDISC QRS web page describes the development methodology for new QRS terminology. Because the nature of QRS precludes implementers from modifying the published data collection structure, the CDASHIG metadata table does not include specifications for QRS. Instead, implementers should refer to instrument-specific QRS supplements on the QRS web page for example aCRFs, instrument-specific assumptions, and data examples.

For definitions and descriptions of the different types of questionnaires, ratings, and scales, visit the QRS web page.

The released QRS documentation is maintained on the CDISC QRS web page.

Specification for the CDASHIG QRS - Questionnaires, Ratings, and Scales Domain

Reference the QRS supplements posted on the QRS web page and the specifications for specific domains (QS, RS, and FT) in the SDTMIG.

Assumptions for the CDASHIG QRS - Questionnaires, Ratings, and Scales Domain

1. CDISC standards for QRS include controlled terminology for test codes (--TESTCD), test names (--TEST), standard timing values, standard results for database values, and an aCRF with SDTMIG domain variable names. These standards can be used to create an electronic data collection (EDC) structure following the same conventions that would be used for any Findings class domain. The SDTMIG QS, RS, and FT domains utilize a normalized data structure; that is, 1 variable (--TEST) is used to capture the test name and another variable (--ORRES) is used to capture the result. Even though these domain variables are presented as a normalized structure in the CDASHIG metadata table, implementers using a denormalized structure (1 variable for each test) should create variable names that mirror the values in QRS Controlled Terminology (e.g., QSTESTCD, RSTESTCD, FTTESTCD).
2. Electronic representations of QRS instruments should reflect the title, subheadings, and exact numbering and wording of questions as they appear in original versions.
3. Electronic response fields should allow either the original response (--ORRES) or coded value (--STRESC) to be input—but usually not both, to avoid discrepancies.
4. Checkboxes that appear on validated QRS instruments should remain checkboxes in the CRF/eCRF.
5. Copyrighted instruments may include the copyright notice on the eCRF/CRF. For more copyright Information about QRS instruments, see the QRS web page.
6. Instrument-specific assumptions are included in the QRS supplements posted on the QRS web page.<http://www.cdisc.org/qrs>

Example CRF for the CDASHIG QRS - Questionnaires, Ratings, and Scales Domain

See the examples in the QRS supplements posted on the QRS web page (<https://www.cdisc.org/standards/foundational/qrs>).

8.3.19 RE - Respiratory System Findings

Description/Overview for the CDASHIG RE - Respiratory System Findings Domain

The CDASHIG RE domain contains physiological and morphological findings related to the respiratory system, including the organs that are involved in breathing (e.g., nose, throat, larynx, trachea, bronchi, lungs).

Specification for the CDASHIG RE - Respiratory System Findings Domain

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings	RE	N/A	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTM variable listed in the SDTM Target column .	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included in the database or populated during SDTM-based dataset creation.
Findings	RE	N/A	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	Paper: This is typically pre-printed in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be pre-printed on the CRFs that are shipped to each site. EDC: This should be pre-populated.
Findings	RE	N/A	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What is the subject identifier?	Subject	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be provided to the site using a pre-populated list in the system. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Findings	RE	N/A	N/A	4	VISIT	Visit Name	The name of a clinical encounter that encompasses planned and unplanned trial interventions, procedures, and assessments that may be performed on a subject.	What is the visit name?	[Visit]	Char	R/C	N/A	VISIT	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	The name of the clinical encounter is typically pre-printed on the CRF or displayed in the EDC for any visit-based data collection, most often in Findings domains. This Visit text description is then available in any EDC data extract for that Findings domain.
Findings	RE	N/A	N/A	5	VISDAT	Visit Date	Date the clinical encounter occurred (or started).	What [is/was] the date of the visit?	(Visit) Date	Char	R/C	Record the [date/start date] of the visit using this format (DD-MON-YYYY).	N/A	This field is not an SDTM variable. The date of a measurement, test, observation can be determined from the date/time of visit (VISDAT/VISTIM) and then concatenating the CDASH VISDAT/VISTIM	N/A	N/A	The date the RE measurements were collected can be determined from the visit date variable (VISDAT) and applying that date to all of the observations at that visit, or the collection date can be included on the RE CRF

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
														components and populating the SDTMIG variable VSDTC in ISO 8601 format.			using the Respiratory Assessments (REDAT) field.
Findings	RE	N/A	N/A	6	REPERF	Respiratory Assessment Performed	An indication of whether a planned measurement, test, observation or specimen was performed/collected.	Was a respiratory assessment performed?	Respiratory Assessment Performed	Char	O	Indicate whether or not a respiratory assessment was done.	RESTAT	This field does not map directly to an SDTM variable. May be used to populate a value into the SDTM variable RESTAT. If the CDASH variable REPERF="N", the value of the SDTM variable RESTAT is "NOT DONE". If REPERF= "Y", RESTAT is null. A combination of SDTM variables (e.g., RECAT and RESCAT, RETPT) is used to indicate that multiple tests were not done. In this situation, the SDTM variable RETESTCD would be populated with REALL and an appropriate test name (RETEST) provided. See SDTMIG for additional information.	(NY)	N/A	This field is used to capture a response to whether or not a planned measurement, test or observation was performed. A negative response can be collected as "N" and mapped to the -STAT variable in SDTM as " NOT DONE".
Findings	RE	N/A	N/A	7	REDAT	Respiratory Assessment Date	The date the respiratory measurement was performed, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the date the respiratory measurement was taken?	Date	Char	R/C	Record date of measurements using this format (DD-MON-YYYY).	REDTC	This field does not map directly to an SDTM variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTM variable REDTC in ISO 8601 format.	N/A	N/A	The date the RE measurements were collected can be determined from the visit date variable (VISDAT) and applying that date to all of the observations at that visit, or the collection date can be included on the RE CRF using the Date of Collection (REDAT) field.
Findings	RE	N/A	N/A	8	RETIM	Respiratory Assessment Time	The time of measurement, represented in an unambiguous time format (e.g., hh:mm:ss).	What was the time of the respiratory system measurement?	Time	Char	R/C	Record time of measurement (as complete as possible).	REDTC	This field does not map directly to an SDTM variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTM variable REDTC in ISO 8601 format.	N/A	N/A	A single collection time (e.g., RETIM) may be collected for all the measurements when they are performed at the same time. The time of each measurement can also be collected using a CDASH variable [RETESTCD] RETIM.
Findings	RE	N/A	N/A	9	RETPT	RE Assessment Planned Time Point Name	A text description of planned time points when measurements should be taken, as defined in the protocol.	What is the planned time point for this respiratory assessment measurement?	[Planned Time Point Name]	Char	R/C	Record the planned time-point labels for respiratory assessment, if not pre-printed on the CRF.	RETPT	Maps directly to the SDTM variable listed in the SDTM Target column. See the SDTMIG for additional information on representing time points. The SDTM time-point anchors RETPTREF (text description) and RERFTDTC (date/time) may be needed, as well as SDTMIG variables RETPTNUM, REELTM.	N/A	N/A	Planned time points are needed to differentiate multiple sequential assessments. It is recommended that time points should be pre-printed on the CRF rather than collected in a free-text field. If the form is laid out as a grid, then terms such as "Planned Time Point" can be included in the column heading.
Findings	RE	N/A	N/A	10	RETEST	Respiratory Test Name	Descriptive name of the test or examination used to obtain the measurement or finding.	What is the respiratory test name?	[Respiratory Test Name]	Char	HR	Record the name of the respiratory test, if not pre-printed on the CRF.	RETEST; RETESTCD	Maps directly to the SDTM variable listed in the SDTM Target column. The SDTM variable RETESTCD may be determined from the value collected in RETEST using the Controlled Terminology List RETESTCD. The SDTMIG variables RETESTCD and RETEST are required in SDTM.	(RETEST)	N/A	The test name will usually be pre-printed on the CRF, and not solicited as a question. If the form is laid out as a grid, then "Test" or "Test Name" can be included in the column heading. RETEST is most useful as the PROMPT on the field in which the

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	RESULT for that test is collected.
Findings	RE	N/A	N/A	11	RECAT	Category for Respiratory Test	A grouping of topic-variable values based on user-defined characteristics.	What is the category of the respiratory test?	[Respiratory Test Category]; NULL	Char	R/C	Record the respiratory assessment category, if not pre-printed on the CRF.	RECAT	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a pre-printed category value on the CRF, not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Category" can be included as the column header.
Findings	RE	N/A	N/A	12	RESCAT	Subcategory for Respiratory Test	A sub-division of the RECAT values based on user-defined characteristics.	What was the subcategory of the respiratory assessment?	[Respiratory Assessment Subcategory]; NULL	Char	O	Record the respiratory assessment subcategory, if not pre-printed on the CRF.	RESCAT	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a pre-printed category value on the CRF, not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Subcategory" can be included in the column heading. RESCAT can only be used if there is a RECAT, and it must be a subcategorization of RECAT.
Findings	RE	N/A	N/A	13	REORRES	RE Test Result in Original Units	Result of the measurement or finding as originally received or collected.	What was the result of the measurement?	[RETEST] Result	Char	HR	Record the respiratory test result.	REORRES	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	Both quantitative results and interpretive findings or summaries may be recorded here.
Findings	RE	N/A	N/A	14	REORRESU	Respiratory Test Original Unit	The unit of the result as originally received or collected.	What was the unit of the result?	Unit	Char	R/C	Record or select the original unit in which these data were collected, if not pre-printed on CRF.	REORRESU	Maps directly to the SDTM variable listed in the SDTM Target column.	(UNIT)	N/A	Should be pre-printed on the CRF with the associated test when possible, rather than collected in a free-text field. Should be included if applicable and not available elsewhere.
Findings	RE	N/A	N/A	15	RESER	Respiratory Test Result or Finding	The result of the measurement or finding as originally received or collected.	Was the result (normal/abnormal/absent/present/ [sponsored defined response])?	(Result)	Char	O	Indicate the overall assessment for [RETEST].	REORRES	This does not map directly to an SDTM variable. The mapping instructions depend on the implementation; for example: 1. Where RESER is to be used collect Normal, Abnormal or similar type classifications (e.g., Absent/Present) with a description of the abnormal result using the CDASH field REDESC. For SDTM submission datasets, if the CDASH field RESER = "NORMAL", populate the SDTM variables REORRES and RESTRESC with	N/A	N/A	The CDASH field RESER is used when the collected results are not mapped directly to the SDTM variable REORRES and must be transformed. For example, 1. RESER is used to collect standardized values on the CRF and the value of "OTHER" is included and "Specify Other" is collected. 2. REORRES is collected using Normal, Abnormal and a description of the

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
														the value of the CDASH field RERES. If the CDASH field RERES is "ABNORMAL", populate the SDTM variable REORRES with the CDASH field REDESC. If the reported findings in REDESC are coded using a dictionary, then the SDTM variable RESTRESC is populated with the dictionary preferred term and REMODIFY is populated with the modified text used for coding. If the reported findings in REDESC are not coded, then the SDTM variable RESTRESC is populated with the CDASH REDESC field. The SDTM variable RENRIND may be populated with "NORMAL" or "ABNORMAL" if appropriate. 2. Where RERES is used to collect standardized values (e.g. a codelist) on the CRF and the value of "OTHER" is included, the CDASH field RERESOTH can be used to collect free-text values for "Specify Other". When using this field, the "OTHER" value recorded in the CDASH field RERES field is mapped to the SDTM variable RESTRESC and the value in the CDASH field RERESOTH is mapped to the SDTM variable REORRES. See SDTMIG for additional information.			abnormality is collected.
Findings	RE	N/A	N/A	16	REDESC	Description of Respiratory Test Finding	Text description of respiratory test findings.	What was the description of the (abnormality/observed finding/[Sponsor-defined])?	(Abnormal) Findings	Char	O	Record all abnormal findings for the respiratory test in the space provided.	REORRES	This does not map directly to an SDTM variable. May be used to populate a value into the SDTM variable REORRES. If RERES="Normal", populate REORRES with the value of RERES. If RERES="Abnormal", populate REORRES with the value of REDESC.	N/A	N/A	RERES and REDESC are used when a question is asked to collect the finding result, with a follow-up question for a description of the finding. See CDASH General finding Assumptions
Findings	RE	N/A	N/A	17	RERESOTH	Respiratory Test Result Other	A free-text result which provides further information about the original received or collected result.	If other is selected, [explain/specify/provide more detail].	[Specify Other/Explain/Specify Details]	Char	O	Provide more detail for the "Other" result.	REORRES	When using this CDASH field, the "OTHER" value collected in the CDASH field RERES is mapped to the SDTM variable RESTRESC	N/A	N/A	In cases where RERES is used to collect standardized values on the CRF and the value of "OTHER" is included, the CDASH field

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
														and the value in the CDASH field RERESOTH is mapped to the SDTM variable REORRES.			RERESOTH can be used to collect free-text values for "Specify Other".
Findings	RE	N/A	N/A	18	REORNRL0	RE Ref Range Lower Limit-Original Unit	The lower end of normal range or reference range for continuous results stored in REORRES.	What was the lower limit of the reference range?	Normal Range Lower Limit	Char	O	Record the lower limit of the reference range of the respiratory test.	REORNRL0	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	REORNRL0 should be populated only for continuous findings. The SDTM variable RESTNRC should be populated only for noncontinuous results. These data may be obtained from the lab or the electronic equipment. These data could be derived from a site or lab specific set of normal ranges stored in a look-up table.
Findings	RE	N/A	N/A	19	REORNRLH	RE Ref Range Upper Limit-Original Unit	The upper end of normal range or reference range for continuous results stored in REORRES.	What was the upper limit of the reference range?	Normal Range Upper Limit	Char	O	Record the upper limit of the reference range of the respiratory test.	REORNRLH	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	REORNRLH should be populated only for continuous findings. The SDTM variable RESTNRC should be populated only for noncontinuous results. These data may be obtained from the lab or the electronic equipment. These data could be derived from a site or lab specific set of normal ranges stored in a look-up table.
Findings	RE	N/A	N/A	20	RENRLND	RE Reference Range Indicator	An indication or description about how the value compares to the normal range or reference range.	How do the reported values compare within the [reference/normal/expected] range?	Comparison to [Reference/Expected/Normal] Range	Char	O	Record where the test result fell with respect to the reference range.	RENRLND	Maps directly to the SDTM variable listed in the SDTM Target column.	(NRLND)	N/A	Reference ranges may be defined by REORNRL0, REORNRLH, RESTNRC or other objective criteria. Reference Range Indicator (e.g., Y, N; HIGH, LOW; NORMAL, ABNORMAL) may be included if not derived or determined programmatically after data collection. Should not be used to indicate clinical significance.
Findings	RE	N/A	N/A	21	RESTAT	Completion Status	This variable is used to indicate that data are not available, by having the site recording the value as "Not Done".	Indicate if the [RETEST] was not [answered/assessed/done/evaluated/performed].	Not Done	Char	O	Indicate if the respiratory assessment or measurement was not done.	RESTAT	Maps directly to the SDTM variable listed in the SDTM Target column. If collected, the Origin (a column in the Define-XML) ="CRF"; if populated from other sources such as free text or sponsor-defined listing for REREASND, the Origin ="DERIVED".	(ND)	N/A	Used only when the response value is collected as NOT DONE or NULL in lieu of or in addition to the CDASH REPERF field. Typically a checkbox which indicates the test was NOT DONE. This field can be useful when multiple questions are asked to confirm that a blank result field is meant to be blank.
Findings	RE	N/A	N/A	22	REREASND	Reason Not Done	An explanation for why the data are not available.	Was the was the reason that the respiratory (assessment/[RETEST]) was not [collected / answered / done / assessed / evaluated]?	Reason Not [Answered/Collected/Done/Evaluated/ Assessed/Available]	Char	O	Provide the reason the measurement or test was not done.	REREASND	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	Sponsor-defined controlled terminology may be used. The reason the data are not available may be chosen from a sponsor-defined codelist (e.g., broken equipment, subject refused) or entered as free text. When REREASND is used, RESTAT should also be populated in the SDTM-based dataset.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings	RE	N/A	N/A	23	REPOS	Position of Subject During Observation	The position of the subject during a measurement or examination.	What was the position of the subject during the assessment?	Position	Char	O	Record the position of subject at time of test.	REPOS	Maps directly to the SDTM variable listed in the SDTM Target column.	(POSITION)	N/A	Results may be affected by whether conditions for respiratory test, as specified in the protocol, were properly met. One common condition is the subject's position. If the protocol requires this type of information, then a CDASH variable [RETESTCD]_REPOS may be created for each RETESTCD and added to the CRF, if needed.
Findings	RE	N/A	N/A	24	RELOC	Location	Location used for the measurement.	What was the anatomical location where the measurement was taken?	Anatomical Location	Char	O	Record or select location on body where the measurement was performed.	RELOC	Maps directly to the SDTM variable listed in the SDTM Target column.	(LOC)	N/A	Collected or pre-printed when the sponsor needs to identify the specific anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF.LAT, DIR, and PORTOT are used to further describe the anatomical location.
Findings	RE	N/A	N/A	25	RELAT	Laterality	Qualifier for anatomical location, further detailing the side of the body.	What was the side of the anatomical location of the [measurement/test/ examination]?	Side	Char	O	Record the side of the anatomical location of the respiratory test or measurement.	RELAT	Maps directly to the SDTM variable listed in the SDTM Target column.	(LAT)	N/A	May be pre-printed or collected when the sponsor needs to identify the specific side of the anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Findings	RE	N/A	N/A	26	REDIR	Directionality	Qualifier further detailing the position of the anatomical location, relative to the center of the body, organ, or specimen.	What was the directionality of the anatomical location of the respiratory test?	Directionality	Char	O	Record the directionality of the anatomical location of the respiratory test.	REDIR	Maps directly to the SDTM variable listed in the SDTM Target column.	(DIR)	N/A	May be pre-printed or collected when the sponsor needs to identify the directionality of the anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Findings	RE	N/A	N/A	27	REMETHOD	Method of Respiratory Test	The method of the test or examination.	What was the method (used for the [measurement/test/examination])?	Method	Char	O	Record the method used for the respiratory test.	REMETHOD	Maps directly to the SDTM variable listed in the SDTM Target column.	(METHOD)	N/A	This information may be collected when more than 1 method is possible, and collecting the method used is necessary.
Findings	RE	N/A	N/A	28	REEVAL	Respiratory Test Evaluator	The role of the person who provided the evaluation.	Who was the evaluator?	Evaluator	Char	O	Select the role of the person who provided the evaluation.	REEVAL	Maps directly to the SDTM variable listed in the SDTM Target column.	(EVAL)	N/A	Used only for results that are subjective (e.g., assigned by a person or a group). May be a pre-printed or collected. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Findings	RE	N/A	N/A	29	REEVALID	Respiratory Test Evaluator Identifier	An identifier used to distinguish multiple evaluators with the same role recorded in REEVAL.	What is the identifier of the evaluator?	Evaluator Identifier	Char	O	Record the unique identifier assigned to the person making the evaluation.	REEVALID	Maps directly to the SDTM variable listed in the SDTM Target column.	(MEDEVAL)	N/A	Collect if multiple evaluators are used in the study (may be omitted if multiple evaluators are not used); values should follow controlled terminology.
Findings	RE	N/A	N/A	30	REACPTFL	Accepted Record Flag	An indication that the evaluation is considered, by an independent assessor, to be the accepted or final evaluation.	Was this record considered to be the accepted evaluation?	Accepted Evaluation	Char	O	Indicate whether or not the evaluation is considered, by an independent assessor, to be	REACPTFL	Maps directly to the SDTM variable listed in the SDTM Target column.	(NY)	N/A	Use where more than one assessor provides an evaluation of a result or response. Typically a checkbox with the value of "Y" or "NULL", which

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
												the accepted or final evaluation.					Indicates the evaluation was accepted.
Findings	RE	N/A	N/A	31	REREPNUM	Respiratory Test Repetition Number	The instance number of a test that is repeated within a given timeframe for the same test. The level of granularity can vary (e.g., within a time point, within a visit).	What was the repetition number within the time point for this measurement?	Repetition Number	Char	O	Record the repetition number of the measurement within the time point.	REREPNUM	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	The repetition number of the test/measurement within the time point may be pre-printed on the CRF.
Findings	RE	N/A	N/A	32	RECLSIG	Respiratory Test Clinical Significance	An indication of whether the test results were clinically significant.	Was this result clinically significant?	Clinically Significant	Char	O	Record whether respiratory test results were clinically significant.	RECLSIG	Maps directly to the SDTM variable listed in the SDTM Target column.	(NY)	N/A	Could apply to specific measurements or to overall interpretation, as required by the protocol.

Assumptions for the CDASHIG RE - Respiratory System Findings Domain

1. This domain is used to represent the results/findings of a respiratory diagnostic procedure (e.g., spirometry). Information about the conduct of the procedure(s), if collected, should be submitted in the Procedures (PR) domain.
2. Many respiratory assessments require the use of a device. When data about the device used for an assessment or additional information about its use in the assessment are collected, SPDEVID should be included in the record. See the SDTMIG for Medical Devices for further information about SPDEVID and the device domains.
3. Any identifier variables, timing variables, or Findings general observation class qualifiers may be added to the RE domain, but the following qualifiers would generally not be used in the RE domain: --MODIFY, --BODSYS, and --FAST.

Example CRFs for the CDASHIG RE - Respiratory System Findings Domain

Example 1: Respiratory Assessment

Title: Respiratory Assessment Form

Indicate if the assessments were performed. If "Yes", include the appropriate details where indicated on the CRF.	Was the respiratory assessment performed? REPERF RESTAT = "NOT DONE" where REPERF = "N" and RESTAT = null when REPERF = "Y"	☐ Yes ☐ No <NY codelist>
Provide the reason the measurement or test was not done.	What was the reason that the respiratory assessment was not done? REREASND	
Record the date of assessment using this format (DD-MON-YYYY). Assessments during the study are expected to have a complete start date.	Date REDAT REDTC	
Record time of measurement (as complete as possible).	Time RETIM REDTC	
Record the measurement results.	What was the result of the Total Lung Capacity (TLC)? TLC_REORRES REORRES where RETESTCD = "TLC"	
	Unit TLC_REORRESU REORRESU where RETESTCD = "TLC" Pre-populated	L <UNIT codelist>
Record the measurement results.	What was the result of the TLC Percent Predicted? TLCPP_REORRES REORRES where RETESTCD = "TLCPP"	
	Unit TLCPP_REORRESU REORRESU where RETESTCD = "TLCPP" Pre-populated	% <UNIT codelist>
Record the measurement result.	What was the result of the Forced Expiratory Volume in 1 Second (FEV1)? FEV1_REORRES REORRES where RETESTCD = "FEV1"	
	Unit FEV1_REORRESU REORRESU where RETESTCD = "FEV1" Pre-populated	L <UNIT codelist>
Record the measurement results.	What was the result of the Percent Predicted FEV1? FEV1PP_REORRES REORRES where RETESTCD = "FEV1PP"	
	Unit FEV1PP_REORRESU REORRESU where RETESTCD = "FEV1PP" Pre-populated	% <UNIT codelist>

Record the measurement results.	What was the result of the Forced Vital Capacity (FVC)? FVC_REORRES REORRES where RETESTCD = "FVC"	
	Unit FVC_REORRESU REORRESU where RETESTCD = FVC <i>Pre-populated</i>	L <UNIT codelist>
Record the measurement results.	What was the result of the Percent Predicted FVC? FVCPPEORRES REORRES where RETESTCD = "FVCPPE"	
	Unit FVCPPEORRESU REORRESU where RETESTCD = "FVCPPE" <i>Pre-populated</i>	% <UNIT codelist>
Record the measurement results.	What was the result of the Diffusion Capacity of Lung for Carbon Monoxide (DLCO)? DLCO_REORRES REORRES where RETESTCD = "DLCO"	
	Unit DLCO_REORRESU REORRESU where RETESTCD = "DLCO" <i>Pre-populated</i>	mL/min/mmHg <UNIT codelist>
Record the measurement results.	What was the result of the Percent Predicted DLCO? DLCOPEORRES REORRES where RETESTCD = "DLCOPE"	
	Unit DLCOPEORRESU REORRES where RETESTCD = "DLCOPE" <i>Pre-populated</i>	% <UNIT codelist>

CRF Metadata

Order	CDASH Variable	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target	SDTM Variable Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-specified Value	Query Display	List Style	Hidden
1	REPERF	Was the respiratory assessment performed?	Respiratory Assessment Performed	Indicate if the assessments were performed. If "Yes", include the appropriate details where indicated on the CRF.	Text	RESTAT	RESTAT = "NOT DONE" where REPERF = "N" and RESTAT = null when REPERF = "Y"	(NY)	Yes; No				
2	REREASND	What was the reason that the respiratory assessment was not done?	Reason Not Done	Provide the reason the measurement or test was not done.	Text	REREASND							
3	REDAT	What was the respiratory assessment date?	Date	Record the date of assessment using this format (DD-MON-YYYY).	Date	REDTC					Prompt		

Order	CDASH Variable	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target	SDTM Variable Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-specified Value	Query Display	List Style	Hidden
				Assessments during the study are expected to have a complete start date.									
4	RETIM	What was time of the respiratory test measurement?	Time	Record time of measurement (as complete as possible).	Text	REDTC					prompt		
5	TLC_REORRES	What was the result of the Total Lung Capacity (TLC)?	TLC	Record the measurement results.	Text	REORRES	REORRES where RETESTCD = "TLC"						
6	TLC_REORRESU	What was the unit of the Total Lung Capacity (TLC)?	Unit	Record or select the original units in which these data were collected, if not preprinted on CRF.	Text	REORRESU	REORRESU where RETESTCD = "TLC"	(UNIT)		L	prompt		
7	TLCPP_REORRES	What was the result of the TLC Percent Predicted?	Percent Predicted TLC	Record the measurement results.	Text	REORRES	REORRES where RETESTCD = "TLCPP"						
8	TLCPP_REORRESU	What was the unit of the TLC Percent Predicted?	Unit	Record or select the original units in which these data were collected, if not preprinted on CRF.	Text	REORRESU	REORRESU where RETESTCD = "TLCPP"	(UNIT)		%	prompt		
9	FEV1_REORRES	What was the result of the Forced Expiratory Volume in 1 Second (FEV1)?	FEV1	Record the measurement result.	Text	REORRES	REORRES where RETESTCD = "FEV1"						
10	FEV1_REORRESU	What was the unit of the Forced Expiratory Volume in 1 Second (FEV1)?	Unit	Record or select the original units in which these data were collected, if not preprinted on CRF.	Text	REORRESU	REORRESU where RETESTCD = "FEV1"	(UNIT)		L	prompt		
11	FEV1PP_REORRES	What was the result of the Percent Predicted FEV1?	Percent Predicted FEV1	Record the measurement results.	Text	REORRES	REORRES where RETESTCD = "FEV1PP"						
12	FEV1PP_REORRESU	What was the unit of the Percent Predicted FEV1?	Unit	Record or select the original units in which these data were collected, if not	Text	REORRESU	REORRESU where RETESTCD = "FEV1PP"	(UNIT)		8.3.19.1.1 %	prompt		

Order	CDASH Variable	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target	SDTM Variable Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-specified Value	Query Display	List Style	Hidden
				preprinted on CRF.									
13	FVC_REORRES	What was the result of the Forced Vital Capacity (FVC)?	FVC	Record the measurement results.	Text	REORRES	REORRES where RETESTCD = "FVC"						
14	FVC_REORRESU	What was the unit of the Forced Vital Capacity (FVC)?	Unit	Record or select the original units in which these data were collected, if not preprinted on CRF.	Text	REORRESU	REORRESU where RETESTCD = FVC	(UNIT)		L	prompt		
15	FVCPPE_REORRES	What was the result of the Percent Predicted FVC?	Percent Predicted FVC	Record the measurement results.	Text	REORRES	REORRES where RETESTCD = "FVCPPE"						
16	FVCPPE_REORRESU	What was the unit of the Percent Predicted FVC?	Unit	Record or select the original units in which these data were collected, if not preprinted on CRF.	Text	REORRESU	REORRESU where RETESTCD = "FVCPPE"	(UNIT)		%	prompt		
17	DLCO_REORRES	What was the result of the Diffusion Capacity of Lung for Carbon Monoxide (DLCO)?	DLCO	Record the measurement results.	Text	REORRES	REORRES where RETESTCD = "DLCO"						
18	DLCO_REORRESU	What was the unit of the Diffusion Capacity of Lung for Carbon Monoxide (DLCO)?	Unit	Record or select the original units in which these data were collected, if not preprinted on CRF.	Text	REORRESU	REORRESU where RETESTCD = "DLCO"	(UNIT)		mL/min/mmHg	prompt		
19	DLCOPPE_REORRES	What was the result of the Percent Predicted DLCO?	Percent Predicted DLCO	Record the measurement results.	Text	REORRES	REORRES where RETESTCD = "DLCOPPE"						
20	DLCOPPE_REORRESU	What was the unit of the Percent Predicted DLCO?	Unit	Record or select the original units in which these data were collected, if not preprinted on CRF.	Text	REORRESU	REORRES where RETESTCD = "DLCOPPE"	(UNIT)		%	prompt		

Example 2: Reversibility Assessment

This is an example of a single normalized CRF collecting both pre- and post-bronchodilator assessments. This form collects the overall/reversibility assessment information based on the 2 respiratory assessments at different time points. Collection of data may be set up in a log format in an EDC platform.

Title: Reversibility Assessment Form

CRF Instructions		
Record the reversibility test results. Complete each section of the form.		
Reversibility Assessment		
Indicate if the reversibility assessment was performed. If "Yes", include the appropriate details where indicated on the CRF. If not performed, provide the reason the assessment was not performed. Record the date of reversibility assessment using this format (DD-MON-YYYY). Assessments during the study are expected to have a complete start date.	Was reversibility assessment performed? REPERF RESTAT = "NOT DONE" where REPERF = "N" and RESTAT = null when REPERF = "Y" Respiratory Assessment Category RECAT <i>Hidden/pre-populated</i> What is the reason reversibility assessment was not performed? REREASND Date REDAT REDTC	☐ Yes ☐ No <NY codelist> Reversibility Assessment
Pre-Bronchodilator		
Record the time of pre-bronchodilator assessment was done (as complete as possible) Record the measurement result.	PRE-BRONCHODILATOR RETPT <i>Hidden/pre-populated</i> Method REMETHOD <i>Pre-populated</i> What was the time of the respiratory assessment? RETIM REDTC FEV1 FEV1_REORRES REORRES where RETESTCD = "FEV1" Unit FEV1_REORRESU REORRESU where RETESTCD = "FEV1" <i>Pre-populated</i>	PRE-BRONCHODILATOR SPIROMETRY <METHOD codelist> L/s <UNIT codelist>
Bronchodilator (Albuterol) Administration		
Indicate if albuterol was administered to the subject If administered, record the time albuterol was administered. (as complete as possible) Record the number of puffs administered	Was the subject administered albuterol? AGNY Not Submitted Bronchodilator agent AGTRT <i>Pre-populated</i> Time of administration AGTIM AGDTC Number of puffs administered AGDOSE Unit AGDOSU <i>Pre-populated</i>	☐ No ☐ Yes <NY codelist> Albuterol Puffs <UNIT codelist>

Reversibility Assessment Result		
Record the reversibility measurement result.	FEV1 Reversibility FEV1REV_REORRES REORRES where RETESCD = FEV1REV	
	FEV1 Reversibility Unit FEV1REV_REORRESU REORRESU where RETESTCD = FEV1REV Pre-populated	% <UNIT codelist>
Record whether respiratory test result was clinically significant.	Was this result clinically significant? RECLSIG SUPPRE.QVAL when SUPPRE.QNAM = "CLSIG" and SUPPRE.QLABEL = "Clinical Significance";	☐ No ☐ Yes <NY codelist>
Select the role of the person who provided the evaluation	What was the role of the person performing the assessment? REEVAL	☐ INVESTIGATOR ☐ ADJUDICATION COMMITTEE ☐ VENDOR <EVAL codelist>

CRF Metadata

Order	CDASH Variable	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target	SDTM Variable Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-specified Value	Query Display	List Style	Hidden
Reversibility Assessment													
1	REPERF	Was reversibility assessment performed?	Reversibility Assessment Performed	Indicate if the reversibility assessment was performed. If "Yes", include the appropriate details where indicated on the CRF.	Text	N/A	RESTAT = "NOT DONE" where REPERF = "N" and RESTAT = null when REPERF = "Y"	(NY)	Yes; No			Radio	
2	RECAT	What is the category of the respiratory assessment?	Respiratory Assessment Category	Record the respiratory assessment category, if not preprinted on the CRF.	Text	RECAT				Reversibility Assessment			Y
3	REREASND	What is the reason reversibility assessment was not performed?	Reason Not Done	If not performed, provide the reason the assessment was not performed.	Text	REREASND							
4	REDAT	What was the assessment date?	Date	Record the date of reversibility assessment using this format (DD-MON-YYYY). Assessments during the study are expected to have a complete start date.	Date	REDTC						Date	
Pre-Bronchodilator													
5	RETPT	What was the planned time point of the respiratory assessment?	PRE-BRONCHODILATOR	Fields below are related to Pre-Bronchodilator respiratory assessment	Text	RETPT				PRE-BRONCHODILATOR			Yes
6	REMETHOD	What was the method used for the respiratory assessment?	Method	Record the method used for the respiratory assessment.	Text	REMETHOD		(METHOD)		SPIROMETRY			
7	RETIM	What was the time of the respiratory assessment?	Time	Record the time of pre-bronchodilator assessment was done (as complete as possible)	Text	REDTC						Time	
8	FEV1_REORRES	What was the result of the Forced Expiratory Volume in 1 Second?	FEV1	Record the measurement result.	Text	REORRES	REORRES where RETESTCD = "FEV1"				prompt		
9	FEV1_REORRESU	What was the unit of the Forced Expiratory Volume in 1 Second?	Unit	Record or select the original units in which these data were collected, if not preprinted on CRF.	Text	REORRESU	REORRESU where RETESTCD = "FEV1"	(UNIT)		L/s			
Bronchodilator (Albuterol) Administration													
10	AGNY	Was the subject administered albuterol?	Bronchodilator administered	Indicate if albuterol was administered to the subject	Text			(NY)	No; Yes			radio	
11	AGTRT	What is the name of bronchodilator agent?	Bronchodilator agent	Name of bronchodilator agent, if not pre-specified	Text	AGTRT				Albuterol	prompt		
12	AGTIM	What time was albuterol administered?	Time of administration	If administered, record the time albuterol was administered. (as complete as possible)	Text	AGDTC					prompt	Time	
13	AGDOSE	How many puffs were administered?	Number of puffs administered	Record the number of puffs administered	Text	AGDOSE					prompt		
14	AGDOSU	What was the unit of the albuterol administration?	Unit	Record administration unit, if not preprinted on CRF.	Text	AGDOSU		(UNIT)		Puffs	prompt		
Post-Bronchodilator													
15	RETPT	What was the planned time point of the respiratory assessment?	POST-BRONCHODILATOR	Fields below are related to Pre-Bronchodilator respiratory assessment	Text	RETPT				POST-BRONCHODILATOR			Yes
16	REMETHOD	What was the method used for the respiratory assessment?	Method	Record the method used for the respiratory assessment.	Text	REMETHOD		(METHOD)		SPIROMETRY			
17	RETIM	What was the time of the respiratory assessment?	Time	Record the time post-bronchodilator assessment was done (as complete as possible)	Text	REDTC						Time	
18	FEV1_REORRES	What was the result of the Forced Expiratory Volume in 1 Second?	FEV1	Record the measurement result.	Text	REORRES	REORRES where RETESTCD = "FEV1"				prompt		
19	FEV1_REORRESU	What was the unit of the Forced Expiratory Volume in 1 Second?	Unit	Record or select the original units in which these data were collected, if not preprinted on CRF.	Text	REORRESU	REORRESU where RETESTCD = "FEV1"	(UNIT)		L/s			
Reversibility Assessment Result													
19	FEV1REV_REORRES	What is the FEV1 Reversibility?	FEV1 Reversibility	Record the reversibility measurement result.	Text	REORRES	REORRES where RETESCD = FEV1REV				prompt		
20	FEV1REV_REORRESU	FEV1 Reversibility Unit	FEV1 Reversibility Unit	Record or select the original units in which these data were collected, if not preprinted on CRF.	Text	REORRESU	REORRESU where RETESTCD = FEV1REV	(UNIT)		%	prompt		

Order	CDASH Variable	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target	SDTM Variable Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-specified Value	Query Display	List Style	Hidden
21	RECLSIG	Was this result clinically significant?	Clinically significant	Record whether respiratory test result was clinically significant.	Text	RECLSIG	SUPPRE.QVAL when SUPPRE.QNAM = "CLSIG" and SUPPRE.QLABEL = "Clinical Significance".	(NY)	No; Yes			Radio	
22	REEVAL	What was the role of the person performing the assessment?	Evaluator	Select the role of the person who provided the evaluation	Text	REEVAL		(EVAL)	INVESTIGATOR; ADJUDICATION COMMITTEE; VENDOR			Radio	

8.3.20 RP - Reproductive System Findings

Description/Overview for the CDASHIG RP - Reproductive System Findings Domain

The CDASHIG RP domain is used to collect all reproductive detail information about a subject, such as reproductive ability, reproductive history (e.g., number of previous pregnancies, number of births), pregnancy during the study, and so on. All reproductive system findings for a subject are contained in the RP domain rather than other domains. Although sponsors previously may have reported this information in the Subject Characteristics (SC) domain, this information is now consolidated into the RP domain.

Specification for the CDASHIG RP - Reproductive System Findings Domain

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings	RP	N/A	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included in the database or populated during SDTM-based dataset creation before submission.
Findings	RP	N/A	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically pre-printed in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be pre-printed on the CRFs that are shipped to each site. EDC: This should be pre-populated.
Findings	RP	N/A	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What [is/was] the (study) [subject/participant] identifier?	[Subject/Participant] (Identifier)	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system-generated. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings	RP	N/A	N/A	4	VISIT	Visit Name	The name of a clinical encounter that encompasses planned and unplanned trial interventions, procedures, and assessments that may be performed on a subject.	What is the visit name?	[Visit]	Char	R/C	N/A	VISIT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The name of the clinical encounter is typically pre-printed on the CRF or displayed in the EDC for any visit-based data collection, most often in Findings domains. This Visit text description is then available in any EDC data extract for that Findings domain.
Findings	RP	N/A	N/A	5	VISDAT	Visit Date	Date the clinical encounter occurred (or started).	What [is/was] the date of the visit?	(Visit) Date	Char	R/C	Record the [date/start date] of the visit using this format (DD-MON-YYYY).	N/A	This field is not an SDTM variable. The date of a measurement, test, observation can be determined from the date/time of visit (VISDAT/VISTIM) and then concatenating the CDASH VISDAT/VISTIM components and populating the SDTMIG variable RPDTC in ISO 8601 format.	N/A	N/A	The date the reproductive system findings were collected can be determined from the visit date variable (VISDAT) and applying that date to all of the reproductive system findings at that visit, or the collection date can be included on the RP CRF using the date (RPDAT) field.
Findings	RP	N/A	N/A	6	RPCAT	Category for Repro System Findings	A grouping of topic-variable values based on user-defined characteristics.	What was the category of the reproductive system?	[Reproductive System Category]; NULL	Char	O	Record the reproductive system category, if not pre-printed on the CRF.	RPCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a pre-printed category value on the CRF, and not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Category" can be included in the column heading.
Findings	RP	N/A	N/A	7	RPSCAT	Subcategory for Repro System Findings	A sub-division of the RPCAT values based on user-defined characteristics.	What was the subcategory of the reproductive system?	Reproductive System Subcategory]; NULL	Char	O	Record the reproductive system subcategory, if not pre-printed on the CRF.	RPSCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a pre-printed category value on the CRF, and not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Subcategory" can be included in the column heading. RPSCAT can only be used if there is an RPCAT, and it must be a subcategorization of RPCAT.
Findings	RP	N/A	N/A	8	RPPERF	Reproductive System Evaluation Performed	An indication of whether a planned measurement, series of	Was a reproductive system evaluation performed?	Reproductive System Evaluation Performed	Char	O	Indicate whether or not a planned reproductive system	RPSTAT	This does not map directly to an SDTMIG variable. May be used to derive a value into the SDTMIG variable	(NY)	N/A	This may be implemented for a series of reproductive system evaluations, or a specific reproductive

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
							measurements, test, or observation was performed.					evaluation was done.		RPSTAT. If the CDASH field RPPERF="N", the value of RPSTAT will be "NOT DONE". If RPPERF="Y", RPSTAT should be null. A combination of SDTMIG variables (e.g., RPCAT and RPSCAT, RPTPT) is used to indicate that multiple tests were not done. In this situation, the SDTMIG variable RPTSTCD would be populated as RPALL and an appropriate test name (RPTTEST) provided. See SDTMIG for additional information.			system test. This general prompt question is used as a data management tool to verify that missing results are confirmed missing.
Findings	RP	N/A	N/A	9	RPREASND	RP Reason Not Performed	An explanation for why the data are not available.	What was the reason the reproductive system test was not collected?	Reason Not Done	Char	O	Provide the reason the measurement or test was not done.	RPREASND	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The reason the data are not available may be chosen from a sponsor-defined list (e.g., broken equipment, subject refused) or entered as free text. When PCREASND is used, the SDTMIG variable PCSTAT should also be populated in the SDTM-based dataset.
Findings	RP	N/A	N/A	10	RPYN	Any Reproductive System Findings	General prompt question regarding whether any reproductive system findings are available.	Were there any reproductive system findings?	Any Reproductive System Findings	Char	O	Indicate if there are reproductive system findings. If Yes, include the appropriate details where indicated on the CRF.	N/A	Does not map to an SDTMIG variable. The SDTM annotated CRF indicates that this field is NOT SUBMITTED.	(NY)	N/A	The intent/purpose of collecting this field is to help with data cleaning and monitoring. It provides verification that all other fields on the CRF were deliberately left blank.
Findings	RP	N/A	N/A	11	RPSPID	RP Sponsor-Defined Identifier	A sponsor-defined identifier. In CDASH, this is typically used for pre-printed or auto-generated numbers on the CRF, or any other type of identifier that does not already have a defined CDASH identifier field.	[Sponsor-defined question]	[Sponsor defined]	Char	O	If collected on the CRF, the sponsor may insert instructions to ensure each record has a unique identifier.	RPSPID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. May be used to create RELREC to link this record with a record in another domain.	N/A	N/A	Because SPID is a sponsor-defined identifier, conformance to Question Text or Item Prompt is not applicable. Typically used as an identifier in a data query to communicate clearly to the site the specific record in question or to reconcile data. May be used to record pre-printed number (e.g., line number, record number) on the CRF. This field may be populated by the sponsor's data collection system.
Findings	RP	N/A	N/A	12	RPTTEST	Reproductive System Findings Test Name	Descriptive name for reproductive system finding.	What is the reproductive finding name?	[Reproductive System Findings Test Name]	Char	HR	Select the name of the reproductive system finding, or record if not pre-printed on the CRF. If collected on the CRF, the sponsor may	RPTTEST; RPTTESTCD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The SDTMIG variable RPTTESTCD may be determined from the value collected in RPTTEST. The SDTMIG variables RPTTESTCD and RPTTEST	(RPTTEST)	N/A	Required to identify which test the result is for. It is recommended that test names be pre-printed on the CRF rather than collected in a free-text field. If the form is laid out as a grid, then words such

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
												provide additional instructions to ensure the data is entered as intended.		are required in the SDTM submission datasets. Use appropriate CDISC Controlled Terminology for the test and test code.			as "Test" can be included in the column heading.
Findings	RP	N/A	N/A	13	RPORRES	RP Result or Finding in Original Units	Result of the finding defined in reproductive system finding, as originally received or collected.	What was the result for the reproductive system question?	(Result)	Char	HR	Record the reproductive system finding.	RPORRES	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Both quantitative results and interpretive findings or summaries may be recorded here.
Findings	RP	N/A	N/A	14	RPORRESU	RP Original Units	The unit of the result as originally received or collected.	What was the unit of the result?	Unit	Char	R/C	Record the original unit in which these data were collected, if not pre-printed on the CRF.	RPORRESU	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(UNIT)	N/A	Should be pre-printed on the CRF with the associated test when possible, rather than collected in a free-text field.
Findings	RP	N/A	N/A	15	RPDAT	Reproductive System Finding Date	The date on which the reproductive system result or finding was collected, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the date the reproductive system question was collected?	Collection Date	Char	R/C	Record the date of collection using this format (DD-MON-YYYY).	RPDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable RPDTC in ISO 8601 format.	N/A	N/A	This should be a complete date. The date of collection may be determined from the date of visit (VISDAT).

Assumptions for the CDASHIG RP - Reproductive System Findings Domain

Any information on medications related to reproduction (e.g., contraceptives, fertility treatments) should not be collected in the RP domain; instead, they will need to be collected in the Concomitant/Prior Medications (CM) domain.

Example CRF for the CDASHIG RP - Reproductive System Findings Domain

Example 1

Title: Reproductive System Findings

Indicate if there are reproductive system findings. If yes, include the appropriate details where indicated on the CRF.

Record date of collection using this format (DD-MON-YYYY).

Record the subject's age at menarche.

Record the number of pregnancies.

Record the number of live births.

Record the subject's age at menopause.

Reproductive System Category RPCAT <i>Hidden/pre-populated</i>	FEMALE REPRODUCTIVE STATUS
Were there any reproductive system findings? RPYN <i>Not Submitted</i>	☐ Yes ☐ No <NY codelist>
Collection Date RPDAT RPDTC	
What was the subject's menarche age? MENARAGE_RPORRES RPORRES WHERE RPTSTCD = "MENARAGE"	
Unit MENARAGE_RPORRESU RPORRESU WHERE RPTSTCD = "MENARAGE" <i>Pre-populated</i>	YEARS <UNIT codelist>
What was the number of pregnancies? PREGNN_RPORRES RPORRES WHERE RPTSTCD = "PREGNN"	
What was the number of live births? BRTHLVN_RPORRES RPORRES WHERE RPTSTCD = "BRTHLVN"	
What was the subject's menopause age? MENOAGE_RPORRES RPORRES WHERE RPTSTCD = "MENOAGE"	
Unit MENOAGE_RPORRESU RPORRESU WHERE RPTSTCD = "MENOAGE" <i>Pre-populated</i>	YEARS <UNIT codelist>

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
RPCAT	1	What was the category of the reproductive system?	Reproductive System Category	Record the reproductive system category, if not pre-printed on the CRF.	Text	RPCAT				FEMALE REPRODUCTIVE STATUS			Yes
RPYN	2	Were there any reproductive system findings?	Any Reproductive System Findings	Indicate if there are reproductive system findings. If yes, include the appropriate details where indicated on the CRF.	Text	N/A		(NY)	Yes; No			radio	
RPDAT	4	What was the date the	Collection Date	Record date of collection using this	Date	RPDTC					Prompt		

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
		reproductive system question was collected?		format (DD-MON-YYYY).									
MENARAGE_RPORRES	5	What was the subject's menarche age?	Menarche Age	Record the subject's age at menarche.	Integer	RPORRES	RPORRES WHERE RPTTESTCD = "MENARAGE"						
MENARAGE_RPORRESU	6	What was the unit?	Unit	Record or select the original unit in which these data were collected, if not pre-printed on CRF.	Text	RPORRESU	RPORRESU WHERE RPTTESTCD = "MENARAGE"	(UNIT)		YEARS	Prompt		
PREGNN_RPORRES	7	What was the number of pregnancies?	Number of Pregnancies	Record the number of pregnancies.	Integer	RPORRES	RPORRES WHERE RPTTESTCD = "PREGNN"						
BRTHLVN_RPORRES	8	What was the number of live births?	Number of Live Births	Record the number of live births.	Integer	RPORRES	RPORRES WHERE RPTTESTCD = "BRTHLVN"						
MENOAGE_RPORRES	9	What was the subject's menopause age?	Menopause Age	Record the subject's age at menopause.	Integer	RPORRES	RPORRES WHERE RPTTESTCD = "MENOAGE"						
MENOAGE_RPORRESU	10	What was the unit?	Unit	Record or select the original unit in which these data were collected, if not pre-printed on CRF.	Text	RPORRESU	RPORRESU WHERE RPTTESTCD = "MENOAGE"	(UNIT)		YEARS	Prompt		

8.3.21 RS - Disease Response and Clin Classification

Description/Overview for the CDASHIG RS - Disease Response and Clin Classification Domain

The CDASHIG RS domain describes assessment of disease response to treatment or clinical classifications, which are often based on published criteria. Clinical classifications may be based solely on objective data from clinical records, or they may involve a clinical judgment or interpretation of the directly observable signs, behaviors, or other physical manifestations related to a condition or subject status.

Specification for the CDASHIG RS - Disease Response and Clin Classification Domain

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings	RS	N/A	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included in the database or populated during SDTM-based dataset creation before submission.
Findings	RS	N/A	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted on the CRFs that are shipped to each site. EDC: This should be prepopulated.
Findings	RS	N/A	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What [is/was] the (study) [subject/participant] identifier?	[Subject/Participant] (Identifier)	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system-generated. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Findings	RS	N/A	N/A	4	VISIT	Visit Name	The name of a clinical encounter that encompasses planned and unplanned trial interventions, procedures, and assessments that may be performed on a subject.	What is the visit name?	[Visit]	Char	R/C	N/A	VISIT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The name of the clinical encounter is typically preprinted on the CRF or displayed within the EDC for any visit-based data collection, most often in Findings domains. This Visit text description is then available in any EDC data extract for that Findings domain.
Findings	RS	N/A	N/A	5	VISDAT	Visit Date	Date the clinical encounter occurred (or started).	What [is/was] the date of the visit?	(Visit) Date	Char	R/C	Record the [date/start date] of the visit using this format (DD-MON-YYYY).	N/A	This field is not an SDTM variable. If the date of a measurement, test, observation can be determined from the date/time of visit (VISDAT/VISTIM), concatenate the CDASH VISDAT/VISTIM components and populate the SDTMIG variable	N/A	N/A	If the date the tests were collected can be determined from the visit date variable (VISDAT), apply that date to all of the tests at that visit, or the collection date can be collected on the CRF using the date (RSDAT). In this domain, it may not be

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
														RSDTC in ISO 8601 format.			appropriate to use the visit date as RSDTC.
Findings	RS	N/A	N/A	6	RSCAT	Category for Response or Clin Class	A grouping of topic-variable values based on user-defined characteristics.	What is the [category/ criteria] for the [disease response/clinical classification] or What is the [response/clinical classification] criteria?	[Disease Response/Clinical Classification Category]; NULL	Char	R/C	N/A	RSCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(CCCAT) (ONCRSCAT)	N/A	This is most commonly either a heading or a preprinted category value on the CRF, not a question to which the site would provide an answer. If a question is asked, the response is typically a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Category" can be included in the column heading. There are separate codelists used for categorizing records about oncology response criteria (ONCRCAT) or other clinical classification (CRSCAT). Collect if multiple clinical classifications, or disease responses are active in a single study/database; otherwise, information should be distinguished somewhere on a form (e.g., table name, title, tab).
Findings	RS	N/A	N/A	7	RSSCAT	Subcategory for Response or Clin Class	A sub-division of the RSCAT values based on user-defined characteristics.	What is the subcategory for the [disease response/clinical classification]?	[Disease Response/Clinical Classification Sub-Category]; NULL	Char	R/C	N/A	RSSCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be preprinted on the CRF or screen and prepopulated in the data management system. This is not typically a question to which the site would provide an answer. RSSCAT can only be used if there is an RSCAT, and it must be a subcategorization of RSCAT.
Findings	RS	N/A	N/A	8	RSPERF	Response or Clin Class Performed	An indication of whether a planned disease response or clinical classification assessment was performed.	Was the [(disease) response/clinical classification] assessment performed?	[Disease Response/Clinical Classification] Assessment	Char	O	Indicate whether or not the [disease response/clinical classification] assessment was performed.	RSSTAT	This does not map directly to an SDTMIG variable. May be used to derive a value into the SDTMIG variable RSSTAT. If RSPERF="N", the value of RSSTAT will be "NOT DONE". If RSPERF="Y", RSSTAT should be null. A combination of SDTMIG variables (e.g., RSCAT and RSSCAT, RSTPT) is used to indicate that multiple tests were not done. In this situation, the SDTMIG variable RSTESTCD would be populated as RSALL and an appropriate test name	(NY)	N/A	A Not Done checkbox, which indicates the test was "NOT DONE". Typically, there would be 1 check box for each measurement. This field can be useful to confirm that a blank result field is meant to be blank.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
														(RSTEST) provided. See SDTMIG for additional information.			
Findings	RS	N/A	N/A	9	RSREASND	Response or Clin Class Reason Not Done	An explanation of why the data are not available.	Why was the [disease response/clinical classification] assessment not performed?	Reason Response Assessment Not Performed	Char	O	If the response was not collected, indicate why.	RSREASND	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The reason that data are not available may be chosen from a sponsor-defined list (e.g., Not Imaged, Patient Refusal, Site Error) or entered as free text. When RSREASND is used, the SDTMIG variable RSSTAT should also be populated in the SDTM-based dataset.
Findings	RS	N/A	N/A	10	RSDAT	Response or Clin Class Assessment Date	The date of the Response or Clin Class was performed, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the date the response or clinical classification was performed?	Date	Char	R/C	Record the date of measurements using this format (DD-MON-YYYY).	REDTC	This field does not map directly to an SDTM variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTM variable RSDTC in ISO 8601 format.	N/A	N/A	The date the measurements were collected can be determined from the visit date variable (VISDAT) and applying that date to all of the observations at that visit, or the collection date can be included on the RS CRF using the Date of Collection (RSDAT) field.
Findings	RS	N/A	N/A	11	RSEVAL	Response or Clin Class Evaluator	The role of the person who provided the information.	What was the role of the person performing the [disease response/clinical classification] assessment?	Evaluator	Char	R/C	Indicate who performed the assessment.	RSEVAL	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(EVAL)	N/A	Used only for results that are subjective (assigned by a person or a group). RSEVAL is expected for oncology response criteria. It can be null when the investigator provides all the data in a study. It should contain no null values when data from 1 or more evaluator are used in a study.
Findings	RS	N/A	N/A	12	RSEVALID	Response or Clin Class Evaluator ID	Used to distinguish multiple evaluators with the same role.	What is the evaluator identifier?	Evaluator Identifier	Char	O	Identify the evaluator providing this evaluation.	RSEVALID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(MEDEVAL)	N/A	When multiple assessors play the role identified in RSEVAL, values of RSEVALID will attribute a row of data to a particular assessor.
Findings	RS	N/A	N/A	13	RSLNKID	Response or Clin Class Link ID	An identifier used to link the disease response assessment to the related record in another domain which was used to determine the response result.	What was the [Disease Response or Clinical Classification] Link ID Identifier?	[Disease Response or Clinical Classification] Link ID	Char	O	If collected, record the unique [Disease Response or Clinical Classification] Link ID.	RSLNKID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	This variable is used to provide a unique code in order to link records across related CRFs (e.g., RS and TR) when appropriate. Sponsors develop their own conventions for populating RSLNKID.
Findings	RS	N/A	N/A	14	RSLNKGRP	Response or Clin Class Link Group	A grouping identifier used to link the disease response assessment to a group of related record in another domain which was used to	What was the [Disease Response or Clinical Classification] Link Group Identifier?	[Disease Response or Clinical Classification] Link Group	Char	O	If collected, record the unique [Disease Response or Clinical Classification] Link Group ID.	RSLNKGRP	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	This variable is used to provide a unique code in order to link a group of records across related CRFs (e.g., RS and TR) when appropriate. Sponsors develop their own conventions for populating RSLNKGRP.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
							determine the response result.										
Findings	RS	N/A	N/A	15	RSTEST	Response or Clin Class Assessment Name	Descriptive name of the disease response or clinical classification used to obtain the measurement or finding.	What was the [disease response/clinical classification] test name?	[Disease Response / Clinical Classification Test Name]	Char	HR	Record the name of the RS test, if not preprinted on the CRF. If collected on the CRF, the sponsor may provide additional instructions to ensure the data is entered as intended.	RSTEST; RSTESTCD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The SDTMIG variable RSTESTCD may be determined from the value collected in RSTEST. The SDTMIG variables RSTESTCD and RSTEST are required in the SDTM submission datasets. Use appropriate CDISC Controlled Terminology for the test and test code.	(ONCRTS)	N/A	Required to identify which test the result is for. It is recommended that the test names be preprinted on the CRF rather than collected in a free-text field. If the form is laid out as a grid, then words such as "Test" can be included in the column heading.
Findings	RS	N/A	N/A	16	RSORRES	Response or Clin Class Original Result	Result of the disease response or clinical classification as originally received, collected, or calculated.	What was the [disease response/clinical classification]?	(Result)	Char	HR	Indicate the response classification.	RSORRES	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Both quantitative results and interpretive findings or summaries may be recorded here.
Findings	RS	N/A	N/A	17	RSORRESU	Response or Clin Class Original Units	The unit of the result as originally received or collected.	What was the [disease response/clinical classification] unit?	Unit	Char	HR	Record or select the original units in which these data were collected, if not preprinted on CRF.	RSORRESU	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(UNIT)	N/A	Should be preprinted on the CRF with the associated test when possible, rather than collected in a free-text field. Should be included if applicable and not available elsewhere.

Assumptions for the CDASHIG RS - Disease Response and Clin Classification Domain

1. This domain is for clinical classifications, including oncology disease response criteria.
2. Whenever possible, all physical manifestations that are collected to determine the disease response or clinical classification should be represented in the topic-based domains (e.g., Laboratory Test Results, Vital Signs,Tumor/Lesion Identification, Clinical Events) to which they pertain. For example, if a lab test value is collected and then scored for a response evaluation or clinical classification measure, the lab test value should be collected in the LB domain using the rules that apply to that domain.
3. The RS domain is applicable for representing responses to assessment criteria used in oncology studies.
4. When using the RS domain to represent response evaluation or clinical classification determined from data from other domains (i.e., relates back to another source domain), the appropriate identifier must be collected to allow the relevant RELRECs to be created. These may include --LNKID, --LNKGRP, --SPID, --REFID, or the CDASH --NO variables.
5. RSCAT is used to group a set of assessments based on a disease response criterion (published or protocol-defined) or a clinical classification. There are 2 codelists for RSCAT:
 - a. ONCRSCAT contains Controlled Terminology terms for oncology disease response assessments.
 - b. CCCAT contains Controlled Terminology for other clinical classifications instruments.
6. Within CDISC, clinical classification instruments represented in the RS domain fall under the concept of questionnaires, ratings, and scales (QRS).
 - a. Oncology response criteria do not currently follow the processes for other clinical classifications instruments. Note that in oncology studies, RSSTRESC is subject to controlled terminology in the SDTM datasets.

- b. For other clinical classification instruments, QRS naming rules apply to the codelists. CDISC publishes standard QRS supplements to the SDTMIG along with Controlled Terminology.
 - i. All standard supplement development is coordinated with the CDISC SDS QRS Subteam as the governing body. The process involves drafting the controlled terminology and defining measure-specific, standardized values for qualifier, timing, and result variables to populate the SDTM Questionnaires (QS), Functional Tests (FT), and RS domains. These supplements are developed based on user demand and therapeutic-area standards development needs. Sponsors should always consult the CDISC website to review the terminology and supplements prior to modeling any QRS measure data in the RS domain.
 - ii. Sponsors may participate in and/or request the development of additional supplements and terminology through the CDISC SDS QRS Subteam and the Controlled Terminology QRS Subteam.
 - iii. Once generated, the clinical classifications supplement is posted on the CDISC website (<http://www.cdisc.org/grs>).
 - iv. Sponsors should always consult published QRS supplements for guidance on submitting derived information in SDTM-based domains.
- 7. When a clinical classification result is based on multiple procedures, scans, images, or physical exams performed on different dates, the individual procedure, scan, image, and physical exam dates should be collected. RSDTC data may then be derived from these individual dates as specified by the sponsor.
- 8. The RS domain is intended for collected data. This includes records derived by the investigator or with a data collection tool, but not sponsor-derived records. Sponsor-derived records and results should be provided in an analysis dataset. However, totals and subtotals in clinical classification measures are considered collected data if recorded by an assessor. If these totals are operationally derived through a data collection tool (e.g., eCRF, ePRO), then RSDRVLFL should be "Y".
- 9. The Controlled Terminology Teams have created codetable mapping files for oncology (available at <https://www.cdisc.org/standards/terminology/>) based on published terminology, which show relationships between terms in CT codelists.

Example CRFs for the CDASHIG RS - Disease Response and Clin Classification

Example 1

Title: Child-Pugh Classification

	Child-Pugh Classification RSCAT <i>Hidden/pre-populated</i>	CHILD-PUGH CLASSIFICATION <CCCAT or ONCRSCAT codelist>
Indicate whether or not the Child-Pugh Classification assessment was performed.	Was the Child-Pugh Classification assessment performed? RSPERF <i>If RSPERF = "N", the value of RSSTAT will be "NOT DONE". If RSPERF = "Y", RSSTAT should be null</i>	☐ Yes ☐ No <NY codelist>
If the response was not collected, indicate why.	Why was the Child-Pugh Classification assessment not performed? RSREASND	
Indicate the Encephalopathy Grade.	What was the Encephalopathy Grade? CPS0101_RSORRES <i>RSORRES where RSTESTCD = "CPS0101"</i>	☐ None ☐ 1 or 2 ☐ 3 or 4
Indicate the Ascites Grade.	What was the Ascites grade? CPS0102_RSORRES <i>RSORRES where RSTESTCD = "CPS0102"</i>	☐ Absent ☐ Slight ☐ Moderate

Indicate the Serum Bilirubin Grade.	What was the Serum Bilirubin? CPS0103_RSORRES RSORRES where RSTESTCD = "CPS0103"	☐ <2 ☐ 2 to 3 ☐ >3
Indicate the Serum Bilirubin Units.	What was the Serum Bilirubin unit? CPS0103_RSORRESU RSORRESU where RSTESTCD = "CPS0103"	☐ mg/dL
If local labs were used, record the identifier for the source serum bilirubin result.	What was the identifier for the laboratory result used to make this serum bilirubin classification? CPS0103_RSLBNO Associate with related LB record via RELREC	
Indicate the Serum Albumin Grade.	What was the Serum Albumin Grade? CPS0104_RSORRES RSORRES where RSTESTCD = "CPS0104"	☐ >3.5 ☐ 2.8 to 3.5 ☐ <2.8
Indicate the Serum Albumin Unit.	What was the Serum Albumin unit? CPS0104_RSORRESU RSORRESU where RSTESTCD = "CPS0104"	☐ g/dL
If local labs were used, record the identifier for the source serum albumin result.	What was the identifier for the laboratory result used to make this serum albumin classification? CPS0104_RSLBNO Associate with related LB record via RELREC	
Indicate the Prothrombin Time (sec prolonged).	What was the Prothrombin Time (sec prolonged)? CPS0105A_RSORRES RSORRES where RSTESTCD = "CPS0105A"	☐ <4 ☐ 4 to 6 ☐ >6
If local labs were used, record the identifier for the source prothrombin time (sec prolonged).	What was the identifier for the laboratory result used to make this prothrombin time (sec prolonged) classification? CPS0105A_RSLBNO Associate with related LB record via RELREC	
Indicate the Prothrombin Time (international normalized ratio) Grade.	What was the Prothrombin Time (international normalized ratio)? CPS0105B_RSORRES RSORRES where RSTESTCD = "CPS0105B"	☐ <1.7 ☐ 1.7-2.3 ☐ >2.3
If local labs were used, record the identifier for the source prothrombin time (international normalized ratio).	What was the identifier for the laboratory result used to make this prothrombin time ((international normalized ratio) classification? CPS0105B_RSLBNO Associate with related LB record via RELREC	
Indicate the Child-Pugh Grade Total Score.	What was the Child-Pugh Total Score? CPS0106_RSORRES RSORRES where RSTESTCD = "CPS0106"	
Indicate the Child-Pugh Grade (A=5 or 6 points, Grade B=7 to 9 points, C=10 to 15 points).	What was the Child-Pugh Grade? CPS0107_RSORRES RSORRES where RSTESTCD = "CPS0107"	☐ A ☐ B ☐ C

CRF Metadata

Order Number	CDASH Variable	Question Text	Prompt	Data Type	Case Report Form Completion Instructions	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Codelist Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
1	RSCAT	What is the clinical classification criteria?	Child-Pugh Classification	text	N/A	RSCAT	N/A	(CCCAT);(ONCRSCAT)		CHILD-PUGH CLASSIFICATION	prompt		Y

Order Number	CDASH Variable	Question Text	Prompt	Data Type	Case Report Form Completion Instructions	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Codelist Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
2	RSPERF	Was the Child-Pugh Classification assessment performed?	Child-Pugh Classification Assessment Performed	text	Indicate whether or not the Child-Pugh Classification assessment was performed.	RSSTAT	If RSPERF = "N", the value of RSSTAT will be "NOT DONE". If RSPERF = "Y", RSSTAT should be null	(NY)	Yes; No				
3	RSREASND	Why was the Child-Pugh Classification assessment not performed?	Reason Child-Pugh Classification assessment Not Performed	text	If the response was not collected, indicate why.	RSREASND	N/A	N/A					
4	CPS0101_RSORRES	What was the Encephalopathy Grade?	Encephalopathy Grade	text	Indicate the Encephalopathy Grade.	RSORRES where RSTESTCD = "CPS0101"		N/A	None; 1 or 2; 3 or 4				
5	CPS0102_RSORRES	What was the Ascites grade?	Ascites Grade	text	Indicate the Ascites Grade.	RSORRES where RSTESTCD = "CPS0102"		N/A	Absent; Slight; Moderate				
6	CPS0103_RSORRES	What was the Serum Bilirubin?	Serum Bilirubin	text	Indicate the Serum Bilirubin Grade.	RSORRES where RSTESTCD = "CPS0103"		N/A	<2; 2 to 3; >3				
7	CPS0103_RSORRESU	What was the Serum Bilirubin unit?	Serum Bilirubin Unit	text	Indicate the Serum Bilirubin Units.	RSORRESU where RSTESTCD = "CPS0103"		N/A	mg/dL				
8	CPS0103_RSLBNO	What was the identifier for the laboratory result used to make this serum bilirubin classification?	Related Laboratory Result Identifier	text	If local labs were used, record the identifier for the source serum bilirubin result.	N/A	Associate with related LB record via RELREC	N/A					
9	CPS0104_RSORRES	What was the Serum Albumin Grade?	Serum Albumin Grade	text	Indicate the Serum Albumin Grade.	RSORRES where RSTESTCD = "CPS0104"		N/A	>3.5; 2.8 to 3.5 ; <2.8				
10	CPS0104_RSORRESU	What was the Serum Albumin unit?	Serum Albumin Unit	text	Indicate the Serum Albumin Unit.	RSORRESU where RSTESTCD = "CPS0104"		N/A	g/dL				
11	CPS0104_RSLBNO	What was the identifier for the laboratory result used to make this serum albumin classification?	Related Laboratory Result Identifier	text	If local labs were used, record the identifier for the source serum albumin result.	N/A	Associate with related LB record via RELREC	N/A					
12	CPS0105A_RSORRES	What was the Prothrombin Time (sec prolonged)?	Prothrombin Time (sec prolonged) Result	text	Indicate the Prothrombin Time (sec prolonged).	RSORRES where RSTESTCD = "CPS0105A"		N/A	<4; 4 to 6; >6				
13	CPS0105A_RSLBNO	What was the identifier for the laboratory result used to make this prothrombin time (sec prolonged) classification?	Related Laboratory Result Identifier	text	If local labs were used, record the identifier for the source prothrombin time (sec prolonged).	N/A	Associate with related LB record via RELREC	N/A					
14	CPS0105B_RSORRES	What was the Prothrombin Time (international normalized ratio)?	Prothrombin Time (international normalized ratio Result	text	Indicate the Prothrombin Time (international normalized ratio) Grade.	RSORRES where RSTESTCD = "CPS0105B"		N/A	<1.7; 1.7-2.3; >2.3				
15	CPS0105B_RSLBNO	What was the identifier for the laboratory result used to make this prothrombin time ((international normalized ratio) classification)?	Related Laboratory Result Identifier	text	If local labs were used, record the identifier for the source prothrombin time (international normalized ratio).	N/A	Associate with related LB record via RELREC	N/A					
16	CPS0106_RSORRES	What was the Child-Pugh Total Score?	Child-Pugh Total Score	text	Indicate the Child-Pugh Grade Total Score.	RSORRES where RSTESTCD = "CPS0106"		N/A					
17	CPS0107_RSORRES	What was the Child-Pugh Grade?	Child-Pugh Grade	text	Indicate the Child-Pugh Grade (A=5 or 6 points, Grade B=7 to 9 points, C=10 to 15 points).	RSORRES where RSTESTCD = "CPS0107"		N/A	A; B; C				

Example 2

This CRF was designed to collect information on tumor response. The denormalized CDASH variable names used here are intended to provide examples of CDASH variable names that can be used within a denormalized data structure. The variable names in this example were sponsor-defined.

Title: Oncology Response Assessment

	Response Category RSCAT <i>Hidden/pre-populated</i>	RECIST 1.1 <ONCRSCAT codelist>
Indicate whether or not response was collected.	Was the response assessment performed? RSPERF <i>If "No", RSSTAT = "NOT DONE" where RSTESTCD = "OVLRESP"</i>	☐ Yes ☐ No <NY codelist>
If the response was not collected, indicate why.	Why was the response assessment not performed? RSREASND <i>RSREASND where RSTESTCD = "OVLRESP"</i>	☐ Not Imaged ☐ Patient Refusal ☐ Site Error ☐ Other
	Evaluator RSEVAL <i>Hidden/pre-populated</i>	Independent Assessor <EVAL codelist>
Identify the evaluator providing this evaluation.	What is the evaluator identifier? RSEVALID	☐ Radiologist 1 ☐ Radiologist 2 <MEDEVAL codelist>
Indicate whether a new lesion was identified at this assessment based on RECIST 1.1 criteria.	Was a new lesion detected at this assessment? NLESIN_RSORRES <i>RSORRES where RSTESTCD = "NEWLIN" and RSCAT = "RECIST 1.1"</i>	☐ Yes ☐ No <NY codelist>
Indicate the response assessment for target lesions using the RECIST 1.1 criteria.	What was the Target Response? TRGRESR_RSORRES <i>RSORRES where RSTESTCD = "TRGRESR" and RSCAT = "RECIST 1.1"</i>	☐ Complete Response (CR) ☐ Partial Response (PR) ☐ Stable Disease (SD) ☐ Progressive Disease (PD) ☐ Not Evaluable (NE) ☐ Not Applicable
Insert the date of the procedure associated with target response.	What was the date of procedure for the Target Response (e.g., scan date)? TRGRESR_RSDAT RSDTC	
Indicate the response assessment for non-target lesions using RECIST 1.1 criteria.	What was the Non-Target Response? NTRGRESR_RSORRES <i>RSORRES where RSTESTCD = "NTRGRESR" and RSCAT = "RECIST 1.1"</i>	☐ Complete Response (CR) ☐ Non Complete Response/Non Progressive Disease (NON-CR/NON-PD) ☐ Progressive Disease (PD) ☐ Not Evaluable (NE) ☐ Not Applicable
Insert the date of the procedure associated with the non-target response.	What was the date of procedure for the Non-Target Response (e.g., scan date)? NTRGRESR_RSDAT RSDTC	

Indicate the overall response assessment using RECIST 1.1 criteria.	What was the overall response? OVRLRESP_RSORRES RSORRES where RSTESTCD = "OVRLRESP" and RSCAT = "RECIST 1.1"	☐ Complete Response (CR) ☐ Partial Response (PR) ☐ Stable Disease (SD) ☐ Non Complete Response/Non Progressive Disease (NON-CR/NON-PD) ☐ Progressive Disease (PD) ☐ Not Evaluable (NE) <ONCRSR codelist>
Record the date of the procedure associated with the overall response.	What was the date of procedure for the overall response (e.g., scan date)? OVRLDAT_RSDAT RSDTC	
Indicate the best overall response assessment.	What was the best overall response? BESTRESP_RSORRES RSORRES where RSTESTCD = "BESTRESP" and RSCAT = "RECIST 1.1"	☐ Complete Response (CR) ☐ Partial Response (PR) ☐ Stable Disease (SD) ☐ Non Complete Response/Non Progressive Disease (NON-CR/NON-PD) ☐ Progressive Disease (PD) ☐ Not Evaluable (NE) <ONCRSR codelist>
Insert the date of the procedure associated with the best overall response.	What was the date of procedure for the best overall response (e.g., scan date)? BESTDAT_RSDAT RSDTC	
Indicate whether or not symptomatic deterioration is observed.	Did the patient experience symptomatic deterioration? SYMPTDTR_RSORRES RSORRES where RSTESTCD = "SYMPTDTR"	☐ Yes ☐ No <NY codelist>
Insert the date on which symptomatic deterioration was observed.	Symptomatic Deterioration Date SYMPTDAT_RSDAT RSDTC	
Insert the name of the vendor performing the response assessments.	What was the vendor name? RSNAM	

CRF Metadata

Order Number	CDASH Variable Name	Question Text	Prompt	Case Report Form Completion Instructions	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology CodeList Name	CRF Implementation Notes	Permissible Values	Pre-specified Value	Displayed Query	List Style	Input Type	Hidden
1	RSCAT	N/A	Response Category	N/A	RSCAT		(ONCRSCAT)	Collect if multiple types/versions are active in a single study/database; otherwise information should be distinguished somewhere on a form (table name, title, tab). The appropriate category must be associated with all responses when the SDTM-based datasets are created		RECIST 1.1			text	Y
2	RSPERF	Was the response assessment performed?	Response Assessment Status	Indicate whether or not response was collected.	RSSTAT	If "No", RSSTAT = "NOT DONE" where RSTESTCD = "OVRLRESP"	(NY)	This may be implemented for an entire response paradigm (i.e., RSTESTCD=OVRLRESP).	Yes; No	N/A	question text	radio	text	visible

CDISC CDASH Implementation Guide for Human Clinical Trials (Version 2.3 Final)

Order Number	CDASH Variable Name	Question Text	Prompt	Case Report Form Completion Instructions	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology CodeList Name	CRF Implementation Notes	Permissible Values	Pre-specified Value	Displayed Query	List Style	Input Type	Hidden
3	RSREASND	Why was the response assessment not performed?	Reason Response Assessment Not Performed	If the response was not collected, indicate why.	RSREASND	RSREASND where RSTESTCD = "OVRRESP"	N/A	The pre-specified terms are simply examples of REASND collected terms.	Not Imaged; Patient Refusal; Site Error; Other	N/A	question text	radio	text	visible
4	RSEVAL	What was the role of the person performing the response assessment?	Evaluator	Indicate who performed the assessment.	RSEVAL		(EVAL)	EVAL codelist has more elements than included in this table, but the remainder are usually not be used in this context.		Independent Assessor	prompt	radio	text	Y
5	RSEVALID	What is the evaluator identifier?	Evaluator Identifier	Identify the evaluator providing this evaluation.	RSEVALID		(MEDEVAL)	When multiple assessors play the role identified in RSEVAL, values of RSEVALID will attribute a row of data to a particular assessor. MEDEVAL codelist has more elements than included in this table, but the remainder would not typically be used in this context.	Radiologist 1; Radiologist 2;	N/A	question text	radio	text	visible
6	NLESIN__RSORRES	Was a new lesion detected at this assessment?	New Lesion	Indicate whether a new lesion was identified at this assessment based on RECIST 1.1 criteria.	RSORRES; RSTEST; RSTESTCD	RSORRES where RSTESTCD = "NEWLIN" and RSCAT = "RECIST 1.1"	(NY)	NLESIND was considered a response-related category, similar to the other components of RECIST. This question is used to explain a RECIST response of PD, when the other response categories are non-PD.	Yes; No	N/A	question text	radio	text	visible
8	TRGRES_P_RSORRES	What was the Target Response?	Target Response	Indicate the response assessment for target lesions using the RECIST 1.1 criteria.	RSORRES; RSTEST; RSTESTCD	RSORRES where RSTESTCD = "TRGRES_P" and RSCAT = "RECIST 1.1"	N/A	Generally collected in the CRF if efficacy endpoint requires such specificity and supportive data are available in the source.	Complete Response (CR); Partial Response (PR); Stable Disease (SD); Progressive Disease (PD); Not Evaluable (NE); Not Applicable	N/A	question text	radio	text	visible
10	TRGRES_P_RSDAT	What was the date of procedure for the Target Response (e.g., scan date)?	Date of Procedure for Target Response (e.g., scan date)	Insert the date of the procedure associated with target response.	RSDTC		N/A	RSDAT is typically derived from the dates of scans/ images/physical exams, which may be performed on different dates. Sponsors should determine which convention to use for populating the date of the response assessment. Examples are: (1) Earliest date of any assessment contributing to the response assessment; (2) Most frequent date on which assessments are performed; (3) Latest date of any assessment if the response is beneficial (earliest date otherwise)	N/A	N/A	question text	N/A	date	visible
11	NTRGRES_P_RSORRES	What was the Non-Target Response?	Non-target Response	Indicate the response assessment for non-target lesions using	RSORRES; RSTEST; RSTESTCD	RSORRES where RSTESTCD = "NTRGRES_P"	N/A	Generally collected in the CRF if efficacy endpoint requires such specificity and supportive data are available in the source. Patients with target plus non-	Complete Response (CR); Non Complete Response/Non Progressive	N/A	question text	radio	text	visible

Order Number	CDASH Variable Name	Question Text	Prompt	Case Report Form Completion Instructions	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology CodeList Name	CRF Implementation Notes	Permissible Values	Pre-specified Value	Displayed Query	List Style	Input Type	Hidden
				RECIST 1.1 criteria.		and RSCAT = "RECIST 1.1"		target disease have a different allowable set of values than patients with non-target disease only. Refer to RECIST 1.1 criteria. Please note that Unequivocal PD is considered synonymous with PD and should be recorded accordingly.	Disease (NON-CR/NON-PD); Progressive Disease (PD); Not Evaluable (NE); Not Applicable					
13	NTRGRES_P_RSDAT	What was the date of procedure for the Non-Target Response (e.g., scan date)?	Non-target Response Date (e.g., scan date)	Insert the date of the procedure associated with the non-target response.	RSDTC		N/A	RSDAT is typically derived from the dates of scans/ images/physical exams, which may be performed on different dates. Sponsors should determine which convention to use for populating the date of the response assessment. Examples are: (1) Earliest date of any assessment contributing to the response assessment; (2) Most frequent date on which assessments are performed; (3) Latest date of any assessment if the response is beneficial (earliest date otherwise)	N/A	N/A	question text	radio	date	visible
15	OVRLRESP_RSORRES	What was the overall response?	Overall Response	Indicate the overall response assessment using RECIST 1.1 criteria.	RSORRES; RSTESTCD; RSTEST	RSORRES where RSTESTCD = "OVRLRESP" and RSCAT = "RECIST 1.1"	(ONCRSR)	Collected at the appropriate visit in which assessments are performed. Non-CR/Non-PD is limited value for patients with non-target disease only, as including this population is protocol-specific.	Complete Response (CR); Partial Response (PR); Stable Disease (SD); Non Complete Response/Non Progressive Disease (NON-CR/NON-PD); Progressive Disease (PD); Not Evaluable (NE)	N/A	question text	radio	text	visible
17	OVRLDAT_RSDAT	What was the date of procedure for the overall response (e.g., scan date)?	Overall Response Date (e.g., scan date)	Record the date of the procedure associated with the overall response.	RSDTC		N/A	RSDAT is typically derived from the dates of scans/ images/physical exams, which may be performed on different dates. Sponsors should determine which convention to use for populating the date of the response assessment. Examples are: (1) Earliest date of any assessment contributing to the response assessment; (2) Most frequent date on which assessments are performed; (3) Latest date of any assessment if the response is beneficial (earliest date otherwise)	N/A	N/A	question text	radio	date	visible
18	BESTRESP_RSORRES	What was the best overall response?	Best Overall Response	Indicate the best overall response assessment.	RSORRES; RSTEST; RSTESTCD	RSORRES where RSTESTCD = "BESTRESP"	(ONCRSR)	This question is meant to represent independent evaluation that is collected in a CRF. In these circumstances,	Complete Response (CR); Partial Response (PR);	N/A	question text	radio	text	visible

Order Number	CDASH Variable Name	Question Text	Prompt	Case Report Form Completion Instructions	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology CodeList Name	CRF Implementation Notes	Permissible Values	Pre-specified Value	Displayed Query	List Style	Input Type	Hidden
						and RSCAT = "RECIST 1.1"		this question could appear on a separate form (i.e., completed one time, rather than visit-dependent). This result is most typically derived (and therefore not collected in the CRF), but in cases of third-party data providers or unique radiology agreements, independent evaluation of best overall response may be recorded in the CRF. Determined once all the data for the patient is known.	Stable Disease (SD); Non Complete Response/Non Progressive Disease (NON-CR/NON-PD); Progressive Disease (PD); Not Evaluable (NE)					
20	BESTDAT_RSDAT	What was the date of procedure for the best overall response (e.g., scan date)?	Best Overall Response Date (e.g., scan date)	Insert the date of the procedure associated with the best overall response.	RSDTC		N/A	RSDAT is typically derived from the dates of scans/ images/physical exams, which may be performed on different dates. Sponsors should determine which convention to use for populating the date of the response assessment. Examples are: (1) Earliest date of any assessment contributing to the response assessment; (2) Most frequent date on which assessments are performed; (3) Latest date of any assessment if the response is beneficial (earliest date otherwise)	N/A	N/A	question text	N/A	date	visible
21	SYMPTDTR_RSORRES	Did the patient experience symptomatic deterioration?	Symptomatic Deterioration	Indicate whether or not symptomatic deterioration is observed.	RSORRES; RSTEST; RSTESTCD	RSORRES where RSTESTCD = "SYMPTDTR"	(NY)	Collect for non-objective progression in the symptoms of the disease in accordance with the efficacy parameters; recommend to collect Symptomatic Deterioration on the Response CRF but maybe collected on a separate Clinical Assessment, Symptomatic Disease, or Disease Symptom Status eCRF to include a detailed description as text (i.e., increased shortness of breath, increased weakness, worsening of performance status) or link to the associated AEs.	Yes; No	N/A	question text	radio	text	visible
22	SYMPTDAT_RSDAT	What was the date of symptomatic deterioration?	Symptomatic Deterioration Date	Insert the date on which symptomatic deterioration was observed.	RSDTC		N/A	Date associated with the non-objective progression in the symptoms of the disease; may be the start date of associated AE(s)	N/A	N/A	prompt	N/A	date	visible
23	RSNAM	What was the vendor name?	Vendor Name	Insert the name of the vendor performing the response assessments.	RSNAM		N/A	Do not collect if "Investigator" is the only source of response data. If the data come from a single external source, this maybe noted in the protocol or vendor specifications rather than collected.	N/A	N/A	question text	N/A	text	visible

8.3.22 SC - Subject Characteristics

Description/Overview for the CDASHIG SC - Subject Characteristics Domain

The CDASHIG SC domain describes protocol-specified characteristics of the study subjects and serves as an extension of the data contained in the Demographics (DM) domain. It is important to note that:

- 1. Data in this domain are collected only once per subject.
- 2. SC data are collected once at the beginning of the trial and are not expected to change during the trial.
- 3. SC contains data such as information about education level, marital status, and national origin.
- 4. There is extensible CDASHIG Controlled Terminology for SCTEST. These data might be useful, for example, for risk-benefit or quality-of-life analyses, or for subsetting a subject population.
- 5. The SDTMIG SC domain utilizes a normalized data structure; that is, 1 variable (SCTEST) is used to capture the test name and another variable (SCORRES) is used to capture the result. Subject characteristics are presented as a normalized structure in the CDASHIG metadata table, but implementers using a denormalized structure (1 variable for each test) should create variable names that mirror the SCTESTCDs in controlled terminology.

Specification for the CDASHIG SC - Subject Characteristics Domain

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings	SC	N/A	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included in the database or populated during SDTM-based dataset creation before submission.
Findings	SC	N/A	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted on the CRFs that are shipped to each site. EDC: This should be prepopulated.
Findings	SC	N/A	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What [is/was] the (study) [subject/participant] identifier?	[Subject/Participant] (Identifier)	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system-generated. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	SDTMIG DM domain. For more information, refer to the SDTMIG.
Findings	SC	N/A	N/A	4	VISIT	Visit Name	The name of a clinical encounter that encompasses planned and unplanned trial interventions, procedures, and assessments that may be performed on a subject.	What is the visit name?	[Visit]	Char	R/C	N/A	VISIT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The name of the clinical encounter is typically preprinted on the CRF or displayed within the EDC for any visit-based data collection, most often in Findings domains. This Visit text description is then available in any EDC data extract for that Findings domain.
Findings	SC	N/A	N/A	5	VISDAT	Visit Date	Date the clinical encounter occurred (or started).	What [is/was] the date of the visit?	(Visit) Date	Char	R/C	Record the [date/start date] of the visit using this format (DD-MON-YYYY).	N/A	This field is not an SDTM variable. The date of a measurement, test, observation can be determined from the date/time of visit (VISDAT/VISTIM) and then concatenating the CDASH VISDAT/VISTIM components and populating the SDTMIG variable SCDTC in ISO 8601 format.	N/A	N/A	The date the subject characteristics were collected can be determined from the visit date variable (VISDAT) and applying that date to all of the subject characteristics at that visit, or the collection date can be included on the SC CRF using the date (SCDAT) field.
Findings	SC	N/A	N/A	6	SCCAT	Category for Subject Characteristic	A grouping of topic-variable values based on user-defined characteristics.	What was the category of the subject characteristics?	[Subject Characteristics Category]; NULL	Char	O	Record the subject characteristics category, if not preprinted on the CRF.	SCCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Category" can be included in the column heading.
Findings	SC	N/A	N/A	7	SCSCAT	Subcategory for Subject Characteristic	A sub-division of the SCCAT values based on user-defined characteristics.	What was the subcategory of the subject characteristics?	[Subject Characteristics Subcategory]; NULL	Char	O	Record the subject characteristics subcategory, if not preprinted on the CRF.	SCSCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Subcategory" can be included in the column heading.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	SCSCAT can only be used if there is an SCCAT, and it must be a subcategorization of SCCAT.
Findings	SC	N/A	N/A	8	SCPERF	SC Assessment Performed	An indication of whether any subject characteristics were collected.	Were subject characteristics collected?	Subject Characteristics Collected	Char	O	Indicate if subject characteristics information was collected. If Yes, record the appropriate details.	SCSTAT	This does not map directly to an SDTMIG variable. May be used to derive a value into the SDTM variable SCSTAT. If SCPERF="N", the value of SCSTAT will be "NOT DONE". If SCPERF="Y", SCSTAT should be null. A combination of SDTMIG variables (e.g., SCCAT and SCSCAT, SCTPT) is used to indicate that multiple tests were not done. In this situation, the SDTMIG variable SCTESTCD would be populated as SCALL and an appropriate test name (SCTEST) provided. See the SDTMIG for additional information.	(NY)	N/A	General prompt question to be used as a data management tool to verify that missing results are confirmed missing.
Findings	SC	N/A	N/A	9	SCSPID	SC Sponsor-Defined Identifier	A sponsor-defined identifier. In CDASH, this is typically used for preprinted or auto-generated numbers on the CRF, or any other type of identifier that does not already have a defined CDASH identifier field.	[Sponsor-defined question]	[Sponsor defined]	Char	O	If collected on the CRF, the sponsor may insert instructions to ensure each record has a unique identifier.	SCSPID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Because SPID is a sponsor-defined identifier, conformance to Question Text or Item Prompt is not applicable. Typically used as an identifier in a data query to communicate clearly to the site the specific record in question or to reconcile data. May be used to record preprinted number (e.g., line number, record number) on the CRF. This field may be populated by the sponsor's data collection system.
Findings	SC	N/A	N/A	10	SCDAT	Subject Characteristic Collection Date	The date of collection represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the date the subject characteristics were collected?	Date	Char	R/C	Record the date the subject characteristics were collected using the format (DD-MON-YYYY).	SCDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable SCDTC in ISO 8601 format.	N/A	N/A	The date of collection can be determined from a collected date of the visit (VISDAT); in such cases, a date field is not required.
Findings	SC	N/A	N/A	11	SCTEST	Subject Characteristic	Descriptive name of the subject characteristic of interest.	What is the subject characteristics name?	[Subject Characteristic Test Name]	Char	HR	Record the name of the subject characteristics if not preprinted on the CRF. If collected on	SCTEST; SCTESTCD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The SDTMIG variable SCTESTCD may be determined from the value collected in SCTEST. The SDTMIG	(SCTEST)	N/A	Required to identify which test the result is for. It is recommended that the test names be preprinted on the CRF rather than collected in a free-text field. If the form is laid out as a grid, then words

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
												the CRF, the sponsor may provide additional instructions to ensure the data is entered as intended.		variables SCTESTCD and SCTEST are required in the SDTM submission datasets. Use appropriate CDISC Controlled Terminology for the test and test code.			such as "Test" can be included in the column header.
Findings	SC	N/A	N/A	12	SCORRES	SC Result or Finding in Original Units	Result of the subject characteristic as originally received or collected.	What is the subject characteristic?	(Result)	Char	HR	Record the subject characteristic.	SCORRES	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	N/A
Findings	SC	N/A	Horizontal-Generic	1	STUDYID	Study Identifier	A unique identifier for a study	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included in the database or populated during SDTM-based dataset creation before submission.
Findings	SC	N/A	Horizontal-Generic	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted on the CRFs that are shipped to each site. EDC: This should be prepopulated.
Findings	SC	N/A	Horizontal-Generic	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What [is/was] the (study) [subject/participant] identifier?	[Subject/Participant] (Identifier)	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be provided to the site using a prepopulated list in the system. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTM.
Findings	SC	N/A	Horizontal-Generic	4	VISIT	Visit Name	The name of a clinical encounter that encompasses planned and unplanned trial interventions, procedures, and	What is the visit name?	[Visit]	Char	R/C	N/A	VISIT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is represented only in the SDTMIG DM domain. For more information, refer to SDTM Table 2.2.4.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
							assessments that may be performed on a subject.										
Findings	SC	N/A	Horizontal-Generic	5	VISDAT	Visit Date	Date the clinical encounter occurred (or started).	What [is/was] the date of the visit?	(Visit) Date	Char	R/C	Record the [date/start date] of the visit using this format (DD-MON-YYYY).	N/A	This field is not an SDTM variable. The date of a measurement, test, observation can be determined from the date/time of visit (VISDAT/VISTIM) and then concatenating the CDASH VISDAT/VISTIM components and populating the SDTMIG variable SCDTC in ISO 8601 format.	N/A	N/A	The date the subject characteristics were collected can be determined from the visit date variable (VISDAT) and applying that date to all of the subject characteristics at that visit, or the collection date can be included on the SC CRF using the date (SCDAT) field.
Findings	SC	N/A	Horizontal-Generic	6	[SCTESTCD]_SCCAT	Category for Subject Characteristic	A grouping of topic-variable values based on user-defined characteristics.	What was the category of the subject characteristics??	[Subject Characteristics Category]; NULL	Char	O	Record the subject characteristics category, if not preprinted on the CRF.	SCCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Category" can be included in the column heading. This is an example of the types of CDASH variable names that can be used in a denormalized data structure.
Findings	SC	N/A	Horizontal-Generic	7	[SCTESTCD]_SCSCAT	Subcategory for Subject Characteristic	A sub-division of the SCCAT values based on user-defined characteristics.	What was the subcategory of the subject characteristics?	[Subject Characteristics Subcategory]; NULL	Char	O	Record the subject characteristics subcategory, if not preprinted on the CRF.	SCSCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Subcategory" can be included in the column header. SCSCAT can only be used if there is an SCCAT, and it must be a subcategorization of SCCAT. This is an example of the types of CDASH variable names that can be used in a

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	denormalized data structure.
Findings	SC	N/A	Horizontal-Generic	8	[SCTESTCD]_SCPERF	SC Assessment Performed	An indication of whether any subject characteristics were collected.	Were subject characteristics collected for [SCTESTCD]?	[SCTEST] Collected	Char	O	Indicate if subject characteristics information was collected. If Yes, include the appropriate details where indicated on the CRF.	SCSTAT	This does not map directly to an SDTMIG variable. May be used to derive a value into the SDTM variable SCSTAT. If [SCTESTCD]_SCPERF = "N", the value of SCSTAT will be "NOT DONE". If [SCTESTCD]_SCPERF = "Y", SCSTAT should be null. A combination of SDTMIG variables (e.g., SCCAT and SCSCAT, SCTPT) is used to indicate that multiple tests were not done. In this situation, the SDTMIG variable SCTESTCD would be assigned SCALL and an appropriate test name (SCTEST) provided. See SDTMIG for additional information.	(NY)	N/A	General prompt question to be used as a data management tool to verify that missing results are confirmed missing. This may be implemented for all tests collected on the same horizontal record or for each specific test. When the SDTM-based datasets are created, the value of SCPERF would apply to all tests on the same record. Use the CDASH variable [SCTESTCD]_SCPERF when implemented on a specific test basis. This is an example of the types of CDASH variable names that can be used in a denormalized data structure.
Findings	SC	N/A	Horizontal-Generic	9	SCGRPID	Subject Characteristics Group ID	A sponsor-defined identifier used to tie together a block of related records in a single domain.	What is the test group identifier?	Test Group ID	Char	O	Record unique group identifier. Sponsors may insert additional instructions to ensure each record has a unique group identifier.	SCGRPID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	It can be beneficial to use an identifier in a data query to communicate clearly to the site the specific record in question. This group identifier ties together all the tests collected on this horizontal record. This field may be populated by the sponsor's data collection system.
Findings	SC	N/A	Horizontal-Generic	10	[SCTESTCD]_SCORRES	SC Result or Finding in Original Units	Result of the subject characteristics as originally received or collected.	What is the subject's [SCTEST]?	[SCTEST] Result	Char	HR	Record the subject characteristic.	SCORRES; SCTEST; SCTESTCD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	N/A

Assumptions for the CDASHIG SC - Subject Characteristics Domain

- 1. The subject characteristics that should be collected are not specified by CDASH; this is a medical and scientific decision that should be based on the needs of the protocol.
- 2. The SDTMIG variable SCDTC can be determined from a collected date of the visit (VISDAT); in such cases, a CDASH date of collection field is not required on the CRF.

Example CRF for the CDASHIG SC - Subject Characteristics Domain

Example 1

Title: Subject Characteristics

Indicate if subject characteristics information was collected. If Yes, record the appropriate details.

Were subject characteristics collected?

SCPERF If SCPERF = "Y", NOT SUBMITTED. If SCPERF = "N", SCSTAT where SCTESTCD = "SCALL".

☐ Yes

☐ No

<NY codelist>

Indicate the subject's education level.

Education Level

EDLEVEL_SCORRES SCORRES WHERE SCTESTCD = "EDLEVEL"

☐ Did not complete Secondary School or Less than High School

☐ Some Secondary School or High School Education

☐ High School or Secondary School Degree Complete

☐ Associate's or Technical Degree Complete

☐ College or Baccalaureate Degree Complete

☐ Doctoral or Postgraduate Education

Indicate the subject's employment status.

Employment Status

JOBCLAS_SCORRES SCORRES WHERE SCTESTCD = "JOBCLAS"

☐ Full-time

☐ Part-time

☐ Not employed

<EMPSTAT codelist>

Indicate the subject's marital status.

Marital Status

MARISTAT_SCORRES SCORRES WHERE SCTESTCD = "MARISTAT"

☐ Never Married

☐ Married

☐ Legally Divorced

☐ Divorced

☐ Widowed

<MARISTAT codelist>

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTM Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
SCPERF	1	Were subject characteristics collected?	Subject Characteristics Collected	Indicate if subject characteristics information was collected. If Yes, record the appropriate details.	Text	SCSTAT	If SCPERF = "Y", NOT SUBMITTED. If SCPERF = "N", SCSTAT where SCTESTCD = "SCALL".	(NY)	Yes; No				
EDLEVEL_SCORRES	2	What is the subject's education level?	Education Level	Indicate the subject's education level.	Text	SCORRES;SCTEST;SCTESTCD	SCORRES WHERE SCTESTCD = "EDLEVEL"		Did not complete Secondary School or Less than High School; Some Secondary School or High School Education; High School or Secondary School Degree		prompt	radio	

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTM Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
									Complete; Associate's or Technical Degree Complete; College or Baccalaureate Degree Complete; Doctoral or Postgraduate Education				
JOBCLAS_SCORRES	3	What is the subject's employment status?	Employment Status	Indicate the subject's employment status.	Text	SCORRES;SCTEST;SCTESTCD	SCORRES WHERE SCTESTCD = "JOBCLAS"	(EMPSTAT)	Full-time; Part-time; Not employed		prompt	radio	
MARISTAT_SCORRES	4	What is the subject's marital status?	Marital Status	Indicate the subject's marital status.	Text	SCORRES;SCTEST;SCTESTCD	SCORRES WHERE SCTESTCD = "MARISTAT"	(MARISTAT)	Never Married; Married; Legally Divorced; Divorced; Widowed		prompt	radio	

8.3.23 TR - Tumor/Lesion Results

Description/Overview for the CDASHIG TR - Tumor/Lesion Results Domain

The CDASHIG TR domain represents measurements and/or assessments of the tumors and lesions identified in the Tumor/Lesion Identification (TU) domain. When the TR domain is used, there must be a corresponding TU domain present. This multiple-domain approach was developed largely to reduce the need to collect tumor identification information at each assessment (e.g., anatomical location). A unique tumor/lesion identification number (populated in TULNKID/TRLNKID) is used to link the tumor/lesion identification (TU) with the measurement/assessments (TR). When designing CRFs, it is common that a single CRF collects both the identification information and the results of any assessments on identified tumors/lesions.

Specification for the CDASHIG TR - Tumor/Lesion Identification Domain

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings	TR	N/A	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included in the database or populated during SDTM-based dataset creation before submission.
Findings	TR	N/A	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted on the CRFs that are shipped to each site. EDC: This should be prepopulated.
Findings	TR	N/A	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What [is/was] the (study) [subject/participant] identifier?	[Subject/Participant] (Identifier)	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system-generated. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Findings	TR	N/A	N/A	4	VISIT	Visit Name	The name of a clinical encounter that encompasses planned and unplanned trial interventions, procedures, and assessments that may be performed on a subject.	What is the visit name?	[Visit]	Char	R/C	N/A	VISIT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The name of the clinical encounter is typically preprinted on the CRF or displayed within the EDC for any visit-based data collection, most often in Findings domains. This Visit text description is then available in any EDC data extract for that Findings domain.
Findings	TR	N/A	N/A	5	VISDAT	Visit Date	Date the clinical encounter occurred (or started).	What [is/was] the date of the visit?	(Visit) Date	Char	R/C	Record the [date/start date] of the visit using this format (DD-MON-YYYY).	N/A	This field is not an SDTM variable. If the date of a measurement, test, observation can be determined from the date/time of visit (VISDAT/VISTIM) and then concatenating the CDASH VISDAT/VISTIM components and	N/A	N/A	If the date the test was collected can be determined from the visit date variable (VISDAT), apply that date to all of the tests at that visit, or the collection date can be collected on the CRF using the date (TRDAT). In this domain, it may not be

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
														populating the SDTMIG variable TRDTC in ISO 8601 format.			appropriate to use the vist date as TRDTC.
Findings	TR	N/A	N/A	6	TRLNKGRP	Tumor/Lesion Result Link Group	An identifier used to link related records across domains.	What was the [tumor/lesion] [link group] identifier?	[Tumor/Lesion] [Link Group] ID	Char	O	If collected on the CRF, the sponsor may insert instructions to ensure each record has the appropriate identifier.	TRLNKGRP	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Because TRLNKGRP is a sponsor-defined identifier, conformance to Question Text or Item Prompt is not applicable. This is typically used in oncology clinical trials. It is intended to group all the assessments at a evaluation time point represented in the TR domain with the associated response assessments represented in the RS domain.
Findings	TR	N/A	N/A	7	TRCAT	Category of Tumor/Lesion Result	A grouping of topic-variable values based on user-defined characteristics.	What is the category of the [tumor/lesion] results?	[Tumor/Lesion Result Category]; or NULL	Char	O	Record the tumor/lesion result category, if not preprinted on the CRF.	TRCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Category" can be included in the column heading.
Findings	TR	N/A	N/A	8	TRSCAT	Subcategory of Tumor/Lesion Result	A subgrouping of topic-variable values based on user-defined characteristics.	What is the subcategory of the [tumor/lesion] results?	[Tumor/Lesion Result Subcategory]; or NULL	Char	O	Record the tumor/lesion result subcategory, if not preprinted on the CRF.	TRSCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be preprinted on the CRF or screen and prepopulated in the data management system. This is not typically a question to which the site would provide an answer. TRSCAT can only be used if there is a TRCAT, and it must be a subcategorization of TRCAT.
Findings	TR	N/A	N/A	9	TRSTAT	Tumor/Lesion Result Completion Status	This variable is used to indicate that data are not available, by having the site record the value as "Not Done".	Indicate if the [tumor/lesion] evaluation was not done.	Not Done	Char	O	Indicate if the [tumor/lesion] evaluation was not done.	TRSTAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(ND)	N/A	A Not Done checkbox, which indicates the test was NOT DONE. Typically, there would be 1 check box for each result. This field can be useful to confirm that a blank result field is meant to be blank.
Findings	TR	N/A	N/A	10	TRREASND	Reason Tumor Measurement Not Performed	An explanation of why the data are not available.	What was the reason that the [tumor/lesion] was not [evaluated/assessed]?	Reason Not Done	Char	O	Provide the reason the result was not provided.	TRREASND	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology may be used. The reason the data are not available may be chosen from a sponsor-defined codelist (e.g., broken equipment, subject

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	refused) or entered as free text. When TRREASND is used, TRSTAT should also be populated in the SDTM-based dataset.
Findings	TR	N/A	N/A	11	TREVAL	Tumor/Lesion Result Evaluator	The role of the person who provided the information.	Who provided the information?; Who was the evaluator?	[Evaluator/Reporter]	Char	O	Select the role of the person who provided the evaluation (e.g., INVESTIGATOR, ADJUDICATION COMMITTEE, VENDOR).	TREVAL	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(EVAL)	N/A	Used only for results that are subjective (e.g., assigned by a person or a group). May be preprinted or collected. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Findings	TR	N/A	N/A	12	TREVALID	Tumor/Lesion Result Evaluator Identifier	Used to distinguish multiple evaluators with the same role.	What was the identifier of the evaluator?	Evaluator Identifier	Char	O	Record the unique identifier assigned to the person making the evaluation.	TREVALID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(MEDEVAL)	N/A	Collect if multiple evaluators are used in the study (may be omitted if multiple evaluators are not used); values should follow controlled terminology.
Findings	TR	N/A	N/A	13	TRDAT	Tumor/Lesion Result Date	The date of the procedure used for tumor/lesion assessment, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the date of the procedure used for [tumor/lesion] assessment?	[Tumor/Lesion] Assessment Procedure Date	Char	R/C	Record the date when the method used to assess the tumor/lesion occurred using this format (DD-MON-YYYY).	TRDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable TRDTC in ISO 8601 format.	N/A	N/A	This is the date of the scan/image/physical exam used to evaluate the tumor/lesion. It is not the date the MRI or scan was read. This is typically not the visit date.
Findings	TR	N/A	N/A	14	TRLNKID	Tumor/Lesion Result Link ID	An identifier used to link identified tumor/lesion to the assessment result.	What was the [tumor/lesion] Identifier?	[Tumor/ Lesion] ID	Char	R/C	If collected, record the unique identifier for this tumor/lesion.	TRLNKID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	This variable is used to provide a unique code for each identified tumor in order to link records across related CRFs (TU and TR) when appropriate. Sponsors develop their own conventions for populating --LNKID. Typically, the lesion/tumor is assigned the --LNKID at baseline when the tumor/lesion is identified, and this --LNKID is used at other visits to collect assessments on this tumor or lesion. Note: This variable may be collected using 1 CDASH variable name (e.g., TULNKID) and populated into TRLNKID when creating submission datasets.
Findings	TR	N/A	N/A	15	TRTEST	Tumor/Lesion Assessment Test Name	Descriptive name of the measurement or finding.	What was the [tumor/lesion] (assessment) test name?	[Tumor/Lesion] (Assessment) Test Name]	Char	HR	Record the name of the tumor lesion assessment, if not preprinted on the CRF. If collected on the CRF, the sponsor may provide additional instructions to	TRTEST; TRTESTCD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The SDTMIG variable TRTESTCD may be determined from the value collected in TRTEST. The SDTMIG variables	(TRTEST)	N/A	Required to identify which test the result is for. It is recommended that the test names be preprinted on the CRF rather than collected in a free-text field. If the form is laid out as a grid, then words such

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
												ensure the data is entered as intended.		TRTESTCD and TRTEST are required in SDTM submission datasets. Use appropriate CDISC Controlled Terminology for the test and test code.			as "Test" can be included in the column heading.
Findings	TR	N/A	N/A	16	TRORRES	TR Result or Finding in Original Units	Result of the tumor/lesion assessment.	What is the result for the [tumor/lesion assessment]?	(Result)	Char	HR	Record the tumor/lesion assessment result.	TRORRES; TRTESTCD; TRTEST	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. In addition to the SDTMIG variable TRORRES, create TRTESTCD from the CDASH variable name and determine the value of TRTEST from TRTESTCD. The CDASH prompt may also contain the TRTEST. Use appropriate CDISC Controlled Terminology for the test and test code.	N/A	N/A	Result of the tumor/lesion assessment. Both quantitative and qualitative results may be recorded here.
Findings	TR	N/A	N/A	17	TRORRESU	TR Original Units	The unit of the result as originally received or collected.	What was the unit of the [result/measurement]?	Unit	Char	R/C	Record or select the original units in which these data were collected, if not preprinted on CRF.	TRORRESU	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(UNIT)	N/A	Usually, the unit of the test is preprinted on the CRF.
Findings	TR	N/A	N/A	18	TRNAM	Tumor/Lesion Result Vendor Name	The name or identifier of the vendor (e.g., laboratory) that provided the test results.	What was the name of the vendor used?	Vendor Name	Char	O	Record the name of the vendor providing the evaluation.	TRNAM	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	It is recommended to collect on the CRF if vendor name was not collected at the site/study level or if multiple vendors are used by a site.

Assumptions for the CDASHIG TR - Tumor/Lesion Identification Domain

1. This domain only includes the information on the tumor/lesion assessment results (e.g., size of a tumor/lesion). This may be a single assessment or multiple assessments over time.
2. The identification information is provided in the TU domain. The TULNKID and TRLNKID variables contain the same unique code to link each identified tumor/lesion and each identified tumor result/assessment. The unique code is not specified by CDASH; this is a decision that is based on the needs of the protocol. Suggestions for the unique TULNKID/TRLNKID codes are provided in the oncology TAUGs and the SDTMIG.
3. The SDTM identifiers --GRPID, --REFID, and --SPID must not be used to link the identified tumor/lesion with the results/assessments for this identified tumor. These identifiers are used for other purposes, as described in the SDTMIG.
4. Link identifiers (e.g., TRLNKID, TRLNKGRP) may be used to link the assessments in the TR domain to the Disease Response and Clin Classification (RS) domain. The RS domain would typically provide the classification or response assessments associated with these TR results.
5. TREVAL and TREVALID are used indicate who provided the data. TREVALID provides more details when multiple evaluators are used. TREVAL must be collected or defaulted when TREVALID is collected.

6. The Controlled Terminology Teams have created codetable mapping files for oncology (available at <https://www.cdisc.org/standards/terminology/>), based on published terminology, which show relationships between terms in CT codelists.

Example CRFs for the CDASHIG TR - Tumor/Lesion Identification Domain

Example 1: Tumor Identification/Evaluation

This example CRF collects tumor measurements in an oncology trial. Note that the CDASH variables CDAT, CEVAL, CLNKID, CMETHOD were used to indicated that these were the collect variables. These variables were then mapped to the corresponding variables in TU and TR.

Title: Tumor Identification/Evaluation

Indicate if there are [tumors/lesions] identified. If Yes, include the appropriate details where indicated on the CRF.	Were any ([target/non-target/new/sponsor-defined] [tumors/lesions]) identified? TUYN Not Submitted	☐ Yes ☐ No <NY codelist>
Record the date when the scan or image was made or when the physical exam occurred using this format (DD-MON-YYYY).	What was the date of the procedure used for [tumor/lesion] identification? TUDAT TUDTC and TRDTC	
Select the role of the person who provided the evaluation (e.g., INVESTIGATOR, ADJUDICATION COMMITTEE, VENDOR).	Who was the evaluator? CEVAL TUEVAL and TREVAL	 <EVAL codelist>
Record the unique identifier assigned to the person making the evaluation.	What was the identifier of the evaluator? CEVALID TUEVALID and TREVALID	 <MEDEVAL codelist>
If collected, record the unique identifier for this [tumor/lesion].	What was the [Tumor/Lesion] Identifier? CLNKID TULNKID and TRLNKID	
Record the method used to evaluate/identify the [tumor/lesion].	What was the method used to [evaluate/identify] the tumor/lesion? CMETHOD TUMETHOD	 <METHOD codelist>
Record the internal or external identifier assigned to the procedure/method used to identify the [tumor/lesion]	What was the procedure [reference identifier/accession number] ? CREFID TUREFID and TRREFID	
Record the name of the TU test, if not preprinted on the CRF. If collected on the CRF, the sponsor may provide additional instructions to ensure the data is entered as intended.	What was the [tumor/lesion identification test name]? TUTEST	 <TUTEST codelist>
Record the Tumor Identification classification. This may be preprinted on the CRF. If collected on the CRF, the sponsor may provide additional instructions to ensure the data is entered as intended.	What is the [type/classification] of [tumor/lesion] as defined by the criteria being employed? TUMIDENT_TUTESTCD TUORRES where TUTESTCD="TUMIDENT"	☐ TARGET ☐ NON-TARGET ☐ NEW TARGET ☐ NEW-NON-TARGET

Record what type of change to the [tumor/lesion] was identified.	Indicate what type of change to the tumor was identified. TUCHANGE If TUCHANGE = "SPLIT", TUORRES = "TARGET" where TUTESTCD = "TUSPLIT" If TUCHANGE = "MERGED", TUORRES = "TARGET" where TUTESTCD = "TUMERGE"	☐ SPLIT ☐ MERGED
Record or select the anatomical location of the identified [tumor/lesion].	What was the anatomical location of the [tumor/lesion] identified? TULOC	<LOC codelist>
Record the side of the anatomical location of the identified [tumor/lesion].	If applicable, what was the laterality of the anatomical location? TULAT	<LAT codelist>
Record the directionality of the anatomical location of the identified [tumor/lesion].	If applicable, what was the directionality of the anatomical location? TUDIR	<DIR codelist>
Describe additional detail on the exact location of the [tumor/lesion] so that it can be distinguished from other tumors in the same anatomical location.	If applicable, what is the additional detail about the tumor location? TULOCDDL SUPPTU.QVAL where SUPPTU.QNAM = "TULOCDDL" and SUPPTU.QLABEL = "Tumor Location Details"	
Record the name of the vendor providing the evaluation.	What was the name of the vendor used? TUNAM	
Record the longest diameter.	What was the longest diameter of the tumor? LDIAM_TORRES TRORRES where TRTESTCD = "LDIAM"	
Record the unit.	What was the unit? LDIAM_TRORESSU TRORESSU	

CRF Metadata

Order Number	CDASHIG Variable	Question Text	Prompt	Type	Case Report Form Completion Instructions	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Codelist Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
1	TUYN	Were any ([target/non-target/new/sponsor-defined] [tumors/lesions])identified?	Any ([Target/Non-target/New/Sponsor-defined] [Tumor/Lesion]	text	Indicate if the there are [tumors/lesions] identified. If Yes, include the appropriate details where indicated on the CRF.	N/A		(NY)	Yes; No				
2	TUDAT	What was the date of the procedure used for [tumor/lesion] identification?	Procedure Date	text	Record the date when the scan or image was made or when the physical exam occurred using this format (DD-MON-YYYY).	TUDTC;TRDTC	TUDTC and TRDTC	N/A					
3	CEVAL	Who was the evaluator?	[Tumor/Lesion] [Evaluator/Reporter]	text	Select the role of the person who provided the evaluation (e.g., INVESTIGATOR, ADJUDICATION COMMITTEE, VENDOR).	TUEVAL;TREVAL	TUEVAL and TREVAL	(EVAL)					
4	CEVALID	What was the identifier of the evaluator?	[Tumor/Lesion] Evaluator Identifier	text	Record the unique identifier assigned to the person making the evaluation.	TUEVALID;TREVALID	TUEVALID and TREVALID	(MEDEVAL)					
5	CLNKID	What was the [Tumor/Lesion] Identifier?	[Tumor/Lesion] ID	text	If collected, record the unique identifier for this [tumor/lesion].	TULNKID;TRLNKID	TULNKID and TRLNKID	N/A					
6	CMETHOD	What was the method used to [evaluate/identify] the tumor/lesion?	Method of [Evaluation/Identification]	text	Record the method used to evaluate/identify the [tumor/lesion].	TUMETHOD		(METHOD)					
7	CREFID	What was the procedure [reference identifier/accession number] ?	Reference ID	text	Record the internal or external identifier assigned to the procedure/method used to identify the [tumor/lesion]	TUREFID;	TUREFID and TRREFID	N/A					

Order Number	CDASHIG Variable	Question Text	Prompt	Type	Case Report Form Completion Instructions	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Codelist Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
8	TUTEST	What was the [tumor/lesion identification test name]?	[Tumor/Lesion Identification Test Name]	text	Record the name of the TU test, if not preprinted on the CRF. If collected on the CRF, the sponsor may provide additional instructions to ensure the data is entered as intended.	TUTEST	TUTEST	(TUTEST)					y
9	TUMIDENT_TUTESTCD	What is the [type/classification] of [tumor/lesion] as defined by the criteria being employed?	Result	text	Record the Tumor Identification classification. This may be preprinted on the CRF. If collected on the CRF, the sponsor may provide additional instructions to ensure the data is entered as intended.	TUORRES:TUEST:TUTESTCD:	TUORRES where TUTESTCD="TUMIDENT"	N/A	TARGET; NON-TARGET; NEW TARGET; NEW-NON-TARGET				
10	TUCHANGE	Indicate what type of change to the tumor was identified.	Changes to Tumor (Result)	text	Record what type of change to the [tumor/lesion] was identified.	TUORRES:TUEST:TUTESTCD	If TUCHANGE = "SPLIT", TUORRES = "TARGET" where TUTESTCD = "TUSPLIT" ; If TUCHANGE = "MERGED", TUORRES = "TARGET" where TUTESTCD = "TUMERGE"	N/A	SPLIT; MERGED				
11	TULOC	What was the anatomical location of the [tumor/lesion] identified?	Anatomical Location	text	Record or select the anatomical location of the identified [tumor/lesion].	TULOC		(LOC)					
12	TULAT	If applicable, what was the laterality of the anatomical location?	Side	text	Record the side of the anatomical location of the identified [tumor/lesion].	TULAT		(LAT)					
13	TUDIR	If applicable, what was the directionality of the anatomical location?	Directionality	text	Record the directionality of the anatomical location of the identified [tumor/lesion].	TUDIR		(DIR)					
14	TULOCDDL	If applicable, what is the additional detail about the tumor location?	Location Detail	text	Describe additional detail on the exact location of the [tumor/lesion] so that it can be distinguished from other tumors in the same anatomical location.	SUPPTU.QVAL	SUPPTU.QVAL where SUPPTU.QNAM = "TULOCDDL" and SUPPTU.QLABEL = "Tumor Location Details"	N/A					
15	TUNAM	What was the name of the vendor used?	Vendor Name	text	Record the name of the vendor providing the evaluation.	TUNAM		N/A					
16	LDIAM_TRORES	What was the longest diameter of the tumor?	Longest Diameter	text	Record the longest diameter.	TRORES; TRTESTCD;	TRORES where TRTESTCD = "LDIAM"	N/A					
17	LDIAM_TRORESSU	What was the unit?	Unit	text	Record the unit.	TRORESSU		N/A					

Example 2: Acne Vulgaris Lesion Evaluations

This example CRF collects both acne lesion identification data (TU) and the lesion result data (TR). It collects the number of lesions of each type at each location. This is a normalized CRF. One record is collected for each anatomical location, and each type of lesion. The sponsor must determine how the TULNKID/TRLNKID are created and assigned. Other lesion types or location were not of interest.

At subsequent assessments, post-baseline, the CRF may be designed so that only the relevant questions are displayed (e.g., --EVAL, --LNKID, --DAT --REFID, TRORRES).

Title: Acne Vulgaris Lesion Evaluations

Indicate if there are any acne vulgaris lesion identified. If Yes, include the appropriate details where indicated on the CRF.	Were any acne vulgaris lesions identified? TUYN Not Submitted ☐ Yes ☐ No <NY codelist>
	[Evaluator/Reporter] TUEVAL TUEVAL and TREVAL <i>Hidden/pre-populated</i> BLINDED EVALUATOR<EVAL codelist>
	Lesion] Identification Test Name TUTEST TUTEST and TUTESTCD <i>Hidden/pre-populated</i> Tumor Identification<TUTEST codelist>
Record the Tumor Identification classification. This may be pre-printed on the CRF. If collected on the CRF, the sponsor may provide additional instructions to ensure the data is entered as intended.	What is the type of lesion? TUORRES TUORRES where TUTESTCD="LESIDENT" ☐ Inflammatory Papules ☐ Inflammatory Pustules ☐ Non-Inflammatory - Open ☐ Inflammatory Closed <TUMIDENT codelist>
Record or select the anatomical location of the lesion.	What was the anatomical location of the lesions? TULOC ☐ Forehead ☐ Chin ☐ Cheek <LOC codelist>
Record the side of the anatomical location of the identified.	Side TULAT ☐ Right ☐ Left <LAT codelist>
If collected, record the unique identifier for the lesion	What was the lesion identifier? TULNKID TULNKID and TRLNKID
Record the date when lesions were photographed and counted using this format (DD-MON-YYYY).	What was the date the lesions were photographed and counted? TUDAT TUDTC and TRDTC
Record the internal or external identifier assigned to the photograph.	What was the photograph reference identifier? TUREFID
Record the number of lesions. When no lesions are identified at a site of interest, record 0.	What was the number of lesions? TORRES TORRES where TRTESTCD="NUMLES"

CRF Metadata

Order Number	CDASH Variable	Question Text	Prompt	Data Type	Case Report Form Completion Instructions	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Codelist Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
1	TUYN	Were any acne vulgaris lesions identified?	Any Acne Vulgaris Lesions	text	Indicate if there are any acne vulgaris lesion identified. If Yes, include the appropriate details where indicated on the CRF.	N/A		(NY)	Yes; No				
2	TUEVAL	Who was the evaluator?	[Evaluator/Reporter]	text	Select the role of the person who provided the evaluation (e.g., INVESTIGATOR, ADJUDICATION COMMITTEE, VENDOR).	TUEVAL; TREVAL	TUEVAL and TREVAL	(EVAL)		BLINDED EVALUATOR		checkbox	y
3	TUTEST	What was the lesion] Identification test name?	Lesion] Identification Test Name	text	Record the name of the TU test, if not pre-printed on the CRF. If collected on the CRF, the sponsor may provide additional instructions to ensure the data is entered as intended.	TUTEST; TUTESTCD	TUTEST and TUTESTCD	(TUTEST)		Tumor Identification			y
4	TUORRES	What is the type of lesion?	Result	text	Record the Tumor Identification classification. This may be pre-printed on the CRF. If collected on the CRF, the sponsor may provide additional instructions to ensure the data is entered as intended.	TUORRES; TUTEST; TESTCD	TUORRES where TUTESTCD="LESIDENT"	(TUMIDENT)	Inflammatory Papules; Inflammatory Pustules; Non-Inflammatory - Open; Inflammatory Closed				
5	TULOC	What was the anatomical location of the lesions?	Anatomical Location	text	Record or select the anatomical location of the lesion.	TULOC		(LOC)	Forehead; Chin; Cheek				
6	TULAT	If applicable, what was the laterality of the anatomical location?	Side	text	Record the side of the anatomical location of the identified.	TULAT		(LAT)	Right; Left		prompt		
7	TULNKID	What was the lesion identifier?	Lesion ID	text	If collected, record the unique identifier for the lesion	TULNKID; TRLNKID	TULNKID and TRLNKID	N/A					
8	TUDAT	What was the date the lesions were photographed and counted?	Date	text	Record the date when lesions were photographed and counted using this format (DD-MON-YYYY).	TUDTC; TRDTC	TUDTC and TRDTC	N/A					
9	TUREFID	What was the photograph reference identifier?	Reference ID	text	Record the internal or external identifier assigned to the photograph.	TUREFID		N/A					
10	TRORRES	What was the number of lesions?	Number of Lesions	integer	Record the number of lesions. When no lesions are identified	TRORRES; TRTEST; TRTESTCD	TRORRES where TRTESTCD="NUMLES"						

Order Number	CDASH Variable	Question Text	Prompt	Data Type	Case Report Form Completion Instructions	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Codelist Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
					at a site of interest, record 0.								

8.3.24 TU - Tumor/Lesion Identification

Description/Overview for the CDASHIG TU - Tumor/Lesion Identification Domain

The CDASHIG TU domain represents data that uniquely identifies tumors and lesions (i.e., malignant tumors, culprit lesions, other sites of disease such as lymph nodes). Commonly, tumors/lesions are identified by an investigator and/or independent assessor and classified according to disease assessment criteria. For example, for an oncology study using RECIST evaluation criteria, this equates to the identification of target, non-target, or new tumors. When designing CRFs, it is common that a single CRF is designed to collect both the tumor/lesion identification information and the results of any assessments on these identified tumors/lesions.

Specification for the CDASHIG TU - Tumor/Lesion Identification Domain

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings	TU	N/A	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included in the database or populated during SDTM-based dataset creation before submission.
Findings	TU	N/A	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted on the CRFs that are shipped to each site. EDC: This should be prepopulated.
Findings	TU	N/A	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What [is/was] the (study) [subject/participant] identifier?	[Subject/Participant] (Identifier)	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system-generated. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Findings	TU	N/A	N/A	4	VISIT	Visit Name	The name of a clinical encounter that encompasses planned and unplanned trial interventions, procedures, and assessments that may be performed on a subject.	What is the visit name?	[Visit]	Char	R/C	N/A	VISIT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The name of the clinical encounter is typically preprinted on the CRF or displayed in the EDC for any visit-based data collection, most often in Findings domains. This Visit text description is then available in any EDC data extract for that Findings domain.
Findings	TU	N/A	N/A	5	VISDAT	Visit Date	Date the clinical encounter occurred (or started).	What [is/was] the date of the visit?	(Visit) Date	Char	R/C	Record the [date/start date] of the visit using this format (DD-MON-YYYY).	N/A	This field is not an SDTM variable. If the date of a measurement, test, observation can be determined from the date/time of visit (VISDAT/VISTIM), then concatenate the CDASH VISDAT/VISTIM components and populate the SDTMIG variable TUDTC in ISO 8601 format.	N/A	N/A	If the date the test was collected can be determined from the visit date variable (VISDAT), apply that date to all of the tests at that visit, or the collection date can be collected on the CRF using the date (TUDAT). In this domain, it may not be appropriate to use the visit date as TUDTC.
Findings	TU	N/A	N/A	6	TUCAT	Category of Tumor/Lesion Identification	A grouping of topic-variable values based on user-defined characteristics.	What is the category of the [tumor/lesion] identification?	[Tumor/Lesion] Identification Category]; or NULL	Char	O	Record the tumor identification category, if not	TUCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This is most commonly either a heading or a

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
												preprinted on the CRF.					preprinted category value on the CRF, not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Category" can be included in the column heading.
Findings	TU	N/A	N/A	7	TUSCAT	Subcategory Tumor/Lesion Identification	A sub-division of the TUCAT values based on user-defined characteristics.	What is the subcategory for the [tumor/lesion] identification?	[Tumor/Lesion] Identification Subcategory; or NULL	Char	O	Record the tumor identification subcategory, if not preprinted on the CRF.	N/A	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This is most commonly preprinted on the CRF or screen and prepopulated in the data management system. This is not typically a question to which the site would provide an answer. TUSCAT can only be used if there is a TUCAT, and it must be a subcategorization of TUCAT.
Findings	TU	N/A	N/A	8	TUYN	Any Tumors/Lesions Identification	An indication of whether any tumors were identified.	Were any [target/non-target/new/sponsor-defined] [tumors/lesions] identified?	Any ([Target/Non-target/New/Sponsor-defined] [Tumors/Lesions] Identified	Char	O	Indicate whether [tumors/lesions] were identified. If Yes, include the appropriate details where indicated on the CRF.	N/A	Not submitted.	(NY)	N/A	This is intended to be used as a data management tool to verify that missing tumor/lesions evaluations are confirmed missing. The sponsor may decide to map "No" responses using the appropriate SDTMIG variables. Typically, this would use the SDTMIG variable TUOCCUR, with an appropriate TUTEST.
Findings	TU	N/A	N/A	9	TUDAT	Tumor/Lesion Identification Date	The date of the [examination/procedure] used for tumor/lesion identification, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the date of the [examination/procedure] used for [tumor/lesion] identification?	[Tumor/Lesion] Identification Procedure Date	Char	R/C	Record the scan/image/physical exam date used to identify the tumor/lesion using this format (DD-MON-YYYY).	TUDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable TUDTC in ISO 8601 format.	N/A	N/A	This is the date of the scan/image/physical exam used to identified the tumor/lesion. It is not the date the MRI or scan was read. This is typically not the visit date.
Findings	TU	N/A	N/A	10	TUEVAL	Tumor/Lesion Evaluator	The role of the person who provided the information.	Who provided the information?; Who was the evaluator?	[Evaluator/Reporter]	Char	O	Select the role of the person who provided the evaluation (e.g., INVESTIGATOR, ADJUDICATION COMMITTEE, VENDOR).	TUEVAL	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(EVAL)	N/A	Used only for results that are subjective (e.g., assigned by a person or a group). May be preprinted, or collected. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Findings	TU	N/A	N/A	11	TUEVALID	Tumor/Lesion Evaluator Identifier	Used to distinguish multiple evaluators with the same role.	What was the identifier of the evaluator?	[Evaluator/Reporter] Identifier	Char	O	Record the unique identifier assigned to the person making the evaluation.	TUEVALID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(MEDEVAL)	N/A	Collect if multiple evaluators are used in the study (may be omitted if multiple evaluators are not used); values should follow controlled terminology.
Findings	TU	N/A	N/A	12	TULNKID	Tumor/Lesion Identification Link ID	An identifier used to link identified tumor/lesion to the assessment result.	What was the [tumor/lesion] (link) identifier?	[Tumor/Lesion] ID	Char	HR	If collected, record the unique identifier for this tumor/lesion.	TULNKID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	This variable is used to provide a unique code for each identified tumor in order to link records

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	across related CRFs (TU and TR) when appropriate. Sponsors develop their own conventions for populating --LNKID. Typically, the lesion/tumor is assigned the --LNKID at baseline when the tumor/lesion is identified, and the this --LNKID is used at other visits to collect assessments on this tumor/lesion.
Findings	TU	N/A	N/A	13	TUPRNO	Tumor/Lesion Related Procedure ID	The identifier for the procedure used to identify the tumor.	What was the identifier for the procedure used to identify this [tumor/lesion] ?	Procedure Identifier	Char	O	Record the procedure [ID or Line Number] used to evaluate the tumor/lesion.	N/A	This does not map directly to an SDTMIG variable. For the SDTM submission datasets, may be used to create RELREC to link this record with a record in the PR domain.	N/A	N/A	Intent is to establish a link between the TU identified and the procedure undergone to identify this tumor/lesion. TUPRNO can be used to identify a relationship between records in the TU dataset and records in the PR dataset. See SDTMIG for information on RELREC.
Findings	TU	N/A	N/A	14	TUMETHOD	Tumor/Lesion Method of Identification	Method of the test or examination.	What was the method used to [evaluate/identify] the [tumor/lesion]?	Method of [Evaluation/Identification]	Char	O	Record the method used to evaluate/identify the tumor/lesion.	TUMETHOD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(METHOD)	N/A	Sponsors may collect the method used to identify the tumor/lesions via a codelist which includes the most commonly known or generally recognized terms. The values will represent the method generically, not the product of the method (e.g., photograph). A sponsor may customize or restrict the list of values per response criteria or protocol needs. At a minimum, the primary method of identification should be entered and is expected to be consistent throughout the study; recording secondary methods is at the discretion of the sponsor.
Findings	TU	N/A	N/A	15	TUREFID	Tumor/Lesion Identification Reference ID	An internal or external identifier, such as image ID number (e.g., CT scan, MRI, ultrasound identifier).	What was the procedure [reference identifier/accession number]?	[Tumor/Lesion] Reference ID	Char	O	Record the internal or external identifier assigned to the procedure/method used to identify the tumor/lesion.	TUREFID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	This variable may be used to collect a reference/accession number associated with the method used to identify the tumor/lesion. Sponsors may use the CDASH variable TUPRNO as an identifier for a procedure.
Findings	TU	N/A	N/A	16	TUTEST	Tumor/Lesion Identification Test Name	Descriptive name of the measurement or finding.	What was the [tumor/lesion] identification test name?	[Tumor/Lesion] Identification Test Name]	Char	HR	Record the name of the TU test, if not preprinted on the CRF. If collected on the CRF, the sponsor may provide additional instructions to ensure the data is entered as intended.	TUTEST; TUTESTCD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The SDTMIG variable TUTESTCD may be determined from the value collected in TUTEST. The SDTMIG variables TUTESTCD and TUTEST are required in SDTM submission datasets. Use	(TUTEST)	N/A	Required to identify which test the result is for. It is recommended that test names be preprinted on the CRF rather than collected in a free-text field. If the form is laid out as a grid, then words such as "Test" can be

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
														appropriate CDISC Controlled Terminology for the test and test code.			included in the column heading.
Findings	TU	N/A	N/A	17	TUORRES	Tumor/Lesion Identification Result	Result of the tumor identification (e.g., classification or type of tumor).	What is the [type/classification] of [tumor/lesion] as defined by the criteria being employed?	(Result)	Char	HR	Record the TU classification. This may be preprinted on the CRF. If collected on the CRF, the sponsor may provide additional instructions to ensure the data is entered as intended.	TUORRES	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Each test may be collected using the CDASH variable TESTCD (e.g., TUMERGE, TUSPLIT, TUMIDENT) or TESTCD_TUORRES where TESTCD is the appropriate CT for the TU test code. This is an example of the types of CDASH variable names that can be used in a denormalized data structure.
Findings	TU	N/A	N/A	18	TULOC	Location of the Tumor/Lesion	A description of the anatomical location of the identified tumor/lesion.	What was the anatomical location of the [tumor/lesion] (identified)?	Anatomical Location	Char	O	Record or select the anatomical location of the identified tumor/lesion.	TULOC	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(LOC)	N/A	Collected or preprinted when the sponsor needs to identify the specific anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF. LAT, DIR, and PORTOT are used to further describe the anatomical location. A location detail text field (TULOCDDL) is conditional for entry (i.e., can be left blank) and allows the study site to specify the lesion in its own terms or can be used to distinguish tumors within the same location if other location qualifiers are not specific enough.
Findings	TU	N/A	N/A	19	TULAT	Tumor/Lesion Identification Laterality	Qualifier for anatomical location, further detailing the side of the body relevant for the event.	What was the laterality of the anatomical location?	[Tumor/Lesion Identification] Side	Char	O	Record the side of the body within the anatomical location of the identified [tumor/lesion].	TULAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(LAT)	N/A	May be preprinted or collected when the sponsor needs to identify the specific side of the anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Findings	TU	N/A	N/A	20	TUDIR	Tumor/Lesion Directionality	Qualifier further detailing the position of the anatomical location, relative to the center of the body, organ, or specimen.	What was the directionality of the anatomical location?	[Tumor/Lesion Identification] Directionality	Char	O	Record the directionality within the anatomical location of the identified [tumor/lesion].	TUDIR	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(DIR)	N/A	May be preprinted or collected when the sponsor needs to identify the directionality of the anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Findings	TU	N/A	N/A	21	TULOCDDL	TU Identification Location Detail	A detailed description of the location of the identified tumor/lesion.	What [were/are] additional details on the exact location of the [tumor/lesion] so that it can be distinguished from other [tumor/lesion] in the same anatomical location?	[Tumor/Lesion Identification] Location Detail	Char	O	Describe additional detail on the exact location of the tumor so that it can be distinguished from other tumors in the same anatomical location.	SUPPTU.QVAL	This does not map directly to an SDTMIG variable. This information could be submitted in a SUPPTU dataset as the value of SUPPTU.QVAL where SUPPTU.QNAM="TULOCDDL" and SUPPTU.QLABEL= "TU Identification Location Detail".	N/A	N/A	Use if TULOC and TULAT and/or TUDIR values cannot provide uniqueness from other identified tumors. TULOCDDL is not meant to replace TULOC, TULAT, and/or TUDIR or serve as the free-text description field for

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	TULOC (e.g., Location, Other).
Findings	TU	N/A	N/A	22	TUNAM	Tumor/Lesion Identification Vendor Name	The name or identifier of the vendor (e.g., laboratory) that provided the test results.	What was the name of the vendor used?	[Tumor/Lesion Identification] Vendor Name	Char	O	Record the name of the vendor providing the evaluation.	TUNAM	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Recommended to collect on the CRF if vendor name was not collected at the site/study level or if multiple vendors are used by a site.

Assumptions for the CDASHIG TU - Tumor/Lesion Identification Domain

1. This domain only includes the information needed to identify the tumor/lesion. Results (e.g., size of a tumor/lesion) would be represented in the associated TR domain.
2. Typically in oncology studies, initial identification of a tumor/lesion is done once, usually at baseline. New tumors/lesions identified subsequent to baseline or changes to tumors/lesions initially identified are also collected in this domain.
3. The identification information would typically include the location description.
4. The TULNKID variable is used to provide a unique code for each identified tumor/lesion. The unique code is not specified by CDASH; this is a decision that is based on the needs of the protocol. Suggestions for the unique TULNKID codes are provided in the oncology TAUGs (available at <https://www.cdisc.org/standards/therapeutic-areas>) and in the SDTMIG.
5. TULNKID is used to relate an identification record in TU domain to assessment/result records in the TR domain. Therefore, the values must be identical. Suggestions for the unique TULNKID codes used for the identification of tumors/lesions in oncology trials are provided in the oncology TAUGs and in the SDTMIG.
6. The SDTM identifiers, --GRPID, --REFID, and --SPID must not be used to link the identified tumor/lesion with the results/assessments for this identified tumor. These identifiers are used for other purposes, as described in the SDTMIG.
7. TUEVAL and TUEVALID are used indicate who provided the data. TUEVALID provides more details when multiple evaluators are used. TUEVAL must be collected or defaulted when TUEVALID is collected.
8. The Controlled Terminology Teams have created codetable mapping files for oncology (available at <https://www.cdisc.org/standards/terminology/>), based on published terminology, which show relationships between terms in CT codelists.

Example CRFs for the CDASHIG TU - Tumor/Lesion Identification Domain

Example 1: Tumor Identification/Evaluation

This example CRF collects tumor measurements in an oncology trial. Note that the CDASH variables CDAT, CEVAL, CLNKID, CMETHOD were used to indicated that these were the collect variables. These variables were then mapped to the corresponding variables in TU and TR.

Title: Tumor Identification/Evaluation

Indicate if the there are [tumors/lesions] identified. If Yes, include the appropriate details where indicated on the CRF.	Were any ([target/non-target/new/sponsor-defined] [tumors/lesions])identified? TUYN Not Submitted	☐ Yes ☐ No <NY codelist>
Record the date when the scan or image was made or when the physical exam occurred using this format (DD-MON-YYYY).	What was the date of the procedure used for [tumor/lesion] identification? TUDAT TUDTC and TRDTC	
Select the role of the person who provided the evaluation (e.g., INVESTIGATOR, ADJUDICATION COMMITTEE, VENDOR).	Who was the evaluator? CEVAL TUEVAL and TREVAL	 <EVAL codelist>
Record the unique identifier assigned to the person making the evaluation.	What was the identifier of the evaluator? CEVALID TUEVALID and TREVALID	 <MEDEVAL codelist>
If collected, record the unique identifier for this [tumor/lesion].	What was the [Tumor/Lesion] Identifier? CLNKID TULNKID and TRLNKID	
Record the method used to evaluate/identify the [tumor/lesion].	What was the method used to [evaluate/identify] the tumor/lesion? CMETHOD TUMETHOD	 <METHOD codelist>
Record the internal or external identifier assigned to the procedure/method used to identify the [tumor/lesion]	What was the procedure [reference identifier/accession number] ? CREFID TUREFID and TRREFID	
Record the name of the TU test, if not preprinted on the CRF. If collected on the CRF, the sponsor may provide additional instructions to ensure the data is entered as intended.	What was the [tumor/lesion identification test name]? TUTEST	 <TUTEST codelist>
Record the Tumor Identification classification. This may be preprinted on the CRF. If collected on the CRF, the sponsor may provide additional instructions to ensure the data is entered as intended.	What is the [type/classification] of [tumor/lesion] as defined by the criteria being employed? TUMIDENT_TUTESTCD TUORRES where TUTESTCD="TUMIDENT"	☐ TARGET ☐ NON-TARGET ☐ NEW TARGET ☐ NEW-NON-TARGET
Record what type of change to the [tumor/lesion] was identified.	Indicate what type of change to the tumor was identified. TUCHANGE If TUCHANGE = "SPLIT", TUORRES = "TARGET" where TUTESTCD = "TUSPLIT" If TUCHANGE = "MERGED", TUORRES = "TARGET" where TUTESTCD = "TUMERGE"	☐ SPLIT ☐ MERGED
Record or select the anatomical location of the identified [tumor/lesion].	What was the anatomical location of the [tumor/lesion] identified? TULOC	 <LOC codelist>

Record the side of the anatomical location of the identified [tumor/lesion].

If applicable, what was the laterality of the anatomical location?
TULAT

<LAT codelist>

Record the directionality of the anatomical location of the identified [tumor/lesion].

If applicable, what was the directionality of the anatomical location?
TUDIR

<DIR codelist>

Describe additional detail on the exact location of the [tumor/lesion] so that it can be distinguished from other tumors in the same anatomical location.

If applicable, what is the additional detail about the tumor location?
TULOCDTL **SUPPTU.QVAL where SUPPTU.QNAM = "TULOCDTL" and SUPPTU.QLABEL = "Tumor Location Details"**

Record the name of the vendor providing the evaluation.

What was the name of the vendor used?
TUNAM

Record the longest diameter.

What was the longest diameter of the tumor?
LDIAM_TRORES **TRORES where TRTESTCD = "LDIAM"**

Record the unit.

What was the unit?
LDIAM_TRORESSU **TRORESSU**

CRF Metadata

Order Number	CDASHIG Variable	Question Text	Prompt	Type	Case Report Form Completion Instructions	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Codelist Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
1	TUYN	Were any ([target/non-target/new/sponsor-defined] [tumors/lesions]) identified?	Any ([Target/Non-target/New/Sponsor-defined] [Tumor/Lesion])	text	Indicate if the there are [tumors/lesions] identified. If Yes, include the appropriate details where indicated on the CRF.	N/A		(NY)	Yes; No				
2	TUDAT	What was the date of the procedure used for [tumor/lesion] identification?	Procedure Date	text	Record the date when the scan or image was made or when the physical exam occurred using this format (DD-MON-YYYY).	TUDTC;TRDTC	TUDTC and TRDTC	N/A					
3	CEVAL	Who was the evaluator?	[Tumor/Lesion] [Evaluator/Reporter]	text	Select the role of the person who provided the evaluation (e.g., INVESTIGATOR, ADJUDICATION COMMITTEE, VENDOR).	TUEVAL;TREVAL	TUEVAL and TREVAL	(EVAL)					
4	CEVALID	What was the identifier of the evaluator?	[Tumor/Lesion] Evaluator Identifier	text	Record the unique identifier assigned to the person making the evaluation.	TUEVALID;TREVALID	TUEVALID and TREVALID	(MEDEVAL)					
5	CLNKID	What was the [Tumor/Lesion] Identifier?	[Tumor/Lesion] ID	text	If collected, record the unique identifier for this [tumor/lesion].	TULNKID;TRLNKID	TULNKID and TRLNKID	N/A					
6	CMETHOD	What was the method used to [evaluate/identify] the tumor/lesion?	Method of [Evaluation/Identification]	text	Record the method used to evaluate/identify the [tumor/lesion].	TUMETHOD		(METHOD)					
7	CREFID	What was the procedure [reference identifier/accession number] ?	Reference ID	text	Record the internal or external identifier assigned to the procedure/method used to identify the [tumor/lesion]	TUREFID;	TUREFID and TRREFID	N/A					

Order Number	CDASHIG Variable	Question Text	Prompt	Type	Case Report Form Completion Instructions	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Codelist Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
8	TUTEST	What was the [tumor/lesion identification test name]?	[Tumor/Lesion Identification Test Name]	text	Record the name of the TU test, if not preprinted on the CRF. If collected on the CRF, the sponsor may provide additional instructions to ensure the data is entered as intended.	TUTEST	TUTEST	(TUTEST)					y
9	TUMIDENT_TUTESTCD	What is the [type/classification] of [tumor/lesion] as defined by the criteria being employed?	Result	text	Record the Tumor Identification classification. This may be preprinted on the CRF. If collected on the CRF, the sponsor may provide additional instructions to ensure the data is entered as intended.	TUORRES:TUEST:TUTESTCD:	TUORRES where TUTESTCD="TUMIDENT"	N/A	TARGET; NON-TARGET; NEW-TARGET; NEW-NON-TARGET				
10	TUCHANGE	Indicate what type of change to the tumor was identified.	Changes to Tumor (Result)	text	Record what type of change to the [tumor/lesion] was identified.	TUORRES:TUEST:TUTESTCD	If TUCHANGE = "SPLIT", TUORRES = "TARGET" where TUTESTCD = "TUSPLIT" ; If TUCHANGE = "MERGED", TUORRES = "TARGET" where TUTESTCD = "TUMERGE"	N/A	SPLIT; MERGED				
11	TULOC	What was the anatomical location of the [tumor/lesion] identified?	Anatomical Location	text	Record or select the anatomical location of the identified [tumor/lesion].	TULOC		(LOC)					
12	TULAT	If applicable, what was the laterality of the anatomical location?	Side	text	Record the side of the anatomical location of the identified [tumor/lesion].	TULAT		(LAT)					
13	TUDIR	If applicable, what was the directionality of the anatomical location?	Directionality	text	Record the directionality of the anatomical location of the identified [tumor/lesion].	TUDIR		(DIR)					
14	TULOCDDL	If applicable, what is the additional detail about the tumor location?	Location Detail	text	Describe additional detail on the exact location of the [tumor/lesion] so that it can be distinguished from other tumors in the same anatomical location.	SUPPTU.QVAL	SUPPTU.QVAL where SUPPTU.QNAM = "TULOCDDL" and SUPPTU.QLABEL = "Tumor Location Details"	N/A					
15	TUNAM	What was the name of the vendor used?	Vendor Name	text	Record the name of the vendor providing the evaluation.	TUNAM		N/A					
16	LDIAM_TRORES	What was the longest diameter of the tumor?	Longest Diameter	text	Record the longest diameter.	TRORES; TRTESTCD; TRTEST:	TRORES where TRTESTCD = "LDIAM"	N/A					
17	LDIAM_TRORESSU	What was the unit?	Unit	text	Record the unit.	TRORESSU		N/A					

Example 2: Acne Vulgaris Lesion Evaluations

This example CRF collects both acne lesion identification data (TU) and the lesion result data (TR). It collects the number of lesions of each type at each location. This is a normalized CRF. One record is collected for each anatomical location, and each type of lesion. The sponsor must determine how the TULNKID/TRLNKID are created and assigned. Other lesion types or location were not of interest.

At subsequent assessments, post-baseline, the CRF may be designed so that only the relevant questions are displayed (e.g., --EVAL, --LNKID, --DAT --REFID, TRORES).

Title: Acne Vulgaris Lesion Evaluations

Indicate if there are any acne vulgaris lesion identified. If Yes, include the appropriate details where indicated on the CRF.	Were any acne vulgaris lesions identified? TUYN Not Submitted ☐ Yes ☐ No <NY codelist>
	[Evaluator/Reporter] TUEVAL TUEVAL and TREVAL <i>Hidden/pre-populated</i> BLINDED EVALUATOR<EVAL codelist>
	Lesion] Identification Test Name TUTEST TUTEST and TATESTCD <i>Hidden/pre-populated</i> Tumor Identification<TUTEST codelist>
Record the Tumor Identification classification. This may be pre-printed on the CRF. If collected on the CRF, the sponsor may provide additional instructions to ensure the data is entered as intended.	What is the type of lesion? TUORRES TUORRES where TATESTCD="LESIDENT" ☐ Inflammatory Papules ☐ Inflammatory Pustules ☐ Non-Inflammatory - Open ☐ Inflammatory Closed <TUMIDENT codelist>
Record or select the anatomical location of the lesion.	What was the anatomical location of the lesions? TULOC ☐ Forehead ☐ Chin ☐ Cheek <LOC codelist>
Record the side of the anatomical location of the identified.	Side TULAT ☐ Right ☐ Left <LAT codelist>
If collected, record the unique identifier for the lesion	What was the lesion identifier? TULNKID TULNKID and TRLNKID
Record the date when lesions were photographed and counted using this format (DD-MON-YYYY).	What was the date the lesions were photographed and counted? TUDAT TUDTC and TRDTC
Record the internal or external identifier assigned to the photograph.	What was the photograph reference identifier? TUREFID
Record the number of lesions. When no lesions are identified at a site of interest, record 0.	What was the number of lesions? TORRES TORRES where TRTESTCD="NUMLES"

CRF Metadata

Order Number	CDASH Variable	Question Text	Prompt	Data Type	Case Report Form Completion Instructions	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Codelist Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
1	TUYN	Were any acne vulgaris lesions identified?	Any Acne Vulgaris Lesions	text	Indicate if there are any acne vulgaris lesion identified. If Yes, include the	N/A		(NY)	Yes; No				

Order Number	CDASH Variable	Question Text	Prompt	Data Type	Case Report Form Completion Instructions	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Codelist Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
					appropriate details where indicated on the CRF.								
2	TUEVAL	Who was the evaluator?	[Evaluator/Reporter]	text	Select the role of the person who provided the evaluation (e.g., INVESTIGATOR, ADJUDICATION COMMITTEE, VENDOR).	TUEVAL; TREVAL	TUEVAL and TREVAL	(EVAL)		BLINDED EVALUATOR		checkbox	y
3	TUTEST	What was the lesion] Identification test name?	Lesion] Identification Test Name	text	Record the name of the TU test, if not pre-printed on the CRF. If collected on the CRF, the sponsor may provide additional instructions to ensure the data is entered as intended.	TUTEST; TUTESTCD	TUTEST and TUTESTCD	(TUTEST)		Tumor Identification			y
4	TUORRES	What is the type of lesion?	Result	text	Record the Tumor Identification classification. This may be pre-printed on the CRF. If collected on the CRF, the sponsor may provide additional instructions to ensure the data is entered as intended.	TUORRES; TUTEST; TESTCD	TUORRES where TUTESTCD="LESIDENT"	(TUMIDENT)	Inflammatory Papules; Inflammatory Pustules; Non-Inflammatory - Open; Inflammatory Closed				
5	TULOC	What was the anatomical location of the lesions?	Anatomical Location	text	Record or select the anatomical location of the lesion.	TULOC		(LOC)	Forehead; Chin; Cheek				
6	TULAT	If applicable, what was the laterality of the anatomical location?	Side	text	Record the side of the anatomical location of the identified.	TULAT		(LAT)	Right; Left		prompt		
7	TULNKID	What was the lesion identifier?	Lesion ID	text	If collected, record the unique identifier for the lesion	TULNKID; TRLNKID	TULNKID and TRLNKID	N/A					
8	TUDAT	What was the date the	Date	text	Record the date when lesions	TUDTC; TRDTC	TUDTC and TRDTC	N/A					

Order Number	CDASH Variable	Question Text	Prompt	Data Type	Case Report Form Completion Instructions	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Codelist Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
		lesions were photographed and counted?			were photographed and counted using this format (DD-MON-YYYY).								
9	TUREFID	What was the photograph reference identifier?	Reference ID	text	Record the internal or external identifier assigned to the photograph.	TUREFID		N/A					
10	TORRES	What was the number of lesions?	Number of Lesions	integer	Record the number of lesions. When no lesions are identified at a site of interest, record 0.	TORRES; TRTEST; TRTESTCD	TORRES where TRTESTCD="NUMLES"						

8.3.25 UR - Urinary System Findings

Description/Overview for the CDASHIG UR - Urinary System Findings Domain

The CDASHIG UR domain is a Findings domain that contains physiological and morphological findings related to the urinary tract, including the organs involved in the filtering of blood, creating urine as a waste byproduct, and urine excretion. This involves organs such as the kidneys, ureter, bladder, sphincter, and urethra.

Specification for the CDASHIG UR - Urinary System Findings Domain

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings	UR	N/A	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included in the database or populated during SDTM-based dataset creation.
Findings	UR	N/A	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted on the CRFs that are shipped to each site. EDC: This should be prepopulated.
Findings	UR	N/A	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What is the subject identifier?	Subject	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be provided to the site using a prepopulated list in the system. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Findings	UR	N/A	N/A	4	VISIT	Visit Name	The name of a clinical encounter that encompasses planned and unplanned trial interventions, procedures, and assessments that may be performed on a subject.	What is the visit name?	[Visit]	Char	R/C	N/A	VISIT	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	The name of the clinical encounter is typically preprinted on the CRF or displayed in the EDC for any visit-based data collection, most often in Findings domains. This Visit text description is then available in any EDC data extract for that Findings domain.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings	UR	N/A	N/A	5	VISDAT	Visit Date	Date the clinical encounter occurred (or started).	What [is/was] the date of the visit?	(Visit) Date	Char	R/C	Record the [date/start date] of the visit using this format (DD-MON-YYYY).	N/A	This field is not an SDTM variable. The date of a measurement, test, observation can be determined from the date/time of visit (VISDAT/VISTIM) and then concatenating the CDASH VISDAT/VISTIM components and populating the SDTMIG variable VISDTC in ISO 8601 format.	N/A	N/A	The date the UR measurements were collected can be determined from the visit date variable (VISDAT) and applying that date to all of the observations at that visit, or the collection date can be included on the UR CRF using the Urinary Assessments (URDAT) field.
Findings	UR	N/A	N/A	6	URPERF	Urinary Assessment Performed	An indication of whether a planned measurement, test, observation or specimen was performed/collected.	Was a urinary assessment performed?	Urinary Assessment Performed	Char	O	Indicate whether or not a urinary assessment was done.	URSTAT	This field does not map directly to an SDTM variable. May be used to populate a value into the SDTM variable URSTAT. If the CDASH variable URPERF="N", the value of the SDTM variable URSTAT is "NOT DONE". If URPERF= "Y", URSTAT is null. A combination of SDTM variables (e.g., URCAT and URSCAT, URTPT) is used to indicate that multiple tests were not done. In this situation, the SDTM variable URTESTCD would be populated with URALL and an appropriate test name (URTEST) provided. See SDTMIG for additional information.	(NY)	N/A	This field is used to capture a response to whether or not a planned measurement, test or observation was performed. A negative response can be collected as "N" and mapped to the -STAT variable in SDTM as " NOT DONE".
Findings	UR	N/A	N/A	7	URDAT	Urinary Assessment Date	The date the urinary measurement was performed, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the date the urinary measurement was taken?	Date	Char	R/C	Record date of measurements using this format (DD-MON-YYYY).	URDTC	This field does not map directly to an SDTM variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTM variable URDTC in ISO 8601 format.	N/A	N/A	The date the UR measurements were collected can be determined from the visit date variable (VISDAT) and applying that date to all of the observations at that visit, or the collection date can be included on the UR CRF using the Date of Collection (URDAT) field.
Findings	UR	N/A	N/A	8	URTIM	Urinary Assessment Time	The time of measurement, represented in an unambiguous time format (e.g., hh:mm:ss).	What was the time of the urinary system measurement?	Time	Char	R/C	Record time of measurement (as complete as possible).	URDTC	This field does not map directly to an SDTM variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTM variable URDTC in ISO 8601 format.	N/A	N/A	May be required when multiple assessments are done on 1 day or when the timing in relationship to study treatment is required for analysis or a specimen is collected over an extended time period.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings	UR	N/A	N/A	9	URTPPT	UR Assessment Planned Time Point Name	A text description of planned time points when measurements should be taken, as defined in the protocol.	What is the planned time point for this urinary assessment measurement?	[Planned Time Point Name]	Char	R/C	Record the planned time-point labels for urinary assessment, if not preprinted on the CRF.	URTPPT	Maps directly to the SDTM variable listed in the SDTM Target column. See the SDTMIG for additional information on representing time points. The SDTM time-point anchors URTPPTREF (text description) and URRTFTDTC (date/time) may be needed, as well as SDTMIG variables URTPPTNUM, URELTM.	N/A	N/A	Planned time points are needed to differentiate multiple sequential assessments. It is recommended that time points should be preprinted on the CRF rather than collected in a free-text field. If the form is laid out as a grid, then terms such as "Planned Time Point" can be included in the column heading.
Findings	UR	N/A	N/A	10	URTEST	Urinary Test Name	Descriptive name of the test or examination used to obtain the measurement or finding.	What is the urinary test name?	[Urinary Test Name]	Char	HR	Record the name of the urinary test, if not preprinted on the CRF.	URTEST; URTESTCD	Maps directly to the SDTM variable listed in the SDTM Target column. The SDTM variable URTESTCD may be determined from the value collected in URTEST using the Controlled Terminology List URNSTSCD. The SDTMIG variables URTESTCD and URTEST are required in SDTM.	(URNSTS)	N/A	The test name will usually be preprinted on the CRF, and not solicited as a question. If the form is laid out as a grid, then "Test" or "Test Name" can be included in the column heading. URTEST is most useful as the PROMPT on the field in which the RESULT for that test is collected.
Findings	UR	N/A	N/A	11	URCAT	Category for Urinary Test	A grouping of topic-variable values based on user-defined characteristics.	What is the category of the urinary test?	[Urinary Test Category]; NULL	Char	R/C	Record the urinary assessment category, if not preprinted on the CRF.	URCAT	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be a heading on the CRF or screen, not a question to which the site would provide an answer. URSCAT can only be used if there is a URCAT. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Category" can be included in the column heading.
Findings	UR	N/A	N/A	12	URSCAT	Subcategory for Urinary Test	A sub-division of the URCAT values based on user-defined characteristics.	What was the subcategory of the urinary assessment?	[Urinary Assessment Subcategory]; NULL	Char	O	Record the urinary assessment subcategory, if not preprinted on the CRF.	URSCAT	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, not a question to which the site would provide

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Subcategory" can be included in the column heading. URSCAT can only be used if there is a URCAT, and it must be a subcategorization of URCAT.
Findings	UR	N/A	N/A	13	URORRES	UR Test Result in Original Units	Result of the measurement or finding as originally received or collected.	What was the result of the measurement?	[URTEST] Result	Char	HR	Record the urinary test result.	URORRES	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	Both quantitative results and interpretive findings or summaries may be recorded here.
Findings	UR	N/A	N/A	14	URORRESU	Urinary Test Original Unit	The unit of the result as originally received or collected.	What was the unit of the result?	Unit	Char	R/C	Record or select the original unit in which these data were collected, if not preprinted on CRF.	URORRESU	Maps directly to the SDTM variable listed in the SDTM Target column.	(UNIT)	N/A	Should be preprinted on the CRF with the associated test when possible, rather than collected in a free-text field. Should be included if applicable and not available elsewhere.
Findings	UR	N/A	N/A	15	URRES	Urinary Test Result or Finding	The result of the measurement or finding as originally received or collected.	Was the result (normal/abnormal/absent/present/ [sponsored defined response])?	(Result)	Char	O	Indicate the overall assessment for [URTEST].	URORRES	This does not map directly to an SDTM variable. The mapping instructions depend on the implementation, for example: 1. Where URRES is used to collect normal/abnormal or similar type classifications (e.g., absent/present) with a description of the abnormal result using the CDASH field URDESC. For SDTM submission datasets, If the CDASH field URRES = "NORMAL", populate the SDTM variables URORRES and URSTRES with the value of the CDASH field URRES. If the CDASH field URRES is "ABNORMAL", populate the SDTM variable URORRES with the CDASH field URDESC. If the reported findings in	N/A	N/A	The CDASH field URRES is used when the collected results are not mapped directly to the SDTM variable URORRES and must be transformed. For example, 1. URRES is used to collect standardized values on the CRF and the value of "OTHER" is included and "Specify Other" is collected. 2. URORRES is collected using "Normal", "Abnormal", and a description of the abnormality is collected.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
														URDESC are coded using a dictionary, then the SDTM variable URSTRESC is populated with the dictionary preferred term and URMODIFY is populated with the modified text used for coding. If the reported findings in URDESC are not coded, then the SDTM variable URSTRESC is populated with the CDASH URDESC field. 2. Where URRES is used to collect standardized values (e.g. a codelist) on the CRF and the value of "OTHER" is included, the CDASH field URRESOTH can be used to collect free-text values for "Specify Other". When using this field, the "OTHER" value recorded in the CDASH field URRES field is mapped to the SDTM variable URSTRESC and the value in the CDASH field URRESOTH is mapped to the SDTM variable URRORRES. See the SDTMIG for additional information.			
Findings	UR	N/A	N/A	16	URDESC	Description of Urinary Test Finding	Text description of urinary test findings.	What was the description of the (abnormality/observed finding/ [Sponsor-defined])?	(Abnormal) Findings	Char	O	Record all abnormal findings for the urinary test in the space provided.	URORRES	This does not map directly to an SDTM variable. May be used to populate a value into the SDTM variable URRORRES. If URRES="Normal", populate URRORRES with the value of URRES. If URRES="Abnormal", populate URRORRES with the value of URDESC.	N/A	N/A	URRES and URDESC are used when a question is asked to collect the finding result, with a follow-up question for a description of the finding. See Section 8.3.1, General CDASH Assumptions for Findings Domains .
Findings	UR	N/A	N/A	17	URRESOTH	Urinary Test Result Other	A free-text result which provides further information about the original received or collected result.	If other is selected, [explain/specify/provide more detail].	[Specify Other/Explain/ Specify Details]	Char	O	Provide more detail for the "Other" result.	URORRES	When using this CDASH field, the "OTHER" value collected in the CDASH field URRES is mapped to the SDTM variable URSTRESC and the value in the CDASH field URRESOTH is mapped to the SDTM variable URRORRES.	N/A	N/A	In cases where URRES is used to collect standardized values on the CRF and the value of "OTHER" is included, the CDASH field URRESOTH can be used to collect free-

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings	UR	N/A	N/A	21	URSTAT	Completion Status	This variable is used to indicate that data are not available, by having the site recording the value as "Not Done".	Indicate if the [URTEST] was not [answered/assessed/done/evaluated/performed].	Not Done	Char	O	Indicate if the urinary assessment or measurement was not done.	URSTAT	Maps directly to the SDTM variable listed in the SDTM Target column. If collected, the Origin (a column in the Define-XML) ="CRF"; if populated from other sources such as free text or sponsor-defined listing for URREASND, the Origin ="DERIVED".	(ND)	N/A	text values for "Specify Other". Used only when the response value is collected as NOT DONE or NULL in lieu of or in addition to the CDASH URPERF field. Typically a checkbox which indicates the test was NOT DONE. This field can be useful when multiple questions are asked to confirm that a blank result field is meant to be blank.
Findings	UR	N/A	N/A	22	URREASND	Reason Not Done	An explanation for why the data are not available.	Was the was the reason that the urinary (assessment/[URTEST]) was not [collected / answered / done / assessed / evaluated]?	Reason Not [Answered/Collected/ Done/ Evaluated/ Assessed/Available]	Char	O	Provide the reason the measurement or test was not done.	URREASND	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	Sponsor-defined controlled terminology may be used. The reason the data are not available may be chosen from a sponsor-defined codelist (e.g., broken equipment, subject refused) or entered as free text. When URREASND is used, URSTAT should also be populated in the SDTM-based dataset.
Findings	UR	N/A	N/A	24	URLOC	Location	Location used for the measurement.	What was the anatomical location where the measurement was taken?	Anatomical Location	Char	O	Record or select location on body where the measurement was performed.	URLOC	Maps directly to the SDTM variable listed in the SDTM Target column.	(LOC)	N/A	Collected or preprinted when the sponsor needs to identify the specific anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF.LAT, DIR, and PORTOT are used to further describe the anatomical location.
Findings	UR	N/A	N/A	25	URLAT	Laterality	Qualifier for anatomical location, further detailing the side of the body.	What was the side of the anatomical location of the [measurement/test/ examination]?	Side	Char	O	Record the side of the anatomical location of the urinary test or measurement.	URLAT	Maps directly to the SDTM variable listed in the SDTM Target column.	(LAT)	N/A	May be preprinted or collected when the sponsor needs to identify the specific side of the anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Findings	UR	N/A	N/A	26	URDIR	Directionality	Qualifier further detailing the position of the anatomical location, relative to the center of the body, organ, or specimen.	What was the directionality of the urinary test?	Directionality	Char	O	Record the directionality of the anatomical location of the urinary test.	URDIR	Maps directly to the SDTM variable listed in the SDTM Target column.	(DIR)	N/A	May be preprinted or collected when the sponsor needs to identify the directionality of the anatomical location. Sponsors may collect

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	the data using a subset list of controlled terminology on the CRF.
Findings	UR	N/A	N/A	27	URMETHOD	Method of Urinary Test	The method of the test or examination.	What was the method (used for the [measurement/test/examination])?	Method	Char	O	Record the method used for the urinary test.	URMETHOD	Maps directly to the SDTM variable listed in the SDTM Target column.	(METHOD)	N/A	This information may be collected when more than 1 method is possible, and collecting the method used is necessary.
Findings	UR	N/A	N/A	28	UREVAL	Urinary Test Evaluator	The role of the person who provided the evaluation.	Who was the evaluator?	Evaluator	Char	O	Select the role of the person who provided the evaluation.	UREVAL	Maps directly to the SDTM variable listed in the SDTM Target column.	(EVAL)	N/A	Used only for results that are subjective (e.g., assigned by a person or a group). May be a preprinted or collected. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Findings	UR	N/A	N/A	29	UREVALID	Urinary Test Evaluator Identifier	An identifier used to distinguish multiple evaluators with the same role recorded in UREVAL.	What is the identifier of the evaluator?	Evaluator Identifier	Char	O	Record the unique identifier assigned to the person making the evaluation.	UREVALID	Maps directly to the SDTM variable listed in the SDTM Target column.	(MEDEVAL)	N/A	Collect if multiple evaluators are used in the study (may be omitted if multiple evaluators are not used); values should follow controlled terminology.
Findings	UR	N/A	N/A	30	URACPTFL	Accepted Record Flag	An indication that the evaluation is considered, by an independent assessor, to be the accepted or final evaluation.	Was this record considered to be the accepted evaluation?	Accepted Evaluation	Char	O	Indicate whether or not the evaluation is considered, by an independent assessor, to be the accepted or final evaluation.	URACPTFL	Maps directly to the SDTM variable listed in the SDTM Target column.	(NY)	N/A	Use where more than one assessor provides an evaluation of a result or response. Typically a checkbox with the value of "Y" or "NULL", which indicates the evaluation was accepted.
Findings	UR	N/A	N/A	31	URREPNUM	Urinary Test Repetition Number	The instance number of a test that is repeated within a given timeframe for the same test. The level of granularity can vary (e.g., within a time point, within a visit).	What was the repetition number within the time point for this measurement?	Repetition Number	Char	O	Record the repetition number of the measurement within the time point.	URREPNUM	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A	The repetition number of the test/measurement within the time point may be preprinted on the CRF.
Findings	UR	N/A	N/A	32	URCLSIG	Urinary Test Clinical Significance	An indication of whether the test results were clinically significant.	Was this result clinically significant?	Clinically Significant	Char	O	Record whether urinary test results were clinically significant.	URCLSIG	Maps directly to the SDTM variable listed in the SDTM Target column.	(NY)	N/A	Could apply to specific measurements or to overall interpretation, as required by the protocol.

Assumptions for the CDASHIG UR - Urinary System Findings Domain

1.
- Any Identifiers, timing variables, or Findings general observation class qualifiers may be added to the UR domain, but the following qualifiers would not generally be used in UR: --MODIFY, --BODSYS, --ORNRLO, - --ORNRHI, --STNRLO, --STNRHI, --NRIND, --LOINC, --SPCCND, --FAST, --TOX, --TOXGR, --SEV, --LLOQ.

Example CRFs for the CDASHIG UR - Urinary System Findings Domain

Example 1: Urinary System Assessment

This CRF shows urinary systems assessment. This CRF collects renal blood flow measurement by para-amino hippuric acid (PAH) clearance method. These results fields are mapped to the UR domain.

The standard controlled terminology for URTESTCD, URTEST, URLOC, URLAT, and URMETHOD is represented in the table.

Title: Urinary System Assessment

Indicate whether the renal blood flow assessment was performed or not.	Was the renal blood flow assessment performed? URPERF If URPERF = "N", then URSTAT = "NOT DONE" and URTESTCD = "URALL". If URPERF = "Y" then NOT SUBMITTED.	☐ Yes ☐ No <NY codelist>
Provide the reason the renal blood flow assessment was not performed.	What was the reason the renal blood flow assessment was not done? URREASND	
Record the date of the renal blood flow assessment, using this format (DD-MON-YYYY).	What was the date of the renal blood flow assessment? URDAT URDTC	
	What was the anatomical location where the assessment was performed? URLOC Pre-populated	Kidney <LOC codelist>
Select the side of the anatomical location of the assessment.	What was the laterality of the assessment? URLAT	☐ Right ☐ Left ☐ Bilateral <LAT codelist>
	What was the method used for the renal blood flow assessment? URMETHOD Pre-populated	☒ Para-amino hippuric acid clearance <METHOD codelist>
Record the measurement of the renal blood flow.	What was the renal blood flow measurement? RBLDFW_URORRES URORRES where URTESTCD = "RBLDFW"	
Record or select the original units in which data were collected, if not pre-printed on CRF	What was the unit for renal blood flow measurement? RBLDFW_URORRESU URORRESU where URTESTCD = "RBLDFW"	☐ mL/min <UNIT codelist>

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target	SDTM Variable Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-specified Value	Query Display	List Style	Hidden
URPERF	1	Was the renal blood flow assessment performed?	Performed	Indicate whether the renal blood flow assessment was performed or not.	Text	URSTAT	If URPERF = "N", then URSTAT = "NOT DONE" and URTESTCD = "URALL". If URPERF = "Y" then NOT SUBMITTED.	(NY)	Yes; No				

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target	SDTM Variable Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-specified Value	Query Display	List Style	Hidden
URREASND	2	What was the reason the renal blood flow assessment was not done?	Reason Not Done	Provide the reason the renal blood flow assessment was not performed.	Text	URREASND					Qtext		
URDAT	3	What was the date of the renal blood flow assessment?	Date	Record the date of the renal blood flow assessment, using this format (DD-MON-YYYY).	Date	URDTC					Qtext		
URLOC	4	What was the anatomical location where the assessment was performed?	Anatomical Location	Select the anatomical location of the assessment.	Text	URLOC		(LOC)		Kidney	Qtext		
URLAT	5	What was the laterality of the assessment?	Side	Select the side of the anatomical location of the assessment.	Text	URLAT		(LAT)	Right; Left; Bilateral		Qtext	Radio	
URMETHOD	6	What was the method used for the renal blood flow assessment?	Method	Select the method used for the renal blood flow assessment.	Text	URMETHOD		(METHOD)	Para-amino hippuric acid clearance	Para-amino hippuric acid clearance	Qtext		
RBLDFW_URORRES	7	What was the renal blood flow measurement?	Result	Record the measurement of the renal blood flow.	Text	URORRES	URORRES where URTESTCD = "RBLDFW"				Qtext		
RBLDFW_URORRESU	8	What was the unit for renal blood flow measurement?	Unit	Record or select the original units in which data were collected, if not pre-printed on CRF	Text	URORRESU	URORRESU where URTESTCD = "RBLDFW"	(UNIT)	mL/min		Qtext		

8.3.26 VS - Vital Signs

Description/Overview for the CDASHIG VS - Vital Signs Domain

The CDASHIG VS domain is used for vital signs measurements including but not limited to blood pressure, temperature, respiration, body surface area, body mass index (BMI), height, and weight.

Specification for the CDASHIG VS - Vital Signs Domain

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings	VS	N/A	Horizontal-Generic	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included in the database or populated during SDTM-based dataset creation before submission.
Findings	VS	N/A	Horizontal-Generic	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted on the CRFs that are shipped to each site. EDC: This should be prepopulated.
Findings	VS	N/A	Horizontal-Generic	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What [is/was] the (study) [subject/participant] identifier?	[Subject/Participant] (Identifier)	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system-generated. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Findings	VS	N/A	Horizontal-Generic	4	VISIT	Visit Name	The name of a clinical encounter that encompasses planned and unplanned trial interventions, procedures, and assessments that may be performed on a subject.	What is the visit name?	[Visit]	Char	R/C	N/A	VISIT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The name of the clinical encounter is typically preprinted on the CRF or displayed within the EDC for any visit-based data collection, most often in Findings domains. This Visit text description is then available in any EDC data extract for that Findings domain.
Findings	VS	N/A	Horizontal-Generic	5	VISDAT	Visit Date	Date the clinical encounter occurred (or started).	What [is/was] the date of the visit?	(Visit) Date	Char	R/C	Record the [date/start date] of the visit using this format (DD-MON-YYYY).	N/A	This field is not an SDTM variable. The date of a measurement, test, observation can be determined from the date/time of visit (VISDAT/VISTIM) and then concatenating the CDASH VISDAT/VISTIM components and populating the SDTMIG variable VSDTC in ISO 8601 format.	N/A	N/A	The date the VS measurements were collected can be determined from the visit date variable (VISDAT) and applying that date to all of the observations at that visit, or the collection date can be included on the VS CRF using the date field (VSDAT).
Findings	VS	N/A	Horizontal-Generic	6	[VSTESTCD]_VS PERF	Vital Signs Performed	An indication of whether a planned vital signs measurement, series of vital signs measurements, tests, or observations was performed.	Were [vital signs/[VSTEST] performed?	Vital Signs Performed ; [VSTEST] Performed	Char	O	Indicate if the vital signs were collected. If Yes, include the appropriate details where indicated on the CRF.	VSSTAT	This does not map directly to an SDTMIG variable. May be used to derive a value into the SDTM variable VSSTAT. If VSPERF="N", the value of VSSTAT will be "NOT DONE". If VSPERF="Y", VSSTAT should be null. A combination of SDTMIG variables (e.g., VSCAT and VSSCAT, VSTPT) is used to indicate that multiple tests were not done. In this situation, the SDTMIG variable VSTESTCD would be populated as VSALL and an appropriate test name (VSTEST) provided. See	(NY)	N/A	This general prompt question is used as a data management tool to verify that missing results are confirmed missing. This may be implemented for all tests collected on the same horizontal record or for each specific test. When mapped to SDTM, the value of VSPERF would apply to all tests on the same record. Use the CDASH variable [VSTESTCD]_VS PERF when implemented on a specific test basis.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
														the SDTMIG for additional information.			
Findings	VS	N/A	Horizontal-Generic	7	[VSTESTCD]_VSDAT	Vital Signs Date	The date of the vital signs measurement, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the date of the measurement(s)?	[VSTEST] Date	Char	R/C	Record date of measurements using this format (DD-MON-YYYY).	VSDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable VSDTC in ISO 8601 format.	N/A	N/A	A single date may be collected for all the vital sign measurements when they are performed on the same date. The date of each measurement can also be collected for each measurement using a CDASH variable [VSTESTCD]_VSDAT. The date of the measurements may be determined from a collected date of visit; in such cases, a separate measurement date field is not required.
Findings	VS	N/A	Horizontal-Generic	8	[VSTESTCD]_VSTIM	Vital Signs Time	The time of measurement, represented in an unambiguous time format (e.g., hh:mm:ss).	What was the time of the measurement(s)?	[VSTEST] Time	Char	R/C	Record time of measurement (as complete as possible).	VSDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable VSDTC in ISO 8601 format.	N/A	N/A	A single collection time (e.g., VSTIM) may be collected for all the measurements when they are performed at the same time. The time of each measurement can also be collected using a CDASH variable [VSTESTCD]_VSTIM.
Findings	VS	N/A	Horizontal-Generic	9	VSCAT	Category for Vital Signs	A grouping of topic-variable values based on user-defined characteristics.	What was the category of the vital signs?	[Vital Signs Category]; NULL	Char	O	Record the vital signs category, if not preprinted on the CRF.	VSCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, not a question to which the site would provide an answer. If a question is asked, the response would typically be from a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Category" can be included in the column heading.
Findings	VS	N/A	Horizontal-Generic	10	VSSCAT	Subcategory for Vital Signs	A sub-division of the VSCAT values based on user-defined characteristics.	What was the subcategory of the vital signs?	[Vital Signs Subcategory]; NULL	Char	O	Record the vital signs subcategory, if not preprinted on the CRF.	VSSCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This would most commonly be either a heading or a preprinted category value on the CRF, not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Subcategory" can be included in the column header. VSSCAT can only be used if there is a VSCAT, and it must be a subcategorization of VSCAT.
Findings	VS	N/A	Horizontal-Generic	11	VSGRPID	Vital Signs Group ID	A sponsor-defined identifier used to tie a block of related records in a single domain.	What is the vital signs group identifier?	Test Group ID	Char	O	Record unique group identifier. The sponsor may insert additional instructions to ensure each record has a unique group identifier.	VSGRPID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	It can be beneficial to use an identifier in a data query to communicate clearly to the site the specific record in question. This group identifier ties together all the tests collected on the same horizontal record. This field may be populated by the sponsor's data collection system.
Findings	VS	N/A	Horizontal-Generic	12	[VSTESTCD]_VSTPT	Vital Signs Planned Time Point Name	A text description of planned time points when measurements should be taken, as defined in the protocol.	What is the planned time point for this vital signs measurement?	[Planned Time Point Name]	Char	R/C	Record the planned time-point labels for vital signs, if not preprinted on the CRF.	VSTPT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. See the SDTMIG for information on representing time points. The SDTMIG time-point anchors VSTPTREF (text description) and VSRFTDTC (date/time) may	N/A	N/A	Planned time points are needed to differentiate multiple sequential assessments. It is recommended that time points should be preprinted on the CRF rather than collected in a free-text field. If the form is laid out as a grid, then words such as "Planned Time Point" can be included in the column heading. The planned time point of each

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
														be needed, as well as SDTMIG variables VSTPTNUM, VSELTM.			measurement can also be collected using the CDASH variable [VSTESTCD]_VSTPT.
Findings	VS	N/A	Horizontal-Generic	13	[VSTESTCD]_VSSTAT	Vital Signs Completion Status	This variable is used to indicate that data are not available, by having the site recording the value as "Not Done".	Indicate if the [VSTEST] measurement was not done.	Not Done	Char	O	Indicate if the vital signs measurement was not done.	VSSTAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(ND)	N/A	A single "Not Done" can be collected once for all tests on the same horizontal record using VSSTAT. The value of VSSTAT applies to all measurements on that record when mapped to SDTM. If needed, for each test "NOT DONE" may be collected using the CDASH variable [VSTESTCD]_VSSTAT.
Findings	VS	N/A	Horizontal-Generic	14	[VSTESTCD]_VSORRES	VS Result or Finding in Original Units	Result of the vital signs measurement as originally received or collected.	What was the result of the [VSTEST] measurement?	[VSTEST] (Result)	Char	HR	Record the vital sign results.	VSORRES; VSTEST; VSTESTCD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. In addition to the SDTMIG variable VSORRES, create VSTESTCD from the CDASH variable name and determine the value of VSTEST from VSTESTCD. The CDASH prompt may also contain the VSTEST. Use appropriate CDISC Controlled Terminology for the test and test code.	N/A	N/A	Each test may be collected using the CDASH variable [TESTCD] e.g., SYSBP or [TESTCD]_VSORRES where TESTCD is the appropriate CT for the VS test code e.g., SYSBP_VSORRES. This is an examples of the types of CDASH variable names that can be used in a denormalized data structure.
Findings	VS	N/A	Horizontal-Generic	15	[VSTESTCD]_VSORRESU	VS Original Units	The unit of the result as originally received or collected.	What was the unit of the [VSTEST] measurement?	[VSTEST] Unit	Char	R/C	Record or select the original unit in which these data were collected, if not preprinted on CRF.	VSORRESU	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(UNIT)	N/A	A single Unit field can be collected once for all measurements collected on the same horizontal record using VSUNIT. The value of VSUNIT applies to all measurements on that record when mapped to SDTM. If needed for each measurement, unit may be collected using the CDASH variable [VSTESTCD]_VSORRESU. Should be preprinted on the CRF (or enterable from a picklist) with the associated test when possible, rather than collected as free-text.
Findings	VS	N/A	Horizontal-Generic	16	[VSTESTCD]_VSCLSIG	Vital Signs Clinical Significance	An indication of whether the vital signs results were clinically significant.	Was the [VSTEST] result clinically significant?	[VSTEST] Clinically Significant	Char	O	Record whether the vital sign result was clinically significant.	VSCLSIG	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(NY)	N/A	In horizontal data collection, a CDASH variable [VSTESTCD]_VSCLSIG may be created for each VSTESTCD and added to the CRF if needed.
Findings	VS	N/A	Horizontal-Generic	17	[VSTESTCD]_VSPOS	Vital Signs Position of Subject	The position of the subject during a measurement or examination.	What was the position of the subject during the [VSTEST] measurement?	[VSTEST] Position	Char	R/C	Record the position of subject at time of test (e.g. SITTING).	VSPOS	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(POSITION)	(VSPOS)	Results may be affected by whether conditions for vital signs as specified in the protocol were properly met. One common condition is the subject's position. If the protocol requires this type of information, then a CDASH variable [VSTESTCD]_VSPOS may be created for each VSTESTCD and added to the CRF, if needed.
Findings	VS	N/A	Horizontal-Generic	18	[VSTESTCD]_VSLOC	Location of Vital Signs Measurement	A description of the anatomical location of the subject, relevant to the collection of vital signs measurements.	What was the anatomical location where the [VSTEST] measurement was taken?	[VSTEST] Anatomical Location	Char	O	Record or select location on body where measurement was performed, if not preprinted on CRF.	VSLOC	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(LOC)	N/A	Collected or preprinted on the CRF when the sponsor needs to identify the specific anatomical location (e.g., arm for blood pressure). Sponsors may collect the data using a subset list of controlled terminology on the CRF. In horizontal data collection, a CDASH variable [VSTESTCD]_VSLOC may be created for each VSTESTCD and added to the CRF, if needed. LAT, DIR, and PORTOT are used to further describe the anatomical location.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings	VS	N/A	Horizontal-Generic	19	[VSTESTCD]_VSLAT	Vital Signs Laterality	Qualifier for anatomical location, further detailing the side of the body.	What was the side of the anatomical location of the [VSTEST] measurement?	Side	Char	O	Record the side of the anatomical location of the vital signs measurement.	VSLAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(LAT)	N/A	May be preprinted or collected when the sponsor needs to identify the specific side of the anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Findings	VS	N/A	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included in the database or populated during SDTM-based dataset creation before submission.
Findings	VS	N/A	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted on the CRFs that are shipped to each site. EDC: This should be prepopulated.
Findings	VS	N/A	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What is the subject identifier?	Subject	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be provided to the site using a prepopulated list in the system. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTM.
Findings	VS	N/A	N/A	4	VISIT	Visit Name	The name of a clinical encounter that encompasses planned and unplanned trial interventions, procedures, and assessments that may be performed on a subject.	What is the visit name?	[Visit]	Char	R/C	N/A	VISIT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The name of the clinical encounter is typically preprinted on the CRF or displayed within the EDC for any visit-based data collection, most often in Findings domains. This Visit text description is then available in any EDC data extract for that Findings domain.
Findings	VS	N/A	N/A	5	VISDAT	Visit Date	Date the clinical encounter occurred (or started).	What [is/was] the date of the visit?	(Visit) Date	Char	R/C	Record the [date/start date] of the visit using this format (DD-MON-YYYY).	N/A	This field is not an SDTM variable. The date of a measurement, test, observation can be determined from the date/time of visit (VISDAT/VISTIM) and then concatenating the CDASH VISDAT/VISTIM components and populating the SDTMIG variable VSDTC in ISO 8601 format.	N/A	N/A	The date the VS measurements were collected can be determined from the visit date variable (VISDAT) and applying that date to all of the observations at that visit, or the collection date can be included on the VS CRF using the Vital Signs Date (VSDAT) field.
Findings	VS	N/A	N/A	6	VSPERF	Vital Signs Performed	An indication of whether a planned vital signs measurement, series of vital signs measurements, tests, or observations was performed.	Were vital signs performed?	Vital Signs Performed	Char	O	Indicate if vital signs were collected. If Yes, include the appropriate details where indicated on the CRF.	VSSTAT	This does not map directly to an SDTMIG variable. May be used to derive a value into the SDTM variable VSSTAT. If VSPERF="N", the value of VSSTAT will be "NOT DONE". If VSPERF="Y", VSSTAT should be null. A combination of SDTMIG variables (e.g., VSCAT and VSSCAT, VSTPT) is used to indicate that multiple tests were not done. In this situation, the SDTMIG	(NY)	N/A	This general prompt question is used as a data management tool to verify that missing results are confirmed missing.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
														variable VSTESTCD would be populated as VSALL and an appropriate test name VSTEST provided. See SDTMIG for additional information.			
Findings	VS	N/A	N/A	7	VSDAT	Vital Signs Date	The date of the vital signs measurement, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the date of the vital signs measurement?	Date	Char	R/C	Record date of measurements using this format (DD-MON-YYYY).	VSDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable VSDTC in ISO 8601 format.	N/A	N/A	The date of measurement can be determined from a collected date of visit (VISDAT); in such cases, a separate measurement date field is not required.
Findings	VS	N/A	N/A	8	VSTIM	Vital Signs Time	The time of measurement, represented in an unambiguous time format (e.g., hh:mm:ss).	What was the time of the vital signs measurement?	Time	Char	R/C	Record time of measurement (as complete as possible).	VSDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable VSDTC in ISO 8601 format.	N/A	N/A	Collect time if it is relevant for the analysis.
Findings	VS	N/A	N/A	9	VSSPID	Vital Signs Sponsor-Defined Identifier	A sponsor-defined identifier. In CDASH, this is typically used for preprinted or auto-generated numbers on the CRF, or any other type of identifier that does not already have a defined CDASH identifier field.	[Sponsor-defined question]	[Sponsor defined]	Char	O	If collected on the CRF, the sponsor may insert instructions to ensure each record has a unique identifier.	VSSPID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. May be used to create RELREC to link this record with a record in another domain.	N/A	N/A	Because SPID is a sponsor-defined identifier, conformance to Question Text or Item Prompt is not applicable. Typically used as an identifier in a data query to communicate clearly to the site the specific record in question or to reconcile data. May be used to record preprinted number (e.g. line number, record number) on the CRF. This field may be populated by the sponsor's data collection system.
Findings	VS	N/A	N/A	10	VSTPT	Vital Signs Planned Time Point Name	A text description of planned time points when measurements should be taken, as defined in the protocol.	What is the planned time point for this vital signs measurement?	[Planned Time Point Name]	Char	R/C	Record the planned time-point labels for vital signs, if not preprinted on the CRF.	VSTPT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. See the SDTMIG for information on representing time points. The SDTMIG time-point anchors VSTPTREF (text description) and VSRFTDTC (date/time) may be needed, as well as SDTMIG variables VSTPTNUM, VSELTM.	N/A	N/A	Planned time points are needed to differentiate multiple sequential assessments. It is recommended that time points should be preprinted on the CRF rather than collected in a free-text field. If the form is laid out as a grid, then words such as "Planned Time Point" can be included in the column heading.
Findings	VS	N/A	N/A	11	VSCAT	Category for Vital Signs	A grouping of topic-variable values based on user-defined characteristics.	What was the category of the vital signs?	[Vital Signs Category]; NULL	Char	O	Record the vital signs category, if not preprinted on the CRF.	VSCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This is most commonly either a heading or a preprinted category value on the CRF, not a question to which the site would provide an answer. If a question is asked, the response would typically be from a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Category" can be included in the column heading.
Findings	VS	N/A	N/A	12	VSSCAT	Subcategory for Vital Signs	A sub-division of the VSCAT values based on user-defined characteristics.	What was the subcategory of the vital signs?	[Vital Signs Subcategory]; NULL	Char	O	Record the vital signs subcategory, if not preprinted on the CRF.	VSSCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This is most commonly either a heading or a preprinted category value on the CRF, not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	such as "Subcategory" can be included in the column heading. VSSCAT can only be used if there is a VSCAT, and it must be a subcategorization of VSCAT.
Findings	VS	N/A	N/A	13	VSREPNUM	Vital Signs Repetition Number	The instance number of a test that is repeated within a given timeframe for the same test. The level of granularity can vary (e.g., within a time point, within a visit).	What was the repetition number within the time point for this measurement?	Repetition Number	Char	O	Record the repetition number of the measurement within the time point.	VSREPNUM	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The repetition number of the test/measurement within the time point may be preprinted on the CRF (e.g., multiple measurements of blood pressure, multiple analyses of a sample).
Findings	VS	N/A	N/A	14	VSTEST	Vital Signs Test Name	Descriptive name of the test or examination used to obtain the measurement or finding.	What is the vital sign test name?	[Vital Signs Test Name]	Char	HR	Record the name of the vital sign test if not preprinted on the CRF. If collected on the CRF, the sponsor may provide additional instructions to ensure the data is entered as intended.	VSTEST; VSTESTCD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The SDTMIG variable VSTESTCD may be determined from the value collected in VSTEST. Both VSTESTCD and VSTEST are required in the SDTM submission datasets. Use appropriate CDISC CT for the test and test code.	(VSTEST)	N/A	Required to identify which test the result is for. It is recommended that test names be preprinted on the CRF rather than collected in a free-text field. If the form is laid out as a grid, then words such as "Test" can be included in the column heading.
Findings	VS	N/A	N/A	15	VSSTAT	Vital Signs Completion Status	This variable is used to indicate that data are not available, by having the site recording the value as "Not Done".	Indicate if the vital signs measurement was not done	Not Done	Char	O	Indicate if the vital sign measurement was not done.	VSSTAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(ND)	N/A	A Not Done checkbox, which indicates the test was NOT DONE. Typically, there would be 1 checkbox for each measurement. This field can be useful on individual VS tests to confirm that a blank result field is meant to be blank.
Findings	VS	N/A	N/A	16	VSORRES	VS Result or Finding in Original Units	Result of the vital signs measurement as originally received or collected.	What was the result of the measurement?	(Result)	Char	HR	Record the vital sign result.	VSORRES	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	N/A
Findings	VS	N/A	N/A	17	VSORRESU	VS Original Units	The unit of the result as originally received or collected.	What was the unit of the measurement?	Unit	Char	R/C	Record or select the original unit in which these data were collected, if not preprinted on CRF.	VSORRESU	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(UNIT)	N/A	This should be preprinted on the CRF (or enterable from a picklist) with the associated test when possible, rather than collected as free-text.
Findings	VS	N/A	N/A	18	VSCLSIG	Vital Signs Clinical Significance	An indication whether the vital sign result was clinically significant.	Was the result clinically significant?	Clinically Significant	Char	O	Record whether the vital sign result was clinically significant.	VSCLSIG	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(NY)	N/A	N/A
Findings	VS	N/A	N/A	19	VSLOC	Location of Vital Signs Measurement	A description of the anatomical location of the subject, relevant to the collection of vital signs measurements.	What was the anatomical location where the measurement was taken?	Anatomical Location	Char	O	Record or select location on body where measurement was performed, if not preprinted on CRF.	VSLOC	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(LOC)	N/A	Collected or preprinted when the sponsor needs to identify the specific anatomical location (e.g., ARM for blood pressure). Sponsors may collect the data using a subset list of controlled terminology on the CRF. LAT, DIR, and PORTOT are used to further describe the anatomical location.
Findings	VS	N/A	N/A	20	VSPOS	Vital Signs Position of Subject	The position of the subject during a measurement or examination.	What was the position of the subject during the measurement?	Position	Char	R/C	Record the position of subject at time of test (e.g., SITTING).	VSPOS	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(POSITION)	(VSPOS)	Results may be affected by whether conditions for vital signs, as specified in the protocol, were properly met. One common condition is the subject's position.
Findings	VS	N/A	N/A	21	VSDIR	Vital Signs Directionality	Qualifier further detailing the position of the anatomical location, relative to	What was the directionality of the anatomical location of the measurement?	Directionality	Char	O	Record the directionality.	VSDIR	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(DIR)	N/A	May be preprinted or collected when the sponsor needs to identify the directionality of the anatomical location. Sponsors may collect the

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
							the center of the body, organ, or specimen.										data using a subset list of controlled terminology on the CRF.
Findings	VS	N/A	N/A	22	VSLAT	Vital Signs Laterality	Qualifier for anatomical location, further detailing the side of the body.	What was the side of the anatomical location of the vital signs measurement?	Side	Char	O	Record the side of the anatomical location of the vital signs measurement.	VSLAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(LAT)	N/A	May be preprinted or collected when the sponsor needs to identify the specific side of the anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF.

Assumptions for the CDASHIG VS - Vital Signs Domain

1. Vital signs may be collected using either a normalized or a denormalized horizontal data structure, depending on the functionality of the data management or data capture system being used.
2. In a denormalized structure, vital signs are collected using a unique variable name for each test, resulting in a wide, horizontal dataset with multiple test results in each record. The SDTMIG VS structure is normalized, using 1 variable (VSTEST) for the name of the test and 1 variable (VSORRES) for the collected results, resulting in a vertical data structure in which there is 1 record for each test/result. CDASH recommendations are intended to facilitate moving denormalized data to the SDTM normalized data structure, because standard transformation programming can be written when the variable naming syntax is consistent and uses CDISC root variables and Controlled Terminology.
3. The set of variables needed for a particular study may include only test result and result unit, or may include other variables such as location, laterality, position, or method. The examples in this section different ways that denormalized variable names can be created based on the general variable-naming rules of CDASH, using the root variables found in the CDASH Model in combination with the controlled terminology from the Vital Signs Test Code codelist (VSTESTCD) in a consistent syntax.

Example CRFs for the CDASHIG VS - Vital Signs Domain

Example 1

This example CRF collects vital signs data in a denormalized structure with variable names that could be 8 or more characters. The following syntax was used to create the denormalized variable names: <VSTESTCD>_<SDTMIG Target>.

Title: Vital Signs

Record date of measurements using this format (DD-MON-YYYY).	Date VSDAT VSDTC	
Record time of measurement.	Time VSTIM VSDTC	
Record the height result.	Height HEIGHT_VSORRES VSORRES where VSTESTCD = "HEIGHT"	
Record or select the original unit in which the height was collected, if not pre-printed on CRF.	Height Unit HEIGHT_VSORRES VSORRESU where VSTESTCD = "HEIGHT"	☐ cm ☐ in <VSRESU codelist>
Record the weight result.	Weight WEIGHT_VSORRES VSORRES where VSTESTCD = "WEIGHT"	
Record or select the original unit in which the weight was collected, if not pre-printed on CRF.	Weight Unit WEIGHT_VSORRES VSORRESU where VSTESTCD = "WEIGHT"	☐ kg ☐ LB <VSRESU codelist>
Record the temperature result.	Temperature TEMP_VSORRES VSORRES where VSTESTCD = "TEMP"	
Record or select the original unit in which the temperature was collected, if not pre-printed on CRF.	Temperature Unit TEMP_VSORRES VSORRESU where VSTESTCD = "TEMP"	☐ C ☐ F <VSRESU codelist>
Record or select location on body where the measurement was performed, if not pre-printed on CRF.	Temperature Anatomical Location TEMP_VSLOC VSLOC where VSTESTCD = "TEMP"	☐ AXILLA ☐ EAR ☐ FOREHEAD ☐ ORAL CAVITY ☐ RECTUM <LOC codelist>
Record whether the temperature result was clinically significant.	Temperature Clinically Significant TEMP_VSCLSIG SUPPVS.QVAL where QNAM = "VSCLSIG" and QLABEL = "Clinically Significant" where VSTESTCD = "TEMP"	☐ Yes ☐ No <NY codelist>

Record the respiratory rate result.	Respiratory Rate RESP_VSORRES VSORRES where VSTESTCD = "RESP"	
	Respiratory Rate Unit RESP_VSORRESU VSORRESU where VSTESTCD = "RESP" <i>Pre-populated</i>	breaths/min <VSRESU codelist>
Record whether the respiratory rate result was clinically significant.	Respiratory Rate Clinically Significant RESP_VSCLSIG SUPPVS.QVAL where QNAM = "VSCLSIG" and QLABEL = "Clinically Significant" where VSTESTCD = "RESP"	☐ Yes ☐ No <NY codelist>
Record the systolic blood pressure result.	Systolic Blood Pressure SYSBP_VSORRES VSORRES where VSTESTCD = "SYSBP"	
	Systolic Blood Pressure Unit SYSBP_VSORRESU VSORRESU where VSTESTCD = "SYSBP" <i>Pre-populated</i>	mmHg <VSRESU codelist>
Record whether the systolic blood pressure result was clinically significant.	Systolic Blood Pressure Clinically Significant SYSBP_VSCLSIG SUPPVS.QVAL where QNAM = "VSCLSIG" and QLABEL = "Clinically Significant" where VSTESTCD = "SYSBP"	☐ Yes ☐ No <NY codelist>
Record the position of subject at time of test (e.g. SITTING).	Systolic Blood Pressure Position SYSBP_VSPOS VSPOS where VSTESTCD = "SYSBP"	☐ STANDING ☐ SITTING ☐ SUPINE <POSITION codelist>
Record or select location on body where the measurement was performed, if not pre-printed on CRF.	Systolic Blood Pressure Anatomical Location SYSBP_VSLOC VSLOC where VSTESTCD = "SYSBP"	☐ BRACHIAL ARTERY ☐ RADIAL ARTERY ☐ PERIPHERAL ARTERY <LOC codelist>
Record the side of the anatomical location of the systolic blood pressure measurement.	Systolic Blood Pressure Side SYSBP_VSLAT VSLAT where VSTESTCD = "SYSBP"	☐ RIGHT ☐ LEFT <LAT codelist>
Record the diastolic blood pressure result.	Diastolic Blood Pressure DIABP_VSORRES VSORRES where VSTESTCD = "DIABP"	
	Diastolic Blood Pressure Unit DIABP_VSORRESU VSORRESU where VSTESTCD = "DIABP" <i>Pre-populated</i>	mmHg <VSRESU codelist>
Record whether the diastolic blood pressure result was clinically significant.	Diastolic Blood Pressure Clinically Significant DIABP_VSCLSIG SUPPVS.QVAL where QNAM = "VSCLSIG" and QLABEL = "Clinically Significant" where VSTESTCD = "DIABP"	☐ Yes ☐ No <NY codelist>

Record the position of subject at time of test (e.g. SITTING).	Diastolic Blood Pressure Position DIABP_VSPOS VSPOS where VSTESTCD = "DIABP"	☐ STANDING ☐ SITTING ☐ SUPINE <POSITION codelist>
Record or select location on body where the measurement was performed, if not pre-printed on CRF.	Diastolic Blood Pressure Anatomical Location DIABP_VSLOC VSLOC where VSTESTCD = "DIABP"	☐ BRACHIAL ARTERY ☐ RADIAL ARTERY ☐ PERIPHERAL ARTERY <LOC codelist>
Record the side of the anatomical location of the diastolic blood pressure measurement.	Diastolic Blood Pressure Side DIABP_VSLAT VSLAT where VSTESTCD = "DIABP"	☐ RIGHT ☐ LEFT <LAT codelist>
Record the pulse rate result.	Pulse Rate PULSE_VSORRES VSORRES where VSTESTCD = "PULSE"	
	Pulse Rate Unit PULSE_VSORRESU VSORRESU where VSTESTCD = "PULSE" <i>Pre-populated</i>	beats/min <VSRESU codelist>
Record whether the pulse rate result was clinically significant.	Pulse Rate Clinically Significant PULSE_VSCLSIG SUPPVS.QVAL where QNAM = "VSCLSIG" and QLABEL = "Clinically Significant" where VSTESTCD = "PULSE"	☐ Yes ☐ No <NY codelist>
Record the position of subject at time of test (e.g. SITTING).	Pulse Rate Position PULSE_VSPOS VSPOS where VSTESTCD = "PULSE"	☐ STANDING ☐ SITTING ☐ SUPINE <POSITION codelist>
Record or select location on body where pulse rate measurement was performed.	Pulse Rate Anatomical Location PULSE_VSLOC VSLOC where VSTESTCD = "PULSE"	☐ BRACHIAL ARTERY ☐ CAROTID ARTERY ☐ DORSALIS PEDIS ARTERY ☐ FEMORAL ARTERY ☐ RADIAL ARTERY <LOC codelist>
Record the side of the anatomical location of the pulse rate measurement.	Pulse Rate Side PULSE_VSLAT VSLAT where VSTESTCD = "PULSE"	☐ RIGHT ☐ LEFT <LAT codelist>

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
VSDAT	1	What was the date of the measurements?	Date	Record date of measurements using this format (DD-MON-YYYY).	Date	VSDTC					Prompt		
VSTIM	2	What was the time of the measurements?	Time	Record time of measurement.	Time	VSDTC					Prompt		
HEIGHT_VSORRES	3	What was the result of the height measurement?	Height	Record the height result.	Float	VSORRES; VSTEST; VSTESTCD	VSORRES where VSTESTCD = "HEIGHT"				Prompt		
HEIGHT_VSORRESU	4	What was the unit of the height measurement?	Height Unit	Record or select the original unit in which the height was collected, if not pre-printed on CRF.	Text	VSORRESU	VSORRESU where VSTESTCD = "HEIGHT"	(VSRESU)	cm; in		Prompt		
WEIGHT_VSORRES	5	What was the result of the weight measurement?	Weight	Record the weight result.	Float	VSORRES; VSTEST; VSTESTCD	VSORRES where VSTESTCD = "WEIGHT"				Prompt		
WEIGHT_VSORRESU	6	What was the unit of the weight measurement?	Weight Unit	Record or select the original unit in which the weight was collected, if not pre-printed on CRF.	Text	VSORRESU	VSORRESU where VSTESTCD = "WEIGHT"	(VSRESU)	kg; LB		Prompt		
TEMP_VSORRES	7	What was the result of the temperature measurement?	Temperature	Record the temperature result.	Float	VSORRES; VSTEST; VSTESTCD	VSORRES where VSTESTCD = "TEMP"				Prompt		
TEMP_VSORRESU	8	What was the unit of the temperature measurement?	Temperature Unit	Record or select the original unit in which the temperature was collected, if not pre-printed on CRF.	Text	VSORRESU	VSORRESU where VSTESTCD = "TEMP"	(VSRESU)	C; F		Prompt		
TEMP_VSLOC	9	What was the anatomical location where the temperature measurement was taken?	Temperature Anatomical Location	Record or select location on body where the measurement was performed, if not pre-printed on CRF.	Text	VSLOC	VSLOC where VSTESTCD = "TEMP"	(LOC)	AXILLA; EAR; FOREHEAD; ORAL CAVITY; RECTUM		Prompt		
TEMP_VSCLSIG	10	Was the temperature result clinically significant?	Temperature Clinically Significant	Record whether the temperature result was clinically significant.	Text	SUPPVS.QVAL	SUPPVS.QVAL where QNAM = "VSCLSIG" and QLABEL = "Clinically Significant" where VSTESTCD = "TEMP"	(NY)	Yes; No		Prompt		
RESP_VSORRES	11	What was the result of the respiratory rate measurement?	Respiratory Rate	Record the respiratory rate result.	Integer	VSORRES; VSTEST; VSTESTCD	VSORRES where VSTESTCD = "RESP"				Prompt		
RESP_VSORRESU	12	What was the unit of the respiratory rate measurement?	Respiratory Rate Unit	Record or select the original unit in which the respiratory rate was collected, if not pre-printed on CRF.	Text	VSORRESU	VSORRESU where VSTESTCD = "RESP"	(VSRESU)		breaths/min	Prompt		
RESP_VSCLSIG	13	Was the respiratory rate result clinically significant?	Respiratory Rate Clinically Significant	Record whether the respiratory rate result was clinically significant.	Text	SUPPVS.QVAL	SUPPVS.QVAL where QNAM = "VSCLSIG" and QLABEL = "Clinically Significant" where VSTESTCD = "RESP"	(NY)	Yes; No		Prompt		
SYSBP_VSORRES	14	What was the result of the systolic blood pressure measurement?	Systolic Blood Pressure	Record the systolic blood pressure result.	Integer	VSORRES; VSTEST; VSTESTCD	VSORRES where VSTESTCD = "SYSBP"				Prompt		
SYSBP_VSORRESU	15	What was the unit of the systolic blood pressure measurement?	Systolic Blood Pressure Unit	Record or select the original unit in which the systolic blood pressure was collected, if not pre-printed on CRF.	Text	VSORRESU	VSORRESU where VSTESTCD = "SYSBP"	(VSRESU)		mmHg	Prompt		
SYSBP_VSCLSIG	16	Was the systolic blood pressure result clinically significant?	Systolic Blood Pressure Clinically Significant	Record whether the systolic blood pressure result was clinically significant.	Text	SUPPVS.QVAL	SUPPVS.QVAL where QNAM = "VSCLSIG" and QLABEL = "Clinically Significant" where VSTESTCD = "SYSBP"	(NY)	Yes; No		Prompt		
SYSBP_VSPOS	17	What was the position of the subject during the systolic blood pressure measurement?	Systolic Blood Pressure Position	Record the position of subject at time of test (e.g. SITTING).	Text	VSPOS	VSPOS where VSTESTCD = "SYSBP"	(POSITION)	STANDING; SITTING; SUPINE		Prompt		
SYSBP_VSLOC	18	What was the anatomical location where the systolic	Systolic Blood Pressure	Record or select location on body where the measurement	Text	VSLOC	VSLOC where VSTESTCD = "SYSBP"	(LOC)	BRACHIAL ARTERY; RADIAL ARTERY; PERIPHERAL ARTERY		Prompt		

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
		blood pressure measurement was taken?	Anatomical Location	was performed, if not pre-printed on CRF.									
SYSBP_VSLAT	19	What was the side of the anatomical location of the systolic blood pressure measurement?	Systolic Blood Pressure Side	Record the side of the anatomical location of the systolic blood pressure measurement.	Text	VSLAT	VSLAT where VSTESTCD = "SYSBP"	(LAT)	RIGHT; LEFT		Prompt		
DIABP_VSORRES	20	What was the result of the diastolic blood pressure measurement?	Diastolic Blood Pressure	Record the diastolic blood pressure result.	Integer	VSORRES; VSTEST; VSTESTCD	VSORRES where VSTESTCD = "DIABP"				Prompt		
DIAPU_VSORRESU	21	What was the unit of the diastolic blood pressure measurement?	Diastolic Blood Pressure Unit	Record or select the original unit in which the diastolic blood pressure was collected, if not pre-printed on CRF.	Text	VSORRESU	VSORRESU where VSTESTCD = "DIABP"	(VSRESU)		mmHg	Prompt		
DIABP_VSCLSIG	22	Was the diastolic blood pressure result clinically significant?	Diastolic Blood Pressure Clinically Significant	Record whether the diastolic blood pressure result was clinically significant.	Text	SUPPVS.QVAL	SUPPVS.QVAL where QNAM = "VSCLSIG" and QLABEL = "Clinically Significant" where VSTESTCD = "DIABP"	(NY)	Yes; No		Prompt		
DIABP_VSPOS	23	What was the position of the subject during the diastolic blood pressure measurement?	Diastolic Blood Pressure Position	Record the position of subject at time of test (e.g. SITTING).	Text	VSPOS	VSPOS where VSTESTCD = "DIABP"	(POSITION)	STANDING; SITTING; SUPINE		Prompt		
DIABP_VSLOC	24	What was the anatomical location where the diastolic blood pressure measurement was taken?	Diastolic Blood Pressure Anatomical Location	Record or select location on body where the measurement was performed, if not pre-printed on CRF.	Text	VSLOC	VSLOC where VSTESTCD = "DIABP"	(LOC)	BRACHIAL ARTERY; RADIAL ARTERY; PERIPHERAL ARTERY		Prompt		
DIABP_VSLAT	25	What was the side of the anatomical location of the diastolic blood pressure measurement?	Diastolic Blood Pressure Side	Record the side of the anatomical location of the diastolic blood pressure measurement.	Text	VSLAT	VSLAT where VSTESTCD = "DIABP"	(LAT)	RIGHT; LEFT		Prompt		
PULSE_VSORRES	26	What was the result of the pulse measurement?	Pulse Rate	Record the pulse rate result.	Integer	VSORRES; VSTEST; VSTESTCD	VSORRES where VSTESTCD = "PULSE"				Prompt		
PULSE_VSORRESU	27	What was the unit of the pulse rate measurement?	Pulse Rate Unit	Record or select the original unit in which the pulse rate was collected, if not pre-printed on CRF.	Text	VSORRESU	VSORRESU where VSTESTCD = "PULSE"	(VSRESU)		beats/min	Prompt		
PULSE_VSCLSIG	28	Was the pulse rate result clinically significant?	Pulse Rate Clinically Significant	Record whether the pulse rate result was clinically significant.	Text	SUPPVS.QVAL	SUPPVS.QVAL where QNAM = "VSCLSIG" and QLABEL = "Clinically Significant" where VSTESTCD = "PULSE"	(NY)	Yes; No		Prompt		
PULSE_VSPOS	29	What was the position of the subject during the pulse rate measurement?	Pulse Rate Position	Record the position of subject at time of test (e.g. SITTING).	Text	VSPOS	VSPOS where VSTESTCD = "PULSE"	(POSITION)	STANDING; SITTING; SUPINE		Prompt		
PULSE_VSLOC	30	What was the anatomical location where the pulse rate measurement was taken?	Pulse Rate Anatomical Location	Record or select location on body where pulse rate measurement was performed.	Text	VSLOC	VSLOC where VSTESTCD = "PULSE"	(LOC)	BRACHIAL ARTERY; CAROTID ARTERY; DORSALIS PEDIS ARTERY; FEMORAL ARTERY; RADIAL ARTERY		Prompt		
PULSE_VSLAT	31	What was the side of the anatomical location of the pulse rate measurement?	Pulse Rate Side	Record the side of the anatomical location of the pulse rate measurement.	Text	VSLAT	VSLAT where VSTESTCD = "PULSE"	(LAT)	RIGHT; LEFT		Prompt		

Example 2

This example shows a vital signs data collection in a denormalized structure with variable names restricted to 8 characters or less. The VSTESTCD values were used to create the denormalized variable names.

Title: Vital Signs

Record date of measurements using this format (DD-MON-YYYY).	Date
Record time of measurement.	Time
Record the height result.	Height
Record or select the original unit in which these data were collected, if not pre-printed on CRF.	Height Unit ☐ cm ☐ in <VSRESU codelist>
Record the weight result.	Weight
Record or select the original unit in which these data were collected, if not pre-printed on CRF.	Weight Unit ☐ kg ☐ LB <VSRESU codelist>
Record the temperature result.	Temperature
Record or select the original unit in which these data were collected, if not pre-printed on CRF.	Temperature Unit ☐ C ☐ F <VSRESU codelist>
Record the respiratory rate result.	Respiratory Rate
	Respiratory Rate Unit
Record the systolic blood pressure result.	Systolic Blood Pressure
	Systolic Blood Pressure Unit
Record the diastolic blood pressure result.	Diastolic Blood Pressure
	Diastolic Blood Pressure Unit
Record the pulse rate result.	Pulse Rate
	Pulse Rate Unit

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
VSDAT	1	What was the date of the measurements?	Date	Record date of measurements using this format (DD-MON-YYYY).	Date	VSDTC					Prompt		
VSTIM	2	What was the time of the measurements?	Time	Record time of measurement.	Time	VSDTC					Prompt		
HEIGHT	3	What was the result of the height measurement?	Height	Record the height result.	Float	VSORRES; VSTEST; VSTESTCD	VSORRES where VSTESTCD = "HEIGHT"				Prompt		
HEIGHTU	4	What was the unit of the height measurement?	Height Unit	Record or select the original unit in which these data were collected, if not pre-printed on CRF.	Text	VSORRESU	VSORRESU where VSTESTCD = "HEIGHT"	(VSRESU)	cm; in		Prompt		
WEIGHT	5	What was the result of the weight measurement?	Weight	Record the weight result.	Float	VSORRES; VSTEST; VSTESTCD	VSORRES where VSTESTCD = "WEIGHT"				Prompt		
WEIGHTU	6	What was the unit of the weight measurement?	Weight Unit	Record or select the original unit in which these data were collected, if not pre-printed on CRF.	Text	VSORRESU	VSORRESU where VSTESTCD = "WEIGHT"	(VSRESU)	kg; LB		Prompt		
TEMP	7	What was the result of the temperature measurement?	Temperature	Record the temperature result.	Float	VSORRES; VSTEST; VSTESTCD	VSORRES where VSTESTCD = "TEMP"				Prompt		
TEMPU	8	What was the unit of the temperature measurement?	Temperature Unit	Record or select the original unit in which these data were collected, if not pre-printed on CRF.	Text	VSORRESU	VSORRESU where VSTESTCD = "TEMP"	(VSRESU)	C; F		Prompt		
RESP	9	What was the result of the respiratory rate measurement?	Respiratory Rate	Record the respiratory rate result.	Integer	VSORRES; VSTEST; VSTESTCD	VSORRES where VSTESTCD = "RESP"				Prompt		
RESPU	10	What was the unit of the respiratory rate measurement?	Respiratory Rate Unit	Record or select the original unit in which these data were collected, if not pre-printed on CRF.	Text	VSORRESU	VSORRESU where VSTESTCD = "RESP"	(VSRESU)		breaths/min	Prompt		
SYSBP	11	What was the result of the systolic blood pressure measurement?	Systolic Blood Pressure	Record the systolic blood pressure result.	Integer	VSORRES; VSTEST; VSTESTCD	VSORRES where VSTESTCD = "SYSBP"				Prompt		
SYSBPU	12	What was the unit of the systolic blood pressure measurement?	Systolic Blood Pressure Unit	Record or select the original unit in which these data were collected, if not pre-printed on CRF.	Text	VSORRESU	VSORRESU where VSTESTCD = "SYSBP"	(VSRESU)		mmHg	Prompt		
DIABP	13	What was the result of the diastolic blood pressure measurement?	Diastolic Blood Pressure	Record the diastolic blood pressure result.	Integer	VSORRES; VSTEST; VSTESTCD	VSORRES where VSTESTCD = "DIABP"				Prompt		
DIABPU	14	What was the unit of the diastolic blood pressure measurement?	Diastolic Blood Pressure Unit	Record or select the original unit in which these data were collected, if not pre-printed on CRF.	Text	VSORRESU	VSORRESU where VSTESTCD = "DIABP"	(VSRESU)		mmHg	Prompt		
PULSE	15	What was the result of the pulse measurement?	Pulse Rate	Record the pulse rate result.	Integer	VSORRES; VSTEST; VSTESTCD	VSORRES where VSTESTCD = "PULSE"				Prompt		

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
PULSEU	16	What was the unit of the pulse rate measurement?	Pulse Rate Unit	Record or select the original unit in which these data were collected, if not pre-printed on CRF.	Text	VSORRESU	VSORRESU where VSTESTCD = "PULSE"	(VSRESU)		beats/min	Prompt		

Example 3

This example CRF uses a variable naming pattern that follows the syntax; Target Domain_Target SDTMIG Variable Name_ [optionalPrespecifiedTopicValue]. For the non-standard variables, the QNAM value replaces the -Target SDTMIG Variable Name- portion of the syntax. This pattern intentionally links the data collection variable directly to the SDTM record by identifying first the dataset, then the variable (and, if needed, the Topic value of the record).

Title: Vital Signs

Record date of measurements using this format (DD-MON-YYYY).	Date VS_VSDAT VSDTC	
Record time of measurement.	Time VS_VSTIM VSDTC	
Record the height result.	Height VS_VSORRES_HEIGHT VSORRES where VSTESTCD = "HEIGHT"	
Record or select the original unit in which the height was collected, if not pre-printed on CRF.	Height Unit VS_VSORRESU_HEIGHT VSORRESU where VSTESTCD = "HEIGHT"	☐ cm ☐ in <VSRESU codelist>
Record the weight result.	Weight VS_VSORRES_WEIGHT VSORRES where VSTESTCD = "WEIGHT"	
Record or select the original unit in which the weight was collected, if not pre-printed on CRF.	Weight Unit VS_VSORRESU_WEIGHT VSORRESU where VSTESTCD = "WEIGHT"	☐ kg ☐ LB <VSRESU codelist>
Record the temperature result.	Temperature VS_VSORRES_TEMP VSORRES where VSTESTCD = "TEMP"	
Record or select the original unit in which the temperature was collected, if not pre-printed on CRF.	Temperature Unit VS_VSORRESU_TEMP VSORRESU where VSTESTCD = "TEMP"	☐ C ☐ F <VSRESU codelist>
Record or select location on body where the measurement was performed, if not pre-printed on CRF.	Temperature Anatomical Location VS_VSLOC_TEMP VSLOC where VSTESTCD = "TEMP"	☐ AXILLA ☐ EAR ☐ FOREHEAD ☐ ORAL CAVITY ☐ RECTUM <LOC codelist>

Record whether the temperature result was clinically significant.	Temperature Clinically Significant SUPPVS_VSCLSIG_TEMP SUPPVS.QVAL where QNAM = "VSCLSIG" and QLABEL = "Clinically Significant" where VSTESTCD = "TEMP"	☐ Yes ☐ No <NY codelist>
Record the respiratory rate result.	Respiratory Rate VS_VSORRES_RESP VSORRES where VSTESTCD = "RESP"	
	Respiratory Rate Unit VS_VSORRESU_RESP VSORRESU where VSTESTCD = "RESP" <i>Pre-populated</i>	breaths/min <VSRESU codelist>
Record whether the respiratory rate result was clinically significant.	Respiratory Rate Clinically Significant SUPPVS_VSCLSIG_RESP SUPPVS.QVAL where QNAM = "VSCLSIG" and QLABEL = "Clinically Significant" where VSTESTCD = "RESP"	☐ Yes ☐ No <NY codelist>
Record the systolic blood pressure result.	Systolic Blood Pressure VS_VSORRES_SYSBP VSORRES where VSTESTCD = "SYSBP"	
	Systolic Blood Pressure Unit VS_VSORRESU_SYSBP VSORRESU where VSTESTCD = "SYSBP" <i>Pre-populated</i>	mmHg <VSRESU codelist>
Record whether the systolic blood pressure result was clinically significant.	Systolic Blood Pressure Clinically Significant SUPPVS_VSCLSIG_SYSBP SUPPVS.QVAL where QNAM = "VSCLSIG" and QLABEL = "Clinically Significant" where VSTESTCD = "SYSBP"	☐ Yes ☐ No <NY codelist>
Record the position of subject at time of test (e.g. SITTING).	Systolic Blood Pressure Position VS_VSPOS_SYSBP VSPOS where VSTESTCD = "SYSBP"	☐ STANDING ☐ SITTING ☐ SUPINE <POSITION codelist>
Record or select location on body where the measurement was performed, if not pre-printed on CRF.	Systolic Blood Pressure Anatomical Location VS_VSLOC_SYSBP VSLOC where VSTESTCD = "SYSBP"	☐ BRACHIAL ARTERY ☐ RADIAL ARTERY ☐ PERIPHERAL ARTERY <LOC codelist>
Record the side of the anatomical location of the systolic blood pressure measurement.	Systolic Blood Pressure Side VS_VSLAT_SYSBP VSLAT where VSTESTCD = "SYSBP"	☐ RIGHT ☐ LEFT <LAT codelist>
Record the diastolic blood pressure result.	Diastolic Blood Pressure VS_VSORRES_DIABP VSORRES where VSTESTCD = "DIABP"	
	Diastolic Blood Pressure Unit VS_VSORRESU_DIABP VSORRESU where VSTESTCD = "DIABP" <i>Pre-populated</i>	mmHg <VSRESU codelist>
Record whether the diastolic blood pressure result was clinically significant.	Diastolic Blood Pressure Clinically Significant SUPPVS_VSCLSIG_DIABP SUPPVS.QVAL where QNAM = "VSCLSIG" and QLABEL = "Clinically Significant" where VSTESTCD = "DIABP"	☐ Yes ☐ No <NY codelist>

Record the position of subject at time of test (e.g. SITTING).	Diastolic Blood Pressure Position VS_VSPOS_DIABP VSPOS where VSTESTCD = "DIABP"	☐ STANDING ☐ SITTING ☐ SUPINE <POSITION codelist>
Record or select location on body where the measurement was performed, if not pre-printed on CRF.	Diastolic Blood Pressure Anatomical Location VS_VSLOC_DIABP VSLOC where VSTESTCD = "DIABP"	☐ BRACHIAL ARTERY ☐ RADIAL ARTERY ☐ PERIPHERAL ARTERY <LOC codelist>
Record the side of the anatomical location of the diastolic blood pressure measurement.	Diastolic Blood Pressure Side VS_VSLAT_DIABP VSLAT where VSTESTCD = "DIABP"	☐ RIGHT ☐ LEFT <LAT codelist>
Record the pulse rate result.	Pulse Rate VS_VSORRES_VS VSORRES where VSTESTCD = "PULSE"	
	Pulse Rate Unit VS_VSORRESU_PULSE VSORRESU where VSTESTCD = "PULSE" Pre-populated	beats/min <VSRESU codelist>
Record whether the pulse rate result was clinically significant.	Pulse Rate Clinically Significant SUPPVS_VSCLSIG_PULSE SUPPVS.QVAL where QNAM = "VSCLSIG" and QLABEL = "Clinically Significant" where VSTESTCD = "PULSE"	☐ Yes ☐ No <NY codelist>
Record the position of subject at time of test (e.g. SITTING).	Pulse Rate Position VS_VSPOS_PULSE VSPOS where VSTESTCD = "PULSE"	☐ STANDING ☐ SITTING ☐ SUPINE <POSITION codelist>
Record or select location on body where pulse rate measurement was performed.	Pulse Rate Anatomical Location VS_VSLOC_PULSE VSLOC where VSTESTCD = "PULSE"	☐ BRACHIAL ARTERY ☐ CAROTID ARTERY ☐ DORSALIS PEDIS ARTERY ☐ FEMORAL ARTERY ☐ RADIAL ARTERY <LOC codelist>
Record the side of the anatomical location of the pulse rate measurement.	Pulse Rate Side VS_VSLAT_PULSE VSLAT where VSTESTCD = "PULSE"	☐ RIGHT ☐ LEFT <LAT codelist>

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
VS_VSDAT	1	What was the date of the measurements?	Date	Record date of measurements using this format (DD-MON-YYYY).	Date	VSDTC					Prompt		
VS_VSTIM	2	What was the time of the measurements?	Time	Record time of measurement.	Time	VSDTC					Prompt		
VS_VSORRES_HEIGHT	3	What was the result of the height measurement?	Height	Record the height result.	Float	VSORRES; VSTEST; VSTESTCD	VSORRES where VSTESTCD = "HEIGHT"				Prompt		
VS_VSORRESU_HEIGHT	4	What was the unit of the height measurement?	Height Unit	Record or select the original unit in which the height was collected, if not pre-printed on CRF.	Text	VSORRESU	VSORRESU where VSTESTCD = "HEIGHT"	(VSRESU)	cm; in		Prompt		
VS_VSORRES_WEIGHT	5	What was the result of the weight measurement?	Weight	Record the weight result.	Float	VSORRES; VSTEST; VSTESTCD	VSORRES where VSTESTCD = "WEIGHT"				Prompt		
VS_VSORRESU_WEIGHT	6	What was the unit of the weight measurement?	Weight Unit	Record or select the original unit in which the weight collected, if not pre-printed on CRF.	Text	VSORRESU	VSORRESU where VSTESTCD = "WEIGHT"	(VSRESU)	kg; LB		Prompt		
VS_VSORRES_TEMP	7	What was the result of the temperature measurement?	Temperature	Record the temperature result.	Float	VSORRES; VSTEST; VSTESTCD	VSORRES where VSTESTCD = "TEMP"				Prompt		
VS_VSORRESU_TEMP	8	What was the unit of the temperature measurement?	Temperature Unit	Record or select the original unit in which the temperature was collected, if not pre-printed on CRF.	Text	VSORRESU	VSORRESU where VSTESTCD = "TEMP"	(VSRESU)	C; F		Prompt		
VS_VSLOC_TEMP	9	What was the anatomical location where the temperature measurement was taken?	Temperature Anatomical Location	Record or select location on body where the measurement was performed, if not pre-printed on CRF.	Text	VSLOC	VSLOC where VSTESTCD = "TEMP"	(LOC)	AXILLA; EAR; FOREHEAD; ORAL CAVITY; RECTUM		Prompt		
SUPPVS_VSCLSIG_TEMP	10	Was the temperature result clinically significant?	Temperature Clinically Significant	Record whether the temperature result was clinically significant.	Text	SUPPVS.QVAL	SUPPVS.QVAL where QNAM = "VSCLSIG" and QLABEL = "Clinically Significant" where VSTESTCD = "TEMP"	(NY)	Yes; No		Prompt		
VS_VSORRES_RESP	11	What was the result of the respiratory rate measurement?	Respiratory Rate	Record the respiratory rate result.	Integer	VSORRES; VSTEST; VSTESTCD	VSORRES where VSTESTCD = "RESP"				Prompt		
VS_VSORRESU_RESP	12	What was the unit of the respiratory rate measurement?	Respiratory Rate Unit	Record or select the original unit in which the respiratory rate was collected, if not pre-printed on CRF.	Text	VSORRESU	VSORRESU where VSTESTCD = "RESP"	(VSRESU)		breaths/min	Prompt		
SUPPVS_VSCLSIG_RESP	13	Was the respiratory rate result clinically significant?	Respiratory Rate Clinically Significant	Record whether the respiratory rate result was clinically significant.	Text	SUPPVS.QVAL	SUPPVS.QVAL where QNAM = "VSCLSIG" and QLABEL = "Clinically Significant" where VSTESTCD = "RESP"	(NY)	Yes; No		Prompt		
VS_VSORRES_SYSBP	14	What was the result of the systolic blood pressure measurement?	Systolic Blood Pressure	Record the systolic blood pressure result.	Integer	VSORRES; VSTEST; VSTESTCD	VSORRES where VSTESTCD = "SYSBP"				Prompt		

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
VS_VSORRESU_SYSBP	15	What was the unit of the systolic blood pressure measurement?	Systolic Blood Pressure Unit	Record or select the original unit in which the systolic blood pressure was collected, if not pre-printed on CRF.	Text	VSORRESU	VSORRESU where VSTESTCD = "SYSBP"	(VSRESU)		mmHg	Prompt		
SUPPVS_VSCLSIG_SYSBP	16	Was the systolic blood pressure result clinically significant?	Systolic Blood Pressure Clinically Significant	Record whether the systolic blood pressure result was clinically significant.	Text	SUPPVS.QVAL	SUPPVS.QVAL where QNAM = "VSCLSIG" and QLABEL = "Clinically Significant" where VSTESTCD = "SYSBP"	(NY)	Yes; No		Prompt		
VS_VSPOS_SYSBP	17	What was the position of the subject during the systolic blood pressure measurement?	Systolic Blood Pressure Position	Record the position of subject at time of test (e.g. SITTING).	Text	VSPOS	VSPOS where VSTESTCD = "SYSBP"	(POSITION)	STANDING; SITTING; SUPINE		Prompt		
VS_VSLOC_SYSBP	18	What was the anatomical location where the systolic blood pressure measurement was taken?	Systolic Blood Pressure Anatomical Location	Record or select location on body where the measurement was performed, if not pre-printed on CRF.	Text	VSLOC	VSLOC where VSTESTCD = "SYSBP"	(LOC)	BRACHIAL ARTERY; RADIAL ARTERY; PERIPHERAL ARTERY		Prompt		
VS_VSLAT_SYSBP	19	What was the side of the anatomical location of the systolic blood pressure measurement?	Systolic Blood Pressure Side	Record the side of the anatomical location of the systolic blood pressure measurement.	Text	VSLAT	VSLAT where VSTESTCD = "SYSBP"	(LAT)	RIGHT; LEFT		Prompt		
VS_VSORRES_DIABP	20	What was the result of the diastolic blood pressure measurement?	Diastolic Blood Pressure	Record the diastolic blood pressure result.	Integer	VSORRES; VSTEST; VSTESTCD	VSORRES where VSTESTCD = "DIABP"				Prompt		
VS_VSORRESU_DIAPU	21	What was the unit of the diastolic blood pressure measurement?	Diastolic Blood Pressure Unit	Record or select the original unit in which the diastolic blood pressure was collected, if not pre-printed on CRF.	Text	VSORRESU	VSORRESU where VSTESTCD = "DIABP"	(VSRESU)		mmHg	Prompt		
SUPPVS_VSCLSIG_DIABP	22	Was the diastolic blood pressure result clinically significant?	Diastolic Blood Pressure Clinically Significant	Record whether the diastolic blood pressure result was clinically significant.	Text	SUPPVS.QVAL	SUPPVS.QVAL where QNAM = "VSCLSIG" and QLABEL = "Clinically Significant" where VSTESTCD = "DIABP"	(NY)	Yes; No		Prompt		
VS_VSPOS_DIABP	23	What was the position of the subject during the diastolic blood pressure measurement?	Diastolic Blood Pressure Position	Record the position of subject at time of test (e.g. SITTING).	Text	VSPOS	VSPOS where VSTESTCD = "DIABP"	(POSITION)	STANDING; SITTING; SUPINE		Prompt		
VS_VSLOC_DIABP	24	What was the anatomical location where the diastolic blood pressure measurement was taken?	Diastolic Blood Pressure Anatomical Location	Record or select location on body where the measurement was performed, if not pre-printed on CRF.	Text	VSLOC	VSLOC where VSTESTCD = "DIABP"	(LOC)	BRACHIAL ARTERY; RADIAL ARTERY; PERIPHERAL ARTERY		Prompt		
VS_VSLAT_DIABP	25	What was the side of the anatomical location of the diastolic blood pressure measurement?	Diastolic Blood Pressure Side	Record the side of the anatomical location of the diastolic blood pressure measurement.	Text	VSLAT	VSLAT where VSTESTCD = "DIABP"	(LAT)	RIGHT; LEFT		Prompt		
VS_VSORRES_VS	26	What was the result of the pulse measurement?	Pulse Rate	Record the pulse rate result.	Integer	VSORRES; VSTEST; VSTESTCD	VSORRES where VSTESTCD = "PULSE"				Prompt		
VS_VSORRESU_PULSE	27	What was the unit of the pulse rate measurement?	Pulse Rate Unit	Record or select the original unit in which the pulse rate was collected, if not pre-printed on CRF.	Text	VSORRESU	VSORRESU where VSTESTCD = "PULSE"	(VSRESU)		beats/min	Prompt		

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
SUPPVS_VSCLSIG_PULSE	28	Was the pulse rate result clinically significant?	Pulse Rate Clinically Significant	Record whether the pulse rate result was clinically significant.	Text	SUPPVS.QVAL	SUPPVS.QVAL where QNAM = "VSCLSIG" and QLABEL = "Clinically Significant" where VSTESTCD = "PULSE"	(NY)	Yes; No		Prompt		
VS_VSPOS_PULSE	29	What was the position of the subject during the pulse rate measurement?	Pulse Rate Position	Record the position of subject at time of test (e.g. SITTING).	Text	VSPOS	VSPOS where VSTESTCD = "PULSE"	(POSITION)	STANDING; SITTING; SUPINE		Prompt		
VS_VSLOC_PULSE	30	What was the anatomical location where the pulse rate measurement was taken?	Pulse Rate Anatomical Location	Record or select location on body where pulse rate measurement was performed.	Text	VSLOC	VSLOC where VSTESTCD = "PULSE"	(LOC)	BRACHIAL ARTERY; CAROTID ARTERY; DORSALIS PEDIS ARTERY; FEMORAL ARTERY; RADIAL ARTERY		Prompt		
VS_VSLAT_PULSE	31	What was the side of the anatomical location of the pulse rate measurement?	Pulse Rate Side	Record the side of the anatomical location of the pulse rate measurement.	Text	VSLAT	VSLAT where VSTESTCD = "PULSE"	(LAT)	RIGHT; LEFT		Prompt		

8.4 Findings About Events and Interventions Domain

8.4.1 FA - Findings About Events or Interventions

Description/Overview for the CDASHIG FA - Findings About Events or Interventions Domain

The CDASHIG Findings class includes the subtype Findings About, which is used to record findings related to observations in the Interventions or Events classes.

Specification for the CDASHIG FA - Findings About Events or Interventions Domain

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings About Events or Interventions	FA	N/A	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included in the database or populated during SDTM-based dataset creation before submission.
Findings About Events or Interventions	FA	N/A	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	number can be recorded by the site, or it may be preprinted on the CRFs that are shipped to each site. EDC: This should be prepopulated.
Findings About Events or Interventions	FA	N/A	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What [is/was] the (study) [subject/participant] identifier?	[Subject/Participant] (Identifier)	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system-generated. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Findings About Events or Interventions	FA	N/A	N/A	4	VISIT	Visit Name	The name of a clinical encounter that encompasses planned and unplanned trial interventions, procedures, and assessments that may be performed on a subject.	What is the visit name?	[Visit]	Char	R/C	N/A	VISIT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The name of the clinical encounter is typically preprinted or displayed within the EDC for any visit-based data collection, most often in Findings domains. This Visit text description is then available in any EDC data extract for that Findings domain.
Findings About Events or Interventions	FA	N/A	N/A	5	VISDAT	Visit Date	Date the clinical encounter occurred (or started).	What [is/was] the date of the visit?	(Visit) Date	Char	R/C	Record the [date/start date] of the visit using this format (DD-MON-YYYY).	N/A	This field is not an SDTM variable. The date of a measurement, test, observation, or specimen collection can be determined from the date/time of visit (VISDAT/VISTIM) and then concatenating the CDASH VISDAT/VISTIM components and populating the SDTMIG variable FADTC in ISO 8601 format.	N/A	N/A	The date the finding about measurements were collected can be determined from the visit date variable (VISDAT) and applying that date to all of the observations at that visit, or the collection date can be included on the FA CRF using the Findings About Date (FADAT) field.
Findings About Events or Interventions	FA	N/A	N/A	6	FAOBJ	Findings About Object of the Observation	A description of the object or focal point of the findings observation that is represented by FATEST.	[Sponsored-defined phrase]	[Sponsored-defined phrase]	Char	HR	[Protocol-specific]	FAOBJ	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The FAOBJ will usually be preprinted or hidden, not solicited as an actual question. These FA domains

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	are usually created by the sponsor.
Findings About Events or Interventions	FA	N/A	N/A	7	FAYN	Findings About Collected	An indication of whether data was collected for the finding topic.	Has the subject had any [Findings topic(s)] (after/before [study specific time frame])?; [Was/Were] (there) any [Findings topic(s)] (reported) (after/before [study specific time frame])?; Were all eligibility criteria met?	Any [Finding Topic]	Char	O	Indicate if the there are findings. If Yes, include the appropriate details where indicated on the CRF.	N/A	Does not map to an SDTM variable. The SDTM annotated CRF indicates that this field is NOT SUBMITTED.	(NY)	N/A	This is a field that can be used in any CRF to indicate whether there is data to record. Used primarily as a data cleaning field, it provides verification that all other fields on the CRF were deliberately left blank. FAPERF should be used to capture a response about whether planned measurements, tests, or observations were done.
Findings About Events or Interventions	FA	N/A	N/A	8	FAPERF	Findings About Performed	An indication of whether a planned measurement, series of measurements, test, observation or specimen was performed or collected.	[Were any/Was the] [FATEST/topic] ([measurement(s)/test(s)/ examination(s)/ specimen(s)/sample(s)]) [performed/ collected]?	([FATEST/ topic] ([Measurement (s)/Test(s)/Examination(s)/ Specimen(s)/ Sample(s)]) [Performed/Collected]?	Char	O	Indicate if the [FATESTs] was/were collected. If Yes, include the appropriate details where indicated on the CRF.	FASTAT	This field does not map directly to an SDTM variable. May be used to populate a value into the SDTM variable FASTAT. If the CDASH variable FAPERF="N", the value of the STDM variable FASTAT is "OT DONE". If FAPERF="Y", FASTAT is null. A combination of SDTM variables (e.g., FACAT and FASCAT, FATPT) is used to indicate that multiple tests were not done. In this situation, the SDTM variable FATESTCD would be populated with FAALL and an appropriate test name (FATEST) provided. See the SDTMIG for additional information.	(NY)	N/A	This field is used to capture a response to whether a planned measurement, test or observation was performed. A negative response can be collected as "N" and mapped to the FASTAT variable in SDTM as "NOT DONE".
Findings About Events or Interventions	FA	N/A	N/A	9	FADAT	Findings About Assessment Date	The date when the findings about assessment was performed, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the date the findings about assessment was performed?	Date	Char	R/C	Record date of measurements using this format (DD-MON-YYYY).	FADTC	This field does not map directly to an SDTM variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTM variable FADTC in ISO 8601 format.	N/A	N/A	The date the FA measurements were collected can be determined from the visit date variable (VISDAT) and applying that date to all of the observations at that visit, or the collection date can be included on the FA CRF using the

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	Date of Collection (FADAT) field.
Findings About Events or Interventions	FA	N/A	N/A	10	FATIM	Findings About Assessment Time	The time of measurement, represented in an unambiguous time format (e.g., hh:mm:ss).	What was the time of the findings about assessment?	Time	Char	R/C	Record time of measurement (as complete as possible).	FADTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable VSDTC in ISO 8601 format.	N/A	N/A	Collect time if it is relevant for the analysis.
Findings About Events or Interventions	FA	N/A	N/A	11	FATEST	Findings About Test Name	Descriptive name for the test being performed.	What [is/was] the name (of the [measurement/test/examination])?	[Measurement/Test/Examination/] (Name)	Char	HR	Record the name of the FATEST if not preprinted on the CRF. If collected on the CRF, the sponsor may provide additional instructions to ensure the data is entered as intended.	FATEST; FATESTCD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. The SDTM variable FATESTCD may be determined from the value collected in FATEST. The SDTMIG variables FATESTCD and FATEST are required in SDTM.	N/A	N/A	Required to identify which test the result is for. It is recommended that the test names be preprinted on the CRF rather than collected in a free-text field. If the form is laid out as a grid, then words such as "Test" can be included in the column heading.
Findings About Events or Interventions	FA	N/A	N/A	12	FATSTDTL	Findings About Test Detail	A further description of FATESTCD and FATEST.	What [is/was] the [measurement/test/examination] detail name?	[Measurement/Test/Examination] Detail (Name)	Char	O	Record the detail of the [FATEST], if not preprinted on the CRF.	FATSTDTL	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	It is recommended that the test detail name be preprinted on the CRF. If the form is laid out as a grid, then words such as "Test," "Test Name" can be included in the column heading.
Findings About Events or Interventions	FA	N/A	N/A	13	FACAT	Category for Findings About	A grouping of topic-variable values based on user-defined characteristics.	What [is/was] the [type/category/ name] (of the [measurement/test/ examination/ specimen/sample])?	[Category/Category Value]; NULL	Char	O	Record the FA category, if not preprinted on the CRF.	FACAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This is most commonly either a heading or a preprinted category value on the CRF, not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Category" can be included in the column heading.
Findings About Events or Interventions	FA	N/A	N/A	14	FASCAT	Subcategory for Findings About	A sub-division of the FACAT values based on user-defined characteristics.	What [is/was] the [type/subcategory/name] (of the [measurement/test/examination/ specimen/sample])?	[FA Subcategory/FA Subcategory Value]; NULL	Char	O	Record the FA subcategory, if not preprinted on the CRF.	FASCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This is most commonly either a heading or

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	a preprinted category value on the CRF, not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Subcategory" can be included in the column heading. FASCAT can only be used if there is an FACAT, and it must be a subcategorization of FACAT.
Findings About Events or Interventions	FA	N/A	N/A	15	FAPOS	Findings About Position of Subject	The position of the subject during a measurement or examination.	In what position was the subject during the [measurement/ test/examination/specimen collection/sample collection]?; What was the position of the subject (during the [measurement/test/ examination/ specimen collection/sample collection])?	Position	Char	O	Record the position of the subject during the FA test.	FAPOS	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(POSITION)	N/A	N/A
Findings About Events or Interventions	FA	N/A	N/A	16	FAORRES	FA Result or Finding in Original Units	Result of the measurement or finding as originally received or collected.	What [is/was] the [result/amount/(subject's) characteristic] (of the [measurement/test/ examination/ question/assessment])?	[(Result/Amount) of] [value from FATEST]	Char	HR	Record the FATEST result.	FAORRES	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Both quantitative results and interpretive findings or summaries may be recorded here.
Findings About Events or Interventions	FA	N/A	N/A	17	FAORRESU	FA Original Units	The unit of the result as originally received or collected.	What [is/was] the unit (of the [measurement/test/ examination])?	Unit	Char	R/C	Select the unit of measure associated with the test, or record if not preprinted on the CRF.	FAORRESU	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(UNIT)	N/A	Should be preprinted on the CRF with the associated test when possible, rather than collected in a free-text field. Should be included if applicable and not available elsewhere.
Findings About Events or Interventions	FA	N/A	N/A	18	FAORNRL0	FA Normal Range Lower Limit-Orig Unit	The lower end of normal range or reference range for continuous results stored in FAORRES.	What [is/was] the lower limit of the reference range (for the [measurement/test/ examination])?	Normal Range Lower Limit	Char	O	Record the lower limit of the reference range of the FA test.	FAORNRL0	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	--ORNRL0 should be populated only for continuous findings. The SDTM variable --STNRC should be populated only for noncontinuous results. These data may be obtained from the lab or the electronic equipment, or could be derived from a site- or lab-specific set of normal ranges stored in a look-up table.
Findings About	FA	N/A	N/A	19	FAORNRLHI	FA Normal Range	The upper end of normal range or	What [is/was] the upper limit of the reference range (for the [measurement/test/ examination])?	Normal Range Upper Limit	Char	O	Record the upper limit of the	FAORNRLHI	Maps directly to the SDTMIG variable	N/A	N/A	--ORNRLHI should be populated only

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Events or Interventions						Upper Limit-Orig Unit	reference range for continuous results stored in FAORRES.					reference range of the FA test.		listed in the SDTMIG Target column.			for continuous findings. The SDTM variable -- STNRC should be populated only for noncontinuous results. These data may be obtained from the lab or the electronic equipment, or could be derived from a site- or lab-specific set of normal ranges stored in a look-up table.
Findings About Events or Interventions	FA	N/A	N/A	20	FANRIND	Findings About Reference Range Indicator	An indication or description about how the value compares to the normal range or reference range.	How [did/do] the reported values compare within the [reference/normal/expected] range?	Comparison to [Reference/Expected/Normal] Range	Char	O	Record where the test results were categorized within the respective reference range (e.g. HIGH, LOW, ABNORMAL).	FANRIND	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(NRIND)	N/A	Reference ranges may be defined by FAORNRLO, FAORNRHI, FASTNRC or other objective criteria. Reference Range Indicator may be included if not derived or determined programmatically after data collection. Should not be used to indicate clinical significance.
Findings About Events or Interventions	FA	N/A	N/A	21	FASTAT	Findings About Completion Status	This variable is used to indicate that data are not available, by having the site recording the value as "Not Done".	Was the [--TEST] not [completed/answered/done/assessed/evaluated]?; Indicate if the[--TEST] was) not [answered/assessed/done/evaluated/performed].	Not Done	Char	O	Indicate if the [FATEST] measurement was not done.	FASTAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. If collected, the Origin (a column in the Define-XML) ="CRF", if populated from other sources such as a free text or sponsor-defined listing for FAREASND, the Origin ="DERIVED".	(ND)	N/A	Used only when the response value is collected as NOT DONE or NULL in lieu of or in addition to the CDASH FAPERF field. Typically a checkbox which indicates the test was NOT DONE. This field can be useful when multiple questions are asked to confirm that a blank result field is meant to be blank.
Findings About Events or Interventions	FA	N/A	N/A	22	FAREASND	Findings About Reason Not Performed	An explanation of why data are not available.	Was the [is/was] the reason that the [Findings topic/data/information/ sponsor-defined phrase] was not [collected/answered/done/assessed/evaluated]?	Reason Not [Answered/Collected/Done/ Evaluated/ Assessed/ Available]	Char	O	Provide the reason why an FA test was not collected.	FAREASND	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology may be used. The reason the data are not available may be chosen from a sponsor-defined codelist (e.g., broken equipment, subject refused, etc.) or entered as free text. When -- REASND is used, -STAT should also be populated in the

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	SDTM-based dataset.
Findings About Events or Interventions	FA	N/A	N/A	23	FASPEC	Findings About Specimen Type	The type of specimen used for a measurement.	What [is/was] the specimen type?	Specimen Type	Char	O	Record the specimen material type.	FASPEC	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(SPECTYPE)	N/A	The type of specimen used for a measure. Should be collected if not available elsewhere, or if required to differentiate multiple specimens.
Findings About Events or Interventions	FA	N/A	N/A	24	FASPCCOND	Findings About Specimen Condition	Description of the condition of the specimen.	What [is/was] the condition of the specimen?	Specimen Condition	Char	O	Record the condition of the specimen.	FASPCCOND	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(SPECCOND)	N/A	May be collected using free or standardized text. Results may be affected by whether conditions for specimen were properly met. When local processing is used, sponsors may not routinely collect specimen condition.
Findings About Events or Interventions	FA	N/A	N/A	25	FALOC	Location of the Finding About	The anatomical location of the subject, relevant to the collection of the measurement.	What [is/was] the anatomical location (of the [measurement/test/ examination]) or What [is/was] the anatomical location where the [measurement/specimen] was taken/collected?	Anatomical Location	Char	O	Record or select location on body where the measurement was performed, if not preprinted on CRF.	FALOC	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(LOC)	N/A	Collected or preprinted when the sponsor needs to identify the specific anatomical location (e.g., ARM for blood pressure). Sponsors may collect the data using a subset list of controlled terminology on the CRF. LAT, DIR, and PORTOT are used to further describe the anatomical location.
Findings About Events or Interventions	FA	N/A	N/A	26	FALAT	Laterality of Location of Finding About	Qualifier for anatomical location, further detailing the side of the body.	What [is/was] the side (of the anatomical location of the [measurement/test/examination])?	Side	Char	O	Record the side of the anatomical location of the [FATEST] measurement.	FALAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(LAT)	N/A	May be preprinted or collected when the sponsor needs to identify the specific side of the anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Findings About Events or Interventions	FA	N/A	N/A	27	FADIR	Findings About Directionality	Qualifier further detailing the position of the anatomical location, relative to the center of the body, organ, or specimen.	What [is/was] the directionality (of the anatomical location of the [measurement/test/ examination])?	Directionality	Char	O	Record the directionality.	FADIR	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(DIR)	N/A	May be preprinted or collected when the sponsor needs to identify the directionality of the anatomical location. Sponsors may collect the data using a subset list of controlled

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	terminology on the CRF.
Findings About Events or Interventions	FA	N/A	N/A	28	FAPORTOT	FA Location Portion or Totality	Qualifier for anatomical location, further detailing the distribution (i.e., arrangement of, apportioning of).	What [is/was] the portion or totality (of the anatomical location of the [measurement/test/ examination])?	Portion or Totality	Char	O	Indicate the portion or totality anatomical location.	FAPORTOT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(PORTOT)	N/A	Collected when the sponsor needs to identify the specific portionality for the anatomical locations of the location of the FATEST. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Findings About Events or Interventions	FA	N/A	N/A	29	FAMETHOD	Findings About Method	Method of the test or examination.	What was the method (used for the [measurement/test/ examination])?	Method	Char	O	Record the method used for the measurement, test, or examination.	FAMETHOD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(METHOD)	N/A	N/A
Findings About Events or Interventions	FA	N/A	N/A	30	FALEAD	Findings About Lead	The lead or leads identified to capture the measurement for a test from an instrument.	What [is/was] the lead (used to measure [measurement/test/ examination])?	Lead	Char	O	Record the lead used for measurement.	FALEAD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	N/A
Findings About Events or Interventions	FA	N/A	N/A	31	FAFAST	Findings About Fasting Status	An indication that the subject has abstained from food/water for the specified amount of time.	[Is/Was] the subject fasting (prior to the [test being performed/ sample being collected])?	Fasting	Char	O	Record whether the subject was fasting prior to the test being performed.	FAFAST	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(NY)	N/A	Results may be affected by whether the subject was fasting. This may not be relevant for all tests.
Findings About Events or Interventions	FA	N/A	N/A	32	FAEVAL	Findings About Evaluator	The role of the person providing the evaluation.	Who provided the (sponsor-defined phrase) information?: Who was the evaluator?	[Evaluator/Reporter]	Char	O	Select the role of the person who provided the evaluation (e.g., INVESTIGATOR, ADJUDICATION COMMITTEE, VENDOR).	FAEVAL	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(EVAL)	N/A	Used only for results that are subjective (e.g., assigned by a person or a group). May be a preprinted, or collected. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Findings About Events or Interventions	FA	N/A	N/A	33	FAEVALID	Findings About Evaluator Identifier	An identifier used to distinguish multiple evaluators with the same role recorded in FAEVAL.	What [is/was] the identifier of the [evaluator name/reporter name] (providing the-sponsor-defined phrase-information)?	[Evaluator/Reporter] Identifier	Char	O	Record the unique identifier assigned to the person making the evaluation.	FAEVALID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(MEDEVAL)	N/A	This variable is used in conjunction with FAEVAL to provide an additional level of detail.
Findings About Events or Interventions	FA	N/A	N/A	34	FACLSIG	Findings About Clinical Significance	An indication whether the test results were clinically significant.	[Is/Was] the ([measurement/test/ examination]) result clinically significant?	([Measurement/Test/ Examination])/ Clinically Significant	Char	O	Record whether the [FATEST] result was clinically significant.	SUPPFA.QVAL	This does not map directly to an SDTMIG variable. This information could be submitted in a SUPPFA dataset as the value of SUPPFA.QVAL when SUPPFA.QNAM = "CLSIG" and SUPPFA.QLABEL = "Clinical	(NY)	N/A	N/A

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
														Significance". Refer to the current SDTM and SDTMIG for instructions on placement of non-standard variables in SDTM domains.			

Assumptions for the CDASHIG FA - Findings About Events or Interventions Domain

The CDASHIG FA domain uses the same root variables as the Findings domain, with the addition of the --OBJ variable.

Example CRFs for the CDASHIG FA - Findings About Events or Interventions Domain

Example 1

This example CRF collects data on symptoms associated with the clinical event of interest, migraine headaches.

Title: Migraine Symptoms

Clinical Event		MIGRAINE
	CETERM <i>Hidden/pre-populated</i>	
Record the start date of the clinical event represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the migraine start date? CESTDAT CESTDTC	
Record the start time of the clinical event represented in an unambiguous date format (e.g., hh:mm:ss).	What was the migraine start time? CESTTIM CESTDTC	
Category		MIGRAINE SYMPTOMS
	FACAT <i>Hidden/pre-populated</i>	
Record the occurrence result.	Sensitivity to Light SENSLGHT_FAORRES FAORRES where FATESTCD = "OCCUR" and FAOBJ = "SENSITIVITY TO LIGHT"	☐ No ☐ Yes <NY codelist>
Record the occurrence result.	Sensitivity to Sound SENSOUND_FAORRES FAORRES where FATESTCD = "OCCUR" and FAOBJ = "SENSITIVITY TO SOUND"	☐ No ☐ Yes <NY codelist>
Record the occurrence result.	Nausea NAUSEA_FAORRES FAORRES where FATESTCD = "OCCUR" and FAOBJ = "NAUSEA"	☐ No ☐ Yes <NY codelist>
Record the occurrence result.	Aura AURA_FAORRES FAORRES where FATESTCD = "OCCUR" and FAOBJ = "AURA"	☐ No ☐ Yes <NY codelist>

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target	SDTM Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
CETERM	1	What is the clinical event term?	Clinical Event	Record the clinical event or [insert text corresponding to the specific clinical event].	Text	CETERM				MIGRAINE	Prompt		Yes
CESTDAT	2	What was the migraine start date?	Start Date	Record the start date of the clinical event represented in an	Date	CESTDTC					Qtext		

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target	SDTM Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
				unambiguous date format (e.g., DD-MON-YYYY).									
CESTTIM	3	What was the migraine start time?	Start Time	Record the start time of the clinical event represented in an unambiguous date format (e.g., hh:mm:ss).	Time	CESTDTC					Qtext		
FACAT	4	What was the category?	Category	Record the FA category, if not pre-printed on the CRF.	Text	FACAT				MIGRAINE SYMPTOMS	Prompt		Yes
SENSLGHT_FAORRES	6	What was the occurrence of sensitivity to light with the migraine?	Sensitivity to Light	Record the occurrence result.	Text	FAORRES	FAORRES where FATESTCD = "OCCUR" and FAOBJ = "SENSITIVITY TO LIGHT"	NY	No; Yes		Prompt	Radio	
SENSOUND_FAORRES	7	What was the occurrence of sensitivity to sound with the migraine?	Sensitivity to Sound	Record the occurrence result.	Text	FAORRES	FAORRES where FATESTCD = "OCCUR" and FAOBJ = "SENSITIVITY TO SOUND"	NY	No; Yes		Prompt	Radio	
NAUSEA_FAORRES	8	What was the occurrence of nausea with the migraine?	Nausea	Record the occurrence result.	Text	FAORRES	FAORRES where FATESTCD = "OCCUR" and FAOBJ = "NAUSEA"	NY	No; Yes		Prompt	Radio	
AURA_FAORRES	9	What was the occurrence of aura with the migraine?	Aura	Record the occurrence result.	Text	FAORRES	FAORRES where FATESTCD = "OCCUR" and FAOBJ = "AURA"	NY	No; Yes		Prompt	Radio	

Example 2

This example CRF collects data about pre-specified symptoms of the disease under study, on a daily basis. The date of the assessment is captured, but start and end times of the pre-populated symptoms are not.

Title: Findings About GERD Symptoms

Record the date assessment was done using this format (DD-MON-YYYY).	Assessment Date FADAT FADTC	
Record the occurrence result.	Vomiting OCCUR_VOMIT_FAORRES FAORRES where FATESTCD = "OCCUR" and FAOBJ = "VOMITING" when Y or N FASTAT = "NOT DONE" when ND	☐ No ☐ Yes ☐ Not Done <NY or ND codelist>
Record the volume result.	What was the volume of the vomit? VOL_VOMIT_FAORRES FAORRES where FATESTCD = "VOL" and FAOBJ = "VOMITING"	
	Unit VOL_VOMIT_FAORRESU FAORRESU where FATESTCD = "VOL" and FAOBJ = "VOMITING" Pre-populated	☒ mL <UNIT codelist>
Record the severity result.	What was the maximum severity of the vomiting? SEV_VOMIT_FAORRES FAORRES where FATESTCD = "SEV" and FAOBJ = "VOMITING"	☐ Mild ☐ Moderate ☐ Severe <AESEV codelist>
Record the occurrence result.	Diarrhea OCCUR_DIAR_FAORRES FAORRES where FATESTCD = "OCCUR" and FAOBJ = "DIARRHEA" when Y or N FASTAT = "NOT DONE" when ND	☐ No ☐ Yes ☐ Not Done <NY or ND codelist>
Record the severity result.	What was the maximum severity of the diarrhea? SEV_DIAR_FAORRES FAORRES where FATESTCD = "SEV" and FAOBJ = "DIARRHEA"	☐ Mild ☐ Moderate ☐ Severe <AESEV codelist>
Record the occurrence result.	Nausea OCCUR_NAUS_FAORRES FAORRES where FATESTCD = "OCCUR" and FAOBJ = "NAUSEA" when Y or N FASTAT = "NOT DONE" when ND	☐ No ☐ Yes ☐ Not Done <NY or ND codelist>
Record the severity result.	What was the maximum severity of the nausea? SEV_NAUS_FAORRES FAORRES where FATESTCD = "SEV" and FAOBJ = "NAUSEA"	☐ Mild ☐ Moderate ☐ Severe <AESEV codelist>

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target	SDTM Variable Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
FADAT	1	What is the date of the daily assessment?	Assessment Date	Record the date assessment was done using this format (DD-MON-YYYY).	Date	FADTC					Prompt		
OCCUR_VOMIT_FAORRES	2	What was the occurrence of vomiting?	Vomiting	Record the occurrence result.	Text	FAORRES	FAORRES where FATESTCD = "OCCUR" and FAOBJ = "VOMITING" when Y or N; FASTAT = "NOT DONE" when ND	(NY); (ND)	No; Yes; Not Done		Prompt	Radio	
VOL_VOMIT_FAORRES	3	What was the volume of the vomit?	Volume of Vomit	Record the volume result.	Text	FAORRES	FAORRES where FATESTCD = "VOL" and FAOBJ = "VOMITING"						
VOL_VOMIT_FAORRESU	4	What was the unit of the volume?	Unit	Record or select the unit of measure associated with the test, if not pre-printed on the CRF.	Text	FAORRESU	FAORRESU where FATESTCD = "VOL" and FAOBJ = "VOMITING"	(UNIT)	mL	mL	Prompt	Radio	
NUMEPISD_VOMIT_FAORRES	5	What was the number of episodes of the vomiting?	Number of Episodes of Vomiting	Record the number of episodes result.	Text	FAORRES	FAORRES where FATESTCD = "NUMEPISD" and FAOBJ = "VOMITING"						
SEV_VOMIT_FAORRES	6	What was the maximum severity of the vomiting?	Maximum Severity of Vomiting	Record the severity result.	Text	FAORRES	FAORRES where FATESTCD = "SEV" and FAOBJ = "VOMITING"	(AESEV)	Mild; Moderate; Severe			Radio	
OCCUR_DIAR_FAORRES	7	What was the occurrence of diarrhea?	Diarrhea	Record the occurrence result.	Text	FAORRES	FAORRES where FATESTCD = "OCCUR" and FAOBJ = "DIARRHEA" when Y or N; FASTAT = "NOT DONE" when ND	(NY); (ND)	No; Yes; Not Done		Prompt	Radio	
NUMEPISD_DIAR_FAORRES	8	What was the number of episodes of the diarrhea?	Number of Episodes of Diarrhea	Record the number of episodes result.	Text	FAORRES	FAORRES where FATESTCD = "NUMEPISD" and FAOBJ = "DIARRHEA"						
SEV_DIAR_FAORRES	9	What was the maximum severity of the diarrhea?	Maximum Severity of Diarrhea	Record the severity result.	Text	FAORRES	FAORRES where FATESTCD = "SEV" and FAOBJ = "DIARRHEA"	(AESEV)	Mild; Moderate; Severe			Radio	
OCCUR_NAUS_FAORRES	10	What was the occurrence of nausea?	Nausea	Record the occurrence result.	Text	FAORRES	FAORRES where FATESTCD = "OCCUR" and FAOBJ = "NAUSEA" when Y or N; FASTAT = "NOT DONE" when ND	(NY); (ND)	No; Yes; Not Done		Prompt	Radio	

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target	SDTM Variable Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
NUMEPISD_NAUS_FAORRES	11	What was the number of episodes of the nausea?	Number of Episodes of Nausea	Record the number of episodes result.	Text	FAORRES	FAORRES where FATESTCD = "NUMEPISD" and FAOBJ = "NAUSEA"						
SEV_NAUS_FAORRES	12	What was the maximum severity of the nausea?	Maximum Severity of Nausea	Record the severity result.	Text	FAORRES	FAORRES where FATESTCD = "SEV" and FAOBJ = "NAUSEA"	(AESEV)	Mild; Moderate; Severe			Radio	

8.4.2 SR - Skin Response (Findings About Interventions)

Description/Overview for the CDASHIG SR - Skin Response Domain

The CDASHIG SR domain is a Findings About Interventions domain used to collect dermal responses to antigens.

Specification for the CDASHIG SR - Skin Response Domain

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings About Events or Interventions	SR	N/A	N/A	1	STUDYID	Study Identifier	A unique identifier for a study.	What is the study identifier?	[Protocol/Study]	Char	HR	N/A	STUDYID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Although this field is not typically captured on a CRF, it should be displayed clearly on the CRF and/or in the EDC system. This field can be included in the database or populated during SDTM-based dataset creation before submission.
Findings About Events or Interventions	SR	N/A	N/A	2	SITEID	Study Site Identifier	A unique identifier for a site within a study.	What is the site identifier?	Site (Identifier)	Char	HR	N/A	DM.SITEID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically preprinted in the header of each CRF page for single-site studies. For studies with multiple sites, this field may be left blank so that the number can be recorded by the site, or it may be preprinted on the CRFs that are shipped to each site. EDC: This should be prepopulated.
Findings About Events or Interventions	SR	N/A	N/A	3	SUBJID	Subject Identifier for the Study	A unique subject identifier within a site and a study.	What [is/was] the (study) [subject/participant] identifier?	[Subject/Participant] (Identifier)	Char	HR	Record the identifier for the subject.	DM.SUBJID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Paper: This is typically recorded in the header of each CRF page. EDC: The subject identifiers may be system-generated. This CDASH variable is typically collected in all CDASH domains. However, this CDASH variable is populated only in the SDTMIG DM domain. For more information, refer to the SDTMIG.
Findings About Events or Interventions	SR	N/A	N/A	4	VISIT	Visit Name	The name of a clinical encounter that encompasses planned and unplanned trial interventions, procedures, and assessments that may be performed on a subject.	What is the visit name?	[Visit]	Char	R/C	N/A	VISIT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The name of the visit is typically preprinted on the CRF, and should match the name of the visit in the protocol. May be used to derive the SDTM variable VISITNUM. Note: Sponsors may have CDASH visit-numbering or visit-naming conventions to handle special circumstances (e.g., unscheduled visits). In such cases, the appropriate visit numbers and visit names may need to be populated when creating SDTM submission datasets.
Findings About Events or Interventions	SR	N/A	N/A	5	VISDAT	Visit Date	Date the clinical encounter occurred (or started).	What [is/was] the date of the visit?	(Visit) Date	Char	R/C	Record the [date/start date] of the visit using this	N/A	This field is not an SDTM variable. The date of a measurement, test, or observation can be determined from the date/time of visit	N/A	N/A	The date the skin response measurements were collected can be

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
												format (DD-MON-YYYY).		(VISDAT/VISTIM) and then concatenating the CDASH VISDAT/VISTIM components and populating the SDTMIG variable SRDTC in ISO 8601 format.			determined from the visit date variable (VISDAT) and applying that date to all of the skin response measurements at that visit, or the collection date can be included on the Skin Response CRF using the date (SRDAT) field.
Findings About Events or Interventions	SR	N/A	N/A	6	SRPERF	Skin Response Test Performed	An indication of whether a planned skin response measurement, series of skin response measurements, tests, or observations was performed.	Was a skin response test performed?	Skin Response Test Performed	Char	O	Indicate if a skin response test was performed.	SRSTAT	This does not map directly to an SDTMIG variable. May be used to derive a value into the SDTM variable SRSTAT. If SRPERF="N", the value of SRSTAT will be "NOT DONE". If SRPERF="Y", SRSTAT should be null. A combination of SDTMIG variables (e.g., SRCAT and SRSCAT, SRTPT) is used to indicate that multiple tests were not done. In this situation, the SDTMIG variable SRTESTCD would be populated as SRALL and an appropriate test name (SRTEST) provided. See the SDTMIG for additional information.	(NY)	N/A	General prompt question to be used as a data management tool to verify that missing results are confirmed missing.
Findings About Events or Interventions	SR	N/A	N/A	7	SRREASND	Skin Response Reason Not Done	An explanation for why data are not available.	What was the reason the test was not done?	Reason Not Done	Char	O	Provide the reason why the test or examination was not done.	SRREASND	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	The reason the data are not available may be chosen from a sponsor-defined list (e.g., broken equipment, subject refused) or entered as free text. When SRREASND is used, the SDTMIG variable SRSTAT should also be populated in the SDTM-based dataset.
Findings About Events or Interventions	SR	N/A	N/A	8	SRCAT	Skin Response Category for Test	A grouping of topic-variable values based on user-defined characteristics.	What was the category of the skin response?	[Skin Response Category]; NULL	Char	O	Record the skin response category, if not pre-pinted on the CRF.	SRCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This is most commonly either a heading or a preprinted category value on the CRF, not a question to which the site would provide an answer. If a question is asked, the response would typically be a sponsor-defined codelist. If the form is laid out as a grid, then words such as "Category" can be included in the column heading.
Findings About Events or Interventions	SR	N/A	N/A	9	SRSCAT	Skin Response Subcategory for Test	A sub-division of the SRCAT values based on user-defined characteristics.	What was the subcategory of the skin response?	[Skin Response Subcategory]; NULL	Char	O	Record the skin response subcategory, if not pre-pinted on the CRF.	SRSCAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	Sponsor-defined controlled terminology. This is most commonly either a heading or a preprinted category value on the CRF, not a question to which the site would provide an answer. If a question is asked, the response would typically be a

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
																	sponsor-defined codelist. If the form is laid out as a grid, then words such as "Subcategory" can be included in the column heading. SRSCAT can only be used if there is an SRCAT, and it must be a subcategorization of SRCAT.
Findings About Events or Interventions	SR	N/A	N/A	10	SRSPID	Skin Response Sponsor-Defined Identifier	A sponsor-defined identifier. In CDASH, this is typically used for preprinted or auto-generated numbers on the CRF, or any other type of identifier that does not already have a defined CDASH identifier field.	[Sponsor-defined question]	[Sponsor defined]	Char	O	If collected on the CRF, the sponsor may insert instructions to ensure each record has a unique identifier.	SRSPID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. May be used to create RELREC to link this record with a record in another domain.	N/A	N/A	Because SPID is a sponsor-defined identifier, conformance to Question Text or Item Prompt is not applicable. Typically used as an identifier in a data query to communicate clearly to the site the specific record in question or to reconcile data. May be used to record preprinted number (e.g., line number, record number) on the CRF. This field may be populated by the sponsor's data collection system.
Findings About Events or Interventions	SR	N/A	N/A	11	SROBJ	Skin Response Object of the Observation	A description of the object or focal point of the findings observation that is represented by SRTEST.	What intervention was performed to elicit the skin response?	[Intervention] Performed	Char	HR	Record the name of the antigen administered to the skin to elicit the skin response.	SROBJ	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	N/A
Findings About Events or Interventions	SR	N/A	N/A	12	SRRFTDAT	SR Date of Reference Time Point	The date of the reference time point, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the date of the [intervention] performed to elicit the skin response?	[Intervention] Administration Date	Char	R/C	Record the date of the test material administration using this format (DD-MON-YYYY).	SRRFTDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable SRRFTDTC in ISO 8601 format.	N/A	N/A	A complete date is expected. If the date of administration is collected on a separate CRF (e.g., VISDAT), then it should not be collected on the SR CRF.
Findings About Events or Interventions	SR	N/A	N/A	13	SRRFTTIM	SR Time of Reference Time Point	The time of the reference time point, represented in an unambiguous time format (e.g., hh:mm:ss).	What was the time of the [intervention] performed to elicit the skin response?	[Intervention] Administration Time	Char	R/C	Record the time of the test material administration using this format (hh:mm:ss).	SRRFTDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable SRRFTDTC in ISO 8601 format.	N/A	N/A	Collect time if it is relevant for the analysis of the skin response (e.g., multiple [intervention] administrations).
Findings About Events or Interventions	SR	N/A	N/A	14	SRLOC	SR Location Used for Measurement	A description of the anatomical location of the subject, relevant to the collection of skin response test.	What was the anatomical location of the skin response measurement?	Anatomical Location	Char	O	Record or select location on body where the measurement was performed, if not pre-pinted on CRF.	SRLOC	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(LOC)	N/A	Collected or preprinted when the sponsor needs to identify the specific anatomical location (e.g., arm for skin response). Sponsors may collect the data using a subset list of controlled terminology on the CRF. LAT, DIR, and PORTOT are used to further describe the anatomical location.

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
Findings About Events or Interventions	SR	N/A	N/A	15	SRLAT	Skin Response Laterality	Qualifier for anatomical location, further detailing the side of the body.	What was the side of the anatomical location of the skin response measurement?	Side	Char	O	Record the side of the anatomical location where the test was performed.	SRLAT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(LAT)	N/A	May be preprinted or collected when the sponsor needs to identify the specific side of the anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Findings About Events or Interventions	SR	N/A	N/A	16	SRTEST	Skin Response Test or Examination Name	Descriptive name of the test or examination used to obtain the measurement or finding.	What was the skin response test name?	[Skin Response Test Name]	Char	HR	Record the name of the skin response test if not pre-pinted on the CRF. If collected on the CRF, the sponsor may provide additional instructions to ensure the data is entered as intended.	SRTEST; SRTESTCD	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. SRTESTCD may be determined from the value collected in SRTEST. The SDTMIG variables SRTESTCD and SRTEST are required in SDTM submission datasets. Use appropriate CDISC Controlled Terminology for the test and test code.	(SRTEST)	N/A	Required to identify which test the result is for. It is recommended that the test names be preprinted on the CRF rather than collected in a free-text field. If the form is laid out as a grid, then words such as "Test" can be included in the column heading.
Findings About Events or Interventions	SR	N/A	N/A	17	SRTPT	Skin Response Planned Time Point Name	A text description of planned time point when measurements should be taken as defined in the protocol.	What was the planned time point for skin response measurement?	[Planned Time Point Name]	Char	R/C	Record the planned time-point labels for skin response, if not pre-pinted on the CRF.	SRTPT	Maps directly to the SDTMIG variable listed in the SDTMIG Target column. See the SDTMIG for additional information on representing time points. Time-point anchors SRTPTREF (text description) and SRRFTDTC (date/time) may be needed, as well as SDTMIG variables SRTPTNUM, SRELTM.	N/A	N/A	Planned time points are needed to differentiate multiple sequential assessments. It is recommended that time points be preprinted on the CRF rather than collected in a free-text field. If the form is laid out as a grid, then words such as "Planned Time Point" can be included in the column heading.
Findings About Events or Interventions	SR	N/A	N/A	18	SRDAT	Skin Response Observation Date	The date of the measurements, represented in an unambiguous date format (e.g., DD-MON-YYYY).	What was the date of the skin response measurement?	Date	Char	R/C	Record the date of measurements using this format (DD-MON-YYYY).	SRDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable SRDTC in ISO 8601 format.	N/A	N/A	The date of measurement can be determined from a collected date of the visit (VISDAT); in such cases, a separate measurement date field is not required.
Findings About Events or Interventions	SR	N/A	N/A	19	SRTIM	Skin Response Observation Time	The time of measurement, represented in an unambiguous time format (e.g., hh:mm:ss).	What was the time of the skin response measurement?	Time	Char	R/C	Record the time of measurement (as complete as possible).	SRDTC	This does not map directly to an SDTMIG variable. For the SDTM submission dataset, concatenate all collected CDASH DATE and TIME components and populate the SDTMIG variable SRDTC in ISO 8601 format.	N/A	N/A	The time of measurement (if required) can be determined from a collected time of the visit (VISTIM); in such cases, a separate measurement date field is not required.
Findings About Events or Interventions	SR	N/A	N/A	20	SRDIR	Skin Response Directionality	Qualifier further detailing the position of the anatomical location, relative to the center of the body, organ, or specimen.	What was the directionality of the anatomical location of the skin response measurement?	Directionality	Char	O	Record the directionality of the anatomical location where the test was performed.	SRDIR	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(DIR)	N/A	May be preprinted or collected when the sponsor needs to identify the directionality of the anatomical location. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Findings About Events or Interventions	SR	N/A	N/A	21	SREVAL	Skin Response Evaluator	The role of the person who provided the evaluation.	Who was the evaluator?	[Evaluator/Reporter]	Char	O	Select the role of the person who provided the evaluation (e.g., INVESTIGATOR,	SREVAL	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(EVAL)	N/A	Used only for results that are subjective (e.g., assigned by a person or a group). May be a preprinted or

Observation Class	Domain	Data Collection Scenario	Implementation Options	Order Number	CDASHIG Variable	CDASHIG Variable Label	DRAFT CDASHIG Definition	Question Text	Prompt	Data Type	CDASHIG Core	Case Report Form Completion Instructions	SDTMIG Target	Mapping Instructions	Controlled Terminology Codelist Name	Subset Controlled Terminology/CDASH Codelist Name	Implementation Notes
												ADJUDICATION COMMITTEE, VENDOR).					collected. Sponsors may collect the data using a subset list of controlled terminology on the CRF.
Findings About Events or Interventions	SR	N/A	N/A	22	SREVALID	Skin Response Evaluator Identifier	Used to distinguish multiple evaluators with the same role recorded in SREVAL.	What was the identifier of the evaluator providing the skin response information?	[Evaluator/Reporter] Identifier	Char	O	Record the unique identifier assigned to the person making the evaluation.	SREVALID	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(MEDEVAL)	N/A	If EVALID needs to be collected for each test on the horizontal record the CDASH variable [SRTESTCD]_ EVALID can be used.
Findings About Events or Interventions	SR	N/A	N/A	23	SRORRES	SR Results or Findings in Original Units	Result of the skin response test as originally received or collected.	What was the result of the skin response measurement?	(Result)	Char	HR	Record the skin response test result.	SRORRES	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	N/A	N/A	N/A
Findings About Events or Interventions	SR	N/A	N/A	24	SRORRESU	SR Original Units	The unit of the result as originally received or collected.	What was the unit of the skin response measurement?	Unit	Char	R/C	Record or select the unit of measurement associated with the test, if not pre-printed on the CRF.	SRORRESU	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(UNIT)	N/A	Should be preprinted on the CRF with the associated test when possible, rather than collected in a free-text field.
Findings About Events or Interventions	SR	N/A	N/A	25	SRNRIND	Skin Response Reference Range Indicator	An indication or description about how the value compares to the normal range or reference range.	How [did/do] the reported values compare within the [reference/normal/expected] range?	Comparison to [Reference/Expected/Normal] Range	Char	O	Record the categorization of the test results, within the respective reference range (e.g. HIGH, LOW, ABNORMAL).	SRNRIND	Maps directly to the SDTMIG variable listed in the SDTMIG Target column.	(NRIND)	N/A	The category of the value within the respective reference range. Ranges may be defined by SRORNRLO and SRORNRHI or other objective criteria. Reference Range Indicator may be included if not derived or determined programmatically after data collection. Should not be used to indicate clinical significance.
Findings About Events or Interventions	SR	N/A	N/A	26	SRCLSIG	Skin Response Clinical Significance	An indication of whether the skin response result was clinically significant.	Was the result clinically significant?	Clinically Significant	Char	O	Record whether the skin response result was clinically significant.	SUPPSR.QVAL	This does not map directly to an SDTMIG variable. This information could be submitted in a SUPPSR dataset as the value of SUPPSR.QVAL where SUPPSR.QNAM ="SRCLSIG" and SUPPSR.QLABEL="Clinically Significant". Refer to the current SDTM and SDTMIG for instructions on placement of non-standard variables in SDTM domains.	(NY)	N/A	If this level of information is needed, it may be added to the CRF.

Assumptions for the CDASHIG SR - Skin Response Domain

1. The SR domain is to be used when the skin response is the primary response that is being assessed (e.g., allergy test kits, tuberculosis skin test), rather than it being a secondary response to the actual injection.
2. The method of assessment is typically a skin-prick test.

Example CRFs for the CDASHIG SR - Skin Response Domain

Example 1

Title: Skin Test

	Skin Response Category SRCAT <i>Hidden/pre-populated</i>	Sponsor Defined
Indicate if a skin response test as performed. If Yes, include the appropriate details where indicated on the CRF.	Skin Response Test Performed SRPERF SRSTAT	☐ Yes ☐ No <NY codelist>
Provide the reason why the test or examination was not done.	What was the reason the test was not done? SRREASND	
	Intervention Performed SROBJ <i>Pre-populated</i>	PURIFIED PROTEIN DERIVATIVE [PPD] INJECTION
Record date of the test material administration using this format (DD-MON-YYYY).	What was the date of the intervention performed to elicit the skin response? SRRFTDAT SRRFTDTC	
Record time of the test material administration using this format (hh:mm:ss).	What was the time of the intervention performed to elicit the skin response? SRRFTTIM SRRFTDTC	
Record date of measurements using this format (DD-MON-YYYY).	What was the date of the skin response measurement? SRDAT SRDTC	
Record time of measurement (as complete as possible).	What was the time of the skin response measurement? SRTIM SRDTC	
Record or select location on body where measurement was performed, if not preprinted on CRF.	Anatomical Location SRLOC	☐ ARM ☐ LEG <LOC codelist>
Record the side of the anatomical location where the test was performed.	Side SRLAT	☐ RIGHT ☐ LEFT <LAT codelist>
Record the directionality of the anatomical location where the test was performed.	Directionality SRDIR	☐ UPPER ☐ LOWER ☐ ANTERIOR <DIR codelist>

Record the name of the skin response test if not preprinted on the CRF. If collected on the CRF, the sponsor may provide additional instructions to ensure the data is entered as intended.	Skin Response Test Name SRTEST	☐ Flare Size ☐ Flare Mean Diameter ☐ Induration Longest Diameter ☐ Wheal Size ☐ Wheal Longest Diameter ☐ Wheal Mean Diameter <SRTEST codelist>
Record the skin response test result.	Result SRORRES	
Record or select the unit of measure associated with the test, if not preprinted on the CRF.	What was the unit of the skin response measurement? SRORRESU	☐ mm ☐ cm <UNIT codelist>
Select the role of the person who provided the evaluation (e.g., INVESTIGATOR, ADJUDICATION COMMITTEE, VENDOR).	Who was the evaluator? SREVAL	☐ INVESTIGATOR ☐ HEALTH CARE PROFESSIONAL ☐ STUDY SUBJECT <EVAL codelist>

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTM Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
SRCAT	1	What was the category of the skin response?	Skin Response Category	Record the skin response category, if not pre-printed on the CRF.	Text	SRCAT				Sponsor Defined			Yes
SRPERF	2	Was a skin response test performed?	Skin Response Test Performed	Indicate if a skin response test as performed. If Yes, include the appropriate details where indicated on the CRF.	Text	SRSTAT		(NY)	Yes; No		prompt		
SRREASND	3	What was the reason the test was not done?	Reason Not Done	Provide the reason why the test or examination was not done.	Text	SRREASND							
SROBJ	4	What intervention was performed to elicit the skin response?	Intervention Performed	Record the name of the antigen administered to the skin to elicit the skin response.	Text	SROBJ				PURIFIED PROTEIN DERIVATIVE [PPD] INJECTION			
SRRFTDAT	5	What was the date of the intervention performed to elicit the skin response?	Administration Date	Record date of the test material administration using this format (DD-MON-YYYY).	Date	SRRFTDTC					qtext		

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTM Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
SRRFTTIM	6	What was the time of the intervention performed to elicit the skin response?	Administration Time	Record time of the test material administration using this format (hh:mm:ss).	Time	SRRFTDTC					qtext		
SRDAT	7	What was the date of the skin response measurement?	Date	Record date of measurements using this format (DD-MON-YYYY).	Date	SRDTC					qtext		
SRTIM	8	What was the time of the skin response measurement?	Time	Record time of measurement (as complete as possible).	Time	SRDTC					qtext		
SRLOC	10	What was the anatomical location of the skin response measurement?	Anatomical Location	Record or select location on body where measurement was performed, if not preprinted on CRF.	Text	SRLOC		(LOC)	ARM; LEG		prompt		
SRLAT	11	What was the side of the anatomical location of the skin response measurement?	Side	Record the side of the anatomical location where the test was performed.	Text	SRLAT		(LAT)	RIGHT; LEFT		prompt		
SRDIR	12	What was the directionality of the anatomical location of the skin response measurement?	Directionality	Record the directionality of the anatomical location where the test was performed.	Text	SRDIR		(DIR)	UPPER; LOWER; ANTERIOR		prompt		
SRTEST	13	What was the skin response test name?	Skin Response Test Name	Record the name of the skin response test if not preprinted on the CRF. If collected on the CRF, the sponsor may provide additional instructions to ensure the data is entered as intended.	Text	SRTEST		(SRTEST)	Flare Size; Flare Mean Diameter; Induration Longest Diameter; Wheal Size; Wheal Longest Diameter; Wheal Mean Diameter		prompt		
SRORRES	14	What was the result of the skin response measurement?	Result	Record the skin response test result.	Float	SRORRES					prompt		
SRORRESU	15	What was the unit of the skin response measurement?	Unit	Record or select the unit of measure associated with the test, if not preprinted on the CRF.	Text	SRORRESU		(UNIT)	mm; cm				
SREVAL	16	Who was the evaluator?	Evaluator	Select the role of the person who provided the evaluation (e.g., INVESTIGATOR, ADJUDICATION	Text	SREVAL		(EVAL)	INVESTIGATOR; HEALTH CARE PROFESSIONAL; STUDY SUBJECT				

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTM Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
				COMMITTEE, VENDOR).									

Example 2**Title: Skin Response**

Indicate if a skin response test as performed. If Yes, include the appropriate details where indicated on the CRF.

Provide the reason why the test or examination was not done.

If collected on the CRF, sponsor may insert instructions to ensure each record has a unique identifier.

Record date of the test material administration using this format (DD-MON-YYYY).

Record time of the test material administration using this format (hh:mm:ss).

Record or select location on body where measurement was performed, if not pre-printed on CRF.

Record the side of the anatomical location where the test was performed.

Record the test result.

Skin Response Test Performed SRPERF SRSTAT	☐ Yes ☐ No <NY codelist>
Reason Not Done SRREASND [Skin Response Category]; NULL SRCAT Hidden/pre-populated	
What is the skin response identifier? SRSPID	
Intervention Performed SROBJ Pre-populated	PURIFIED PROTEIN DERIVATIVE [PPD] INJECTION
Administration Date SRRFTDAT SRRFTDTC	
Administration Time SRRFTTIM SRRFTDTC	
Anatomical Location SRLOC	☐ ARM ☐ SHOULDER ☐ LEG <LOC codelist>
Side SRLAT	☐ RIGHT ☐ LEFT <LAT codelist>
Flare Size FLARESZ_SORRES SRORRES where SRTESTCD = "FLARESZ"	

Record or select the original units in which these data were collected, if not pre-printed on CRF.	Flare Size Unit FLARESZ_SRORRES SRORRES where SRTESTCD = "FLARESZ"	☐ cm ☐ mm <Unit codelist>
Record the test result.	Flare Longest Diameter FLRLDIAM_SRORRES SRORRES where SRTESTCD = "FLRLDIAM"	
Record or select the original unit in which these data were collected, if not pre-printed on CRF.	Flare Longest Diameter Unit FLRLDIM_SRORRES SRORRES where SRTESTCD = "FLRLDIAM"	☐ cm ☐ mm <Unit codelist>
Record the test result.	Flare Mean Diameter FLRMDIAM_SRORRES SRORRES where SRTESTCD = "FLRMDIAM"	
Record or select the original unit in which these data were collected, if not pre-printed on CRF.	Flare Mean Diameter Unit FLRMDIM_SRORRES SRORRES where SRTESTCD = "FLRMDIAM"	☐ cm ☐ mm <Unit codelist>
Record the test result.	Induration Longest Diameter IDRLDIAM_SRORRES SRORRES where SRTESTCD = "IDRLDIAM"	
Record or select the original unit in which these data were collected, if not pre-printed on CRF.	Induration Longest Diameter Unit IDRLDIAM_SRORRES SRORRES where SRTESTCD = "IDRLDIAM"	☐ cm ☐ mm <Unit codelist>
Record the test result.	Wheal Size WHEALSZ_SRORRES SRORRES where SRTESTCD = "WHEALSZ"	
Record or select the original units in which these data were collected, if not pre-printed on CRF.	Wheal Size Unit WHEALSZ_SRORRES SRORRES where SRTESTCD = "WHEALSZ"	☐ cm ☐ mm <Unit codelist>
Record the test result.	Wheal Longest Diameter WHLLDIAM_SRORRES SRORRES where SRTESTCD = "WHLLDIAM"	
Record or select the original units in which these data were collected, if not pre-printed on CRF.	Wheal Longest Diameter Unit WHLLDIM_SRORRES SRORRES where SRTESTCD = "WHLLDIAM"	☐ cm ☐ mm <Unit codelist>
Record the test result.	Wheal Mean Diameter WHLMDIAM_SRORRES SRORRES where SRTESTCD = "WHLMDIAM"	
Record or select the original units in which these data were collected, if not pre-printed on CRF.	Wheal Mean Diameter Unit WHLMDIM_SRORRES SRORRES where SRTESTCD = "WHLMDIAM"	☐ cm ☐ mm <Unit codelist>

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology CodeList Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
SRPERF	1	Was a skin response test performed?	Skin Response Test Performed	Indicate if a skin response test as performed. If Yes, include the appropriate details where indicated on the CRF.	Text	SRSTAT		NY	Yes; No		prompt		
SRREASND	2	What was the reason the test was not done?	Reason Not Done	Provide the reason why the test or examination was not done.	Text	SRREASND					prompt		
SRCAT	2	What was the category of the skin response?	[Skin Response Category]; NULL	Record the skin response category, if not pre-printed on the CRF.	Text	SRCAT				Sponsor Defined			Yes
SRSPID	3	What is the skin response identifier?	[Line Number/SR Number]	If collected on the CRF, sponsor may insert instructions to ensure each record has a unique identifier.	Text	SRSPID							
SROBJ	3	What intervention was performed to elicit the skin response?	Intervention Performed	Record the name of the antigen administered to the skin to elicit the skin response.	Text	SROBJ				PURIFIED PROTEIN DERIVATIVE [PPD] INJECTION			
SRRFTDAT	4	What was the date of the [intervention] performed to elicit the skin response?	Administration Date	Record date of the test material administration using this format (DD-MON-YYYY).	Date	SRRFTDTC							
SRRFTTIM	5	What was the time of the [intervention] performed to elicit the skin response?	Administration Time	Record time of the test material administration using this format (hh:mm:ss).	Time	SRRFTDTC							
SRLOC	6	What was the anatomical location of the skin response measurement?	Anatomical Location	Record or select location on body where measurement was performed, if not pre-printed on CRF.	Text	SRLOC		LOC	ARM; SHOULDER; LEG		prompt		
SRLAT	7	What was the side of the anatomical location of the skin response measurement?	Side	Record the side of the anatomical location where the test was performed.	Text	SRLAT		LAT	RIGHT; LEFT		prompt		
FLARESZ_SRORRES	8	What was the result of the flare size measurement?	Flare Size	Record the test result.	float	SRORRES;SRTEST;SRTESTCD	SRORRES where SRTESTCD = "FLARESZ"				prompt		
FLARESZ_SRORRESU	9	What was the unit of the flare size measurement?	Flare Size Unit	Record or select the original units in which these data were collected, if not pre-printed on CRF.	text	SRORRESU	SRORRESU where SRTESTCD = "FLARESZ"	Unit	cm; mm		prompt		
FLRLDIAM_SRORRES	10	What was the result of the flare longest diameter measurement?	Flare Longest Diameter	Record the test result.	float	SRORRES; SRTEST; SRTESTCD	SRORRES where SRTESTCD = "FLRLDIAM"				prompt		

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology CodeList Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
FLRLDIM_SRORESU	11	What was the unit of the flare longest diameter measurement?	Flare Longest Diameter Unit	Record or select the original unit in which these data were collected, if not pre-printed on CRF.	text	SRORESU	SRORESU where SRTESTCD = "FLRLDIAM"	Unit	cm; mm		prompt		
FLRMDIAM_SRORES	12	What was the result of the flare mean diameter measurement?	Flare Mean Diameter	Record the test result.	float	SRORES; SRTEST;SRTESTCD	SRORES where SRTESTCD = "FLRMDIAM"				prompt		
FLRMDIM_SRORESU	13	What was the unit of the flare mean diameter measurement?	Flare Mean Diameter Unit	Record or select the original unit in which these data were collected, if not pre-printed on CRF.	text	SRORESU	SRORESU where SRTESTCD = "FLRMDIAM"	Unit	cm; mm		prompt		
IDRLDIAM_SRORES	14	What was the result of the induration longest diameter measurement?	Induration Longest Diameter	Record the test result.	float	SRORES;SRTEST; SRTESTCD	SRORES where SRTESTCD = "IDRLDIAM"				prompt		
IDRLDIM_SRORESU	15	What was the unit of the induration longest diameter measurement?	Induration Longest Diameter Unit	Record or select the original unit in which these data were collected, if not pre-printed on CRF.	text	SRORESU	SRORESU where SRTESTCD = "IDRLDIAM"	Unit	cm; mm		prompt		
WHEALSZ_SRORES	16	What was the result of the wheal size measurement?	Wheal Size	Record the test result.	float	SRORES; SRTEST; SRTESTCD	SRORES where SRTESTCD = "WHEALSZ"				prompt		
WHEALSZ_SRORESU	17	What was the unit of the wheal size measurement?	Wheal Size Unit	Record or select the original units in which these data were collected, if not pre-printed on CRF.	text	SRORESU	SRORESU where SRTESTCD = "WHEALSZ"	Unit	cm; mm		prompt		
WHLLDIAM_SRORES	18	What was the result of the wheal longest diameter measurement?	Wheal Longest Diameter	Record the test result.	float	SRORES; SRTEST;SRTESTCD	SRORES where SRTESTCD = "WHLLDIAM"				prompt		
WHLLDIM_SRORESU	19	What was the unit for the wheal longest diameter measurement?	Wheal Longest Diameter Unit	Record or select the original units in which these data were collected, if not pre-printed on CRF.	text	SRORESU	SRORESU where SRTESTCD = "WHLLDIAM"	Unit	cm; mm		prompt		
WHLMDIAM_SRORES	20	What was the result of the wheal mean diameter measurement?	Wheal Mean Diameter	Record the test result.	float	SRORES;SRTEST;SRTESTCD	SRORES where SRTESTCD = "WHLMDIAM"				prompt		
WHLMDIM_SRORESU	21	What was the unit of the wheal mean diameter measurement?	Wheal Mean Diameter Unit	Record or select the original units in which these data were collected, if not pre-printed on CRF.	text	SRORESU	SRORESU where SRTESTCD = "WHLMDIAM"	Unit	cm; mm		prompt		

8.5 Associated Persons Domains

Description/Overview for the CDASHIG AP Domains

Data may be collected about persons other than the subject under study. Appropriate consent may be needed when collecting data about caregivers, study partners, organ donors, and so on. (Consent would not be needed to collect data about a subject's family medical history.) These persons could be associated with the study itself, a particular study subject, or a device used in the study. The term *associated persons* is used to classify data collected about persons who are not subject participants in a clinical study. An associated person may be a family member or may have a non-familial relationship to a study subject (e.g., a caregiver, an organ or blood donor). An associated person may also be unrelated to any study subject (e.g., a study technician who is inadvertently exposed to a study-related substance and has to be followed for adverse events).

AP domains parallel General Observation Class domains as well as the Demographics (DM) and potentially the Comments (CO) domains. The structure of AP domains is therefore the same as those for study-subject domains, with the exception of variables that are only applicable to study subjects (e.g., the identifiers USUBJID and SPDEVID). Unless otherwise stated, all other general assumptions about CDASHIG variables and domains will apply to AP data.

See the SDTMIG: Associated Persons (SDTMIG-AP; available at <https://www.cdisc.org/standards/foundational/sdtmig/>) for further details about representing data collected about people other than study subjects in SDTM.

Specification for the CDASHIG Identifiers - Associated Persons

Refer to the AP identifier variables in CDASH Model Section 4.8.

Observation Class	Domain	Order Number	CDASH Variable	CDASH Variable Label	DRAFT CDASH Definition	Question Text	Prompt	Data Type	SDTM Target	Mapping Instructions	Controlled Terminology Codelist Name	Implementation Notes
Associated Persons - Identifiers	N/A	1	APID	Associated Persons Identifier	The identifier for a single associated person, a group of associated persons, or a pool of associated persons.	What is the [associated person's/group of associated persons/pool of associated persons] identifier?	[Associated Person's/Group of Associated Persons/Pool of associated persons] Identifier	Char	APID	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	N/A
Associated Persons - Identifiers	N/A	2	RSUBJID	Related Subject or Pool Identifier	The identifier for the study subject/participant.	What [is/was] the related (study) [subject/participant] identifier?	Related [Subject/Participant] (Identifier)	Char	RSUBJID	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	This may be derived/populated from the study subject's identifier as recorded on the subject Demographics CRF.
Associated Persons - Identifiers	N/A	3	RDEVID	Related Device Identifier	The Identifier for a related device.	What is the identifier for the related device?	Related Device Identifier	Char	RDEVID	Maps directly to the SDTM variable listed in the SDTM Target column.	N/A	RDEVID will be populated with the SPDEVID of the related device
Associated Persons - Identifiers	N/A	4	SREL	Subject, Device, or Study Relationship	The Identifier for a related subject or pool of subjects.	What is the associated person's relationship to the (study) [subject/participant]?	Relationship to (Study) [Subject/Participant]	Char	SREL	Maps directly to the SDTM variable listed in the SDTM Target column.	(RELSUB)	If RSUBJID is populated, describes the relationship of the associated person(s) identified in APID to the subject or pool identified in RSUBJID. If RDEVID is populated, describes the relationship of the associated person(s) identified in APID to the subject or pool identified in RDEVID. If RSUBJID and RDEVID are null, SREL describes the relationship of the associated person(s) identified in APID to the study identified in STUDYID.

Assumptions for the CDASHIG AP Domains

1. Every CDASHIG AP domain has a 4-character code, beginning with "AP" and followed by the respective domain abbreviation; for example, APCM (Associated Persons Concomitant Medication), APDM (Associated Persons Demographics), APMH (Associated Persons Medical History).
2. Required Variables for SDTM
 - a. AP SDTM datasets must include the required topic variable for its associated class (e.g., --TRT for an Interventions class domain) plus the following required variables specific to AP domains: an associated person identifier (APID) and a description of the associated person's relationship to one or more study subjects (SREL), if any. The CRF for the AP data may collect both APID and SREL, or just SREL. When only SREL is collected, the APID variable is populated when the SDTM datasets are created.
 - b. The AP domain variable RSUBJID (identifier for the related study subject) may be collected on the CRF. However, because there is typically just 1 related study subject, RSUBJID is not required to be collected and may be populated in the SDTMIG dataset from the study subject's identifier.
 - c. AP domains should include the commonly used variables for their respective class.
3. Prohibited Variables for SDTM
 - a. The same variables that are listed as not being allowed for use within a given class are also prohibited from use in an AP domain for that class. For example, when creating an AP Interventions Class domain, --ORRES, --ORRESU, --PERF, and --TERM are prohibited.
 - b. Careful consideration should be given if/when creating AP CRFs with CDASHIG fields that may map to multiple SDTMIG classes.
4. Special Considerations
 - a. me is created by adding the prefix "AP" to the CDASHIG domain letters associated with the data to be reported (e.g., "APMH" where "MH" is the parent CDASHIG domain of interest).
 - b. For non-supplemental qualifiers (i.e., parent domain variables) individual CDASHIG variable names use the same names as CDASHIG items in the parent domain (e.g., MHTERM, MHSDAT) variable. They do not have the prefix "AP" appended.
 - c. For supplemental qualifier variables, individual CDASH items are mapped to an AP domain-specific supplemental qualifier variable. Supplemental qualifier variables for AP domains begin with SQAP<domain abbreviation>.QVAL. e.g., SQAPMH.QVAL where QNAM = MHNAM.
 - d. When any CRF includes the variables APID and/or SREL, the sponsor must ensure that the appropriate AP-- domain is used when the SDTM datasets are created. Sponsors may opt to include the CDASH variable "DOMAIN", which is prespecified to the applicable AP domain (e.g., APMH), to facilitate the creation of the SDTM datasets.

Example CRFs for the CDASHIG AP Domains

Example 1

This example CRF represents a use case where the study subject is an infant and the biological mother and biological father are associated persons.

Title: Associated Persons Demographics

Domain	APDM<DOMAIN codelist>
Record the identifier for the study subject/participant. This may be derived/populated from the study subject's identifier as recorded on the subject Demographics CRF. DOMAIN <i>Hidden/pre-populated</i>	
What is the related study subject's identifier? RSUBJID	
Record the relationship of the associated person to the study subject. What is the associated person's relationship to the subject? SREL	☐ Mother, Biological ☐ Father, Biological <RELSUB codelist>
Record the identifier for a single associated person. Associated Persons Identifier APID	
Record the date of birth to the level of precision known (e.g., day/month/year, year, month/year) in this format (DD-MON-YYYY). Birth Date BRTHDAT BRTHDTC	
Record the appropriate sex. Sex SEX	☐ Male ☐ Female <SEX codelist>
Study participants should self-report ethnicity, with ethnicity being asked about before race. Do you consider yourself Hispanic/Latino or not Hispanic/Latino? ETHNIC	☐ Hispanic or Latino ☐ Not Hispanic or Latino ☐ Not Reported <ETHNIC codelist>
Study participants should self-report race, with race being asked about after ethnicity. Which of the following five racial designations best describes you? (More than one choice is acceptable.) RACE	☐ American Indian or Alaska Native ☐ Asian ☐ Black or African American ☐ Native Hawaiian or Other Pacific Islander ☐ White <RACE codelist>

CRF Metadata

CDASH Variable	Order	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
DOMAIN	1	Domain	Domain	N/A	Text	DOMAIN		(DOMAIN)		APDM			Yes
RSUBJID	1	What is the related study subject's identifier?	Related Subject Identifier	Record the identifier for the study subject/participant. This may be derived/populated from the study subject's identifier as recorded on the subject Demographics CRF.	Text	RSUBJID							Yes
SREL	2	What is the associated person's relationship to the subject?	Relationship to Subject	Record the relationship of the associated person to the study subject.	Text	SREL		RELSUB	Mother, Biological; Father, Biological				
APID	3	What is the associated persons identifier?	Associated Persons Identifier	Record the identifier for a single associated person.	Text	APID					Prompt		
BIRTHDAT	4	What is the subject's date of birth?	Birth Date	Record the date of birth to the level of precision known (e.g., day/month/year, year, month/year) in this format (DD-MON-YYYY).	Date	BIRTHDTC					Prompt		
SEX	5	What is the sex of the subject?	Sex	Record the appropriate sex.	Text	SEX		(SEX)	Male; Female		Prompt	radio	
ETHNIC	6	Do you consider yourself Hispanic/Latino or not Hispanic/Latino?	Ethnicity	Study participants should self-report ethnicity, with ethnicity being asked about before race.	Text	ETHNIC		(ETHNIC)	Hispanic or Latino; Not Hispanic or Latino; Not Reported			radio	
RACE	7	Which of the following five racial designations best describes you? (More than one choice is acceptable.)	Race	Study participants should self-report race, with race being asked about after ethnicity.	Text	RACE		(RACE)	American Indian or Alaska Native; Asian; Black or African American; Native Hawaiian or Other Pacific Islander; White			check	

Example 2

This example CRF represents a use case where the study subject is an infant and the biological mother is an associated person and data about her medications during breastfeeding are being collected.

Title: Concomitant Medications During Breastfeeding

Domain DOMAIN <i>Hidden/pre-populated</i>	APCM <DOMAIN codelist>
Concomitant Medication Category CMCAT <i>Hidden/pre-populated</i>	MEDICATION DURING BREASTFEEDING
Relationship to Subject SREL <i>Hidden/pre-populated</i>	MOTHER, BIOLOGICAL <RELSUB codelist>
Record the identifier for the study subject/participant. This may be derived/populated from the study subject's identifier as recorded on the subject Demographics CRF. RSUBJID	What is the related study subject's identifier?
Record the associated persons identifier for the mother, using the same value as noted on the Associated Persons Demographics CRF. APID	Associated Persons Identifier
Indicate if any concomitant medications were taken. If Yes, include the appropriate details where indicated on the CRF. CMYN Not Submitted	Any Concomitant Medication(s) ☐ Yes ☐ No <NY codelist>
Record only 1 medication per line. Provide the full trade or proprietary name of the medication; otherwise, the generic name may be recorded. CMTRT	What was the concomitant medication name?
Record the concomitant medication subcategory. CMSCAT	What is the subcategory for the concomitant medication? ☐ ANTIRETROVIRAL ☐ GENERAL
Record the dose of concomitant medication taken per administration (e.g., 200). CMDOSE	What was the individual dose of the concomitant medication per administration?
Record the dose unit of the dose of concomitant medication taken (e.g., mg). CMDOSU	What is the unit? <UNIT codelist>
Record how often the concomitant medication was taken (e.g., BID, PRN). CMDOSFRQ	What was the frequency of the concomitant medication? <FREQ codelist>
Provide the route of administration for the concomitant medication. CMROUTE	What was the route of administration of the concomitant medication? <ROUTE codelist>

Record the date the concomitant medication was first taken, using this format: DD-MON-YYYY. If the subject has been taking the concomitant medication for a considerable amount of time prior to the start of the study, it is acceptable to have an incomplete date. Any concomitant medication taken during the study is expected to have a complete start date. Any prior concomitant medication that is exclusionary should have both a start and end date.

Record the concomitant medication/treatment as ongoing if the subject has not stopped taking the concomitant medication/treatment at the time of data collection and the end date should be left blank.

Record the date the concomitant medication was stopped, using this format: DD-MON-YYYY. If the subject has not stopped taking the concomitant medication, leave this field blank.

What was the concomitant medication start date?

CMSTDAT CMSTDTC

Was the concomitant medication ongoing?

CMONGO CMENRF/CMENRTP

☐ Yes
<NY codelist>

What was the concomitant medication end date?

CMENDAT CMENDTC

CRF Metadata

CDASH Variable	Order Number	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
DOMAIN	0	Domain	Domain	N/A	Text	DOMAIN		(DOMAIN)		APCM			Yes
CMCAT	1	What is the category for the concomitant medication?	Concomitant Medication Category	Record the concomitant medication category, if not pre-printed on the CRF.	text	CMCAT				MEDICATION DURING BREASTFEEDING			Yes
SREL	2	What is the associated person's relationship to the subject?	Relationship to Subject	Record the relationship of the associated person to the study subject.	Text	SREL		(RELSUB)		MOTHER, BIOLOGICAL			Yes
RSUBJID	3	What is the related study subject's identifier?	Related Subject Identifier	Record the identifier for the study subject/participant. This may be derived/populated from the study subject's identifier as recorded on the subject Demographics CRF.	Text	RSUBJID							Yes
APID	4	What is the associated persons identifier?	Associated Persons Identifier	Record the associated persons identifier for the mother, using the same value as noted on the Associated Persons Demographics CRF.	Text	APID					prompt		
CMYN	5	Were any concomitant medication(s) taken while breastfeeding?	Any Concomitant Medication(s)	Indicate if any concomitant medications were taken. If Yes, include the appropriate details where indicated on the CRF.	text			(NY)	Yes; No		prompt	Radio	
CMTRT	6	What was the concomitant medication name?	Concomitant Medication	Record only 1 medication per line. Provide the full trade or proprietary name of the medication; otherwise, the generic name may be recorded.	text	CMTRT							
CMSCAT	7	What is the subcategory for the concomitant medication?	Concomitant Medication Subcategory	Record the concomitant medication subcategory.	text	CMSCAT			ANTIRETROVIRAL; GENERAL				
CMDOSE	8	What was the individual dose of the concomitant medication per administration?	Dose per administration	Record the dose of concomitant medication taken per administration (e.g., 200).	text	CMDOSE							
CMDOSU	9	What is the unit?	(Dose) Unit	Record the dose unit of the dose of concomitant medication taken (e.g., mg).	text	CMDOSU		(UNIT)					
CMDOSFRQ	10	What was the frequency of the concomitant medication?	Frequency	Record how often the concomitant medication was taken (e.g., BID, PRN).	text	CMDOSFRQ		(FREQ)					
CMROUTE	11	What was the route of administration of the concomitant medication?	Route	Provide the route of administration for the concomitant medication.	text	CMROUTE		(ROUTE)					
CMSTDAT	12	What was the concomitant medication start date?	Start Date	Record the date the concomitant medication was first taken, using this format: DD-MON-YYYY. If the subject has been taking the concomitant medication for a considerable amount of time prior to the start of the study, it is acceptable to have an incomplete date. Any concomitant medication taken during the study is expected to have a complete start date. Any prior concomitant medication that is exclusionary should have both a start and end date.	text	CMSTDTC							
CMONGO	13	Was the concomitant medication ongoing?	Concomitant Meds Ongoing	Record the concomitant medication/treatment as ongoing if the subject has not stopped taking the concomitant medication/treatment at the time of data collection and the end date should be left blank.	text	CMENRF; CMENRTPT	CMENRF/CMENRTPT	(NY)	Yes			Checkbox	

CDASH Variable	Order Number	Question Text	Prompt	CRF Completion Instructions	Type	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology Code List Name	Permissible Values	Pre-Populated Value	Query Display	List Style	Hidden
CMENDAT	14	What was the concomitant medication end date?	End Date	Record the date the concomitant medication was stopped, using this format: DD-MON-YYYY. If the subject has not stopped taking the concomitant medication, leave this field blank.	text	CMENDTC							

Example 3

This example CRF represents a use case where the study subject is a child and the biological parents are associated persons.

Title: Associated Persons STI Medical History and Risk Factors

	Domain DOMAIN <i>Hidden/pre-populated</i>	APMH <DOMAIN codelist>
	Medical History Category MHCAT <i>Hidden/pre-populated</i>	RISK FACTORS
	Medical History Subcategory MHSCAT <i>Hidden/pre-populated</i>	HISTORY OF STI
Record the identifier for the study subject/participant. This may be derived/populated from the study subject's identifier as recorded on the subject Demographics CRF.	What is the related study subject's identifier? RSUBJID	
Record the relationship of the associated person to the study subject.	What is the associated person's relationship to the subject? SREL	☐ Mother, Biological ☐ Father, Biological <RELSUB codelist>
Record the identifier for the associated person using the same value as noted on the Associated Persons Demographics CRF.	What is the associated person's identifier? APID	
	Medical History Term HIV_MHTERM MHTERM <i>Hidden/pre-populated</i>	HIV
Indicate if the associated person has ever been diagnosed with HIV.	Has the associated person been diagnosed with HIV? HIV_MHOCCUR MHOCCUR where MHTERM = "HIV"	☐ Yes ☐ No <NY codelist>
Record the diagnosis date of the medical event or condition.	Diagnosis Date HIV_MHSTDAT MHSTDTC	
	Medical History Event Date Type HIV_DIAG_MHEVDTP SQAPMH.QVAL where SQAPMH.QNAM = "MHEVDTP" and SQAPMH.QLABEL = "Medical History Event Date Type" <i>Hidden/pre-populated</i>	DIAGNOSIS
	Medical History Term GONORRHEA_MHTERM MHTERM <i>Hidden/pre-populated</i>	GONORRHEA

Indicate if the associated person has ever been diagnosed with gonorrhea.	Has the associated person ever had gonorrhea? GONORRHEA_MHOCCUR MHOCCUR where MHTERM = "GONORRHEA" ☐ Yes ☐ No <NY codelist>
Record the start date of the medical event or condition.	What was the medical condition or event start date? GONORRHEA_MHSTDAT MHSTDTG
Indicate if the condition is ongoing at the time the history is collected.	Is the event ongoing at the time of collection of this history? GONORRHEA_MHONGO MHENRTPT where MHENTPT = Date of Collection ☐ Yes <NY codelist>
Record the end date of the medical event or condition.	What was the medical condition or event end date? GONORRHEA_MHENDAT MHENDTG
	Medical History Term CHLAMYDIA_MHTERM MHTERM Hidden/pre-populated CHLAMYDIA
Indicate if the associated person has ever been diagnosed with chlamydia.	Has the associated person ever had chlamydia? CHLAMYDIA_MHOCCUR MHOCCUR where MHTERM = "CHLAMYDIA" ☐ Yes ☐ No <NY codelist>
Record the start date of the medical event or condition.	What was the medical condition or event start date? CHLAMYDIA_MHSTDAT MHSTDTG
Indicate if the condition is ongoing.	Is the event ongoing at the time of collection of this history? CHLAMYDIA_MHONGO MHENRTPT where MHENTPT = Date of Collection ☐ Yes <NY codelist>
Record the end date of the medical event or condition.	What was the medical condition or event end date? CHLAMYDIA_MHENDAT MHENDTG

CRF Metadata

CDASH Variable	Order Number	Question Text	Prompt	Type	CRF Completion Instructions	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology CodeList Name	Permissible Values	Pre-Populated Value	Displayed Query	List	Hidden
DOMAIN	0	Domain	Domain	text	N/A	DOMAIN		(DOMAIN)		APMH			Yes
MHCAT	1	What was the category of the medical history?	Medical History Category	text	Indicate the category of the medical history event or condition.	MHCAT				RISK FACTORS			Y
MHSCAT	2	What was the subcategory of the medical history?	Medical History Subcategory	text	Indicate the subcategory of the medical history event or condition.	MHSCAT				HISTORY OF STI			Y
RSUBJID	3	What is the related study subject's identifier?	Related Subject Identifier	text	Record the identifier for the study subject/participant. This may be derived/populated from the study subject's identifier as recorded on the subject Demographics CRF.	RSUBJID							Y
SREL	4	What is the associated person's relationship to the subject?	Relationship to Subject	text	Record the relationship of the associated person to the study subject.	SREL		RELSUB	Mother, Biological; Father, Biological				
APID	5	What is the associated person's identifier?	Associated Persons Identifier	text	Record the identifier for the associated person using the same value as noted on the Associated Persons Demographics CRF.	APID							

CDASH Variable	Order Number	Question Text	Prompt	Type	CRF Completion Instructions	SDTMIG Target Variable	SDTMIG Target Mapping	Controlled Terminology CodeList Name	Permissible Values	Pre-Populated Value	Displayed Query	List	Hidden
HIV_MHTERM	6	N/A	Medical History Term	text	N/A	MHTERM				HIV			Y
HIV_MHOCCUR	7	Has the associated person been diagnosed with HIV?	HIV Occurrence	text	Indicate if the associated person has ever been diagnosed with HIV.	MHOCCUR	MHOCCUR where MHTERM = "HIV"	(NY)	Yes;No			Radio Buttons	
HIV_MHSTDAT	8	What was the medical condition or event diagnosis date?	Diagnosis Date	text	Record the diagnosis date of the medical event or condition.	MHSTDTC		N/A			Prompt		
HIV_DIAG_MHEVDTYP	9	What was the medical history event date type?	Medical History Event Date Type	text	The instructions depend upon the format of the CRF. Sponsors may pre-print these values on the CRF or use them as defaulted or hidden text.	SQAPMH.QVAL	SQAPMH.QVAL where SQAPMH.QNAM = "MHEVDTYP" and SQAPMH.QLABEL = "Medical History Event Date Type"			DIAGNOSIS			Y
GONORRHEA_MHTERM	10	N/A	Medical History Term	text	N/A	MHTERM				GONORRHEA			Y
GONORRHEA_MHOCCUR	11	Has the associated person ever had gonorrhea?	Medical History Term	text	Indicate if the associated person has ever been diagnosed with gonorrhea.	MHOCCUR	MHOCCUR where MHTERM = "GONORRHEA"	(NY)	Yes;No			Radio Buttons	
GONORRHEA_MHSTDAT	12	What was the medical condition or event start date?	Start Date	text	Record the start date of the medical event or condition.	MHSTDTC							
GONORRHEA_MHONGO	13	Is the event ongoing at the time of collection of this history?	Ongoing	text	Indicate if the condition is ongoing at the time the history is collected.	MHENRF	MHENRTPT where MHENTPT = Date of Collection	(NY)	Yes			checkbox	
GONORRHEA_MHENDAT	14	What was the medical condition or event end date?	End Date	text	Record the end date of the medical event or condition.	MHENDTC							
CHLAMYDIA_MHTERM	15	N/A	Medical History Term	text	N/A	MHTERM				CHLAMYDIA			Y
CHLAMYDIA_MHOCCUR	16	Has the associated person ever had chlamydia?	Medical History Term	text	Indicate if the associated person has ever been diagnosed with chlamydia.	MHOCCUR	MHOCCUR where MHTERM = "CHLAMYDIA"	(NY)	Yes;No			Radio Buttons	
CHLAMYDIA_MHSTDAT	17	What was the medical condition or event start date?	Start Date	text	Record the start date of the medical event or condition.	MHSTDTC							
CHLAMYDIA_MHONGO	18	Is the event ongoing at the time of collection of this history?	Ongoing	text	Indicate if the condition is ongoing.	MHENRTPT	MHENRTPT where MHENTPT = Date of Collection	(NY)	Yes;			checkbox	
CHLAMYDIA_MHENDAT	19	What was the medical condition or event end date?	End Date	text	Record the end date of the medical event or condition.	MHENDTC							

Appendices

Appendix A: CDASH Model and CDASHIG Team Contributors

The following table lists volunteers who actively contributed to the development of the CDASH Model v1.3 and CDASHIG v2.3.

Name	Institution/Organization
Melissa Binz, CDASH Team Lead	Takeda
Chris Battiston	Women's College Hospital
Dana Booth	Merck
Michelle Borrelli	Johnson & Johnson
Erin Crecelius	UNC Lineberger Comprehensive Cancer Center
Carolyn Famatiga-Fay	CFSQUARED Solutions, LLC
Nikki Flores, CDASHIG Subteam Lead	Gilead Sciences
Erica Gonzales	Moderna
Hwalih Han	Gilead Sciences
Kit Howard	CDISC
Dawn Kaminski	eClinical Solutions
Natalia Khelmer	Johnson & Johnson
Joanna Kuzmich	AstraZeneca
Naida Lodgaard	Astellas
Kathleen Mellars	CDISC
Emilea Norris	ProPharma Group
Karen Outten	Merck
Amy Palmer	CDISC
Matthew Paulson	AbbVie
Soumya Rajesh	IQVIA
Deborah Rittenhouse	CSL Behring
Kelli Smith	CDISC
Justin Sheppard	Merative
Angela Soriano	Merck
Lorraine P. Spencer	AbbVie
Mitra Swartley	Bryn Mawr
Alana St. Clair	CDISC
Judy Tran	Merck
Kim Truett	KCT Data
Gary Walker	Gary G Walker, LLC
Guang-liang Wang	Cerevel Therapeutics
Michael Wise	Apellis Pharmaceuticals

Appendix B: Glossary and Abbreviations

The following abbreviations and terms are used in this document. Additional definitions can be found in the CDISC Glossary (available at <https://www.cdisc.org/standards/glossary>).

ADaM	Analysis Data Model
AE	Adverse event; also refers to the Adverse Events domain
ATC	(WHO) Anatomic Therapeutic Chemical (code)
BMI	Body mass index
CDASH	Clinical Data Acquisition Standards Harmonization Project; the name for the project that delivers basic data collection fields
CDASHIG	Clinical Data Acquisition Standards Harmonization Implementation Guide for Human Clinical Trials; the associated implementation guide intended to be paired with CDASH Model
CDISC	Clinical Data Interchange Standards Consortium
CDM	Clinical data management
Clinical database	A repository of the study results data collected in a clinical trial; format and structure may vary across sponsors and vendors
Clinical encounter	Contact (physical or virtual) between the subject/patient and a healthcare practitioner/researcher, during which an assessment or activity is performed
Collected	Information that is recorded and/or transmitted to the sponsor. This includes data entered by the site on CRFs/eCRFs as well as vendor data (e.g., core lab data). This term is a synonym for <i>captured</i> .
CRF	Case report form (sometime <i>case record form</i>); a printed, optical, or electronic document designed to record all required information to be reported to the sponsor for each trial subject
CT	Controlled terminology
CTCAE	Common Terminology Criteria for Adverse Events (dictionary)
Databased	To put (data) into a database
Dataset	A collection of structured data in a single file
Denormalized	The organization of data such that multiple observations (results) are presented in a single row of data. For example, the result values for PULSE, HEIGHT, WEIGHT would be presented in the same row of data with PULSE, HEIGHT, and WEIGHT as column headers. This is also called a <i>horizontal data structure</i> .
Derived	Information that is not directly entered into the specific data field by the investigator site or by a core lab; includes auto-encoded data, calculated data, and similar electronically generated data, but not pre-populated fields
Domain	A collection of data points related by a common topic (e.g., adverse events, demographics)
eCOA	Electronic clinical outcome assessment
eCRF	Electronic case report form
ECG	Electrocardiogram
EDC	Electronic data capture
EHR	Electronic healthcare record
ePRO	Electronic patient-reported outcome
Epoch	Interval of time in the planned conduct of a study. An epoch is associated with a purpose (e.g., screening, randomization, treatment, follow-up), which applies across all arms of a study.
ERCP	Endoscopic retrograde cholangiopancreatography
FDA	Food and Drug Administration; part of the US Department of Health and Human Services. The FDA is the regulatory authority for all pharmaceuticals (including biologics and vaccines) and medical devices in the US.
GCDMP	<i>Good Clinical Data Management Practices</i> (GCDMP); SCDM publication on CDM processes
HL7	Health Level 7; standards for the exchange, integration, sharing, and retrieval of electronic health information
ICD9	<i>International Classification of Diseases, Ninth Revision</i>
ICH	International Conference on Harmonization of Technical Requirements for Registration of Pharmaceuticals for Human Use

ICH E2A	ICH <i>Clinical Safety Data Management: Definitions and Standards for Expedited Reporting</i>
ICH E2B	ICH <i>Electronic Transmission of Individual Case Safety Reports Implementation Guide</i>
ICH E3	ICH <i>Structure and Content of Clinical Study Reports</i>
IHC	Immunohistochemistry
ISO 8601	International Organization for Standardization document of character representation of dates, date/times, intervals, and durations of time
MedDRA	Medical Dictionary for Regulatory Activities; global standard medical terminology designed to supersede other terminologies (e.g., COSTART, ICD9) used in the medical product development process
MHLW	Japanese Ministry of Health, Labour and Welfare
MIC	Minimum inhibitory concentration
MRI	Magnetic resonance imaging
MUGA	Multigated acquisition (scan)
N/A	Not applicable
NCI	National Cancer Institute (NIH)
NCI EVS	National Cancer Institute (NIH) Enterprise Vocabulary Services
NIH	(US) National Institutes of Health
Normalized	The organization of data such that only 1 observation (result) is presented per row. For example, PULSE, HEIGHT, WEIGHT would be presented as values in individual rows (with the column header VSTESTCD) with each result presented in another column (same row) called VSORRES. This is also called a <i>vertical data structure</i> .
NSV	Non-standard variable
OMB	(US) Office of Management and Budget
PK	Pharmacokinetics: the study of the absorption, distribution, metabolism, and excretion of a drug
Preprinted	Items that are part of the original printing on a paper CRF. For example, the unit required for a response, such as “years” for an age question. These data may or may not be stored in the database.
Prepopulated	Items that are part of the eCRF (or data collection device) that are not entered and cannot be modified (cf. <i>preprinted</i>). These data are stored in the study database.
PRO	Patient-reported outcome
Protocol deviation	A variation from processes or procedures defined in a protocol. Deviations usually do not preclude the overall evaluability of subject data for either efficacy or safety, and are often acknowledged and accepted in advance by the sponsor. Good clinical practice recommends that deviations be summarized by site and by category as part of the report of study results so that the possible importance of the deviations to the findings of the study can be assessed (cf. <i>protocol violation</i> ; see also ICH E3).
Protocol violation	A significant departure from processes or procedures that were required by the protocol. Violations often result in data that are not deemed evaluable for a per-protocol analysis, and may require that the subject(s) who violate the protocol be discontinued from the study (cf. <i>protocol deviation</i>).
SAE	Serious adverse event
SAP	Statistical analysis plan
SCDM	Society for Clinical Data Management
SDTM	Study Data Tabulation Model
SDTMIG	Study Data Tabulation Model Implementation Guide
SDTMIG-AP	SDTMIG: Associated Persons
SDTMIG-MD	SDTMIG for Medical Devices
SDV	Source data verification
SME	Subject-matter expert
SNOMED	Systematically organized computer processable collection of medical terms providing codes, terms, synonyms, and definitions used in clinical documentation and reporting
SOC	System organ class (from MedDRA)
SOP	Standard operating procedure

Study treatment	The drug, device, therapy, or process under investigation in a clinical trial which has an effect on outcome of interest in a study (e.g., health-related quality of life, efficacy, safety, pharmacoeconomics; synonyms: <i>intervention, therapeutic intervention, medical product</i>)
TAUG	Therapeutic area user guide
Uncoded	Not coded; not having or showing a code.
UUID	Universally unique identifier
Variable naming fragment	A reusable pattern of characters in variable names that convey an equivalent meaning when applied to multiple variable names across classes and domains.
WHO	World Health Organization
WHO ART	World Health Organization Adverse Reaction Terminology; serves as a basis for rational coding of adverse reaction terms
WHODrug	World Health Organization Drug Dictionary (sometimes WHO-DD)

Appendix C: Revision History – Changes from Previous Version of CDASHIG and CDASH Model

The most significant changes are listed below:

- Inclusion of additional SDTMIG v3.3 domains (i.e., CV, MK, NV, UR)
- Inclusion of SDTMIG v3.4 domains (i.e., GF, CP)
- Adding SA domain and variables from the SAE Supplement v2.0
- Changes to CDASHIG and CDASH Model variable labels, where needed, to more closely align with SDTMIG and SDTM variable labels
- Updated HO date/time prompts to include HOTERM as an optional element
- Included "regulations" in definition and CRF Completion Guidelines for AESER
- Administrative updates that may include metadata consistency to standardize variable definitions across domains

Appendix D: Representations and Warranties, Limitations of Liability, and Disclaimers

CDISC Patent Disclaimers

It is possible that implementation of and compliance with this standard may require use of subject matter covered by patent rights. By publication of this standard, no position is taken with respect to the existence or validity of any claim or of any patent rights in connection therewith. CDISC, including the CDISC Board of Directors, shall not be responsible for identifying patent claims for which a license may be required in order to implement this standard or for conducting inquiries into the legal validity or scope of those patents or patent claims that are brought to its attention.

Representations and Warranties

“CDISC grants open public use of this User Guide (or Final Standards) under CDISC’s copyright.”

Each Participant in the development of this standard shall be deemed to represent, warrant, and covenant, at the time of a Contribution by such Participant (or by its Representative), that to the best of its knowledge and ability: (a) it holds or has the right to grant all relevant licenses to any of its Contributions in all jurisdictions or territories in which it holds relevant intellectual property rights; (b) there are no limits to the Participant’s ability to make the grants, acknowledgments, and agreements herein; and (c) the Contribution does not subject any Contribution, Draft Standard, Final Standard, or implementations thereof, in whole or in part, to licensing obligations with additional restrictions or requirements inconsistent with those set forth in this Policy, or that would require any such Contribution, Final Standard, or implementation, in whole or in part, to be either: (i) disclosed or distributed in source code form; (ii) licensed for the purpose of making derivative works (other than as set forth in Section 4.2 of the CDISC Intellectual Property Policy (“the Policy”)); or (iii) distributed at no charge, except as set forth in Sections 3, 5.1, and 4.2 of the Policy. If a Participant has knowledge that a Contribution made by any Participant or any other party may subject any Contribution, Draft Standard, Final Standard, or implementation, in whole or in part, to one or more of the licensing obligations listed in Section 9.3, such Participant shall give prompt notice of the same to the CDISC President who shall promptly notify all Participants.

No Other Warranties/Disclaimers. ALL PARTICIPANTS ACKNOWLEDGE THAT, EXCEPT AS PROVIDED UNDER SECTION 9.3 OF THE CDISC INTELLECTUAL PROPERTY POLICY, ALL DRAFT STANDARDS AND FINAL STANDARDS, AND ALL CONTRIBUTIONS TO FINAL STANDARDS AND DRAFT STANDARDS, ARE PROVIDED “AS IS” WITH NO WARRANTIES WHATSOEVER, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, AND THE PARTICIPANTS, REPRESENTATIVES, THE CDISC PRESIDENT, THE CDISC BOARD OF DIRECTORS, AND CDISC EXPRESSLY DISCLAIM ANY WARRANTY OF MERCHANTABILITY, NONINFRINGEMENT, FITNESS FOR ANY PARTICULAR OR INTENDED PURPOSE, OR ANY OTHER WARRANTY OTHERWISE ARISING OUT OF ANY PROPOSAL, FINAL STANDARDS OR DRAFT STANDARDS, OR CONTRIBUTION.

Limitation of Liability

IN NO EVENT WILL CDISC OR ANY OF ITS CONSTITUENT PARTS (INCLUDING, BUT NOT LIMITED TO, THE CDISC BOARD OF DIRECTORS, THE CDISC PRESIDENT, CDISC STAFF, AND CDISC MEMBERS) BE LIABLE TO ANY OTHER PERSON OR ENTITY FOR ANY LOSS OF PROFITS, LOSS OF USE, DIRECT, INDIRECT, INCIDENTAL, CONSEQUENTIAL, OR SPECIAL DAMAGES, WHETHER UNDER CONTRACT, TORT, WARRANTY, OR OTHERWISE, ARISING IN ANY WAY OUT OF THIS POLICY OR ANY RELATED AGREEMENT, WHETHER OR NOT SUCH PARTY HAD ADVANCE NOTICE OF THE POSSIBILITY OF SUCH DAMAGES.

Note: The CDISC Intellectual Property Policy can be found at
http://www.cdisc.org/system/files/all/article/application/pdf/cdisc_20ip_20policy_final.pdf