run the tool



### Welcome to SemanticMerge 2.0

Semantic is a different kind of merge tool. It parses the code prior to calculate the merge, which makes it possible to detect and automatically solve most conflicts.

It is different than most merge tools you have used so far, so it is worth to invest a few minutes browsing the sample cases to become a real merge master and get the best out of the tool.



To learn more about the SemanticMerge fundamentals read the Intro Guide (3 minutes read).

Don't show this dialog on start up

Border: ActionButtonMouseOverBrush #004ECF



### Please select MERGE or DIFF



This option launches a 3-way merge tool, able to save the result in another file



This option launches a diff tool, to see the differences of two files

show intro guide

open examples

SemanticBorderBrush

#00112E







Select three file to MERGE: ActionButtonBrush	#0664FF	
Source (theirs)		
C:\Users\Miguel\wkspaces\codice-wrk\01plastic\install\samples\0	CSharp\5. Rep	
Destination (yours)		
spaces\codice-wrk\01plastic\install\samples\CSharp\5. Repositor	yChecker\dst.c	
Base		
aces\codice-wrk\01plastic\install\samples\CSharp\5. RepositoryC	Checker\base.c	
ok	cancel	

show intro guide

open examples



# semanticmerge configuration SemanticFontBrush:




#0664FF

general	external tools	version controls		
✓ Automatically mer	ge without user interaction u	ınless conflicts are found (	(-a)	
☐ Merge declaration conflicts that can be solved automatically (merge-decl)				
☐ Don't ignore inde	ntation and EOL changes (i	nclude-format-change)		
☐ Launch the extern	I tool to process unsolved (	conflicts (process-all-me	rges)	
Run the external tool when the language is not supported (nolangwarn)				
Run the external tool when structure errors are found (nostructurewarn)				
Tab size: 4	SemanticBackgroundB #071D43	rush		
Default encoding:	NONE	<b>v</b>		
Result encoding:	NONE	<b>v</b>		
Path to the Java Virtu	al Machine:			
Command to run the external parser:				
CancelButtonBrush:				
	#C7CDDD			



# semanticmerge configuration

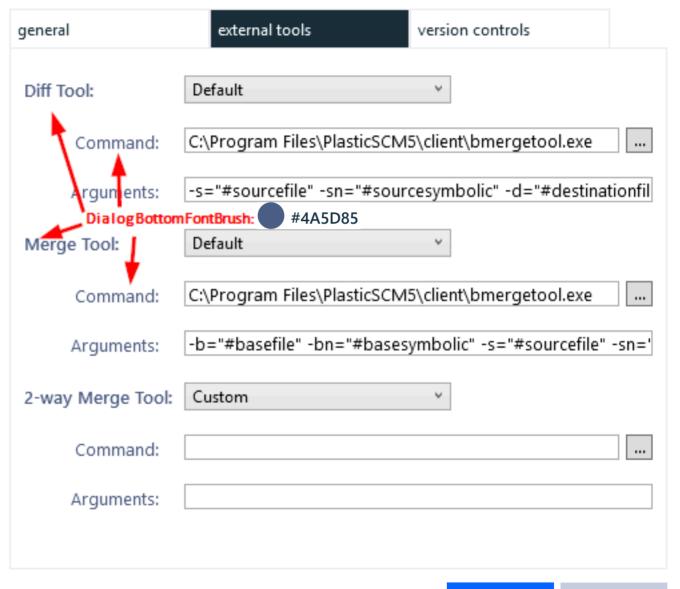





# semantic**merge**

a tool that understands your code. DialogTopFontBrush: #00112E designed for converting merges into a simple, painless task.

Version 0.0.0.0 - GitMaster Release notes

VersionFontBrush:

#C7CDDD

license information

Visit us


Meet the team


Spread the love

DialogBottomFontBrush: Engineered in Boecillo Tech Park, Valladolid, Spain




Copyright © 2013-2016 Codice Software S.L. All Rights Reserved

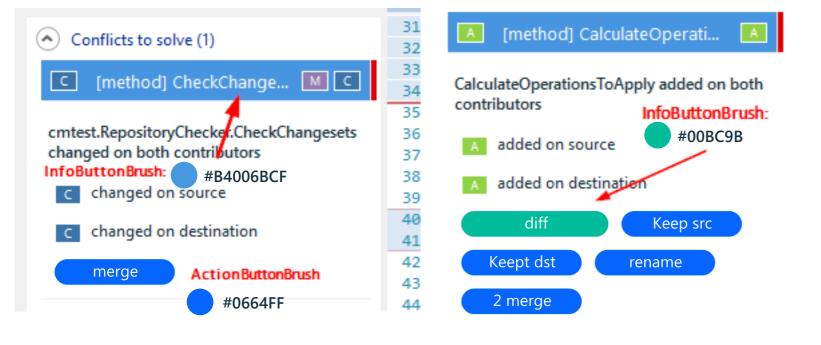

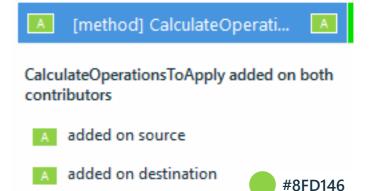

diff

solved using keep src

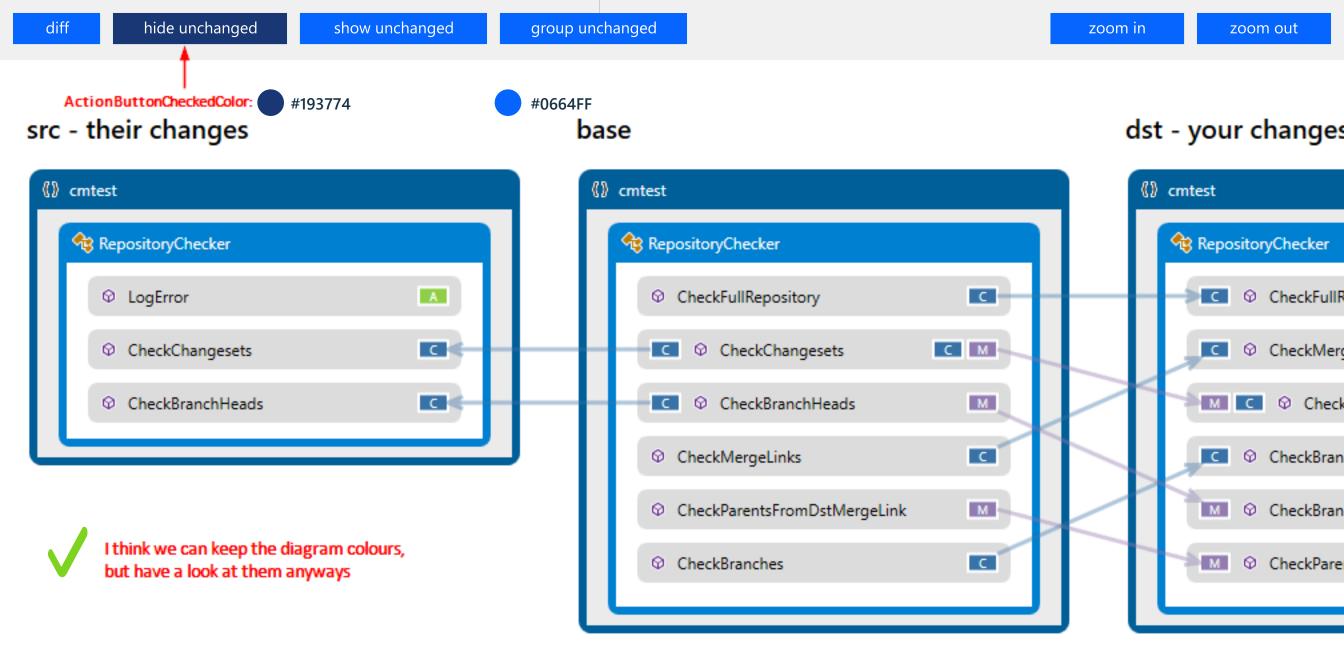

#### **ActionButton**

Normal

ARGB(100, 6, 100, 255)

**MouseOver** 

ARGB(100, 0, 78, 207)

**Pressed** 

ARGB(100, 10, 58, 156)

Checked

ARGB(100, 21, 129, 233)

### **InfoButton**

Normal

ARGB(100, 0, 188, 155)

**MouseOver** 

ARGB(100, 0, 163, 135)

**Pressed** 

ARGB(100, 135, 112, 0)

Checked



ARGB(100, 80, 218, 162)

#### **AlertButton**

Normal

ARGB(100, 255, 67, 0)

**MouseOver** 

ARGB(100, 224, 59, 0)

**Pressed** 

ARGB(100, 198, 52, 0)

### CancelButton

Normal

ARGB(100, 195, 205, 201)

**MouseOver** 



ARGB(100, 173, 180, 197)

**Pressed** 



ARGB(100, 137, 147, 169)