

Week5: Data Viz with ggplot2

Candice Lei (A18585167)

Table of contents

Background	1
Add some custom features	4
Going Further	9


Background

There are many graphic systems in R for making plots and figures. These include so-called base R graphics like the `plot()` function and add on packages like `ggplot2`. Let's compare how we make a simple figure with these two systems: We can use the in-build 'cars' dataset:

```
head(cars)
```


```
      speed dist
1         4    2
2         4   10
3         7    4
4         7   22
5         8   16
6         9   10
```

```
plot(cars)
```

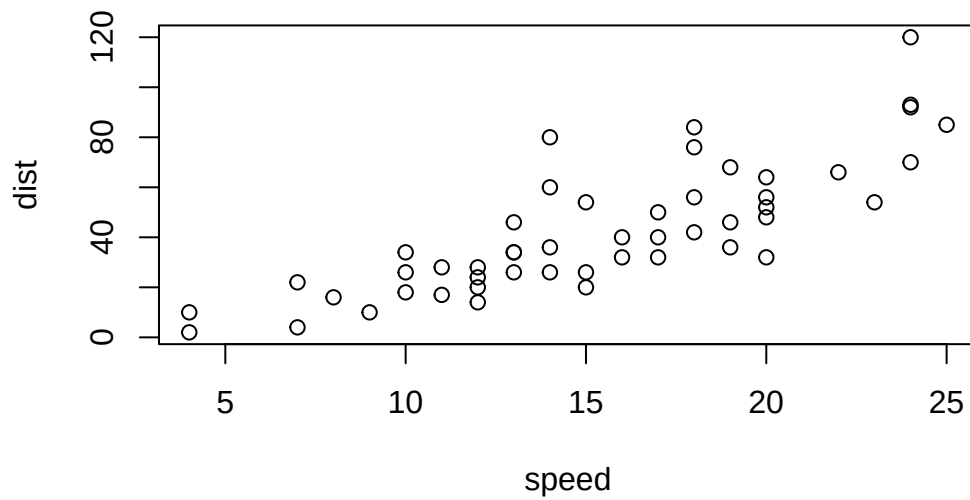


Before I can use ggplot2 I need to install it on my computer. To do this, we can use the function 'install.packages("ggplot2")' Once installed we need to load up the package into our R brain:

```
library(ggplot2)
ggplot(cars)
```



Every ggplot has at least 3 layers:

```
ggplot(cars) +  
  aes(x = speed, y = dist) +  
  geom_point()
```

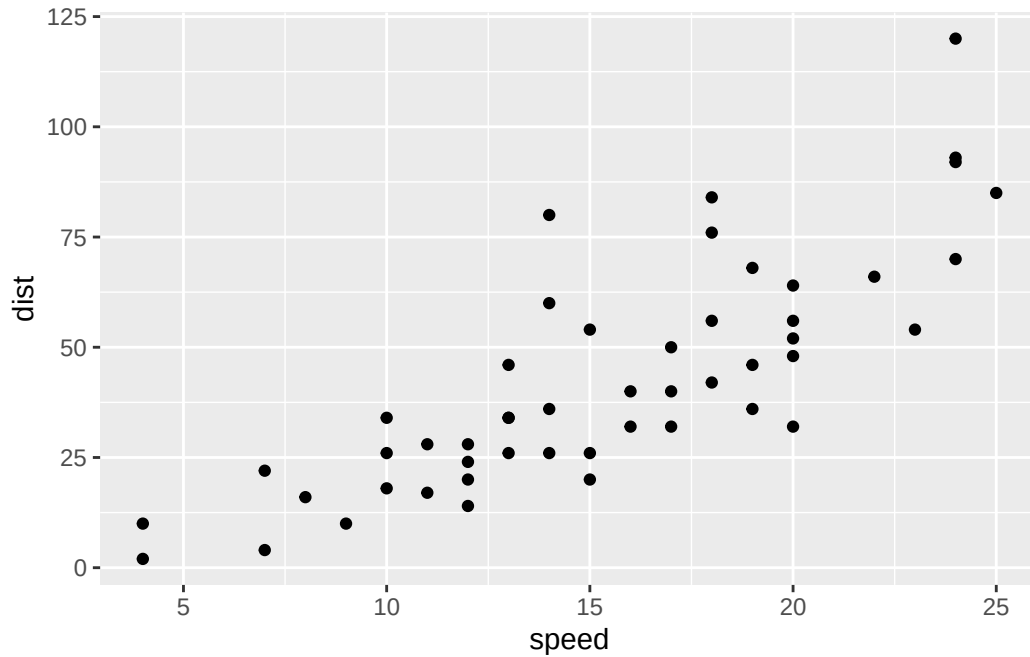


Add some custom features

Let's add a trend line that shows the relationship between speed and distance

```
ggplot(cars) +  
  aes(x = speed, y = dist) +  
  geom_point() +  
  geom_smooth()
```


``geom_smooth()`` using `method = 'loess'` and `formula = 'y ~ x'`

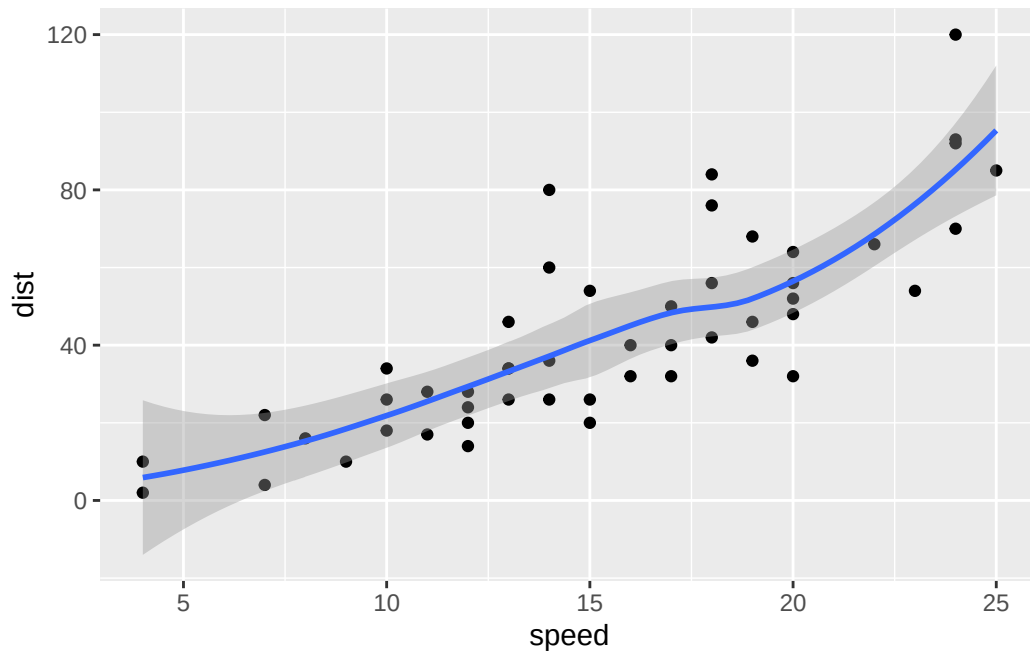

Q. Can you make the `geom_smooth()` function produce a linear straight line to fit the data and turn off the “gray” error region?

```
ggplot(cars) +
  aes(x = speed, y = dist) +
  geom_point() +
  geom_smooth(method = "lm", se = FALSE) +
  theme_bw() +
  labs(title = "Stopping Dist of Old Cars",
       x = "Speed (MPH)",
       y = "Distance (ft)")
```

`geom_smooth()` using `formula = 'y ~ x'`

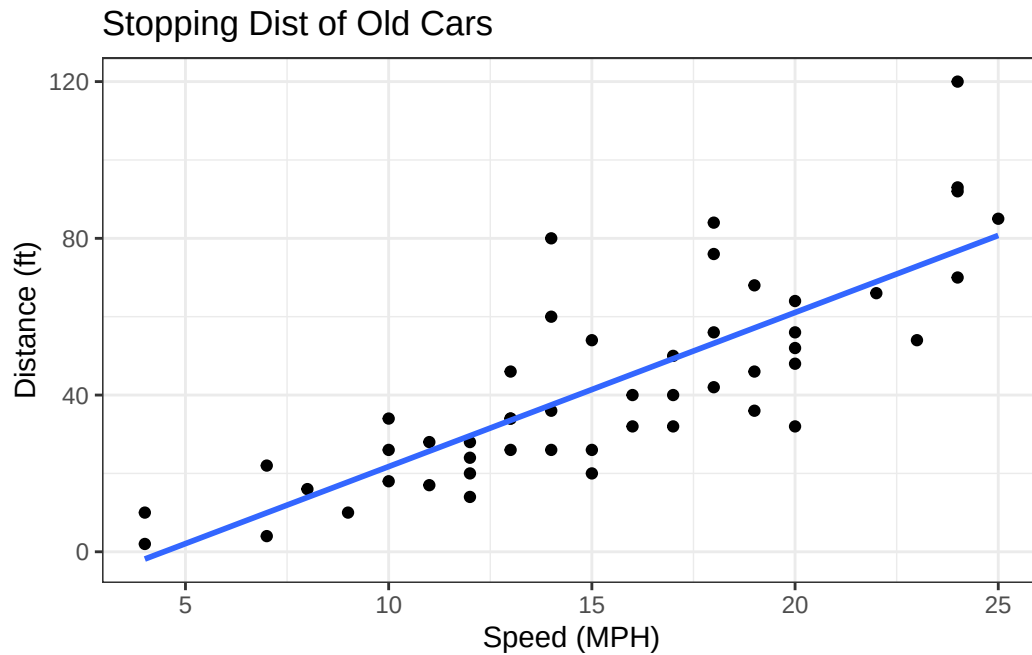

```
url <- "https://bioboot.github.io/bimm143_S20/class-material/up_down_expression.txt"
genes <- read.delim(url)
head(genes)
```

	Gene	Condition1	Condition2	State
1	A4GNT	-3.6808610	-3.4401355	unchanging
2	AAAS	4.5479580	4.3864126	unchanging
3	AASDH	3.7190695	3.4787276	unchanging
4	AATF	5.0784720	5.0151916	unchanging
5	AATK	0.4711421	0.5598642	unchanging
6	AB015752.4	-3.6808610	-3.5921390	unchanging

```
nrow(genes)
```

```
[1] 5196
```

```
colnames(genes)
```

```
[1] "Gene" "Condition1" "Condition2" "State"
```

```
ncol(genes)
```

```
[1] 4
```

```
sum(genes$State == "up")
```

```
[1] 127
```

A useful new function in this context is the `table()` function:

```
table(genes$State)
```


down	unchanging	up
72	4997	127

```
round(table(genes$State)/nrow(genes) * 100, 2)
```

down	unchanging	up
1.39	96.17	2.44


My first plot attempt

```
ggplot(genes) +  
  aes(x = Condition1, y = Condition2, col = State) +  
  geom_point()
```

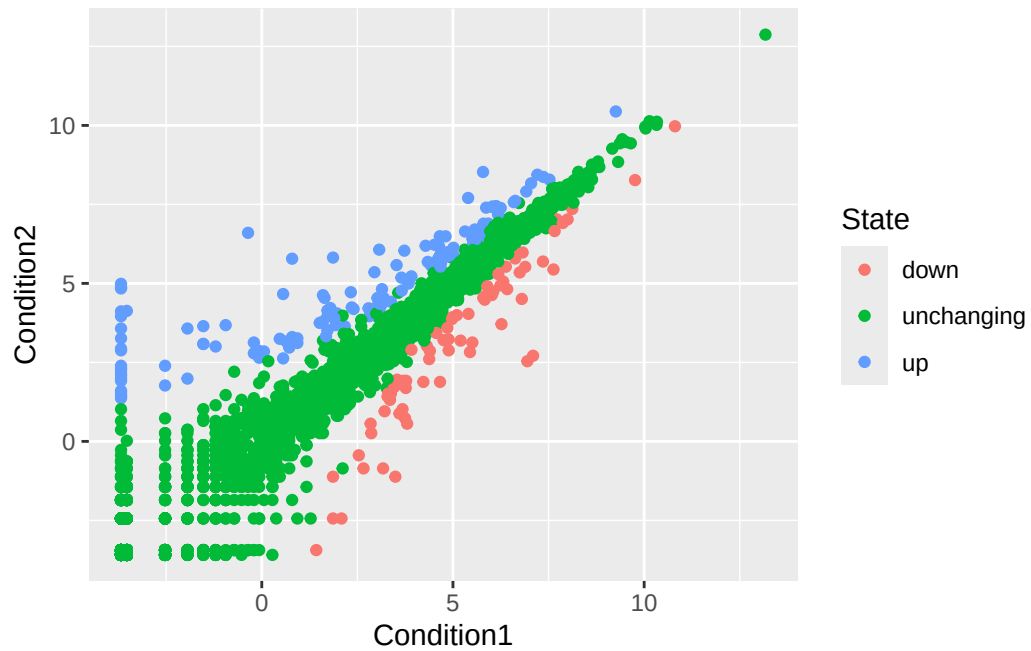

```
ggplot(genes) +
  aes(x = Condition1, y = Condition2, col = State) +
  geom_point() +
  scale_color_manual(values = c("purple", "gray", "orange")) +
  theme_bw() +
  labs(title = "Gene Expression Changes Upon Drug Treatment", x = "Control (No drug)", y = "I
```


Gene Expression Changes Upon Drug Treatment

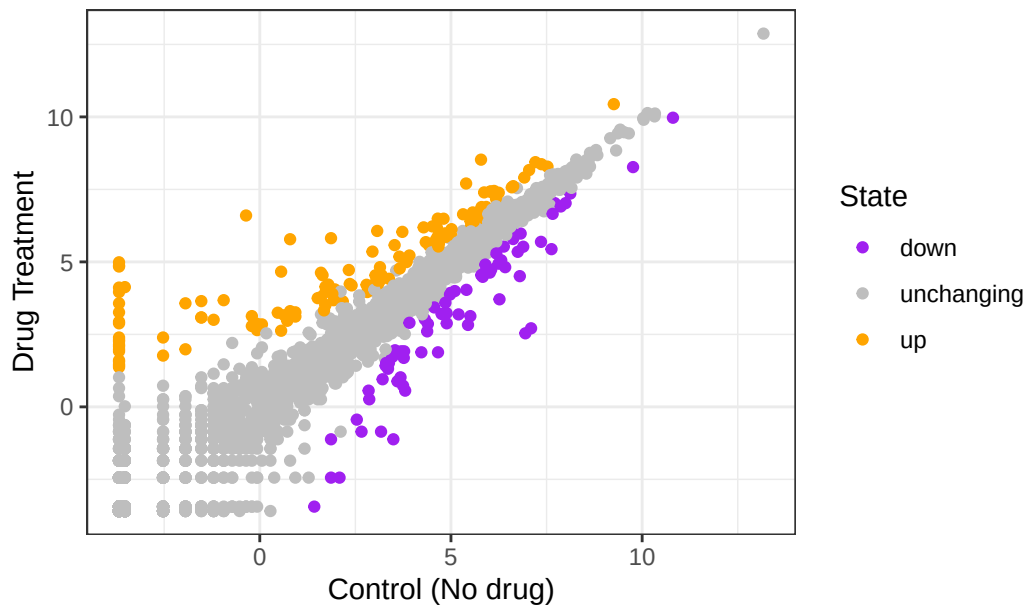

Going Further

Here we read the famous gapminder dataset

```
# File location online
# File location online
url <- "https://raw.githubusercontent.com/jennybc/gapminder/master/inst/extdata/gapminder.tsv"

gapminder <- read.delim(url)
head(gapminder)
```

	country	continent	year	lifeExp	pop	gdpPercap
1	Afghanistan	Asia	1952	28.801	8425333	779.4453
2	Afghanistan	Asia	1957	30.332	9240934	820.8530
3	Afghanistan	Asia	1962	31.997	10267083	853.1007
4	Afghanistan	Asia	1967	34.020	11537966	836.1971
5	Afghanistan	Asia	1972	36.088	13079460	739.9811
6	Afghanistan	Asia	1977	38.438	14880372	786.1134

Q. How many entries are in the dataset?

```
nrow(gapminder)
```

```
[1] 1704
```

Q. How many different “country” entries are in this dataset?

```
length(table(gapminder$country))
```

```
[1] 142
```

```
length(unique(gapminder$country))
```


```
[1] 142
```

Let’s make our first plot of the entire dataset: Plot of “gdpPercap” vs “LifeExp” colored by “continent”

```
p <- ggplot(gapminder) +  
  aes(gdpPercap, lifeExp, col = continent) +  
  geom_point(alpha = 0.3)
```

I can add more layers to ‘p’

```
p +  
  facet_wrap(~continent)
```

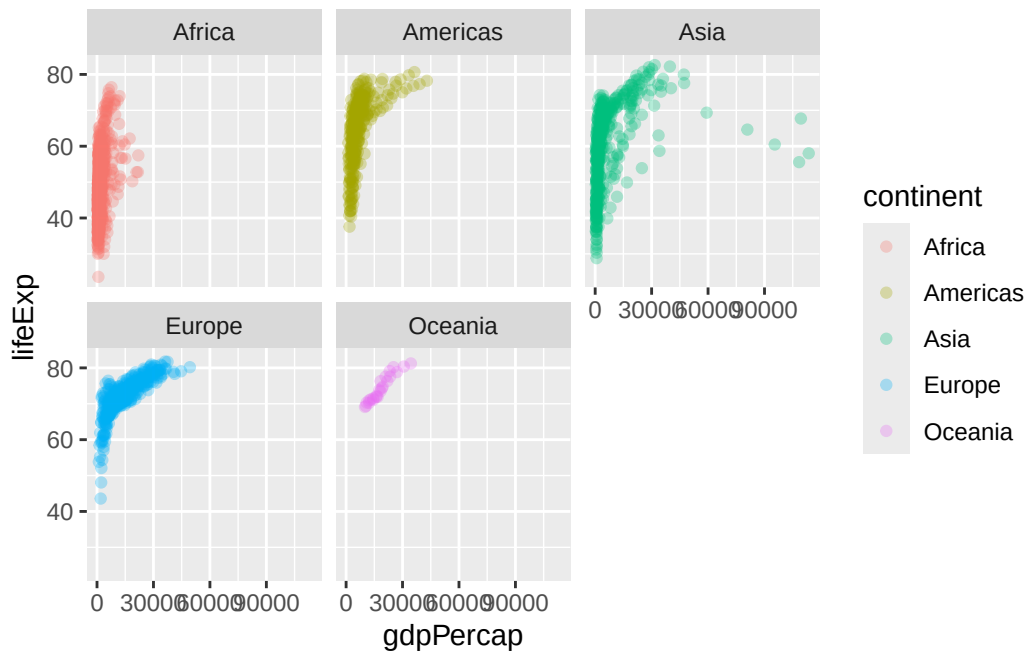

Make a plot for 1977 and 2007 only > Q. First use the `dplyr` package and the `filter()` function from that package to extract the year 2007.

```
library(dplyr)
```

Attaching package: 'dplyr'

The following objects are masked from 'package:stats':


`filter`, `lag`

The following objects are masked from 'package:base':

`intersect`, `setdiff`, `setequal`, `union`

```
g07 <- filter(gapminder, year == 2007)
g77 <- filter(gapminder, year == 1977)
g <- filter(gapminder, year == 2007 | year == 1977)
```


```
ggplot(g) +
  aes(gdpPercap, lifeExp, col = continent, size = pop) +
  geom_point(alpha = 0.3) +
  facet_wrap(~year)
```

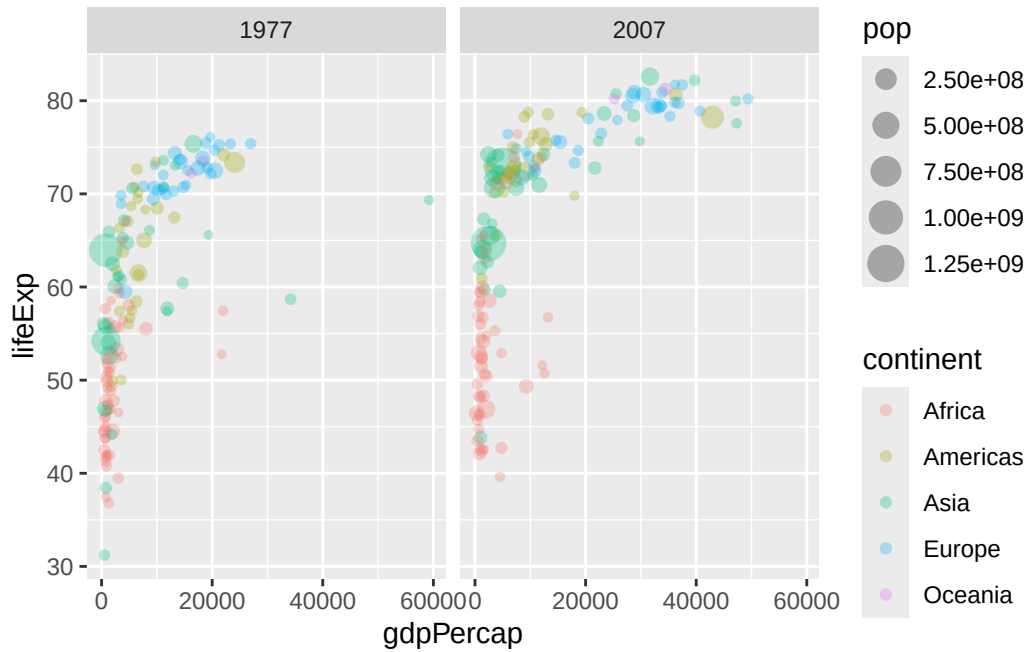

Q. Make a histogram of lifeExp colored by continent Q. Make a histogram of lifeExp faceted by continent


```
ggplot(gapminder) +
  aes(lifeExp) +
  geom_histogram()
```

`stat\_bin()` using `bins = 30`. Pick better value `binwidth`.

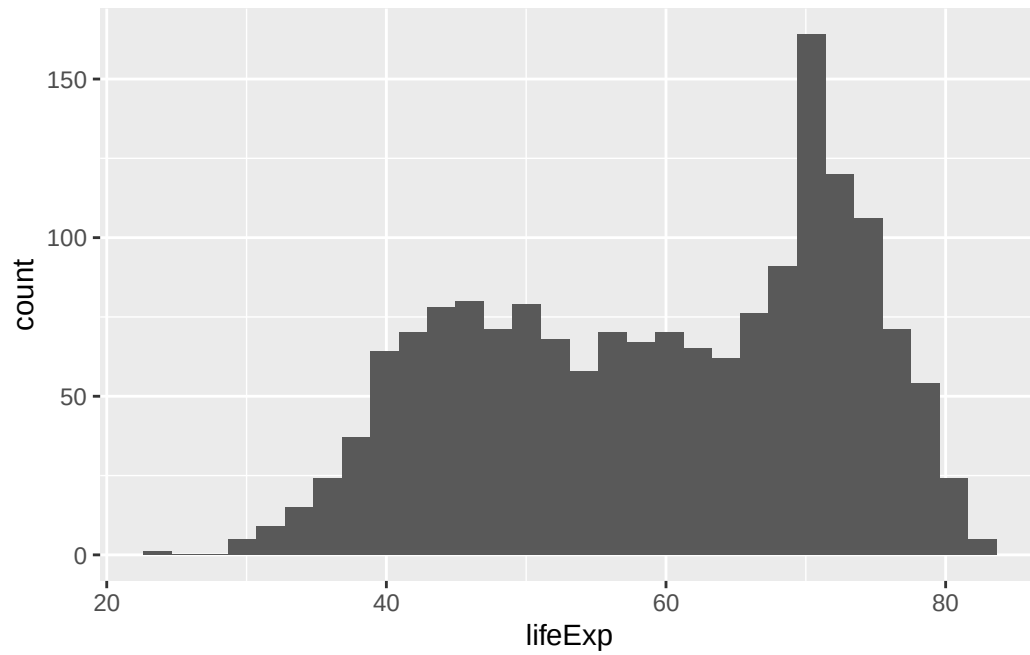

```
ggplot(gapminder) +  
  aes(lifeExp, fill = continent) +  
  geom_histogram()
```

``stat_bin()` using `bins = 30`. Pick better value `binwidth`.`

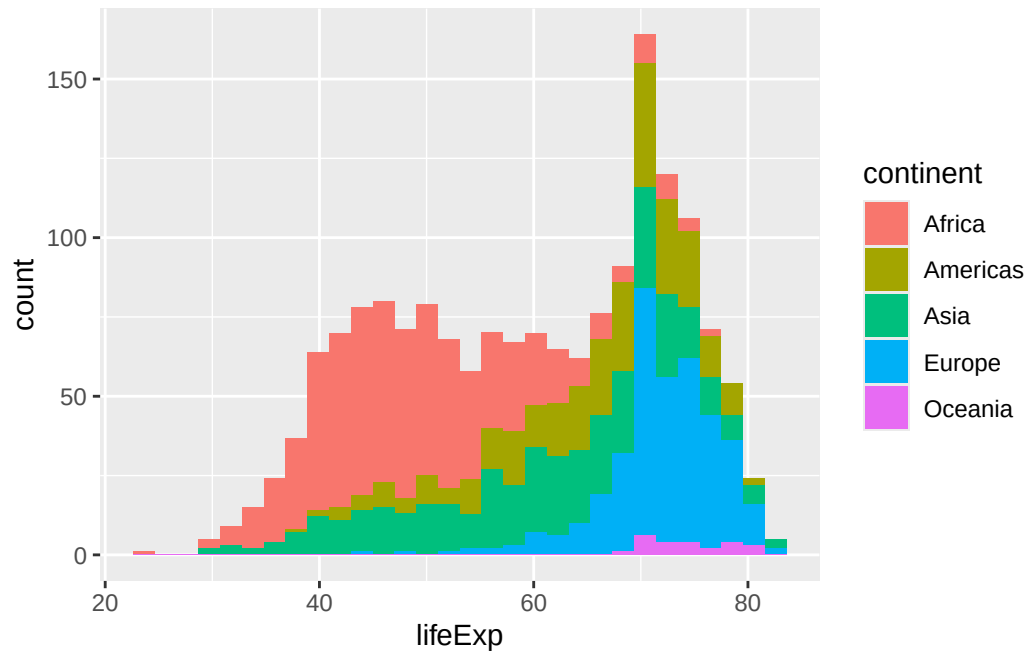

```
ggplot(gapminder) +  
  aes(lifeExp) +  
  geom_histogram() +  
  facet_wrap(~continent)
```

``stat_bin()`` using ``bins = 30``. Pick better value ``binwidth``.

