



(a) The base sets a floor for every learner

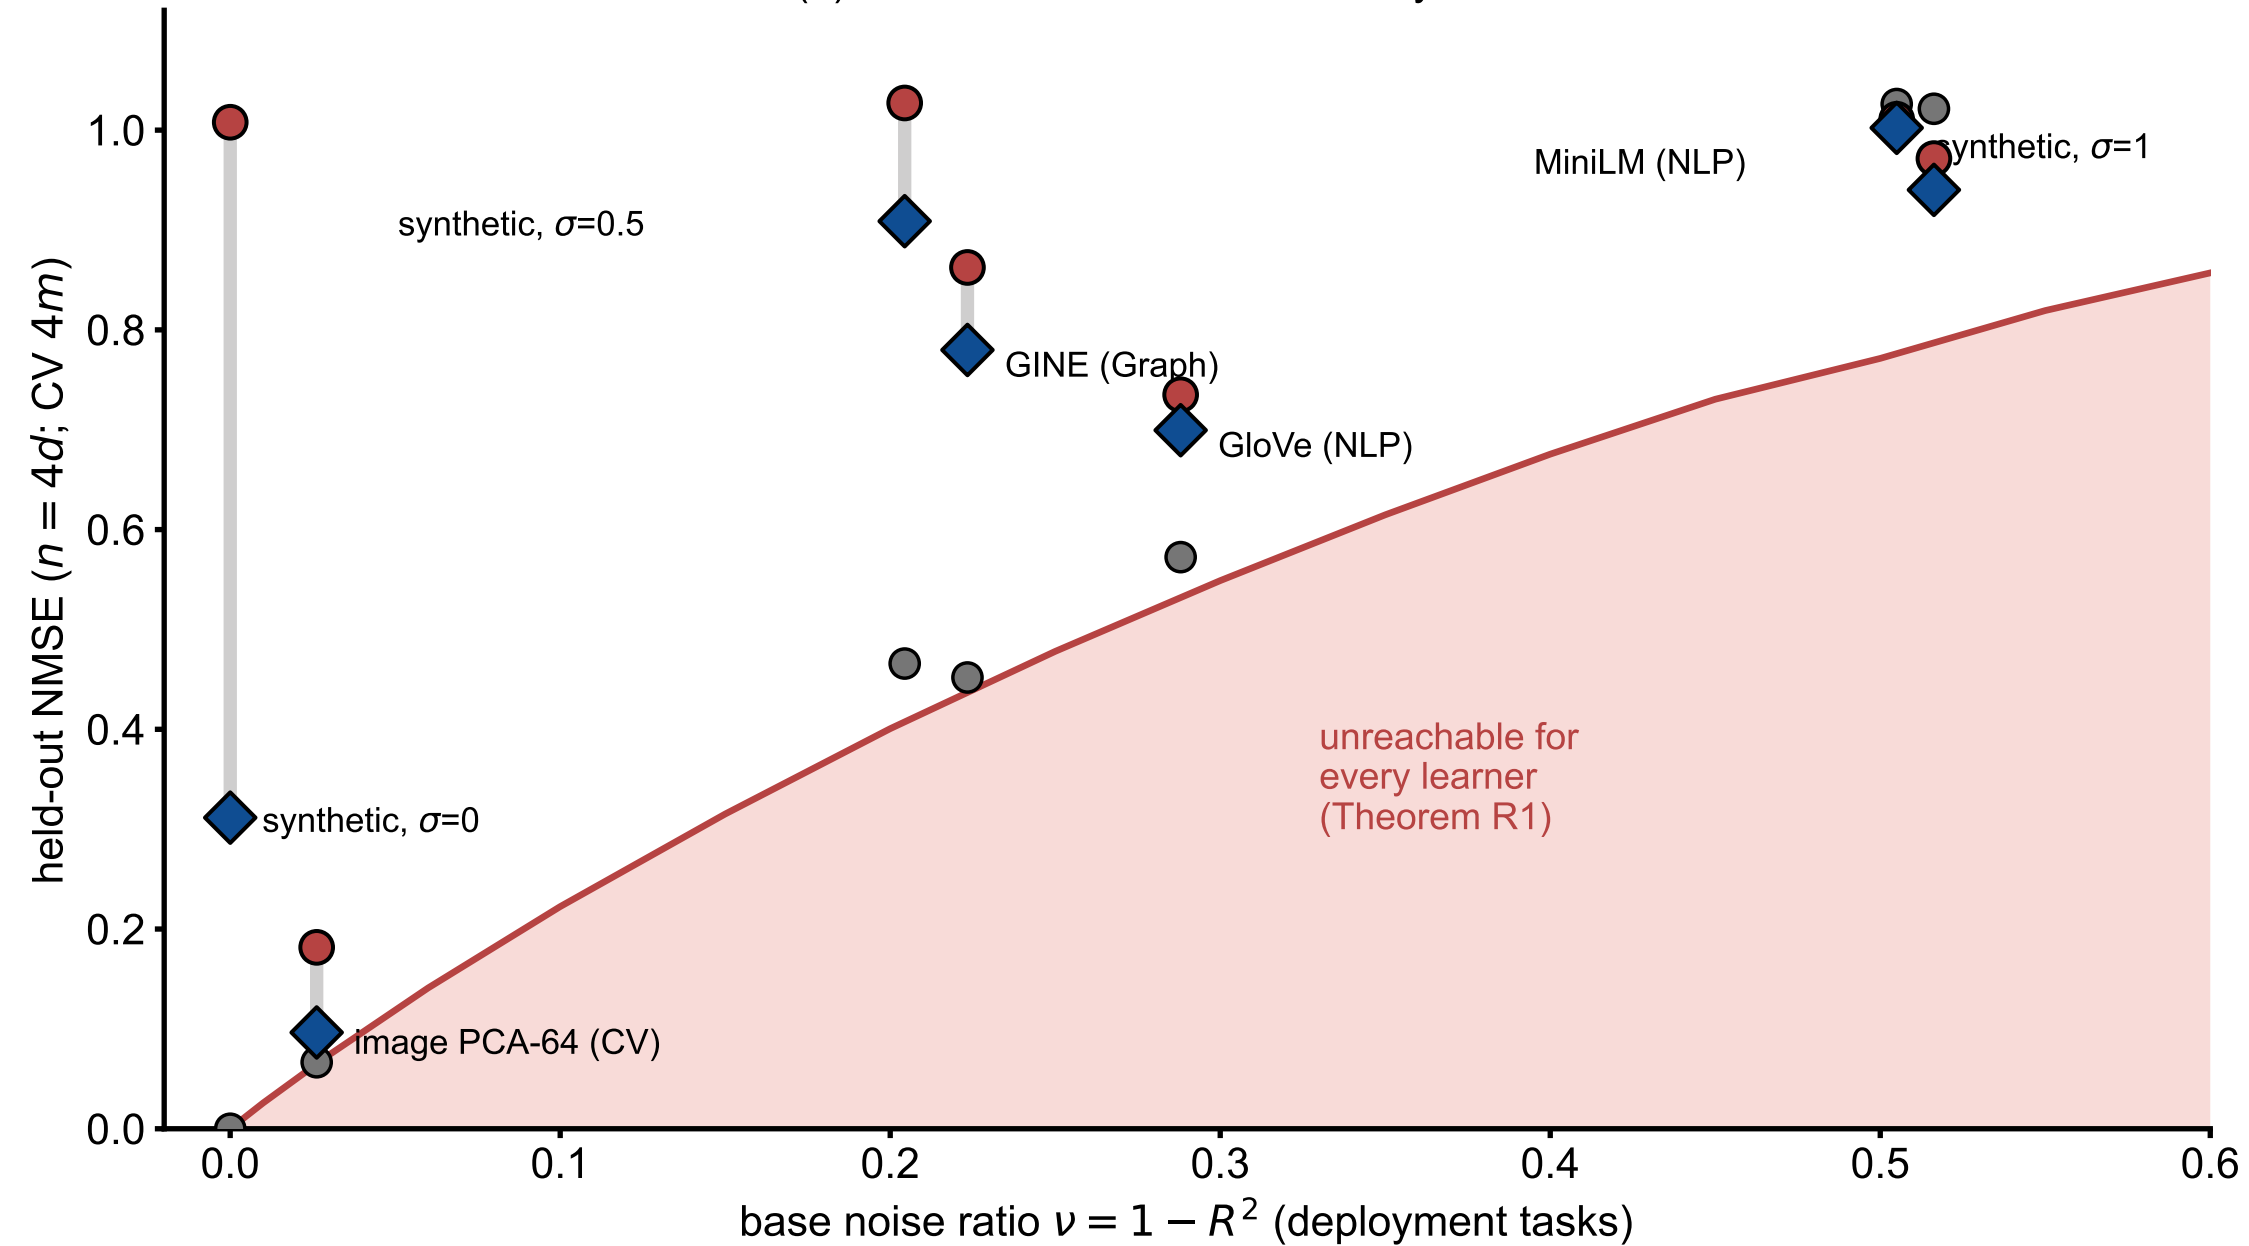

(b) Bases violating R1: every learner fails

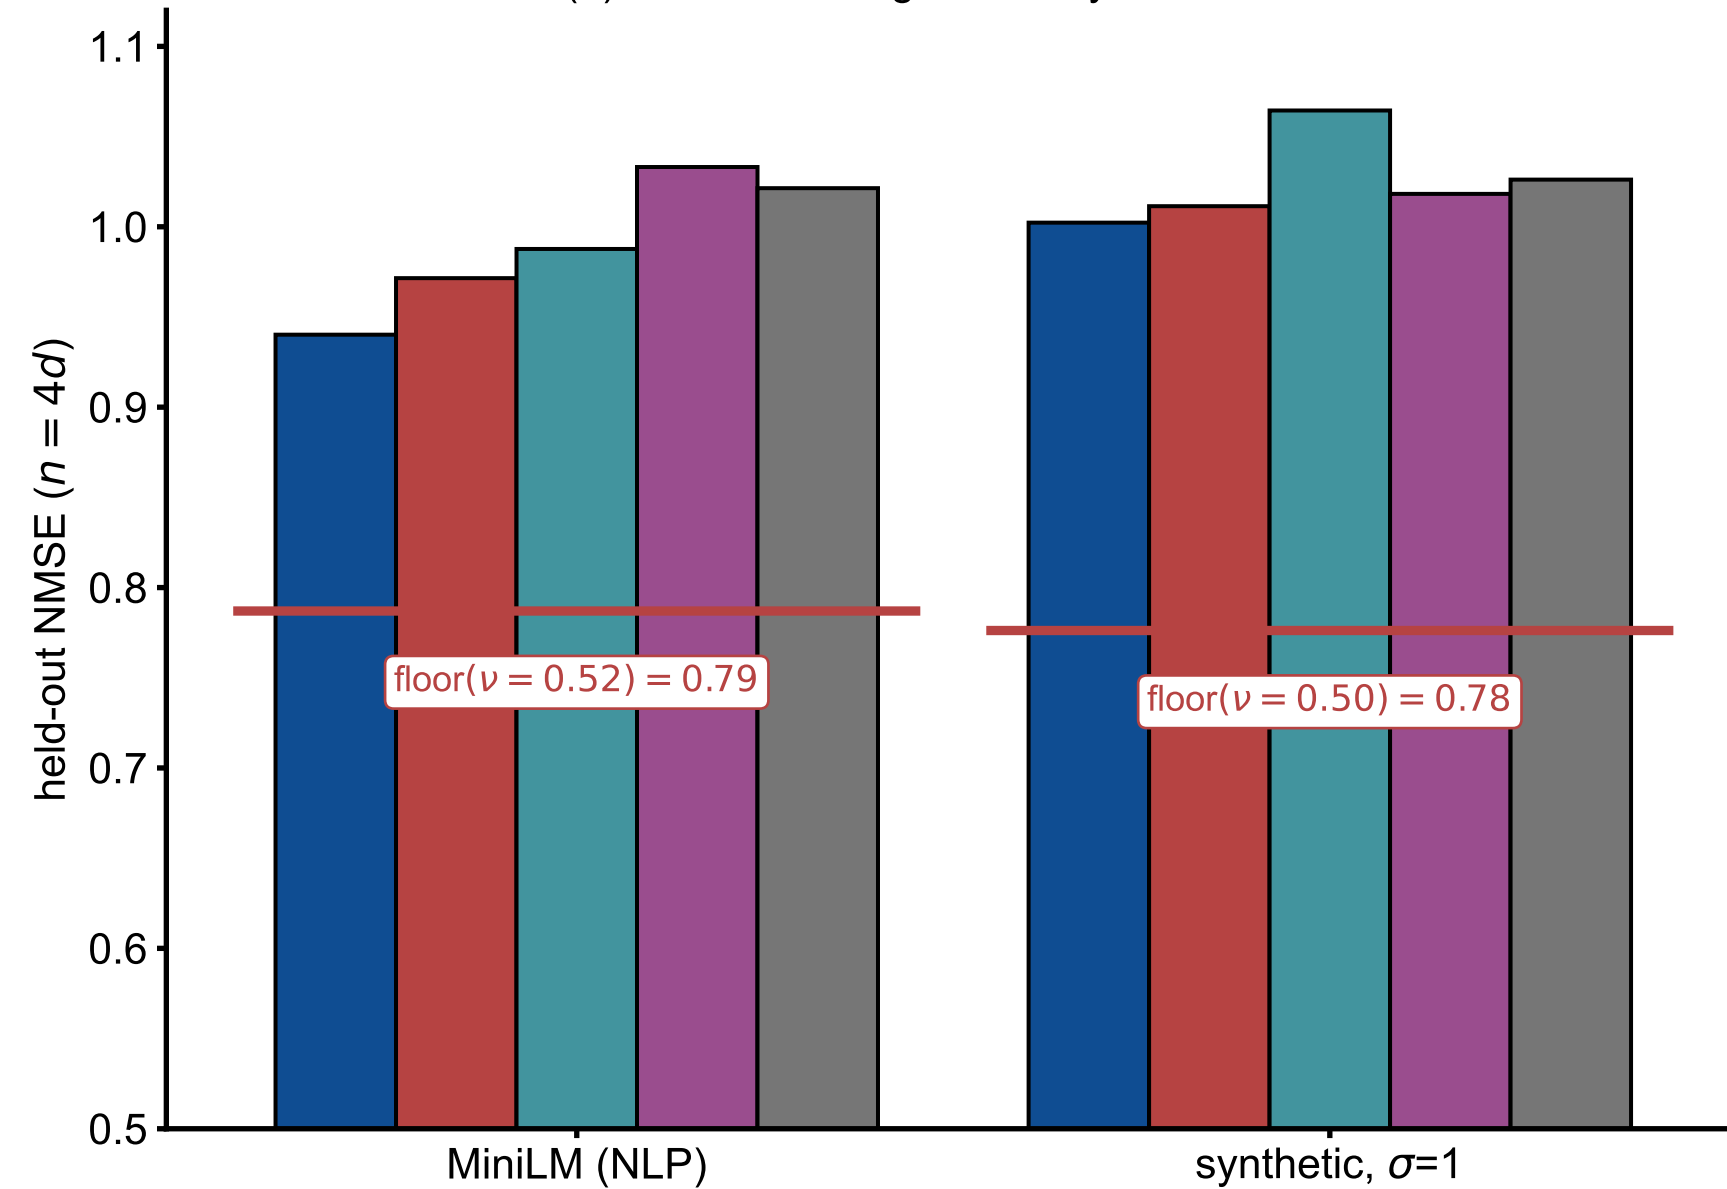

- (a) self-iteration (matched)
- (a) best baseline (TTT-GD, closed form, Transformer)
- (a) oracle probe (all labels)
- floor(ν), any learner (Thm. R1)
- (b) self-iteration
- (b) TTT, full-batch GD
- (b) closed form, quadratic
- (b) Transformer
- (b) oracle probe