	Input entities	Processing	Result
Set aggregation Encode each entity; pool the results.	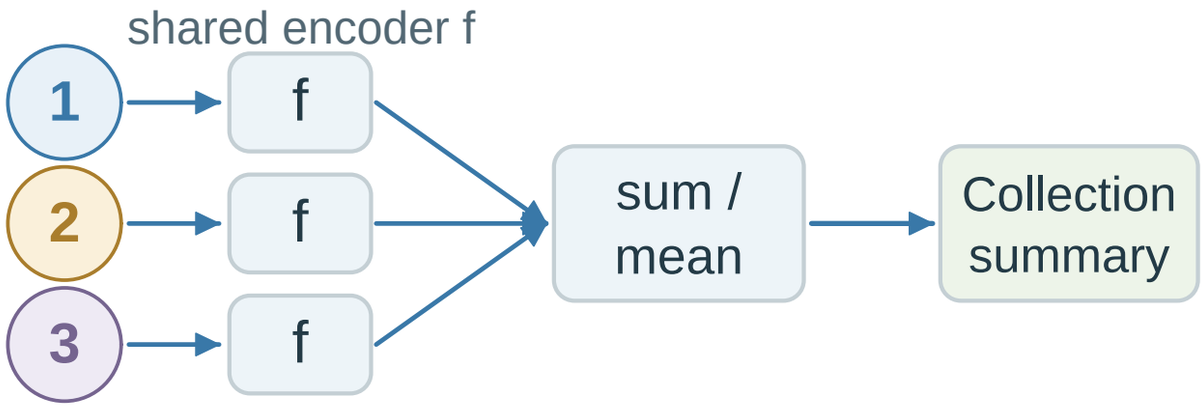		One summary, independent of entity order
Attention Weight information from other entities.	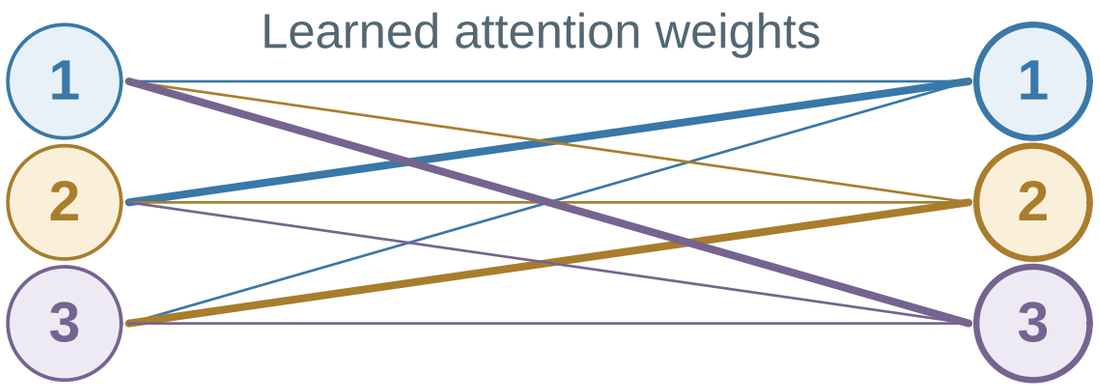		One contextual representation for each entity
Graph message passing Exchange information along specified edges.	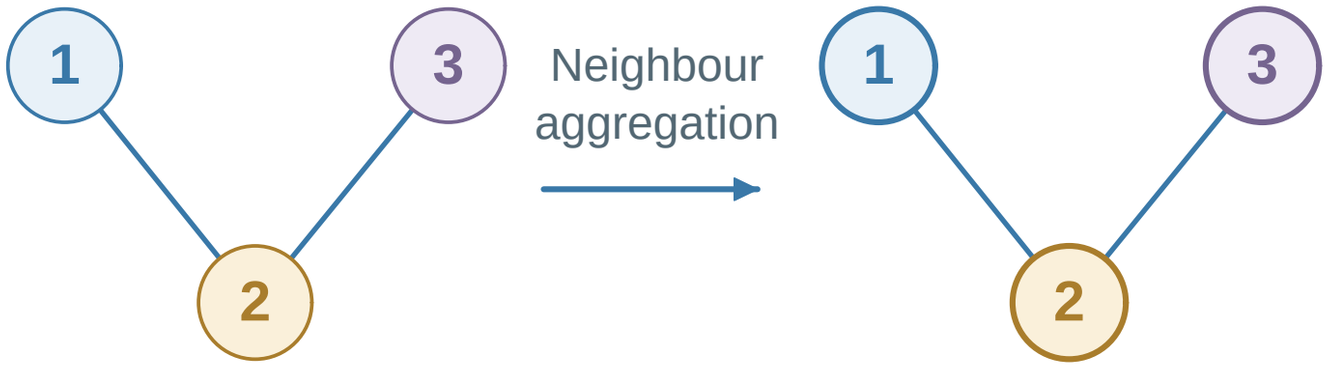		Update each node using its connected neighbours
Typed modules Choose the mapping by entity type.	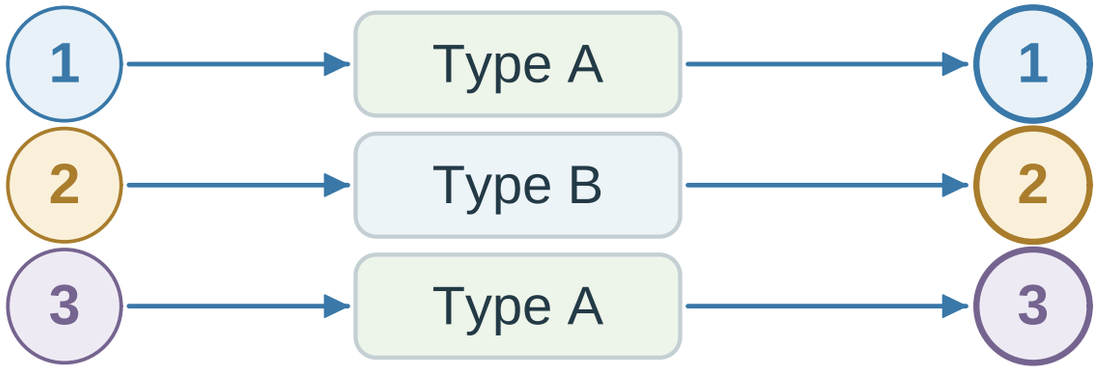		Entities 1 and 3 reuse the Type A mapping; outputs remain separate.