

REPUBLIC OF CHINA

Civil Aviation Administration
Air Traffic Services Division
No. 340 Dunhua N.Road,
Taipei, 105, Taiwan

Tel: +886-2-2349 6118
Fax: +886-2-2349 6122
AFTN: RCTPYAYX
E-Mail: ais@mail.caa.gov.tw

AIRAC

AIRAC AIP AMDT 04/26
20 AUG 2026

生效日期
EFFECTIVE DATE
01 OCT 2026

AIP

Summary

GEN – Differences, Aeronautical charts, Meteorological service.

ENR – ATS Airspace, Significant points, ATS Routes.

AD – Aerodromes.

重要資訊及變更:

Signification information and changes:

ENR 1.8	修訂POTIB與MOLKA之間飛航計畫航路填法。	The FPL route between POTIB and MOLKA is updated.
AD 2 RCKH	新增HOT SPOT 3，配合修訂機場圖。	HOT SPOT 3 is added. ADC is revised accordingly.
AD 2 RCKU	更新障礙物資訊，配合修訂A型機場障礙圖。	Information on obstacles is updated. AOC-Type A is revised accordingly.
AD 2 RCMQ	1. 新增低能見度作業。 2. 機場圖新增地面活動資訊。 3. 更新障礙物資訊，配合修訂A型機場障礙圖。	1. Low Visibility Procedures are added. 2. Information on Ground Movement is added on ADC. 3. Information on obstacles is updated. AOC-Type A is revised accordingly.
AD 2 RCTP	1. 新增F類航空器地面操作作業限制。 2. 修訂跑道定期關閉時段。	1. Ground Maneuvering Restrictions for Aerodrome Reference Code F Aircraft are added. 2. Periods of Runway Scheduled Closure are updated.

請於本次飛航指南修訂生效日期再更換後附各頁

Insert or replace respectively the attached pages with effective date.

取消頁 page to be destroyed		換入頁 page to be inserted	
GEN 0.2 - 1	06 AUG 2026	GEN 0.2 - 1	01 OCT 2026
GEN 0.4 - 1	06 AUG 2026	GEN 0.4 - 1	01 OCT 2026
GEN 0.4 - 2	06 AUG 2026	GEN 0.4 - 2	01 OCT 2026
GEN 0.4 - 3	06 AUG 2026	GEN 0.4 - 3	01 OCT 2026
GEN 0.4 - 4	06 AUG 2026	GEN 0.4 - 4	01 OCT 2026
GEN 0.4 - 5	06 AUG 2026	GEN 0.4 - 5	01 OCT 2026
GEN 0.4 - 6	06 AUG 2026	GEN 0.4 - 6	01 OCT 2026

取消頁 page to be destroyed		換入頁 page to be inserted	
GEN 0.4 - 7	06 AUG 2026	GEN 0.4 - 7	01 OCT 2026
GEN 0.4 - 8	06 AUG 2026	GEN 0.4 - 8	01 OCT 2026
GEN 0.4 - 9	06 AUG 2026	GEN 0.4 - 9	01 OCT 2026
GEN 0.4 - 10	06 AUG 2026	GEN 0.4 - 10	01 OCT 2026
GEN 0.6 - 1	25 DEC 2025	GEN 0.6 - 1	01 OCT 2026
GEN 3.5 - 8	14 MAY 2026	GEN 3.5 - 8	01 OCT 2026
ENR 0.6 - 1	25 DEC 2025	ENR 0.6 - 1	01 OCT 2026
ENR 1.8 - 2	22 MAR 2024	ENR 1.8 - 2	01 OCT 2026
ENR 5.5 - 2	14 MAY 2026	ENR 5.5 - 2	01 OCT 2026
ENR 5.5 - 3	14 MAY 2026	ENR 5.5 - 3	01 OCT 2026
ENR 5.5 - 5	14 MAY 2026	ENR 5.5 - 5	01 OCT 2026
ENR 5.5 - 8	14 MAY 2026	ENR 5.5 - 8	01 OCT 2026
ENR 5.5 - 10	14 MAY 2026	ENR 5.5 - 10	01 OCT 2026
AD 0.6 - 1	25 DEC 2025	AD 0.6 - 1	01 OCT 2026
AD 0.6 - 9	19 MAR 2026	AD 0.6 - 9	01 OCT 2026
AD 0.6 - 12	19 MAR 2026	AD 0.6 - 12	01 OCT 2026
AD 0.6 - 13	19 MAR 2026	AD 0.6 - 13	01 OCT 2026
AD 0.6 - 14	06 AUG 2026	AD 0.6 - 14	01 OCT 2026
AD 0.6 - 15	19 MAR 2026	AD 0.6 - 15	01 OCT 2026
AD 0.6 - 16	19 MAR 2026	AD 0.6 - 16	01 OCT 2026
AD 0.6 - 17	14 MAY 2026	AD 0.6 - 17	01 OCT 2026
AD 0.6 - 18	14 MAY 2026	AD 0.6 - 18	01 OCT 2026
AD 0.6 - 19	14 MAY 2026	AD 0.6 - 19	01 OCT 2026
AD 0.6 - 20	14 MAY 2026	AD 0.6 - 20	01 OCT 2026
AD 0.6 - 21	14 MAY 2026	AD 0.6 - 21	01 OCT 2026
AD 0.6 - 22	14 MAY 2026	AD 0.6 - 22	01 OCT 2026
AD 2 RCKH - 4	06 AUG 2026	AD 2 RCKH - 4	01 OCT 2026
AD 2 RCKH - 12	06 AUG 2026	AD 2 RCKH - 12	01 OCT 2026
AD 2 RCKH - 17	06 AUG 2026	AD 2 RCKH - 17	01 OCT 2026
AD 2 RCKH - 18	06 AUG 2026	AD 2 RCKH - 18	01 OCT 2026
AD 2 RCKH - 19	06 AUG 2026	AD 2 RCKH - 19	01 OCT 2026
AD 2 RCKH - 20	06 AUG 2026	AD 2 RCKH - 20	01 OCT 2026
AD 2 RCKH - 21	06 AUG 2026	AD 2 RCKH - 21	01 OCT 2026
AD 2 RCKH - 22	06 AUG 2026	AD 2 RCKH - 22	01 OCT 2026
AD 2 RCKH - 23	06 AUG 2026	AD 2 RCKH - 23	01 OCT 2026
AD 2 RCKH - 24	06 AUG 2026	AD 2 RCKH - 24	01 OCT 2026
AD 2 RCKH - 25	06 AUG 2026	AD 2 RCKH - 25	01 OCT 2026
AD 2 RCKU - 4	15 MAY 2025	AD 2 RCKU - 4	01 OCT 2026
AD 2 RCKU - 5	06 AUG 2026	AD 2 RCKU - 5	01 OCT 2026
AD 2 RCKU - 6	06 AUG 2026	AD 2 RCKU - 6	01 OCT 2026
AD 2 RCKU - 7	19 MAR 2026	AD 2 RCKU - 7	01 OCT 2026
AD 2 RCKU - 8	22 MAR 2024	AD 2 RCKU - 8	01 OCT 2026
AD 2 RCKU - 9	22 MAR 2024	AD 2 RCKU - 9	01 OCT 2026
AD 2 RCKU - 10	03 OCT 2024	AD 2 RCKU - 10	01 OCT 2026
AD 2 RCKU - 23	15 MAY 2025	AD 2 RCKU - 23	01 OCT 2026

取消頁 page to be destroyed		換入頁 page to be inserted	
AD 2 RCMQ - 5	25 DEC 2025	AD 2 RCMQ - 5	01 OCT 2026
AD 2 RCMQ - 6	25 DEC 2025	AD 2 RCMQ - 6	01 OCT 2026
AD 2 RCMQ - 8	06 AUG 2026	AD 2 RCMQ - 8	01 OCT 2026
AD 2 RCMQ - 11	19 MAR 2026	AD 2 RCMQ - 11	01 OCT 2026
AD 2 RCMQ - 14	25 DEC 2025	AD 2 RCMQ - 14	01 OCT 2026
AD 2 RCMQ - 15	25 DEC 2025	AD 2 RCMQ - 15	01 OCT 2026
AD 2 RCMQ - 16	25 DEC 2025	AD 2 RCMQ - 16	01 OCT 2026
AD 2 RCMQ - 17	25 DEC 2025	AD 2 RCMQ - 17	01 OCT 2026
AD 2 RCMQ - 21	10 JUL 2025	AD 2 RCMQ - 21	01 OCT 2026
AD 2 RCTP - 23	14 MAY 2026	AD 2 RCTP - 23	01 OCT 2026
AD 2 RCTP - 24	14 MAY 2026	AD 2 RCTP - 24	01 OCT 2026
AD 2 RCTP - 25	14 MAY 2026	AD 2 RCTP - 25	01 OCT 2026
AD 2 RCTP - 26	14 MAY 2026	AD 2 RCTP - 26	01 OCT 2026
AD 2 RCTP - 27	14 MAY 2026	AD 2 RCTP - 27	01 OCT 2026
AD 2 RCTP - 28	14 MAY 2026	AD 2 RCTP - 28	01 OCT 2026
AD 2 RCTP - 29	14 MAY 2026	AD 2 RCTP - 29	01 OCT 2026
AD 2 RCTP - 30	14 MAY 2026	AD 2 RCTP - 30	01 OCT 2026
AD 2 RCTP - 31	14 MAY 2026	AD 2 RCTP - 31	01 OCT 2026
AD 2 RCTP - 32	14 MAY 2026	AD 2 RCTP - 32	01 OCT 2026
AD 2 RCTP - 33	14 MAY 2026	AD 2 RCTP - 33	01 OCT 2026
AD 2 RCTP - 34	14 MAY 2026	AD 2 RCTP - 34	01 OCT 2026
AD 2 RCTP - 35	14 MAY 2026	AD 2 RCTP - 35	01 OCT 2026
AD 2 RCTP - 36	14 MAY 2026	AD 2 RCTP - 36	01 OCT 2026

• 手寫修正
NIL

• Hand amendments
NIL

• 請在GEN 0.2-1 頁填入本次修正紀錄

• Record entry of AMDT on the page GEN 0.2-1

• 下列出版品編入本次修正:

• The following publications have been incorporated in this amendment:

AIP SUP	NIL
AIC	NIL
NOTAM	A2442/26

THIS PAGE
INTENTIONALLY
LEFT BLANK

GEN 0.2 飛航指南修正記錄

GEN 0.2 RECORD OF AIP AMENDMENTS

AIRAC AIP AMENDMENT			
序號 / 年 NR / Year	發布日期 Publication date	有效日期 Effective Date	Inserted by
AIRAC AIP AMDT 03/24	04 Apr 2024	16 May 2024	
AIRAC AIP AMDT 04/24	27 Jun 2024	08 Aug 2024	
AIRAC AIP AMDT 05/24	22 Aug 2024	03 Oct 2024	
AIRAC AIP AMDT 06/24	17 Oct 2024	28 Nov 2024	
AIRAC AIP AMDT 01/25	12 Dec 2024	23 Jan 2025	
AIRAC AIP AMDT 02/25	06 Mar 2025	17 Apr 2025	
AIRAC AIP AMDT 03/25	03 Apr 2025	15 May 2025	
AIRAC AIP AMDT 04/25	29 May 2025	10 Jul 2025	
AIRAC AIP AMDT 05/25	24 Jul 2025	04 Sep 2025	
AIRAC AIP AMDT 06/25	13 Nov 2025	25 Dec 2025	
AIRAC AIP AMDT 01/26	05 Feb 2026	19 Mar 2026	
AIRAC AIP AMDT 02/26	02 Apr 2026	14 May 2026	
AIRAC AIP AMDT 03/26	25 Jun 2026	06 Aug 2026	
AIRAC AIP AMDT 04/26	20 Aug 2026	01 Oct 2026	
AIP AMENDMENT			
序號 / 年 NR / Year	發布日期 Publication date	插入日期 Date inserted	Inserted by
AIP AMDT 01/24	22 Mar 2024	22 Mar 2024	

THIS PAGE
INTENTIONALLY
LEFT BLANK

GEN 0.4 CHECKLIST OF AIP PAGES

PAGE	DATE				
GEN 0					
0.1 - 1	28 NOV 2024	1.7 - 9	10 JUL 2025	2.2 - 37	06 AUG 2026
0.1 - 2	22 MAR 2024	1.7 - 10	10 JUL 2025	2.2 - 38	06 AUG 2026
0.1 - 3	22 MAR 2024	1.7 - 11	10 JUL 2025	2.2 - 39	06 AUG 2026
0.1 - 4	22 MAR 2024	1.7 - 12	10 JUL 2025	2.2 - 40	06 AUG 2026
0.2 - 1	01 OCT 2026	1.7 - 13	10 JUL 2025	2.2 - 41	06 AUG 2026
0.2 - 2	22 MAR 2024	1.7 - 14	10 JUL 2025	2.2 - 42	06 AUG 2026
0.3 - 1	22 MAR 2024	1.7 - 15	10 JUL 2025	2.2 - 43	06 AUG 2026
0.3 - 2	22 MAR 2024	1.7 - 16	10 JUL 2025	2.2 - 44	06 AUG 2026
0.4 - 1	01 OCT 2026	1.7 - 17	10 JUL 2025	2.3 - 1	22 MAR 2024
0.4 - 2	01 OCT 2026	1.7 - 18	10 JUL 2025	2.3 - 2	22 MAR 2024
0.4 - 3	01 OCT 2026	1.7 - 19	10 JUL 2025	2.3 - 3	22 MAR 2024
0.4 - 4	01 OCT 2026	1.7 - 20	10 JUL 2025	2.3 - 4	22 MAR 2024
0.4 - 5	01 OCT 2026	1.7 - 21	10 JUL 2025	2.3 - 5	22 MAR 2024
0.4 - 6	01 OCT 2026	1.7 - 22	10 JUL 2025	2.3 - 6	22 MAR 2024
0.4 - 7	01 OCT 2026	1.7 - 23	10 JUL 2025	2.3 - 7	22 MAR 2024
0.4 - 8	01 OCT 2026	1.7 - 24	10 JUL 2025	2.3 - 8	22 MAR 2024
0.4 - 9	01 OCT 2026			2.3 - 9	22 MAR 2024
0.4 - 10	01 OCT 2026	GEN 2		2.3 - 10	22 MAR 2024
0.5 - 1	22 MAR 2024	2.1 - 1	22 MAR 2024	2.3 - 11	22 MAR 2024
0.5 - 2	22 MAR 2024	2.1 - 2	22 MAR 2024	2.3 - 12	22 MAR 2024
0.6 - 1	01 OCT 2026	2.1 - 3	25 DEC 2025	2.4 - 1	22 MAR 2024
0.6 - 2	25 DEC 2025	2.1 - 4	22 MAR 2024	2.4 - 2	22 MAR 2024
0.6 - 3	25 DEC 2025	2.2 - 1	25 DEC 2025	2.4 - 3	22 MAR 2024
0.6 - 4	06 AUG 2026	2.2 - 2	22 MAR 2024	2.4 - 4	22 MAR 2024
0.6 - 5	06 AUG 2026	2.2 - 3	22 MAR 2024	2.5 - 1	22 MAR 2024
0.6 - 6	22 MAR 2024	2.2 - 4	22 MAR 2024	2.5 - 2	03 OCT 2024
		2.2 - 5	22 MAR 2024	2.5 - 3	03 OCT 2024
GEN 1		2.2 - 6	25 DEC 2025	2.5 - 4	22 MAR 2024
1.1 - 1	22 MAR 2024	2.2 - 7	22 MAR 2024	2.6 - 1	22 MAR 2024
1.1 - 2	22 MAR 2024	2.2 - 8	22 MAR 2024	2.6 - 2	22 MAR 2024
1.2 - 1	22 MAR 2024	2.2 - 9	06 AUG 2026	2.7 - 1	22 MAR 2024
1.2 - 2	22 MAR 2024	2.2 - 10	22 MAR 2024	2.7 - 2	22 MAR 2024
1.2 - 3	22 MAR 2024	2.2 - 11	25 DEC 2025	2.7 - 3	25 DEC 2025
1.2 - 4	22 MAR 2024	2.2 - 12	06 AUG 2026	2.7 - 4	22 MAR 2024
1.2 - 5	22 MAR 2024	2.2 - 13	06 AUG 2026	2.7 - 5	25 DEC 2025
1.2 - 6	22 MAR 2024	2.2 - 14	06 AUG 2026	2.7 - 6	22 MAR 2024
1.3 - 1	22 MAR 2024	2.2 - 15	06 AUG 2026	2.7 - 7	25 DEC 2025
1.3 - 2	22 MAR 2024	2.2 - 16	06 AUG 2026	2.7 - 8	22 MAR 2024
1.3 - 3	22 MAR 2024	2.2 - 17	06 AUG 2026	2.7 - 9	25 DEC 2025
1.3 - 4	22 MAR 2024	2.2 - 18	06 AUG 2026	2.7 - 10	22 MAR 2024
1.3 - 5	22 MAR 2024	2.2 - 19	06 AUG 2026	2.7 - 11	25 DEC 2025
1.3 - 6	22 MAR 2024	2.2 - 20	06 AUG 2026	2.7 - 12	22 MAR 2024
1.4 - 1	22 MAR 2024	2.2 - 21	06 AUG 2026	2.7 - 13	25 DEC 2025
1.4 - 2	22 MAR 2024	2.2 - 22	06 AUG 2026	2.7 - 14	22 MAR 2024
1.5 - 1	22 MAR 2024	2.2 - 23	06 AUG 2026	2.7 - 15	25 DEC 2025
1.5 - 2	22 MAR 2024	2.2 - 24	06 AUG 2026	2.7 - 16	22 MAR 2024
1.6 - 1	22 MAR 2024	2.2 - 25	06 AUG 2026	2.7 - 17	25 DEC 2025
1.6 - 2	22 MAR 2024	2.2 - 26	06 AUG 2026	2.7 - 18	22 MAR 2024
1.7 - 1	10 JUL 2025	2.2 - 27	06 AUG 2026	2.7 - 19	25 DEC 2025
1.7 - 2	10 JUL 2025	2.2 - 28	06 AUG 2026	2.7 - 20	22 MAR 2024
1.7 - 3	10 JUL 2025	2.2 - 29	06 AUG 2026	2.7 - 21	25 DEC 2025
1.7 - 4	10 JUL 2025	2.2 - 30	06 AUG 2026	2.7 - 22	22 MAR 2024
1.7 - 5	10 JUL 2025	2.2 - 31	06 AUG 2026	2.7 - 23	25 DEC 2025
1.7 - 6	10 JUL 2025	2.2 - 32	06 AUG 2026	2.7 - 24	22 MAR 2024
1.7 - 7	10 JUL 2025	2.2 - 33	06 AUG 2026	2.7 - 25	25 DEC 2025
1.7 - 8	10 JUL 2025	2.2 - 34	06 AUG 2026	2.7 - 26	22 MAR 2024
		2.2 - 35	06 AUG 2026	2.7 - 27	25 DEC 2025
		2.2 - 36	06 AUG 2026	2.7 - 28	22 MAR 2024

GEN 3	2.7 - 29	25 DEC 2025	ENR 0	4.1 - 1	22 MAR 2024	ENR 2	1.8 - 1	22 MAR 2024
	2.7 - 30	22 MAR 2024		4.1 - 2	22 MAR 2024		1.8 - 2	01 OCT 2026
	2.7 - 31	25 DEC 2025		4.2 - 1	22 MAR 2024		1.8 - 3	22 MAR 2024
	2.7 - 32	22 MAR 2024		4.2 - 2	22 MAR 2024		1.8 - 4	22 MAR 2024
	2.7 - 33	25 DEC 2025					1.8 - 5	22 MAR 2024
	2.7 - 34	22 MAR 2024					1.8 - 6	22 MAR 2024
	2.7 - 35	25 DEC 2025		0.1 - 1	28 NOV 2024		1.8 - 7	22 MAR 2024
	2.7 - 36	22 MAR 2024		0.1 - 2	22 MAR 2024		1.8 - 8	22 MAR 2024
	2.7 - 37	25 DEC 2025		0.2 - 1	22 MAR 2024		1.8 - 9	22 MAR 2024
	2.7 - 38	22 MAR 2024		0.2 - 2	22 MAR 2024		1.8 - 10	22 MAR 2024
				0.3 - 1	22 MAR 2024		1.8 - 11	22 MAR 2024
				0.3 - 2	22 MAR 2024		1.8 - 12	22 MAR 2024
	3.1 - 1	22 MAR 2024		0.4 - 1	22 MAR 2024		1.8 - 13	22 MAR 2024
	3.1 - 2	22 MAR 2024		0.4 - 2	22 MAR 2024		1.8 - 14	22 MAR 2024
	3.1 - 3	25 DEC 2025		0.5 - 1	22 MAR 2024		1.8 - 15	22 MAR 2024
	3.1 - 4	10 JUL 2025		0.5 - 2	22 MAR 2024		1.8 - 16	22 MAR 2024
	3.1 - 5	25 DEC 2025		0.6 - 1	01 OCT 2026		1.8 - 17	22 MAR 2024
	3.1 - 6	25 DEC 2025		0.6 - 2	22 MAR 2024		1.8 - 18	22 MAR 2024
GEN 4	3.1 - 7	22 MAR 2024	ENR 1	0.6 - 3	22 MAR 2024	ENR 3	1.8 - 19	22 MAR 2024
	3.1 - 8	22 MAR 2024		0.6 - 4	25 DEC 2025		1.8 - 20	22 MAR 2024
	3.2 - 1	22 MAR 2024		0.6 - 5	17 APR 2025		1.9 - 1	22 MAR 2024
	3.2 - 2	22 MAR 2024		0.6 - 6	17 APR 2025		1.9 - 2	22 MAR 2024
	3.2 - 3	22 MAR 2024		0.6 - 7	25 DEC 2025		1.10 - 1	25 DEC 2025
	3.2 - 4	22 MAR 2024		0.6 - 8	06 AUG 2026		1.10 - 2	25 DEC 2025
	3.3 - 1	22 MAR 2024					1.10 - 3	22 MAR 2024
	3.3 - 2	22 MAR 2024					1.10 - 4	22 MAR 2024
	3.3 - 3	22 MAR 2024		1.1 - 1	22 MAR 2024		1.11 - 1	08 AUG 2024
	3.3 - 4	22 MAR 2024		1.1 - 2	22 MAR 2024		1.11 - 2	22 MAR 2024
	3.3 - 5	22 MAR 2024		1.1 - 3	22 MAR 2024		1.12 - 1	22 MAR 2024
	3.3 - 6	22 MAR 2024		1.1 - 4	22 MAR 2024		1.12 - 2	22 MAR 2024
	3.3 - 7	17 APR 2025		1.1 - 5	22 MAR 2024		1.12 - 3	22 MAR 2024
	3.3 - 8	22 MAR 2024		1.1 - 6	22 MAR 2024		1.12 - 4	22 MAR 2024
	3.4 - 1	22 MAR 2024		1.2 - 1	22 MAR 2024		1.12 - 5	22 MAR 2024
	3.4 - 2	22 MAR 2024		1.2 - 2	22 MAR 2024		1.12 - 6	22 MAR 2024
	3.4 - 3	22 MAR 2024		1.2 - 3	22 MAR 2024		1.13 - 1	22 MAR 2024
	3.4 - 4	22 MAR 2024		1.2 - 4	22 MAR 2024		1.13 - 2	22 MAR 2024
	3.4 - 5	22 MAR 2024		1.3 - 1	22 MAR 2024		1.14 - 1	22 MAR 2024
	3.4 - 6	22 MAR 2024		1.3 - 2	19 MAR 2026		1.14 - 2	22 MAR 2024
	3.5 - 1	06 AUG 2026		1.3 - 3	19 MAR 2026		1.14 - 3	22 MAR 2024
	3.5 - 2	06 AUG 2026		1.3 - 4	22 MAR 2024		1.14 - 4	22 MAR 2024
	3.5 - 3	14 MAY 2026		1.4 - 1	22 MAR 2024	ENR 2		
	3.5 - 4	14 MAY 2026		1.4 - 2	22 MAR 2024		2.1 - 1	22 MAR 2024
	3.5 - 5	14 MAY 2026		1.4 - 3	22 MAR 2024		2.1 - 2	22 MAR 2024
	3.5 - 6	14 MAY 2026		1.4 - 4	22 MAR 2024		2.1 - 3	22 MAR 2024
	3.5 - 7	14 MAY 2026		1.5 - 1	22 MAR 2024		2.1 - 4	22 MAR 2024
	3.5 - 8	01 OCT 2026		1.5 - 2	22 MAR 2024		2.1 - 5	22 MAR 2024
	3.5 - 9	06 AUG 2026		1.5 - 3	22 MAR 2024		2.1 - 6	22 MAR 2024
	3.5 - 10	06 AUG 2026		1.5 - 4	22 MAR 2024		2.1 - 7	22 MAR 2024
	3.5 - 11	06 AUG 2026		1.5 - 5	22 MAR 2024		2.1 - 8	22 MAR 2024
	3.5 - 12	06 AUG 2026		1.5 - 6	22 MAR 2024		2.1 - 9	22 MAR 2024
	3.5 - 13	06 AUG 2026		1.6 - 1	17 APR 2025		2.1 - 10	22 MAR 2024
	3.5 - 14	06 AUG 2026		1.6 - 2	22 MAR 2024		2.1 - 11	22 MAR 2024
	3.5 - 15	06 AUG 2026		1.6 - 3	22 MAR 2024		2.1 - 12	22 MAR 2024
	3.5 - 16	06 AUG 2026		1.6 - 4	22 MAR 2024		2.2 - 1	22 MAR 2024
	3.6 - 1	22 MAR 2024		1.6 - 5	22 MAR 2024		2.2 - 2	22 MAR 2024
	3.6 - 2	22 MAR 2024		1.6 - 6	22 MAR 2024	ENR 3		
	3.6 - 3	22 MAR 2024		1.7 - 1	22 MAR 2024		3.1 - 1	17 APR 2025
	3.6 - 4	22 MAR 2024		1.7 - 2	22 MAR 2024		3.1 - 2	22 MAR 2024
GEN 4				1.7 - 3	22 MAR 2024			
				1.7 - 4	22 MAR 2024			

3.1 A1 - 1	17 APR 2025	3.1 V23	17 APR 2025	3.2 T1 RNAV	17 APR 2025
3.1 A1 - 2	04 SEPT 2025	TRANSITION - 2		TRANSITION - 1	
3.1 A1 - 3	10 JUL 2025	3.1 V25	17 APR 2025	3.2 T1 RNAV	17 APR 2025
3.1 A1 - 4	17 APR 2025	TRANSITION - 1		TRANSITION - 2	
3.1 A577 - 1	17 APR 2025	3.1 V25	17 APR 2025	3.2 T11 RNAV	17 APR 2025
3.1 A577 - 2	17 APR 2025	TRANSITION - 2		TRANSITION - 1	
3.1 B1	17 APR 2025	3.1 W2 - 1	17 APR 2025	3.2 T11 RNAV	17 APR 2025
TRANSITION - 1		3.1 W2 - 2	17 APR 2025	TRANSITION - 2	
3.1 B1	17 APR 2025	3.1 W2 - 3	17 APR 2025	3.2 T13 RNAV	17 APR 2025
TRANSITION - 2		3.1 W2 - 4	22 MAR 2024	TRANSITION - 1	
3.1 B576 - 1	17 APR 2025	3.1 W4 - 1	17 APR 2025	3.2 T13 RNAV	17 APR 2025
3.1 B576 - 2	17 APR 2025	3.1 W4 - 2	04 SEPT 2025	TRANSITION - 2	
3.1 B591 - 1	17 APR 2025	3.1 W4 - 3	10 JUL 2025	3.2 T15 RNAV	17 APR 2025
3.1 B591 - 2	17 APR 2025	3.1 W4 - 4	22 MAR 2024	TRANSITION - 1	
3.1 B591 - 3	17 APR 2025	3.1 W6 - 1	17 APR 2025	3.2 T15 RNAV	17 APR 2025
3.1 B591 - 4	17 APR 2025	3.1 W6 - 2	17 APR 2025	TRANSITION - 2	
3.1 B591 - 5	17 APR 2025	3.1 W8 - 1	17 APR 2025	3.2 T3 RNAV	17 APR 2025
3.1 B591 - 6	17 APR 2025	3.1 W8 - 2	17 APR 2025	TRANSITION - 1	
3.1 G581 - 1	17 APR 2025	3.1 W8 - 3	17 APR 2025	3.2 T3 RNAV	17 APR 2025
3.1 G581 - 2	17 APR 2025	3.1 W8 - 4	17 APR 2025	TRANSITION - 2	
3.1 G581 - 3	17 APR 2025	3.2 - 1	17 APR 2025	3.2 T5 RNAV	17 APR 2025
3.1 G581 - 4	22 MAR 2024	3.2 - 2	22 MAR 2024	TRANSITION - 1	
3.1 G587 - 1	17 APR 2025	3.2 L1 RNAV	17 APR 2025	3.2 T5 RNAV	17 APR 2025
3.1 G587 - 2	17 APR 2025	TRANSITION - 1		TRANSITION - 2	
3.1 G86 - 1	17 APR 2025	3.2 L1 RNAV	17 APR 2025	3.2 T7 RNAV	17 APR 2025
3.1 G86 - 2	22 MAR 2024	TRANSITION - 2		TRANSITION - 1	
3.1 J1	17 APR 2025	3.2 L2 RNAV	17 APR 2025	3.2 T7 RNAV	17 APR 2025
TRANSITION - 1		TRANSITION - 1		TRANSITION - 2	
3.1 J1	17 APR 2025	3.2 L2 RNAV	17 APR 2025	3.3 - 1	10 JUL 2025
TRANSITION - 2		TRANSITION - 2		3.3 - 2	17 APR 2025
3.1 J4	17 APR 2025	3.2 L3 RNAV	17 APR 2025	3.3 - 3	17 APR 2025
TRANSITION - 1		TRANSITION - 1		3.3 - 4	19 MAR 2026
3.1 J4	25 DEC 2025	3.2 L3 RNAV	17 APR 2025	3.3 - 5	17 APR 2025
TRANSITION - 2		TRANSITION - 2		3.3 - 6	17 APR 2025
3.1 J5	17 APR 2025	3.2 L4 RNAV	17 APR 2025	3.3 - 7	19 MAR 2026
TRANSITION - 1		TRANSITION - 1		3.3 - 8	17 APR 2025
3.1 J5	17 APR 2025	3.2 L4 RNAV	17 APR 2025	3.3 - 9	17 APR 2025
TRANSITION - 2		TRANSITION - 2		3.3 - 10	17 APR 2025
3.1 J7	17 APR 2025	3.2 M646 - 1	17 APR 2025	3.3 - 11	17 APR 2025
TRANSITION - 1		3.2 M646 - 2	17 APR 2025	3.3 - 12	17 APR 2025
3.1 J7	17 APR 2025	3.2 M750 - 1	17 APR 2025	3.3 - 13	17 APR 2025
TRANSITION - 2		3.2 M750 - 2	17 APR 2025	3.3 - 14	17 APR 2025
3.1 R583 - 1	17 APR 2025	3.2 M750 - 3	17 APR 2025	3.3 - 15	14 MAY 2026
3.1 R583 - 2	17 APR 2025	3.2 M750 - 4	17 APR 2025	3.3 - 16	17 APR 2025
3.1 R595 - 1	17 APR 2025	3.2 N892 - 1	17 APR 2025	3.3 - 17	17 APR 2025
3.1 R595 - 2	17 APR 2025	3.2 N892 - 2	17 APR 2025	3.3 - 18	17 APR 2025
3.1 V12	17 APR 2025	3.2 Q11 - 1	17 APR 2025	3.3 - 19	17 APR 2025
TRANSITION - 1		3.2 Q11 - 2	17 APR 2025	3.3 - 20	17 APR 2025
3.1 V12	17 APR 2025	3.2 Q11 - 3	17 APR 2025	3.3 - 21	17 APR 2025
TRANSITION - 2		3.2 Q11 - 4	17 APR 2025	3.3 - 22	17 APR 2025
3.1 V14	17 APR 2025	3.2 Q12 - 1	17 APR 2025	3.3 - 23	17 APR 2025
TRANSITION - 1		3.2 Q12 - 2	17 APR 2025	3.3 - 24	17 APR 2025
3.1 V14	17 APR 2025	3.2 Q13 - 1	17 APR 2025	3.3 - 25	17 APR 2025
TRANSITION - 2		3.2 Q13 - 2	17 APR 2025	3.3 - 26	17 APR 2025
3.1 V21	17 APR 2025	3.2 Q14 - 1	17 APR 2025	3.3 - 27	17 APR 2025
TRANSITION - 1		3.2 Q14 - 2	17 APR 2025	3.3 - 28	17 APR 2025
3.1 V21	17 APR 2025	3.2 R200 - 1	17 APR 2025	3.3 - 29	17 APR 2025
TRANSITION - 2		3.2 R200 - 2	17 APR 2025	3.3 - 30	17 APR 2025
3.1 V23	17 APR 2025	3.2 R596 - 1	17 APR 2025	3.3 - 31	17 APR 2025
TRANSITION - 1		3.2 R596 - 2	17 APR 2025	3.3 - 32	17 APR 2025

ENR 4	3.3 - 33	17 APR 2025		5.2 - 13	06 AUG 2026		0.2 - 1	22 MAR 2024
	3.3 - 34	17 APR 2025		5.2 - 14	06 AUG 2026		0.2 - 2	22 MAR 2024
	3.4 - 1	17 APR 2025		5.2 - 15	14 MAY 2026		0.3 - 1	22 MAR 2024
	3.4 - 2	17 APR 2025		5.2 - 16	14 MAY 2026		0.3 - 2	22 MAR 2024
	3.4 - 3	17 APR 2025		5.3 - 1	22 MAR 2024		0.4 - 1	22 MAR 2024
	3.4 - 4	17 APR 2025		5.3 - 2	22 MAR 2024		0.4 - 2	22 MAR 2024
	3.5 - 1	17 APR 2025		5.3 - 3	22 MAR 2024		0.5 - 1	22 MAR 2024
	3.5 - 2	17 APR 2025		5.3 - 4	17 APR 2025		0.5 - 2	22 MAR 2024
	3.5 - 3	17 APR 2025		5.3 - 5	22 MAR 2024		0.6 - 1	01 OCT 2026
	3.5 - 4	17 APR 2025		5.3 - 6	17 APR 2025		0.6 - 2	25 DEC 2025
				5.4 - 1	22 MAR 2024		0.6 - 3	25 DEC 2025
				5.4 - 2	22 MAR 2024		0.6 - 4	17 APR 2025
	4.1 - 1	25 DEC 2025		5.5 - 1	17 APR 2025		0.6 - 5	25 DEC 2025
	4.1 - 2	17 APR 2025		5.5 - 2	01 OCT 2026		0.6 - 6	25 DEC 2025
	4.2 - 1	22 MAR 2024		5.5 - 3	01 OCT 2026		0.6 - 7	25 DEC 2025
	4.2 - 2	22 MAR 2024		5.5 - 4	14 MAY 2026		0.6 - 8	06 AUG 2026
ENR 5	4.3 - 1	22 MAR 2024		5.5 - 5	01 OCT 2026		0.6 - 9	01 OCT 2026
	4.3 - 2	22 MAR 2024		5.5 - 6	14 MAY 2026		0.6 - 10	19 MAR 2026
	4.4 - 1	17 APR 2025		5.5 - 7	14 MAY 2026		0.6 - 11	19 MAR 2026
	4.4 - 2	17 APR 2025		5.5 - 8	01 OCT 2026		0.6 - 12	01 OCT 2026
	4.4 - 3	10 JUL 2025		5.5 - 9	14 MAY 2026		0.6 - 13	01 OCT 2026
	4.4 - 4	10 JUL 2025		5.5 - 10	01 OCT 2026		0.6 - 14	01 OCT 2026
	4.4 - 5	10 JUL 2025		5.5 - 11	14 MAY 2026		0.6 - 15	01 OCT 2026
	4.4 - 6	10 JUL 2025		5.5 - 12	14 MAY 2026		0.6 - 16	01 OCT 2026
	4.5 - 1	22 MAR 2024		5.5 - 13	14 MAY 2026		0.6 - 17	01 OCT 2026
	4.5 - 2	22 MAR 2024		5.5 - 14	14 MAY 2026		0.6 - 18	01 OCT 2026
				5.5 - 15	14 MAY 2026		0.6 - 19	01 OCT 2026
				5.5 - 16	14 MAY 2026		0.6 - 20	01 OCT 2026
	5.1 - 1	22 MAR 2024		5.6 - 1	22 MAR 2024		0.6 - 21	01 OCT 2026
	5.1 - 2	22 MAR 2024		5.6 - 2	22 MAR 2024		0.6 - 22	01 OCT 2026
	5.1 - 3	22 MAR 2024						
	5.1 - 4	22 MAR 2024						
ENR 6	5.1 - 5	22 MAR 2024	ENR 6	6.1 - 1	17 APR 2025	AD 1	1.1 - 1	22 MAR 2024
	5.1 - 6	22 MAR 2024		6.1 - 2	22 MAR 2024		1.1 - 2	22 MAR 2024
	5.1 - 7	22 MAR 2024		6.1 - 3	17 APR 2025		1.1 - 3	22 MAR 2024
	5.1 - 8	22 MAR 2024		6.1 - 4	22 MAR 2024		1.1 - 4	22 MAR 2024
	5.1 - 9	22 MAR 2024		6.1 - 5	25 DEC 2025		1.1 - 5	22 MAR 2024
	5.1 - 10	22 MAR 2024		6.1 - 6	17 APR 2025		1.1 - 6	22 MAR 2024
	5.1 - 11	22 MAR 2024		6.1 - 7	17 APR 2025		1.2 - 1	22 MAR 2024
	5.1 - 12	14 MAY 2026		6.1 - 8	17 APR 2025		1.2 - 2	22 MAR 2024
	5.1 - 13	14 MAY 2026		6.1 - 9	17 APR 2025		1.3 - 1	22 MAR 2024
	5.1 - 14	22 MAR 2024		6.1 - 10	17 APR 2025		1.3 - 2	22 MAR 2024
	5.1 - 15	22 MAR 2024		6.1 - 11	17 APR 2025		1.3 - 3	22 MAR 2024
	5.1 - 16	22 MAR 2024		6.1 - 12	17 APR 2025		1.3 - 4	22 MAR 2024
	5.1 - 17	22 MAR 2024		6.1 - 13	17 APR 2025		1.3 - 5	25 AUG 2022
	5.1 - 18	22 MAR 2024		6.1 - 14	17 APR 2025		1.3 - 6	22 MAR 2024
	5.1 - 19	25 AUG 2022		6.1 - 15	10 JUL 2025		1.4 - 1	22 MAR 2024
	5.1 - 20	22 MAR 2024		6.1 - 16	17 APR 2025		1.4 - 2	22 MAR 2024
AD 0	5.2 - 1	14 MAY 2026	AD 0	6.1 - 17	17 APR 2025	AD 2	AD 2 RCBS - 1	14 MAY 2026
	5.2 - 2	06 AUG 2026		6.1 - 18	17 APR 2025		AD 2 RCBS - 2	22 MAR 2024
	5.2 - 3	06 AUG 2026		6.1 - 19	17 APR 2025		AD 2 RCBS - 3	06 AUG 2026
	5.2 - 4	06 AUG 2026		6.1 - 20	17 APR 2025		AD 2 RCBS - 4	10 JUL 2025
	5.2 - 5	06 AUG 2026		6.1 - 21	17 APR 2025		AD 2 RCBS - 5	10 JUL 2025
	5.2 - 6	06 AUG 2026		6.1 - 22	17 APR 2025		AD 2 RCBS - 6	14 MAY 2026
	5.2 - 7	06 AUG 2026		6.1 - 23	17 APR 2025		AD 2 RCBS - 7	06 AUG 2026
	5.2 - 8	06 AUG 2026		6.1 - 24	17 APR 2025		AD 2 RCBS - 8	10 JUL 2025
	5.2 - 9	06 AUG 2026					AD 2 RCBS - 9	19 MAR 2026
	5.2 - 10	06 AUG 2026		0.1 - 1	28 NOV 2024		AD 2 RCBS - 10	06 AUG 2026
	5.2 - 11	06 AUG 2026		0.1 - 2	22 MAR 2024			
	5.2 - 12	06 AUG 2026						

AD 2 RCBS - 11	22 MAR 2024	AD 2 RCCM - 17	25 AUG 2022	AD 2 RCFG - 35	17 APR 2025
AD 2 RCBS - 12	22 MAR 2024	AD 2 RCCM - 18	22 MAR 2024	AD 2 RCFG - 36	17 APR 2025
AD 2 RCBS - 13	23 JAN 2025	AD 2 RCCM - 19	17 APR 2025	AD 2 RCFN - 1	10 JUL 2025
AD 2 RCBS - 14	03 OCT 2024	AD 2 RCCM - 20	17 APR 2025	AD 2 RCFN - 2	22 MAR 2024
AD 2 RCBS - 15	17 APR 2025	AD 2 RCDC - 1	15 MAY 2025	AD 2 RCFN - 3	28 NOV 2024
AD 2 RCBS - 16	03 OCT 2024	AD 2 RCDC - 2	22 MAR 2024	AD 2 RCFN - 4	22 MAR 2024
AD 2 RCBS - 17	10 JUL 2025	AD 2 RCDC - 3	22 MAR 2024	AD 2 RCFN - 5	28 NOV 2024
AD 2 RCBS - 18	22 MAR 2024	AD 2 RCDC - 4	22 MAR 2024	AD 2 RCFN - 6	14 MAY 2026
AD 2 RCBS - 19	25 AUG 2022	AD 2 RCDC - 5	06 AUG 2026	AD 2 RCFN - 7	06 AUG 2026
AD 2 RCBS - 20	22 MAR 2024	AD 2 RCDC - 6	19 MAR 2026	AD 2 RCFN - 8	19 MAR 2026
AD 2 RCBS - 21	15 MAY 2025	AD 2 RCDC - 7	22 MAR 2024	AD 2 RCFN - 9	04 SEPT 2025
AD 2 RCBS - 22	22 MAR 2024	AD 2 RCDC - 8	22 MAR 2024	AD 2 RCFN - 10	17 APR 2025
AD 2 RCBS - 23	25 AUG 2022	AD 2 RCDC - 9	22 MAR 2024	AD 2 RCFN - 11	04 SEPT 2025
AD 2 RCBS - 24	22 MAR 2024	AD 2 RCDC - 10	22 MAR 2024	AD 2 RCFN - 12	04 SEPT 2025
AD 2 RCBS - 25	25 AUG 2022	AD 2 RCDC - 11	25 AUG 2022	AD 2 RCFN - 13	04 SEPT 2025
AD 2 RCBS - 26	22 MAR 2024	AD 2 RCDC - 12	22 MAR 2024	AD 2 RCFN - 14	04 SEPT 2025
AD 2 RCBS - 27	25 AUG 2022	AD 2 RCDC - 13	25 AUG 2022	AD 2 RCFN - 15	22 MAR 2024
AD 2 RCBS - 28	22 MAR 2024	AD 2 RCDC - 14	22 MAR 2024	AD 2 RCFN - 16	22 MAR 2024
AD 2 RCBS - 29	25 AUG 2022	AD 2 RCDC - 15	25 AUG 2022	AD 2 RCFN - 17	10 JUL 2025
AD 2 RCBS - 30	22 MAR 2024	AD 2 RCDC - 16	22 MAR 2024	AD 2 RCFN - 18	22 MAR 2024
AD 2 RCBS - 31	25 AUG 2022	AD 2 RCDC - 17	25 AUG 2022	AD 2 RCFN - 19	10 JUL 2025
AD 2 RCBS - 32	22 MAR 2024	AD 2 RCDC - 18	22 MAR 2024	AD 2 RCFN - 20	22 MAR 2024
AD 2 RCBS - 33	25 AUG 2022	AD 2 RCDC - 19	25 AUG 2022	AD 2 RCFN - 21	25 AUG 2022
AD 2 RCBS - 34	22 MAR 2024	AD 2 RCDC - 20	22 MAR 2024	AD 2 RCFN - 22	22 MAR 2024
AD 2 RCBS - 35	25 AUG 2022	AD 2 RCDC - 21	17 APR 2025	AD 2 RCFN - 23	07 SEPT 2023
AD 2 RCBS - 36	22 MAR 2024	AD 2 RCDC - 22	17 APR 2025	AD 2 RCFN - 24	22 MAR 2024
AD 2 RCBS - 37	25 AUG 2022	AD 2 RCFG - 1	06 AUG 2026	AD 2 RCFN - 25	07 SEPT 2023
AD 2 RCBS - 38	22 MAR 2024	AD 2 RCFG - 2	22 MAR 2024	AD 2 RCFN - 26	22 MAR 2024
AD 2 RCBS - 39	25 AUG 2022	AD 2 RCFG - 3	25 DEC 2025	AD 2 RCFN - 27	25 AUG 2022
AD 2 RCBS - 40	22 MAR 2024	AD 2 RCFG - 4	08 AUG 2024	AD 2 RCFN - 28	22 MAR 2024
AD 2 RCBS - 41	25 AUG 2022	AD 2 RCFG - 5	14 MAY 2026	AD 2 RCFN - 29	25 AUG 2022
AD 2 RCBS - 42	22 MAR 2024	AD 2 RCFG - 6	06 AUG 2026	AD 2 RCFN - 30	22 MAR 2024
AD 2 RCBS - 43	25 AUG 2022	AD 2 RCFG - 7	08 AUG 2024	AD 2 RCFN - 31	25 AUG 2022
AD 2 RCBS - 44	22 MAR 2024	AD 2 RCFG - 8	19 MAR 2026	AD 2 RCFN - 32	22 MAR 2024
AD 2 RCBS - 45	25 AUG 2022	AD 2 RCFG - 9	08 AUG 2024	AD 2 RCFN - 33	25 AUG 2022
AD 2 RCBS - 46	22 MAR 2024	AD 2 RCFG - 10	03 OCT 2024	AD 2 RCFN - 34	22 MAR 2024
AD 2 RCBS - 47	25 AUG 2022	AD 2 RCFG - 11	03 OCT 2024	AD 2 RCFN - 35	25 AUG 2022
AD 2 RCBS - 48	22 MAR 2024	AD 2 RCFG - 12	03 OCT 2024	AD 2 RCFN - 36	22 MAR 2024
AD 2 RCBS - 49	25 AUG 2022	AD 2 RCFG - 13	22 MAR 2024	AD 2 RCFN - 37	25 AUG 2022
AD 2 RCBS - 50	22 MAR 2024	AD 2 RCFG - 14	22 MAR 2024	AD 2 RCFN - 38	22 MAR 2024
AD 2 RCBS - 51	16 MAY 2024	AD 2 RCFG - 15	06 AUG 2026	AD 2 RCFN - 39	25 AUG 2022
AD 2 RCBS - 52	22 MAR 2024	AD 2 RCFG - 16	22 MAR 2024	AD 2 RCFN - 40	22 MAR 2024
AD 2 RCBS - 53	17 APR 2025	AD 2 RCFG - 17	08 AUG 2024	AD 2 RCFN - 41	25 AUG 2022
AD 2 RCBS - 54	17 APR 2025	AD 2 RCFG - 18	22 MAR 2024	AD 2 RCFN - 42	22 MAR 2024
AD 2 RCCM - 1	10 JUL 2025	AD 2 RCFG - 19	08 AUG 2024	AD 2 RCFN - 43	16 MAY 2024
AD 2 RCCM - 2	22 MAR 2024	AD 2 RCFG - 20	22 MAR 2024	AD 2 RCFN - 44	22 MAR 2024
AD 2 RCCM - 3	28 NOV 2024	AD 2 RCFG - 21	08 AUG 2024	AD 2 RCFN - 45	17 APR 2025
AD 2 RCCM - 4	14 MAY 2026	AD 2 RCFG - 22	22 MAR 2024	AD 2 RCFN - 46	17 APR 2025
AD 2 RCCM - 5	06 AUG 2026	AD 2 RCFG - 23	08 AUG 2024	AD 2 RCGI - 1	10 JUL 2025
AD 2 RCCM - 6	06 AUG 2026	AD 2 RCFG - 24	22 MAR 2024	AD 2 RCGI - 2	22 MAR 2024
AD 2 RCCM - 7	19 MAR 2026	AD 2 RCFG - 25	08 AUG 2024	AD 2 RCGI - 3	28 NOV 2024
AD 2 RCCM - 8	22 MAR 2024	AD 2 RCFG - 26	22 MAR 2024	AD 2 RCGI - 4	22 MAR 2024
AD 2 RCCM - 9	22 MAR 2024	AD 2 RCFG - 27	08 AUG 2024	AD 2 RCGI - 5	14 MAY 2026
AD 2 RCCM - 10	22 MAR 2024	AD 2 RCFG - 28	22 MAR 2024	AD 2 RCGI - 6	06 AUG 2026
AD 2 RCCM - 11	10 JUL 2025	AD 2 RCFG - 29	25 AUG 2022	AD 2 RCGI - 7	19 MAR 2026
AD 2 RCCM - 12	22 MAR 2024	AD 2 RCFG - 30	22 MAR 2024	AD 2 RCGI - 8	22 MAR 2024
AD 2 RCCM - 13	25 AUG 2022	AD 2 RCFG - 31	08 AUG 2024	AD 2 RCGI - 9	22 MAR 2024
AD 2 RCCM - 14	22 MAR 2024	AD 2 RCFG - 32	22 MAR 2024	AD 2 RCGI - 10	22 MAR 2024
AD 2 RCCM - 15	25 AUG 2022	AD 2 RCFG - 33	08 AUG 2024	AD 2 RCGI - 11	10 JUL 2025
AD 2 RCCM - 16	22 MAR 2024	AD 2 RCFG - 34	22 MAR 2024	AD 2 RCGI - 12	22 MAR 2024

AD 2 RCGI - 13	10 JUL 2025	AD 2 RCKH - 57	21 MAR 2024	AD 2 RCKU - 9	01 OCT 2026
AD 2 RCGI - 14	22 MAR 2024	AD 2 RCKH - 58	22 MAR 2024	AD 2 RCKU - 10	01 OCT 2026
AD 2 RCGI - 15	17 APR 2025	AD 2 RCKH - 59	21 MAR 2024	AD 2 RCKU - 11	15 MAY 2025
AD 2 RCGI - 16	17 APR 2025	AD 2 RCKH - 60	22 MAR 2024	AD 2 RCKU - 12	22 MAR 2024
AD 2 RCKH - 1	25 DEC 2025	AD 2 RCKH - 61	21 MAR 2024	AD 2 RCKU - 13	25 AUG 2022
AD 2 RCKH - 2	16 MAY 2024	AD 2 RCKH - 62	22 MAR 2024	AD 2 RCKU - 14	22 MAR 2024
AD 2 RCKH - 3	06 AUG 2026	AD 2 RCKH - 63	21 MAR 2024	AD 2 RCKU - 15	25 AUG 2022
AD 2 RCKH - 4	01 OCT 2026	AD 2 RCKH - 64	22 MAR 2024	AD 2 RCKU - 16	22 MAR 2024
AD 2 RCKH - 5	06 AUG 2026	AD 2 RCKH - 65	21 MAR 2024	AD 2 RCKU - 17	23 JAN 2025
AD 2 RCKH - 6	06 AUG 2026	AD 2 RCKH - 66	22 MAR 2024	AD 2 RCKU - 18	17 APR 2025
AD 2 RCKH - 7	15 MAY 2025	AD 2 RCKH - 67	08 AUG 2024	AD 2 RCKU - 19	15 MAY 2025
AD 2 RCKH - 8	15 MAY 2025	AD 2 RCKH - 68	22 MAR 2024	AD 2 RCKU - 20	22 MAR 2024
AD 2 RCKH - 9	15 MAY 2025	AD 2 RCKH - 69	08 AUG 2024	AD 2 RCKU - 21	25 AUG 2022
AD 2 RCKH - 10	14 MAY 2026	AD 2 RCKH - 70	22 MAR 2024	AD 2 RCKU - 22	22 MAR 2024
AD 2 RCKH - 11	06 AUG 2026	AD 2 RCKH - 71	21 MAR 2024	AD 2 RCKU - 23	01 OCT 2026
AD 2 RCKH - 12	01 OCT 2026	AD 2 RCKH - 72	22 MAR 2024	AD 2 RCKU - 24	22 MAR 2024
AD 2 RCKH - 13	06 AUG 2026	AD 2 RCKH - 73	21 MAR 2024	AD 2 RCKU - 25	16 MAY 2024
AD 2 RCKH - 14	06 AUG 2026	AD 2 RCKH - 74	22 MAR 2024	AD 2 RCKU - 26	22 MAR 2024
AD 2 RCKH - 15	06 AUG 2026	AD 2 RCKH - 75	08 AUG 2024	AD 2 RCKU - 27	16 MAY 2024
AD 2 RCKH - 16	10 JUL 2025	AD 2 RCKH - 76	22 MAR 2024	AD 2 RCKU - 28	22 MAR 2024
AD 2 RCKH - 17	01 OCT 2026	AD 2 RCKH - 77	08 AUG 2024	AD 2 RCKU - 29	15 MAY 2025
AD 2 RCKH - 18	01 OCT 2026	AD 2 RCKH - 78	22 MAR 2024	AD 2 RCKU - 30	22 MAR 2024
AD 2 RCKH - 19	01 OCT 2026	AD 2 RCKH - 79	21 MAR 2024	AD 2 RCKU - 31	16 MAY 2024
AD 2 RCKH - 20	01 OCT 2026	AD 2 RCKH - 80	22 MAR 2024	AD 2 RCKU - 32	22 MAR 2024
AD 2 RCKH - 21	01 OCT 2026	AD 2 RCKH - 81	08 AUG 2024	AD 2 RCKU - 33	16 MAY 2024
AD 2 RCKH - 22	01 OCT 2026	AD 2 RCKH - 82	22 MAR 2024	AD 2 RCKU - 34	22 MAR 2024
AD 2 RCKH - 23	01 OCT 2026	AD 2 RCKH - 83	08 AUG 2024	AD 2 RCKU - 35	16 MAY 2024
AD 2 RCKH - 24	01 OCT 2026	AD 2 RCKH - 84	22 MAR 2024	AD 2 RCKU - 36	22 MAR 2024
AD 2 RCKH - 25	01 OCT 2026	AD 2 RCKH - 85	21 MAR 2024	AD 2 RCKU - 37	16 MAY 2024
AD 2 RCKH - 26	22 MAR 2024	AD 2 RCKH - 86	22 MAR 2024	AD 2 RCKU - 38	22 MAR 2024
AD 2 RCKH - 27	06 AUG 2026	AD 2 RCKH - 87	21 MAR 2024	AD 2 RCKU - 39	16 MAY 2024
AD 2 RCKH - 28	22 MAR 2024	AD 2 RCKH - 88	22 MAR 2024	AD 2 RCKU - 40	22 MAR 2024
AD 2 RCKH - 29	25 DEC 2025	AD 2 RCKH - 89	21 MAR 2024	AD 2 RCKU - 41	16 MAY 2024
AD 2 RCKH - 30	22 MAR 2024	AD 2 RCKH - 90	22 MAR 2024	AD 2 RCKU - 42	22 MAR 2024
AD 2 RCKH - 31	21 MAR 2024	AD 2 RCKH - 91	21 MAR 2024	AD 2 RCKU - 43	16 MAY 2024
AD 2 RCKH - 32	22 MAR 2024	AD 2 RCKH - 92	22 MAR 2024	AD 2 RCKU - 44	22 MAR 2024
AD 2 RCKH - 33	21 MAR 2024	AD 2 RCKH - 93	21 MAR 2024	AD 2 RCKU - 45	16 MAY 2024
AD 2 RCKH - 34	22 MAR 2024	AD 2 RCKH - 94	22 MAR 2024	AD 2 RCKU - 46	16 MAY 2024
AD 2 RCKH - 35	21 MAR 2024	AD 2 RCKH - 95	21 MAR 2024	AD 2 RCKU - 47	16 MAY 2024
AD 2 RCKH - 36	22 MAR 2024	AD 2 RCKH - 96	22 MAR 2024	AD 2 RCKU - 48	16 MAY 2024
AD 2 RCKH - 37	21 MAR 2024	AD 2 RCKH - 97	21 MAR 2024	AD 2 RCKU - 49	16 MAY 2024
AD 2 RCKH - 38	22 MAR 2024	AD 2 RCKH - 98	22 MAR 2024	AD 2 RCKU - 50	16 MAY 2024
AD 2 RCKH - 39	21 MAR 2024	AD 2 RCKH - 99	25 AUG 2022	AD 2 RCKU - 51	17 APR 2025
AD 2 RCKH - 40	22 MAR 2024	AD 2 RCKH - 100	22 MAR 2024	AD 2 RCKU - 52	17 APR 2025
AD 2 RCKH - 41	21 MAR 2024	AD 2 RCKH - 101	25 JAN 2024	AD 2 RCKW - 1	19 MAR 2026
AD 2 RCKH - 42	22 MAR 2024	AD 2 RCKH - 102	22 MAR 2024	AD 2 RCKW - 2	22 MAR 2024
AD 2 RCKH - 43	21 MAR 2024	AD 2 RCKH - 103	25 JAN 2024	AD 2 RCKW - 3	28 NOV 2024
AD 2 RCKH - 44	22 MAR 2024	AD 2 RCKH - 104	22 MAR 2024	AD 2 RCKW - 4	28 MAR 2024
AD 2 RCKH - 45	21 MAR 2024	AD 2 RCKH - 105	16 MAY 2024	AD 2 RCKW - 5	14 MAY 2026
AD 2 RCKH - 46	22 MAR 2024	AD 2 RCKH - 106	22 MAR 2024	AD 2 RCKW - 6	06 AUG 2026
AD 2 RCKH - 47	21 MAR 2024	AD 2 RCKH - 107	17 APR 2025	AD 2 RCKW - 7	19 MAR 2026
AD 2 RCKH - 48	22 MAR 2024	AD 2 RCKH - 108	17 APR 2025	AD 2 RCKW - 8	28 NOV 2024
AD 2 RCKH - 49	21 MAR 2024	AD 2 RCKU - 1	15 MAY 2025	AD 2 RCKW - 9	22 MAR 2024
AD 2 RCKH - 50	22 MAR 2024	AD 2 RCKU - 2	22 MAR 2024	AD 2 RCKW - 10	06 AUG 2026
AD 2 RCKH - 51	21 MAR 2024	AD 2 RCKU - 3	15 MAY 2025	AD 2 RCKW - 11	06 AUG 2026
AD 2 RCKH - 52	22 MAR 2024	AD 2 RCKU - 4	01 OCT 2026	AD 2 RCKW - 12	22 MAR 2024
AD 2 RCKH - 53	21 MAR 2024	AD 2 RCKU - 5	01 OCT 2026	AD 2 RCKW - 13	14 MAY 2026
AD 2 RCKH - 54	22 MAR 2024	AD 2 RCKU - 6	01 OCT 2026	AD 2 RCKW - 14	22 MAR 2024
AD 2 RCKH - 55	21 MAR 2024	AD 2 RCKU - 7	01 OCT 2026	AD 2 RCKW - 15	14 MAY 2026
AD 2 RCKH - 56	22 MAR 2024	AD 2 RCKU - 8	01 OCT 2026	AD 2 RCKW - 16	22 MAR 2024

AD 2 RCKW - 17	07 SEPT 2023	AD 2 RCMQ - 37	30 NOV 2023	AD 2 RCMT - 39	25 AUG 2022
AD 2 RCKW - 18	22 MAR 2024	AD 2 RCMQ - 38	22 MAR 2024	AD 2 RCMT - 40	22 MAR 2024
AD 2 RCKW - 19	17 APR 2025	AD 2 RCMQ - 39	30 NOV 2023	AD 2 RCMT - 41	25 AUG 2022
AD 2 RCKW - 20	17 APR 2025	AD 2 RCMQ - 40	22 MAR 2024	AD 2 RCMT - 42	22 MAR 2024
AD 2 RCLY - 1	10 JUL 2025	AD 2 RCMQ - 41	30 NOV 2023	AD 2 RCMT - 43	17 APR 2025
AD 2 RCLY - 2	22 MAR 2024	AD 2 RCMQ - 42	22 MAR 2024	AD 2 RCMT - 44	17 APR 2025
AD 2 RCLY - 3	28 NOV 2024	AD 2 RCMQ - 43	30 NOV 2023	AD 2 RCNN - 1	10 JUL 2025
AD 2 RCLY - 4	08 AUG 2024	AD 2 RCMQ - 44	22 MAR 2024	AD 2 RCNN - 2	22 MAR 2024
AD 2 RCLY - 5	14 MAY 2026	AD 2 RCMQ - 45	30 NOV 2023	AD 2 RCNN - 3	28 NOV 2024
AD 2 RCLY - 6	06 AUG 2026	AD 2 RCMQ - 46	22 MAR 2024	AD 2 RCNN - 4	28 NOV 2024
AD 2 RCLY - 7	06 AUG 2026	AD 2 RCMQ - 47	30 NOV 2023	AD 2 RCNN - 5	06 AUG 2026
AD 2 RCLY - 8	19 MAR 2026	AD 2 RCMQ - 48	22 MAR 2024	AD 2 RCNN - 6	28 NOV 2024
AD 2 RCLY - 9	08 AUG 2024	AD 2 RCMQ - 49	30 NOV 2023	AD 2 RCNN - 7	06 AUG 2026
AD 2 RCLY - 10	22 MAR 2024	AD 2 RCMQ - 50	22 MAR 2024	AD 2 RCNN - 8	19 MAR 2026
AD 2 RCLY - 11	25 AUG 2022	AD 2 RCMQ - 51	30 NOV 2023	AD 2 RCNN - 9	06 AUG 2026
AD 2 RCLY - 12	22 MAR 2024	AD 2 RCMQ - 52	22 MAR 2024	AD 2 RCNN - 10	06 AUG 2026
AD 2 RCLY - 13	22 MAR 2024	AD 2 RCMQ - 53	30 NOV 2023	AD 2 RCNN - 11	06 AUG 2026
AD 2 RCLY - 14	22 MAR 2024	AD 2 RCMQ - 54	22 MAR 2024	AD 2 RCNN - 12	06 AUG 2026
AD 2 RCLY - 15	10 JUL 2025	AD 2 RCMQ - 55	06 AUG 2026	AD 2 RCNN - 13	06 AUG 2026
AD 2 RCLY - 16	22 MAR 2024	AD 2 RCMQ - 56	22 MAR 2024	AD 2 RCNN - 14	06 AUG 2026
AD 2 RCLY - 17	10 JUL 2025	AD 2 RCMQ - 57	17 APR 2025	AD 2 RCNN - 15	06 AUG 2026
AD 2 RCLY - 18	22 MAR 2024	AD 2 RCMQ - 58	17 APR 2025	AD 2 RCNN - 16	06 AUG 2026
AD 2 RCLY - 19	17 APR 2025	AD 2 RCMT - 1	06 AUG 2026	AD 2 RCNN - 17	06 AUG 2026
AD 2 RCLY - 20	17 APR 2025	AD 2 RCMT - 2	22 MAR 2024	AD 2 RCNN - 18	06 AUG 2026
AD 2 RCMQ - 1	10 JUL 2025	AD 2 RCMT - 3	15 MAY 2025	AD 2 RCNN - 19	06 AUG 2026
AD 2 RCMQ - 2	22 MAR 2024	AD 2 RCMT - 4	08 AUG 2024	AD 2 RCNN - 20	06 AUG 2026
AD 2 RCMQ - 3	25 DEC 2025	AD 2 RCMT - 5	14 MAY 2026	AD 2 RCNN - 21	06 AUG 2026
AD 2 RCMQ - 4	25 DEC 2025	AD 2 RCMT - 6	15 MAY 2025	AD 2 RCNN - 22	22 MAR 2024
AD 2 RCMQ - 5	01 OCT 2026	AD 2 RCMT - 7	06 AUG 2026	AD 2 RCNN - 23	25 AUG 2022
AD 2 RCMQ - 6	01 OCT 2026	AD 2 RCMT - 8	19 MAR 2026	AD 2 RCNN - 24	22 MAR 2024
AD 2 RCMQ - 7	25 DEC 2025	AD 2 RCMT - 9	22 MAR 2024	AD 2 RCNN - 25	10 JUL 2025
AD 2 RCMQ - 8	01 OCT 2026	AD 2 RCMT - 10	22 MAR 2024	AD 2 RCNN - 26	22 MAR 2024
AD 2 RCMQ - 9	25 DEC 2025	AD 2 RCMT - 11	22 MAR 2024	AD 2 RCNN - 27	19 MAR 2026
AD 2 RCMQ - 10	06 AUG 2026	AD 2 RCMT - 12	22 MAR 2024	AD 2 RCNN - 28	22 MAR 2024
AD 2 RCMQ - 11	01 OCT 2026	AD 2 RCMT - 13	22 MAR 2024	AD 2 RCNN - 29	19 MAR 2026
AD 2 RCMQ - 12	25 DEC 2025	AD 2 RCMT - 14	17 APR 2025	AD 2 RCNN - 30	22 MAR 2024
AD 2 RCMQ - 13	25 DEC 2025	AD 2 RCMT - 15	22 MAR 2024	AD 2 RCNN - 31	19 MAR 2026
AD 2 RCMQ - 14	01 OCT 2026	AD 2 RCMT - 16	22 MAR 2024	AD 2 RCNN - 32	22 MAR 2024
AD 2 RCMQ - 15	01 OCT 2026	AD 2 RCMT - 17	06 AUG 2026	AD 2 RCNN - 33	19 MAR 2026
AD 2 RCMQ - 16	01 OCT 2026	AD 2 RCMT - 18	22 MAR 2024	AD 2 RCNN - 34	22 MAR 2024
AD 2 RCMQ - 17	01 OCT 2026	AD 2 RCMT - 19	25 AUG 2022	AD 2 RCNN - 35	19 MAR 2026
AD 2 RCMQ - 18	22 MAR 2024	AD 2 RCMT - 20	22 MAR 2024	AD 2 RCNN - 36	22 MAR 2024
AD 2 RCMQ - 19	25 DEC 2025	AD 2 RCMT - 21	06 AUG 2026	AD 2 RCNN - 37	19 MAR 2026
AD 2 RCMQ - 20	22 MAR 2024	AD 2 RCMT - 22	22 MAR 2024	AD 2 RCNN - 38	22 MAR 2024
AD 2 RCMQ - 21	01 OCT 2026	AD 2 RCMT - 23	25 AUG 2022	AD 2 RCNN - 39	19 MAR 2026
AD 2 RCMQ - 22	22 MAR 2024	AD 2 RCMT - 24	22 MAR 2024	AD 2 RCNN - 40	22 MAR 2024
AD 2 RCMQ - 23	30 NOV 2023	AD 2 RCMT - 25	25 AUG 2022	AD 2 RCNN - 41	19 MAR 2026
AD 2 RCMQ - 24	22 MAR 2024	AD 2 RCMT - 26	22 MAR 2024	AD 2 RCNN - 42	22 MAR 2024
AD 2 RCMQ - 25	30 NOV 2023	AD 2 RCMT - 27	25 AUG 2022	AD 2 RCNN - 43	19 MAR 2026
AD 2 RCMQ - 26	22 MAR 2024	AD 2 RCMT - 28	22 MAR 2024	AD 2 RCNN - 44	22 MAR 2024
AD 2 RCMQ - 27	30 NOV 2023	AD 2 RCMT - 29	25 AUG 2022	AD 2 RCNN - 45	19 MAR 2026
AD 2 RCMQ - 28	22 MAR 2024	AD 2 RCMT - 30	22 MAR 2024	AD 2 RCNN - 46	22 MAR 2024
AD 2 RCMQ - 29	30 NOV 2023	AD 2 RCMT - 31	25 AUG 2022	AD 2 RCNN - 47	19 MAR 2026
AD 2 RCMQ - 30	22 MAR 2024	AD 2 RCMT - 32	22 MAR 2024	AD 2 RCNN - 48	22 MAR 2024
AD 2 RCMQ - 31	30 NOV 2023	AD 2 RCMT - 33	25 AUG 2022	AD 2 RCNN - 49	16 MAY 2024
AD 2 RCMQ - 32	22 MAR 2024	AD 2 RCMT - 34	22 MAR 2024	AD 2 RCNN - 50	22 MAR 2024
AD 2 RCMQ - 33	30 NOV 2023	AD 2 RCMT - 35	25 AUG 2022	AD 2 RCNN - 51	25 AUG 2022
AD 2 RCMQ - 34	22 MAR 2024	AD 2 RCMT - 36	22 MAR 2024	AD 2 RCNN - 52	22 MAR 2024
AD 2 RCMQ - 35	30 NOV 2023	AD 2 RCMT - 37	25 AUG 2022	AD 2 RCNN - 53	25 AUG 2022
AD 2 RCMQ - 36	22 MAR 2024	AD 2 RCMT - 38	22 MAR 2024	AD 2 RCNN - 54	22 MAR 2024

AD 2 RCNN - 55	17 APR 2025	AD 2 RCSP - 5	06 AUG 2026	AD 2 RCSS - 57	02 NOV 2023
AD 2 RCNN - 56	17 APR 2025	AD 2 RCSP - 6	19 MAR 2026	AD 2 RCSS - 58	22 MAR 2024
AD 2 RCQC - 1	04 SEPT 2025	AD 2 RCSP - 7	22 MAR 2024	AD 2 RCSS - 59	02 NOV 2023
AD 2 RCQC - 2	22 MAR 2024	AD 2 RCSP - 8	17 APR 2025	AD 2 RCSS - 60	22 MAR 2024
AD 2 RCQC - 3	25 DEC 2025	AD 2 RCSS - 1	15 MAY 2025	AD 2 RCSS - 61	02 NOV 2023
AD 2 RCQC - 4	25 DEC 2025	AD 2 RCSS - 2	22 MAR 2024	AD 2 RCSS - 62	22 MAR 2024
AD 2 RCQC - 5	06 AUG 2026	AD 2 RCSS - 3	28 NOV 2024	AD 2 RCSS - 63	02 NOV 2023
AD 2 RCQC - 6	28 NOV 2024	AD 2 RCSS - 4	10 JUL 2025	AD 2 RCSS - 64	22 MAR 2024
AD 2 RCQC - 7	06 AUG 2026	AD 2 RCSS - 5	19 MAR 2026	AD 2 RCSS - 65	02 NOV 2023
AD 2 RCQC - 8	19 MAR 2026	AD 2 RCSS - 6	19 MAR 2026	AD 2 RCSS - 66	22 MAR 2024
AD 2 RCQC - 9	22 MAR 2024	AD 2 RCSS - 7	28 NOV 2024	AD 2 RCSS - 67	02 NOV 2023
AD 2 RCQC - 10	22 MAR 2024	AD 2 RCSS - 8	22 MAR 2024	AD 2 RCSS - 68	22 MAR 2024
AD 2 RCQC - 11	22 MAR 2024	AD 2 RCSS - 9	22 MAR 2024	AD 2 RCSS - 69	02 NOV 2023
AD 2 RCQC - 12	22 MAR 2024	AD 2 RCSS - 10	22 MAR 2024	AD 2 RCSS - 70	22 MAR 2024
AD 2 RCQC - 13	22 MAR 2024	AD 2 RCSS - 11	22 MAR 2024	AD 2 RCSS - 71	02 NOV 2023
AD 2 RCQC - 14	22 MAR 2024	AD 2 RCSS - 12	22 MAR 2024	AD 2 RCSS - 72	22 MAR 2024
AD 2 RCQC - 15	22 MAR 2024	AD 2 RCSS - 13	22 MAR 2024	AD 2 RCSS - 73	02 NOV 2023
AD 2 RCQC - 16	22 MAR 2024	AD 2 RCSS - 14	14 MAY 2026	AD 2 RCSS - 74	02 NOV 2023
AD 2 RCQC - 17	04 SEPT 2025	AD 2 RCSS - 15	06 AUG 2026	AD 2 RCSS - 75	02 NOV 2023
AD 2 RCQC - 18	22 MAR 2024	AD 2 RCSS - 16	19 MAR 2026	AD 2 RCSS - 76	22 MAR 2024
AD 2 RCQC - 19	08 AUG 2024	AD 2 RCSS - 17	22 MAR 2024	AD 2 RCSS - 77	02 NOV 2023
AD 2 RCQC - 20	22 MAR 2024	AD 2 RCSS - 18	22 MAR 2024	AD 2 RCSS - 78	22 MAR 2024
AD 2 RCQC - 21	04 SEPT 2025	AD 2 RCSS - 19	22 MAR 2024	AD 2 RCSS - 79	02 NOV 2023
AD 2 RCQC - 22	22 MAR 2024	AD 2 RCSS - 20	25 DEC 2025	AD 2 RCSS - 80	22 MAR 2024
AD 2 RCQC - 23	30 NOV 2023	AD 2 RCSS - 21	22 MAR 2024	AD 2 RCSS - 81	02 NOV 2023
AD 2 RCQC - 24	22 MAR 2024	AD 2 RCSS - 22	03 OCT 2024	AD 2 RCSS - 82	22 MAR 2024
AD 2 RCQC - 25	30 NOV 2023	AD 2 RCSS - 23	03 OCT 2024	AD 2 RCSS - 83	02 NOV 2023
AD 2 RCQC - 26	22 MAR 2024	AD 2 RCSS - 24	22 MAR 2024	AD 2 RCSS - 84	22 MAR 2024
AD 2 RCQC - 27	30 NOV 2023	AD 2 RCSS - 25	22 MAR 2024	AD 2 RCSS - 85	02 NOV 2023
AD 2 RCQC - 28	22 MAR 2024	AD 2 RCSS - 26	22 MAR 2024	AD 2 RCSS - 86	22 MAR 2024
AD 2 RCQC - 29	30 NOV 2023	AD 2 RCSS - 27	25 AUG 2022	AD 2 RCSS - 87	02 NOV 2023
AD 2 RCQC - 30	22 MAR 2024	AD 2 RCSS - 28	22 MAR 2024	AD 2 RCSS - 88	22 MAR 2024
AD 2 RCQC - 31	30 NOV 2023	AD 2 RCSS - 29	25 AUG 2022	AD 2 RCSS - 89	02 NOV 2023
AD 2 RCQC - 32	22 MAR 2024	AD 2 RCSS - 30	22 MAR 2024	AD 2 RCSS - 90	22 MAR 2024
AD 2 RCQC - 33	30 NOV 2023	AD 2 RCSS - 31	14 MAY 2026	AD 2 RCSS - 91	02 NOV 2023
AD 2 RCQC - 34	22 MAR 2024	AD 2 RCSS - 32	14 MAY 2026	AD 2 RCSS - 92	22 MAR 2024
AD 2 RCQC - 35	30 NOV 2023	AD 2 RCSS - 33	17 APR 2025	AD 2 RCSS - 93	02 NOV 2023
AD 2 RCQC - 36	22 MAR 2024	AD 2 RCSS - 34	17 APR 2025	AD 2 RCSS - 94	22 MAR 2024
AD 2 RCQC - 37	30 NOV 2023	AD 2 RCSS - 35	17 APR 2025	AD 2 RCSS - 95	02 NOV 2023
AD 2 RCQC - 38	22 MAR 2024	AD 2 RCSS - 36	22 MAR 2024	AD 2 RCSS - 96	22 MAR 2024
AD 2 RCQC - 39	30 NOV 2023	AD 2 RCSS - 37	15 MAY 2025	AD 2 RCSS - 97	02 NOV 2023
AD 2 RCQC - 40	22 MAR 2024	AD 2 RCSS - 38	22 MAR 2024	AD 2 RCSS - 98	22 MAR 2024
AD 2 RCQC - 41	30 NOV 2023	AD 2 RCSS - 39	25 AUG 2022	AD 2 RCSS - 99	02 NOV 2023
AD 2 RCQC - 42	22 MAR 2024	AD 2 RCSS - 40	22 MAR 2024	AD 2 RCSS - 100	22 MAR 2024
AD 2 RCQC - 43	30 NOV 2023	AD 2 RCSS - 41	15 MAY 2025	AD 2 RCSS - 101	02 NOV 2023
AD 2 RCQC - 44	22 MAR 2024	AD 2 RCSS - 42	22 MAR 2024	AD 2 RCSS - 102	22 MAR 2024
AD 2 RCQC - 45	30 NOV 2023	AD 2 RCSS - 43	02 NOV 2023	AD 2 RCSS - 103	16 MAY 2024
AD 2 RCQC - 46	22 MAR 2024	AD 2 RCSS - 44	22 MAR 2024	AD 2 RCSS - 104	22 MAR 2024
AD 2 RCQC - 47	30 NOV 2023	AD 2 RCSS - 45	02 NOV 2023	AD 2 RCSS - 105	17 APR 2025
AD 2 RCQC - 48	22 MAR 2024	AD 2 RCSS - 46	22 MAR 2024	AD 2 RCSS - 106	17 APR 2025
AD 2 RCQC - 49	30 NOV 2023	AD 2 RCSS - 47	02 NOV 2023	AD 2 RCSS - 107	17 APR 2025
AD 2 RCQC - 50	22 MAR 2024	AD 2 RCSS - 48	22 MAR 2024	AD 2 RCSS - 108	17 APR 2025
AD 2 RCQC - 51	06 AUG 2026	AD 2 RCSS - 49	02 NOV 2023	AD 2 RCTP - 1	17 APR 2025
AD 2 RCQC - 52	08 AUG 2024	AD 2 RCSS - 50	22 MAR 2024	AD 2 RCTP - 2	14 MAY 2026
AD 2 RCQC - 53	17 APR 2025	AD 2 RCSS - 51	02 NOV 2023	AD 2 RCTP - 3	10 JUL 2025
AD 2 RCQC - 54	17 APR 2025	AD 2 RCSS - 52	22 MAR 2024	AD 2 RCTP - 4	10 JUL 2025
AD 2 RCSP - 1	22 MAR 2024	AD 2 RCSS - 53	02 NOV 2023	AD 2 RCTP - 5	10 JUL 2025
AD 2 RCSP - 2	22 MAR 2024	AD 2 RCSS - 54	22 MAR 2024	AD 2 RCTP - 6	10 JUL 2025
AD 2 RCSP - 3	22 MAR 2024	AD 2 RCSS - 55	02 NOV 2023	AD 2 RCTP - 7	10 JUL 2025
AD 2 RCSP - 4	22 MAR 2024	AD 2 RCSS - 56	22 MAR 2024	AD 2 RCTP - 8	10 JUL 2025

AD 2 RCTP - 9	10 JUL 2025	AD 2 RCTP - 69	25 AUG 2022	AD 2 RCTP - 129	25 AUG 2022
AD 2 RCTP - 10	19 MAR 2026	AD 2 RCTP - 70	22 MAR 2024	AD 2 RCTP - 130	22 MAR 2024
AD 2 RCTP - 11	19 MAR 2026	AD 2 RCTP - 71	25 AUG 2022	AD 2 RCTP - 131	25 AUG 2022
AD 2 RCTP - 12	19 MAR 2026	AD 2 RCTP - 72	22 MAR 2024	AD 2 RCTP - 132	22 MAR 2024
AD 2 RCTP - 13	19 MAR 2026	AD 2 RCTP - 73	25 AUG 2022	AD 2 RCTP - 133	25 AUG 2022
AD 2 RCTP - 14	19 MAR 2026	AD 2 RCTP - 74	25 AUG 2022	AD 2 RCTP - 134	22 MAR 2024
AD 2 RCTP - 15	14 MAY 2026	AD 2 RCTP - 75	02 NOV 2023	AD 2 RCTP - 135	25 AUG 2022
AD 2 RCTP - 16	06 AUG 2026	AD 2 RCTP - 76	22 MAR 2024	AD 2 RCTP - 136	22 MAR 2024
AD 2 RCTP - 17	14 MAY 2026	AD 2 RCTP - 77	25 AUG 2022	AD 2 RCTP - 137	25 AUG 2022
AD 2 RCTP - 18	14 MAY 2026	AD 2 RCTP - 78	22 MAR 2024	AD 2 RCTP - 138	22 MAR 2024
AD 2 RCTP - 19	19 MAR 2026	AD 2 RCTP - 79	02 NOV 2023	AD 2 RCTP - 139	25 AUG 2022
AD 2 RCTP - 20	19 MAR 2026	AD 2 RCTP - 80	22 MAR 2024	AD 2 RCTP - 140	22 MAR 2024
AD 2 RCTP - 21	19 MAR 2026	AD 2 RCTP - 81	25 AUG 2022	AD 2 RCTP - 141	25 AUG 2022
AD 2 RCTP - 22	19 MAR 2026	AD 2 RCTP - 82	22 MAR 2024	AD 2 RCTP - 142	22 MAR 2024
AD 2 RCTP - 23	01 OCT 2026	AD 2 RCTP - 83	02 NOV 2023	AD 2 RCTP - 143	25 AUG 2022
AD 2 RCTP - 24	01 OCT 2026	AD 2 RCTP - 84	22 MAR 2024	AD 2 RCTP - 144	22 MAR 2024
AD 2 RCTP - 25	01 OCT 2026	AD 2 RCTP - 85	25 AUG 2022	AD 2 RCTP - 145	08 AUG 2024
AD 2 RCTP - 26	01 OCT 2026	AD 2 RCTP - 86	25 AUG 2022	AD 2 RCTP - 146	22 MAR 2024
AD 2 RCTP - 27	01 OCT 2026	AD 2 RCTP - 87	02 NOV 2023	AD 2 RCTP - 147	25 AUG 2022
AD 2 RCTP - 28	01 OCT 2026	AD 2 RCTP - 88	22 MAR 2024	AD 2 RCTP - 148	22 MAR 2024
AD 2 RCTP - 29	01 OCT 2026	AD 2 RCTP - 89	25 AUG 2022	AD 2 RCTP - 149	08 AUG 2024
AD 2 RCTP - 30	01 OCT 2026	AD 2 RCTP - 90	25 AUG 2022	AD 2 RCTP - 150	22 MAR 2024
AD 2 RCTP - 31	01 OCT 2026	AD 2 RCTP - 91	02 NOV 2023	AD 2 RCTP - 151	25 AUG 2022
AD 2 RCTP - 32	01 OCT 2026	AD 2 RCTP - 92	22 MAR 2024	AD 2 RCTP - 152	22 MAR 2024
AD 2 RCTP - 33	01 OCT 2026	AD 2 RCTP - 93	25 AUG 2022	AD 2 RCTP - 153	08 AUG 2024
AD 2 RCTP - 34	01 OCT 2026	AD 2 RCTP - 94	22 MAR 2024	AD 2 RCTP - 154	22 MAR 2024
AD 2 RCTP - 35	01 OCT 2026	AD 2 RCTP - 95	02 NOV 2023	AD 2 RCTP - 155	25 AUG 2022
AD 2 RCTP - 36	01 OCT 2026	AD 2 RCTP - 96	22 MAR 2024	AD 2 RCTP - 156	22 MAR 2024
AD 2 RCTP - 37	14 MAY 2026	AD 2 RCTP - 97	25 AUG 2022	AD 2 RCTP - 157	08 AUG 2024
AD 2 RCTP - 38	22 MAR 2024	AD 2 RCTP - 98	22 MAR 2024	AD 2 RCTP - 158	22 MAR 2024
AD 2 RCTP - 39	25 DEC 2025	AD 2 RCTP - 99	02 NOV 2023	AD 2 RCTP - 159	16 MAY 2024
AD 2 RCTP - 40	22 MAR 2024	AD 2 RCTP - 100	22 MAR 2024	AD 2 RCTP - 160	22 MAR 2024
AD 2 RCTP - 41	25 DEC 2025	AD 2 RCTP - 101	25 AUG 2022	AD 2 RCTP - 161	17 APR 2025
AD 2 RCTP - 42	22 MAR 2024	AD 2 RCTP - 102	22 MAR 2024	AD 2 RCTP - 162	17 APR 2025
AD 2 RCTP - 43	25 AUG 2022	AD 2 RCTP - 103	02 NOV 2023	AD 2 RCWA - 1	10 JUL 2025
AD 2 RCTP - 44	22 MAR 2024	AD 2 RCTP - 104	22 MAR 2024	AD 2 RCWA - 2	22 MAR 2024
AD 2 RCTP - 45	10 JUL 2025	AD 2 RCTP - 105	25 AUG 2022	AD 2 RCWA - 3	28 NOV 2024
AD 2 RCTP - 46	22 MAR 2024	AD 2 RCTP - 106	22 MAR 2024	AD 2 RCWA - 4	22 MAR 2024
AD 2 RCTP - 47	10 JUL 2025	AD 2 RCTP - 107	02 NOV 2023	AD 2 RCWA - 5	14 MAY 2026
AD 2 RCTP - 48	22 MAR 2024	AD 2 RCTP - 108	22 MAR 2024	AD 2 RCWA - 6	06 AUG 2026
AD 2 RCTP - 49	10 JUL 2025	AD 2 RCTP - 109	25 AUG 2022	AD 2 RCWA - 7	15 MAY 2025
AD 2 RCTP - 50	22 MAR 2024	AD 2 RCTP - 110	25 AUG 2022	AD 2 RCWA - 8	19 MAR 2026
AD 2 RCTP - 51	10 JUL 2025	AD 2 RCTP - 111	02 NOV 2023	AD 2 RCWA - 9	22 MAR 2024
AD 2 RCTP - 52	22 MAR 2024	AD 2 RCTP - 112	22 MAR 2024	AD 2 RCWA - 10	22 MAR 2024
AD 2 RCTP - 53	10 JUL 2025	AD 2 RCTP - 113	25 AUG 2022	AD 2 RCWA - 11	22 MAR 2024
AD 2 RCTP - 54	22 MAR 2024	AD 2 RCTP - 114	25 AUG 2022	AD 2 RCWA - 12	22 MAR 2024
AD 2 RCTP - 55	10 JUL 2025	AD 2 RCTP - 115	03 OCT 2024	AD 2 RCWA - 13	25 DEC 2025
AD 2 RCTP - 56	22 MAR 2024	AD 2 RCTP - 116	22 MAR 2024	AD 2 RCWA - 14	22 MAR 2024
AD 2 RCTP - 57	17 APR 2025	AD 2 RCTP - 117	25 AUG 2022	AD 2 RCWA - 15	10 JUL 2025
AD 2 RCTP - 58	22 MAR 2024	AD 2 RCTP - 118	25 AUG 2022	AD 2 RCWA - 16	22 MAR 2024
AD 2 RCTP - 59	17 APR 2025	AD 2 RCTP - 119	25 AUG 2022	AD 2 RCWA - 17	25 AUG 2022
AD 2 RCTP - 60	22 MAR 2024	AD 2 RCTP - 120	22 MAR 2024	AD 2 RCWA - 18	22 MAR 2024
AD 2 RCTP - 61	25 AUG 2022	AD 2 RCTP - 121	25 AUG 2022	AD 2 RCWA - 19	25 AUG 2022
AD 2 RCTP - 62	22 MAR 2024	AD 2 RCTP - 122	22 MAR 2024	AD 2 RCWA - 20	22 MAR 2024
AD 2 RCTP - 63	25 AUG 2022	AD 2 RCTP - 123	25 AUG 2022	AD 2 RCWA - 21	25 AUG 2022
AD 2 RCTP - 64	22 MAR 2024	AD 2 RCTP - 124	22 MAR 2024	AD 2 RCWA - 22	22 MAR 2024
AD 2 RCTP - 65	25 AUG 2022	AD 2 RCTP - 125	25 AUG 2022	AD 2 RCWA - 23	17 APR 2025
AD 2 RCTP - 66	22 MAR 2024	AD 2 RCTP - 126	22 MAR 2024	AD 2 RCWA - 24	17 APR 2025
AD 2 RCTP - 67	03 OCT 2024	AD 2 RCTP - 127	25 AUG 2022	AD 2 RCYU - 1	10 JUL 2025
AD 2 RCTP - 68	22 MAR 2024	AD 2 RCTP - 128	22 MAR 2024	AD 2 RCYU - 2	22 MAR 2024

AD 2 RCUY - 3	10 JUL 2025	AD 3			AD 3.14 - 5	25 AUG 2022
AD 2 RCUY - 4	22 MAR 2024				AD 3.14 - 6	22 MAR 2024
AD 2 RCUY - 5	06 AUG 2026		AD 3.1 - 1	22 MAR 2024	AD 3.15 - 1	22 MAR 2024
AD 2 RCUY - 6	17 APR 2025		AD 3.1 - 2	22 MAR 2024	AD 3.15 - 2	22 MAR 2024
AD 2 RCUY - 7	06 AUG 2026		AD 3.2 - 1	22 MAR 2024	AD 3.15 - 3	25 AUG 2022
AD 2 RCUY - 8	19 MAR 2026		AD 3.2 - 2	22 MAR 2024	AD 3.15 - 4	22 MAR 2024
AD 2 RCUY - 9	22 MAR 2024		AD 3.3 - 1	22 MAR 2024	AD 3.15 - 5	25 AUG 2022
AD 2 RCUY - 10	22 MAR 2024		AD 3.3 - 2	22 MAR 2024	AD 3.15 - 6	22 MAR 2024
AD 2 RCUY - 11	22 MAR 2024		AD 3.4 - 1	22 MAR 2024	AD 3.15 - 7	25 AUG 2022
AD 2 RCUY - 12	22 MAR 2024		AD 3.4 - 2	22 MAR 2024	AD 3.15 - 8	22 MAR 2024
AD 2 RCUY - 13	20 OCT 2022		AD 3.5 - 1	22 MAR 2024		
AD 2 RCUY - 14	22 MAR 2024		AD 3.5 - 2	22 MAR 2024		
AD 2 RCUY - 15	25 AUG 2022		AD 3.6 - 1	22 MAR 2024		
AD 2 RCUY - 16	22 MAR 2024		AD 3.6 - 2	22 MAR 2024		
AD 2 RCUY - 17	22 MAR 2024		AD 3.6 - 3	22 MAR 2024		
AD 2 RCUY - 18	10 JUL 2025		AD 3.6 - 4	22 MAR 2024		
AD 2 RCUY - 19	15 MAY 2025		AD 3.7 - 1	22 MAR 2024		
AD 2 RCUY - 20	22 MAR 2024		AD 3.7 - 2	22 MAR 2024		
AD 2 RCUY - 21	25 AUG 2022		AD 3.8 - 1	22 MAR 2024		
AD 2 RCUY - 22	22 MAR 2024		AD 3.8 - 2	22 MAR 2024		
AD 2 RCUY - 23	15 MAY 2025		AD 3.9 - 1	23 JAN 2025		
AD 2 RCUY - 24	22 MAR 2024		AD 3.9 - 2	23 JAN 2025		
AD 2 RCUY - 25	25 AUG 2022		AD 3.9 - 3	23 JAN 2025		
AD 2 RCUY - 26	22 MAR 2024		AD 3.9 - 4	23 JAN 2025		
AD 2 RCUY - 27	25 AUG 2022		AD 3.10 - 1	22 MAR 2024		
AD 2 RCUY - 28	22 MAR 2024		AD 3.10 - 2	22 MAR 2024		
AD 2 RCUY - 29	25 AUG 2022		AD 3.10 - 3	22 MAR 2024		
AD 2 RCUY - 30	22 MAR 2024		AD 3.10 - 4	22 MAR 2024		
AD 2 RCUY - 31	25 AUG 2022		AD 3.11 - 1	22 MAR 2024		
AD 2 RCUY - 32	22 MAR 2024		AD 3.11 - 2	22 MAR 2024		
AD 2 RCUY - 33	25 AUG 2022		AD 3.11 - 3	22 MAR 2024		
AD 2 RCUY - 34	22 MAR 2024		AD 3.11 - 4	22 MAR 2024		
AD 2 RCUY - 35	25 AUG 2022		AD 3.11 - 5	25 AUG 2022		
AD 2 RCUY - 36	22 MAR 2024		AD 3.11 - 6	22 MAR 2024		
AD 2 RCUY - 37	25 AUG 2022		AD 3.11 - 7	25 AUG 2022		
AD 2 RCUY - 38	22 MAR 2024		AD 3.11 - 8	22 MAR 2024		
AD 2 RCUY - 39	25 AUG 2022		AD 3.11 - 9	25 AUG 2022		
AD 2 RCUY - 40	22 MAR 2024		AD 3.11 - 10	22 MAR 2024		
AD 2 RCUY - 41	25 AUG 2022		AD 3.11 - 11	25 AUG 2022		
AD 2 RCUY - 42	22 MAR 2024		AD 3.11 - 12	22 MAR 2024		
AD 2 RCUY - 43	25 AUG 2022		AD 3.12 - 1	22 MAR 2024		
AD 2 RCUY - 44	22 MAR 2024		AD 3.12 - 2	22 MAR 2024		
AD 2 RCUY - 45	25 AUG 2022		AD 3.12 - 3	25 AUG 2022		
AD 2 RCUY - 46	22 MAR 2024		AD 3.12 - 4	22 MAR 2024		
AD 2 RCUY - 47	25 AUG 2022		AD 3.12 - 5	25 AUG 2022		
AD 2 RCUY - 48	22 MAR 2024		AD 3.12 - 6	22 MAR 2024		
AD 2 RCUY - 49	25 AUG 2022		AD 3.12 - 7	25 AUG 2022		
AD 2 RCUY - 50	22 MAR 2024		AD 3.12 - 8	22 MAR 2024		
AD 2 RCUY - 51	25 AUG 2022		AD 3.13 - 1	22 MAR 2024		
AD 2 RCUY - 52	22 MAR 2024		AD 3.13 - 2	22 MAR 2024		
AD 2 RCUY - 53	25 AUG 2022		AD 3.13 - 3	25 AUG 2022		
AD 2 RCUY - 54	22 MAR 2024		AD 3.13 - 4	22 MAR 2024		
AD 2 RCUY - 55	25 AUG 2022		AD 3.13 - 5	25 AUG 2022		
AD 2 RCUY - 56	22 MAR 2024		AD 3.13 - 6	22 MAR 2024		
AD 2 RCUY - 57	25 AUG 2022		AD 3.13 - 7	25 AUG 2022		
AD 2 RCUY - 58	22 MAR 2024		AD 3.13 - 8	22 MAR 2024		
AD 2 RCUY - 59	16 MAY 2024		AD 3.14 - 1	22 MAR 2024		
AD 2 RCUY - 60	22 MAR 2024		AD 3.14 - 2	22 MAR 2024		
AD 2 RCUY - 61	17 APR 2025		AD 3.14 - 3	09 MAR 2023		
AD 2 RCUY - 62	17 APR 2025		AD 3.14 - 4	22 MAR 2024		

GEN 0.6 第一部 目錄/

TABLE OF CONTENTS PART 1

PART 1 - 通則 (GEN)/	
GENERAL (GEN)	PART 1- - 1
GEN 0/	
0	GEN 0.1 - 1
GEN 0.1 序言/	
Preface	GEN 0.1 - 1
0.1.1 發行單位/	
NAME OF THE PUBLISHING AUTHORITY	GEN 0.1 - 1
0.1.2 適用國際民航組織文件/	
APPLICABLE ICAO DOCUMENTS	GEN 0.1 - 1
0.1.3 飛航指南架構與例行修正時程/	
THE AIP STRUCTURE AND ESTABLISHED REGULAR AMENDMENT INTERVAL	GEN 0.1 - 1
0.1.4 飛航指南編排錯誤及疏漏之處理/	
SERVICE TO CONTACT IN CASE OF DETECTED AIP ERRORS OR OMISSIONS	GEN 0.1 - 3
0.1.5 航空器駕駛或操作人員如使用非本局出版之航空情報文件，應核對該資料與本局發布情報之一致性， 並參照本區飛航公告提供之即時資訊，以確保飛安。/	
IN ORDER TO ENSURE THE HIGHEST LEVEL OF AVIATION SAFETY, THE PILOT OR OPERATOR OF AN AIRCRAFT SHALL DETERMINE THAT THE AERONAUTICAL INFORMATION/DATA OF TAIPEI FIR PROVIDED BY THIRD PARTY IS IN ACCORDANCE WITH THOSE ISSUED BY CAA, R.O.C., AND SHALL CONSULT NOTAM FOR LATEST INFORMATION	GEN 0.1 - 3
GEN 0.2 飛航指南修正記錄/	
Record of AIP Amendments	GEN 0.2 - 1
GEN 0.3 飛航指南補充通知書摘要/	
Record of AIP Supplements	GEN 0.3 - 1
GEN 0.4 飛航指南頁碼校對表/	
Checklist of AIP Pages	GEN 0.4 - 1
GEN 0.5 飛航指南手寫修正紀錄/	
List of hand amendments to the AIP	GEN 0.5 - 1
GEN 0.6 第一部 目錄/	
Table of Contents Part 1	GEN 0.6 - 1
GEN 1 本國法令及規定/	
1 NATIONAL REGULATIONS AND REQUIREMENTS	GEN 1.1 - 1
GEN 1.1 有關單位/	
Designated Authorities	GEN 1.1 - 1
1.1.1 民用航空/	
CIVIL AVIATION	GEN 1.1 - 1
1.1.2 氣象/	
METEOROLOGY	GEN 1.1 - 1
1.1.3 海關/	
CUSTOMS	GEN 1.1 - 1
1.1.4 證照查驗/	
IMMIGRATION	GEN 1.1 - 1
1.1.5 衛生/	
HEALTH	GEN 1.1 - 1
1.1.6 航路及機場/直昇機機場收費/	
EN-ROUTE AND AERODROME/HELIPORT CHARGES	GEN 1.1 - 1
1.1.7 動植物檢疫/	
AGRICULTURAL QUARANTINE	GEN 1.1 - 2
1.1.8 航空器失事調查/	
AIRCRAFT ACCIDENT INVESTIGATION	GEN 1.1 - 2
GEN 1.2 民用航空器之入境、過境及離境/	
Entry, transit and departure of aircraft	GEN 1.2 - 1
1.2.1 通則/	
GENERAL	GEN 1.2 - 1

1.2.2 定期班機/ SCHEDULED FLIGHTS	GEN 1.2 - 1
1.2.3 不定期班機/ NON-SCHEDULED FLIGHTS	GEN 1.2 - 2
1.2.4 自用航空器/ PRIVATE FLIGHTS	GEN 1.2 - 4
1.2.5 航空器公共衛生之處理/ PUBLIC HEALTH MEASURES APPLIED TO AIRCRAFT	GEN 1.2 - 5
GEN 1.3 非移民旅客及航空人員之入境、過境、離境規則/ Entry, transit and departure of passengers and crew	GEN 1.3 - 1
1.3.1 海關規定/ CUSTOMS REQUIREMENTS	GEN 1.3 - 1
1.3.2 入出境規定/ IMMIGRATION REQUIREMENTS	GEN 1.3 - 3
1.3.3 公共衛生規定/ PUBLIC HEALTH REQUIREMENTS	GEN 1.3 - 4
GEN 1.4 貨物進出口及轉運之規定/ Entry, transit and departure of cargo	GEN 1.4 - 1
1.4.1 海關規定/ CUSTOMS REQUIREMENTS CONCERNING CARGO AND OTHER ARTICLES	GEN 1.4 - 1
1.4.2 動植物檢疫規定/ ANIMAL, PLANT AND PRODUCT QUARANTINE REQUIREMENTS	GEN 1.4 - 1
GEN 1.5 航空器儀表裝備及飛航文件/ Aircraft instruments, equipment and flight documents	GEN 1.5 - 1
1.5.1 通則/ GENERAL	GEN 1.5 - 1
1.5.2 必要裝備/ SPECIAL EQUIPMENT TO BE CARRIED	GEN 1.5 - 1
GEN 1.6 本國法規摘要及國際協定/公約/ Summary of national regulations and international agreements/conventions	GEN 1.6 - 1
1.6.1 本國法規/ NATIONAL REGULATIONS	GEN 1.6 - 1
1.6.2 國際協定/公約/ INTERNATIONAL AGREEMENT/CONVENTIONS	GEN 1.6 - 2
GEN 1.7 與國際民航組織標準、建議措施及程序相異處/ Differences from ICAO Standards, recommended practices and procedures	GEN 1.7 - 1
Annex 1 — Personnel Licensing	GEN 1.7 - 1
Annex 2 — Rules of the Air	GEN 1.7 - 1
Annex 3 — Meteorological Service for International Air Navigation	GEN 1.7 - 2
Annex 4 — Aeronautical Charts	GEN 1.7 - 4
Annex 5 — Units of Measurement to be Used in Air and Ground Operations	GEN 1.7 - 8
Annex 6 — Operation of Aircraft Part I — International Commercial Air Transport — Aero- planes	GEN 1.7 - 8
Annex 6 — Operation of Aircraft Part II — International General Aviation — Aeroplanes	GEN 1.7 - 9
Annex 6 — Operation of Aircraft Part III — International Operations — Helicopters	GEN 1.7 - 9
Annex 7 — Aircraft Nationality and Registration Marks	GEN 1.7 - 10
Annex 8 — Airworthiness of Aircraft	GEN 1.7 - 11
Annex 9 — Facilitation	GEN 1.7 - 11
Annex 10 — Aeronautical Telecommunications Volume I — Radio Navigation Aids	GEN 1.7 - 12
Annex 10 — Aeronautical Telecommunications Volume II — Communications Procedures including those with PANS status	GEN 1.7 - 14
Annex 10 — Aeronautical Telecommunications Volume III — Communication Systems	GEN 1.7 - 14
Annex 10 — Aeronautical Telecommunications Volume IV — Surveillance and Collision Avoidance Systems	GEN 1.7 - 14
Annex 11 — Air Traffic Services	GEN 1.7 - 15
Annex 12 — Search and Rescue	GEN 1.7 - 17
Annex 13 — Aircraft Accident And Incident Investigation	GEN 1.7 - 17
Annex 14 — Aerodromes Volume I — Aerodrome Design and Operations	GEN 1.7 - 17
Annex 14 — Aerodromes Volume II — Heliports	GEN 1.7 - 20

臺名 航用地名 Name of station Location indicator	觀測類型及頻率/ 自動觀測設備 Type & Frequency of observation (UTC)/ AUTO observing equipment	氣象報告類型及趨勢預報 Types of MET reports & availability of trend forecast	氣象觀測系統及位置 Observation System & Site(s)	作業時間 Hours of operation (UTC)	氣候資訊 Climatological information
1	2	3	4	5	6
臺北/松山 TAIPEI/ SONGSHAN RCSS	h 2200-1600, H 1600-2200, S / AUTO:AWOS ⁽¹⁾	METAR, SPECI, TREND	• 風向風速計 Wind sensor (Anemometer) See AD chart • 跑道視程感應器(向前散射儀) RVR sensor (Forward-scatter meter) See AD chart • 雲高計 Ceilometer R10 TDZ R28 TDZ • 溫度溼度感應器 Temperature and relative humidity sensor R10 TDZ R28 TDZ • 氣壓感應器 Pressure sensor R10 TDZ R28 TDZ • 自動雨量計 Precipitation gauge R10 TDZ R28 TDZ • 低空風切警報系統 Low Level Wind Shear Alert System (LLWAS): 12 surface wind sensors located in the airport and its vicinity	參閱AD 2.11 See AD 2.11	AVBL ⁽²⁾

臺名 航用地名 Name of station Location indicator	觀測類型及頻率/ 自動觀測設備 Type & Frequency of observation (UTC)/ AUTO observing equipment	氣象報 告類型及 趨勢預報 Types of MET reports & availability of trend forecast	氣象觀測系統及位置 Observation System & Site(s)	作業時間 Hours of operation (UTC)	氣候資訊 Climatological information
1	2	3	4	5	6
臺灣桃園國 際 TAIPEI/ TAIWAN TAOYUAN INTL RCTP	h, S / AUTO:AWOS ⁽¹⁾	METAR, SPECI, TREND	• 風向風速計 Wind sensor (Anemometer) See AD chart • 跑道視程感應器(向前散射儀) RVR sensor (Forward-scatter meter) See AD chart • 雲高計 Ceilometer R05L/23R TDZ/END R05R/23L TDZ/END • 溫度溼度感應器 Temperature and relative humidity sensor R05L TDZ R23L TDZ • 氣壓感應器 Pressure sensor R05L/23R TDZ/END R05R/23L TDZ/END • 自動雨量計 Precipitation gauge R05L/23R MID R05R/23L MID • 低空風切警報系統 Low Level Wind Shear Alert System (LLWAS): 16 surface wind sensors located in the airport and its vicinity	參閱AD 2.11 See AD 2.11	AVBL ⁽²⁾

ENR 0.6 第二部 目錄/

TABLE OF CONTENTS TO PART 2

PART 2 - 航路 (ENR)/	
EN-ROUTE (ENR)	PART 2- - 1
ENR 0/	
0	ENR 0.1 - 1
ENR 0.1 序言/	
Preface	ENR 0.1 - 1
ENR 0.2 飛航指南修正紀錄/	
Record of AIP Amendments	ENR 0.2 - 1
ENR 0.3 飛航指南補充通知書紀錄/	
Record of AIP Supplements	ENR 0.3 - 1
ENR 0.4 飛航指南頁碼校對表/	
Checklist of AIP Pages	ENR 0.4 - 1
ENR 0.5 飛航指南手改修正表/	
List of Hand Amendments to the AIP	ENR 0.5 - 1
ENR 0.6 第二部 目錄/	
Table of contents to part 2	ENR 0.6 - 1
ENR 1 通則與程序/	
1 GENEREAL RULES AND PROCEDURES	ENR 1.1 - 1
ENR 1.1 通則/	
General rules	ENR 1.1 - 1
1.1.1 說明/	
INTRODUCTION	ENR 1.1 - 1
1.1.2 通則與程序/	
GENERAL RULES AND PROCEDURES	ENR 1.1 - 1
ENR 1.2 目視飛航規則/	
Visual flight rules	ENR 1.2 - 1
1.2.1 目視飛航天氣最低限度/	
METEOROLOGICAL MINIMUMS	ENR 1.2 - 1
1.2.2 目視飛航限制/	
VFR FLIGHT RESTRICTIONS	ENR 1.2 - 2
1.2.3 目視飛航高度/	
VFR FLIGHT ALTITUDE	ENR 1.2 - 2
1.2.4 特種目視飛航/	
SPECIAL VFR FLIGHT	ENR 1.2 - 2
1.2.5 改變目視飛航為儀器/	
CHANGE FROM VFR FLIGHT TO IFR FLIGHT	ENR 1.2 - 2
ENR 1.3 儀器飛航規則/	
Instrument flight rules	ENR 1.3 - 1
1.3.1 通則/	
GENERAL	ENR 1.3 - 1
1.3.2 航空器儀器飛航裝備/	
AIRCRAFT EQUIPMENT	ENR 1.3 - 1
1.3.3 儀器飛航高度/	
MINIMUM LEVELS FOR IFR FLIGHT	ENR 1.3 - 1
1.3.4 改變儀器飛航為目視飛航/	
CHANGE FROM IFR FLIGHT TO VFR FLIGHT	ENR 1.3 - 1
1.3.5 目視進場/	
VISUAL APPROACH	ENR 1.3 - 1
ENR 1.4 空域分類/	
ATS airspace classification	ENR 1.4 - 1
1.4.1 空域分類/	
ATS AIRSPACE CLASSIFICATION	ENR 1.4 - 1
1.4.2 航空器進入空域前建立雙向無線電通信補充說明/	

SUPPLEMENT TO THE ESTABLISHMENT OF TWO-WAY RADIO COMMUNICATION BEFORE ENTERING A CONTROLLED AIRSPACE	ENR 1.4 - 1
1.4.3 各類空域之服務及限制/ SERVICES AND LIMITATIONS IN EACH CLASS OF AIRSPACE	ENR 1.4 - 2
ENR 1.5 等待、進場及離場程序/ Holding, approach and departure procedures	ENR 1.5 - 1
1.5.1 通則/ GENERAL	ENR 1.5 - 1
1.5.2 到場航空器/ ARRIVING AIRCRAFT	ENR 1.5 - 1
1.5.3 誤失進場/ MISSED APPROACH	ENR 1.5 - 1
1.5.4 航空器進場類別/ AIRCRAFT APPROACH CATEGORIES	ENR 1.5 - 2
1.5.5 離場航空器/ DEPARTING AIRCRAFT	ENR 1.5 - 2
1.5.6 等待/ HOLDING	ENR 1.5 - 3
1.5.7 ILS臨界區保護/ ILS CRITICAL AREA PROTECTION	ENR 1.5 - 4
1.5.8 自動降落或練習低能見度進場/ AUTOLAND OR PRACTICE LOW VISIBILITY APPROACHES	ENR 1.5 - 5
ENR 1.6 雷達服務及程序/ Radar services and procedures	ENR 1.6 - 1
1.6.1 初級搜索雷達/ PRIMARY SURVEILLANCE RADAR	ENR 1.6 - 1
1.6.2 次級搜索雷達/ SECONDARY SURVEILLANCE RADAR	ENR 1.6 - 1
1.6.3 臺北飛航情報區雷達管制服務/ RADAR SERVICES IN TAIPEI FIR	ENR 1.6 - 1
1.6.4 雷達引導航空器雙向無線電失效作業程序/ RADIO COMMUNICATION FAILURE PROCEDURES FOR IFR AIRCRAFT UNDER RADAR VECTOR	ENR 1.6 - 4
ENR 1.7 高度表撥定程序/ Altimeter setting procedures	ENR 1.7 - 1
1.7.1 說明/ INTRODUCTION	ENR 1.7 - 1
1.7.2 基本程序/ BASIC ALTIMETER SETTING PROCEDURES	ENR 1.7 - 1
1.7.3 高度表撥定地區之概述/ DESCRIPTION OF ALTIMETER SETTING REGION	ENR 1.7 - 3
1.7.4 適用於航空器使用者(包括駕駛員)之程序/ PROCEDURES APPLICABLE TO OPERATORS (INCLUDING PILOTS)	ENR 1.7 - 3
ENR 1.8 本國有關之補充規定與實施細則/ Supplementary procedures and national rules	ENR 1.8 - 1
1.8.1 馬赫值管制程序/ MACH NUMBER TECHNIQUE PROCEDURES	ENR 1.8 - 1
1.8.2 航路使用限制/ RESTRICTIVE USE OF AIRWAYS	ENR 1.8 - 2
1.8.3 臺北飛航情報區縮減垂直隔離 (RVSM) 政策及程序/ RVSM POLICY AND PROCEDURES IN TAIPEI FIR	ENR 1.8 - 2
1.8.4 縮減垂直隔離(RVSM)緊急程序/ CONTINGENCY PROCEDURES FOR RVSM	ENR 1.8 - 8
1.8.5 管制員/駕駛員RVSM術語/ CONTROLLER / PILOT PHRASEOLOGY FOR RVSM	ENR 1.8 - 13
1.8.6 臺北與香港飛航情報區間A1航路及G581航路與M750區域航行航路使用方式 : / USE OF ATS ROUTES A1, G581 AND RNAV ROUTE M750 BETWEEN HONG KONG AND TAIPEI FIRS	ENR 1.8 - 15
1.8.7 臺北與福岡飛航情報區間A1航路及M750區域航行航路使用方式/	

ENR 1.8 本國有關之補充規定與實施細則

1.8.1 馬赫值管制程序

1. 臺北飛航情報區與馬尼拉、香港飛航情報區間，依協議書規範，適用馬赫值管制程序。
2. 馬赫值管制程序之細節，詳載於國際民航組織飛航服務程序 (Doc 4444) 及區域補充程序 (Doc 7030) 。
3. 為遵守隔離需求，航管單位將依航情狀況，指定航空器保持適當之馬赫值空速。如航空器無法飛航許可之馬赫值空速，應儘速通知航管單位。
4. 航空器如需改變其許可之馬赫值空速，應儘速通知航管單位。
5. 臺北飛航情報區與馬尼拉飛航情報區間實施馬赫值管制程序，航空器於飛航情報區邊界 (交管點) 之最低前後隔離為：

ENR 1.8 SUPPLEMENTARY PROCEDURES AND NATIONAL RULES

1.8.1 MACH NUMBER TECHNIQUE PROCEDURES

1. Mach Number Technique Procedures will be applied to the requirements of Letter of Agreement between Taipei FIR and Hong Kong FIR as well as Taipei FIR and Manila FIR by control centers.
2. Details of Mach Number Technique contained in ICAO Doc. 4444 (Rules of the Air and Air Traffic Procedures) and Doc. 7030 (Regional Supplementary Procedures).
3. To comply with required separation, ATC may assign aircraft Mach number to maintain as appropriate to traffic situation. Pilot shall advise ATC as soon as possible if the assigned Mach Number not feasible to the aircraft operation.
4. Notify ATC as soon as possible if deviations to the cleared Mach Number is necessary.
5. Between Taipei FIR and Manila FIR, when Mach Number Technique applied, minimum longitudinal separation between aircraft at Flight Information Region boundary (transferring point) will be:

隔離要求 Separation Requirement	
前機較後機快 The preceding Aircraft is faster	
馬赫值差異 Difference in Mach Numbers	前後隔離 Longitudinal Separation
0 - 0.01	10 min
0.02	9 min
0.03	8 min
0.04	7 min
0.05	6 min
0.06	5 min

6. 臺北飛航情報區與香港飛航情報區間實施馬赫值管制程序，航空器於飛航情報區邊界(交管點)之前後隔離為：
6. Between Taipei FIR and Hong Kong FIR, when Mach Number Technique applied, minimum longitudinal separation between aircraft at Flight Information Region boundary (transferring point) will be:

隔離要求 Separation Requirement	
前機較後機慢 The following Aircraft is faster	
馬赫值差異 Difference in Mach Numbers	前後隔離 Longitudinal Separation
0.01	11 min
0.02	12 min
0.03	13 min
0.04	14 min

隔離要求 Separation Requirement	
前機較後機慢 The following Aircraft is faster	
馬赫值差異 Difference in Mach Numbers	前後隔離 Longitudinal Separation
0.05 or greater	15 min

1.8.2 航路使用限制

- 為紓解W4航路後龍(HLG VOR)地區航行擁擠情況，降低飛安事件，每日0000-0230及0600-0800世界標準時間，臺灣桃園國際機場起飛使用M646航路南下之班機，除航管另有指示外，應經由TINHO、B591航路、綠島(GID)、Q11航路銜接M646航路飛航。
- 為紓解航情擁擠情況，每日0600-0800世界標準時間，臺灣桃園國際機場起飛經由KABAM N892航路南下之班機，除航管另有指示外，應經由B591航路、Q12航路銜接N892航路飛航。
- 每日2200-1600世界標準時間，經KAPLI、KABAM或POTIB進出臺北飛航情報區之過境航空器，北上使用W4航路，南下使用B591/Q11航路。
- 每日1750-2020世界標準時間，由POTIB進入臺北飛航情報區飛往仁川飛航情報區之班機，應由Q11航路、TINHO DCT KUDOS、M750航路、MOLKA，銜接福岡飛航情報區Z401航路飛航。
- 每日1700-2200世界標準時間，自香港飛航情報區進入臺北飛航情報區應遵守下列規定：
 - 香港飛航情報區起飛之航機應由ENVAR/ELATO進入本區。
 - 過境香港飛航情報區，並以韓國為目的地之航機應由ENVAR/ELATO進入本區。
 - 過境香港飛航情報區，並以日本為目的地之航機應由KAPLI進入本區，並由IGURU離開本區。

1.8.3 臺北飛航情報區縮減垂直隔離 (RVSM) 政策及程序

- RVSM空域
臺北飛航情報區內，自飛航空層290 (含) 至飛航空層410 (含) 之管制空域為RVSM空域，RVSM空域內各航路使用高度請見ENR 3.1節。其他航路之指定方式，依據ICAO第2號附約附錄3表a)之規定。
- 適航、核准作業及監視
 - 核准作業
航空器使用人應向航空器註冊國或國籍國申請實施RVSM作業之核准。美國聯邦航空總署(Federal Aviation Administration，以下簡稱FAA)代表太平

1.8.2 RESTRICTIVE USE OF AIRWAYS

- In order to reduce traffic jam near Houlong (HLG VOR) area, during 0000-0230 and 0600-0800UTC, south-bound traffic departing from Taipei/Taiwan Taoyuan Int'l airport via M646 shall route via TINHO B591 GID Q11 thereafter join M646, unless otherwise approved by ATC.
- In order to reduce traffic jam, during 0600-0800UTC, south-bound traffic departing from Taipei/Taiwan Taoyuan Int'l airport via KABAM N892 shall route via B591 Q12 thereafter join N892, unless otherwise approved by ATC.
- During 2200-1600UTC, transit flights via KAPLI, KABAM and POTIB shall file airway W4 for north-bound flights and airway B591/Q11 for southbound flights.
- During 1750-2020UTC, inbound traffic via POTIB to Incheon FIR shall route Q11 TINHO DCT KUDOS M750 MOLKA to join Z401 in Fukuoka FIR.
- During 1700-2200UTC, traffic from Hong Kong FIR entering Taipei FIR shall comply with the following regulations:
 - Flights departing from Hong Kong FIR shall enter Taipei FIR via ENVAR/ELATO.
 - Flights transiting Hong Kong FIR and destined for Korea shall enter Taipei FIR via ENVAR/ELATO.
 - Flights transiting Hong Kong FIR and destined for Japan shall enter Taipei FIR via KAPLI and leave Taipei FIR via IGURU.

1.8.3 RVSM POLICY AND PROCEDURES IN TAIPEI FIR

- Identification of RVSM Airspace
In Taipei FIR, RVSM airspace is prescribed within controlled airspace between FL 290 and FL 410 (inclusive). Please see subsection ENR 3.1. Flight level assignments for other airways are in accordance with ICAO Annex 2 Appendix 3 Table a).
- Airworthiness and Operational Approval and Monitoring
 - APPROVAL PROCESS

ENR 5.5 空中運動及娛樂活動

5.5.1 超輕型載具

1. 本表所列空域係交通部民用航空局已公告之超輕型載具活動空域，其中由超輕型載具活動團體申請使用，完成活動場地申請並經民用航空局核准其活動指導手冊者，稱為「核定空域」；核定空域之超輕型載具活動團體聯繫方式請見本表「業者/使用者電話號碼」。
2. 空域垂直範圍標示 MAX Limit 者表示該空域地勢較高部分，不受高度上限 (Upper Limit) 之限制，改以 MAX Limit 為上限。

ENR 5.5 AERIAL SPORTING AND RECREATIONAL ACTIVITIES

5.5.1 ULTRA-LIGHT VEHICLE

1. The airspaces listed in this table refers to the ultra-light vehicle activity airspaces designated by CAA. After an activity association completing the application and having its activities guideline has been approved by CAA, the airspace is known as "authorized airspace". Contact information of activity associations in each authorized airspace is shown in the "Operator/User Telephone Number" column of this table.
2. In those parts of the airspace with high terrain, the maximum limit overrides the upper limit.

名稱與水平範圍 Designation and lateral limits	垂直範圍 Vertical limits	業者/使用者 電話號碼 Operator/User Tel Nr.	備註與活動時間 Remarks and time of ACT
1	2	3	4
超輕型載具 Ultra-light vehicle			
北斗東/Beidou East 235835N 1203711E - 235629N 1203602E - 234827N 1203512E - 234751N 1203841E - 235717N 1203852E - 235835N 1203711E.	MAX Limit: 500 FT AGL Upper Limit: 2000 FT AMSL Lower Limit: SFC	台灣太亞航空休閒觀光暨發展協會 Pacific Asia Aviation Association 886-49-2512908, 886-922-064787 中華民國動力飛行傘訓練協會 Republic of China Powered Paragliding Training Association 886-989-392158 社團法人順風飛行協會 Shun Feng Flying Club Association 886-963-559885	備註: 1. 東面與貓羅溪超輕空域相接，南面與濁水溪超輕空域相接。 2. 不含社頭都市計畫區、田中都市計畫區、二水都市計畫區、八卦山脈風景特定區等都市計畫區。 3. 須依「超輕活動團體固定活動航線」東航線進出本空域：東航線 235831N 1203951E 235422N 1203635E 235122N 1203709E 234651N 1203617E 4. 附近有C35目視走廊。 Remarks: 1. The east side is connected with ULM airspace Maoluo River while the south side is connected with Jhuoshuei River. 2. Excluding urban planning area. 3. Use the "East route" for entering or exiting the airspace: East route 235831N 1203951E 235422N 1203635E 235122N 1203709E 234651N 1203617E 4. VFR corridor C35 passes. 活動時間/Time of ACT: HJ
北斗二林/Beidou Erlin 主區域/Main 235629N 1203602E - 235729N 1202707E - 240322N 1202426E - 235006N 1202101E - 235023N 1202352E - 234827N 1203512E - 235629N 1203602E.	Upper Limit: 1000 FT AMSL Lower Limit: SFC	台灣太亞航空休閒觀光暨發展協會 Pacific Asia Aviation Association 886-49-2512908, 886-922-064787 中華民國動力飛行傘訓練協會	備註: 1. 東面與北斗東超輕空域相接，南面與濁水溪超輕空域相接。 2. 不含溪湖都市計畫區、埤頭都市計畫區、竹塘都市計畫區、永靖都市計畫區、田尾都市計畫區、北斗都市計畫區、溪州都市計畫區、社頭都市計畫區、田中

名稱與水平範圍 Designation and lateral limits	垂直範圍 Vertical limits	業者/使用者 電話號碼 Operator/User Tel Nr.	備註與活動時間 Remarks and time of ACT
1	2	3	4
超輕型載具 Ultra-light vehicle			
禁止進入區域/No Entry Area 235559N 1203318E - 235512N 1203335E - 235204N 1203225E - 235043N 1203038E - 235041N 1202859E - 235129N 1202908E - 235444N 1203107E - 235559N 1203256E - 235559N 1203318E.	Upper Limit: 1000 FT AMSL Lower Limit: SFC	Republic of China Powered Paragliding Training Association 886-989-392158 社團法人順風飛行協會 Shun Feng Flying Club Association 886-963-559885	都市計畫區、二林都市計畫區、高速公路員林交流道附近特定區、田尾園藝(公路公園)特定區及高速鐵路彰化車站特定區。 3. 須依「超輕活動團體固定活動航線」北航線進出本空域: 北航線 235817N 1203725E 235631N 1203623E 235616N 1203330E 235616N 1203047E 235621N 1203012E 235723N 1202654E 4. 附近有C3及C11目視走廊。 Remarks: 1. The east side is connected with ULM airspace Beidou East while the south side is connected with Jhuoshuei River. 2. Excluding urban planning area. 3. Use the "North route" for entering or exiting the airspace: North route 235817N 1203725E 235631N 1203623E 235616N 1203330E 235616N 1203047E 235621N 1203012E 235723N 1202654E 4. VFR corridors C3 and C11 pass. 活動時間/Time of ACT: HJ

名稱與水平範圍 Designation and lateral limits	垂直範圍 Vertical limits	業者/使用者 電話號碼 Operator/User Tel Nr.	備註與活動時間 Remarks and time of ACT
1	2	3	4
超輕型載具 Ultra-light vehicle			
不老溫泉/Bulao Hot Spring 230626N 1204151E - 230426N 1204021E - 230053N 1203809E - 225336N 1203703E - 225248N 1203854E - 230626N 1204151E.	MAX Limit: 500 FT AGL Upper Limit: 3000 FT AMSL Lower Limit: SFC	臺灣飛行大 玩飛運動協會 Taiwan Aviation Master Activi- ty Association 886-970-356359 社團法人中 華航空協會 CTAL 886-925-228303 社團法人中華民國 運動飛行發展協會 Sport Aviation Association of R.O.C. Taiwan 886-931-883194	備註: 1. 南面與南華超輕空域相接。 2. 起飛前需先以電話與海軍左 營塔臺聯絡(886-7-5856823)。 Remarks: 1. The south side is connected with ULM airspace Nanhua. 2. Contact Zuoying tower (886-7-5856823) before take- off. 活動時間/Time of ACT: HJ
大漢溪/Dahan River 245806N 1212338E - 245644N 1212109E - 245612N 1212015E - 245428N 1211841E - 245435N 1211920E - 245601N 1212110E - 245624N 1212126E - 245748N 1212340E - 245806N 1212338E.	MAX Limit: 500 FT AGL Upper Limit: 1000 FT AMSL Lower Limit: SFC	-	備註: 1. 不含鶯歌都市計畫區之住宅 區。 2. 附近有C10及C33目視走廊。 Remarks: 1. Excluding residential quar- ter in urban planning area. 2. VFR corridors C10, C33 pass. 活動時間/Time of ACT: MON- FRI 0730-SS (UTC) MON-FRI SR-0230 (UTC) SAT, SUN, HOL HJ (UTC)

名稱與水平範圍 Designation and lateral limits	垂直範圍 Vertical limits	業者/使用者 電話號碼 Operator/User Tel Nr.	備註與活動時間 Remarks and time of ACT
1	2	3	4
超輕型載具 Ultra-light vehicle			
大里/Dali A區/Area A 240556N 1204138E - 240549N 1204143E - 240513N 1204059E - 240454N 1204022E - 240500N 1203951E - 240502N 1204017E - 240528N 1204104E - 240556N 1204138E. B區/Area B 240500N 1203951E - 240454N 1204022E - 240420N 1204119E - 240305N 1204104E - 240049N 1204004E - 235926N 1204006E - 240049N 1203842E - 240349N 1203815E - 240500N 1203951E. C區/Area C 235926N 1204006E - 235745N 1204009E - 235723N 1203914E - 240049N 1203842E - 235926N 1204006E.	MAX Limit: 500 FT AGL Upper Limit: 800 FT AMSL Lower Limit: SFC MAX Limit: 500 FT AGL Upper Limit: 800 FT AMSL Lower Limit: SFC MAX Limit: 500 FT AGL Upper Limit: 1000 FT AMSL Lower Limit: SFC	台灣太亞航空休閒觀光暨發展協會 Pacific Asia Aviation Association 886-49-2512908, 886-922-064787 中華民國動力飛行傘訓練協會 Republic of China Powered Paragliding Training Association 886-989-392158 社團法人順風飛行協會 Shun Feng Flying Club Association 886-963-559885	備註: 1. 西面與貓羅溪超輕空域相連。 2. A區僅供進出B區使用，不得於A區內盤旋活動。 3. 附近有C35目視走廊。 Remarks: 1. The west side is connected with ULM airspace Maoluo River. 2. Area A is only for entering and exiting Area B, orbiting activity in Area A is prohibited. 3. VFR corridor C35 passes. 活動時間/Time of ACT: MON-FRI 0800-SS (UTC) MON-FRI SR-0130 (UTC) SAT , SUN , HOL HJ (UTC)
大鵬灣/Dapeng Gulf 222540N 1203000E - 222729N 1203002E - 222810N 1202743E - 222719N 1202710E - 222540N 1203000E.	Upper Limit: 1000 FT AMSL Lower Limit: SFC	-	備註: 1. 不含東港都市計畫區及林邊鄉都市計畫區。 2. 附近有C9目視走廊。 Remarks: 1. Excluding urban planning area. 2. VFR corridors C9 passes. 活動時間/Time of ACT: HJ

名稱與水平範圍 Designation and lateral limits	垂直範圍 Vertical limits	業者/使用者 電話號碼 Operator/User Tel Nr.	備註與活動時間 Remarks and time of ACT
1	2	3	4
超輕型載具 Ultra-light vehicle			
高樹/Gaoshu 224608N 1203838E - 224716N 1203654E - 224817N 1203443E - 224947N 1203721E - 224608N 1203838E.	MAX Limit: 500 FT AGL Upper Limit: 1000 FT AMSL Lower Limit: SFC	社團法人中 華航空協會 CTAL 886-925-228303	備註: 1. 西面與南華超輕空域相接。 2. 起飛前需先以電話與海軍左營塔臺聯絡(886-7-5856823)。 Remarks: 1. The west side is connected with ULM airspace Nanhua. 2. Contact Zuoying tower (886-7-5856823) before take-off. 活動時間/Time of ACT: SAT , SUN , HOL HJ (UTC)
恆春機場/Hengchun Airport A區/Area A 220234N 1204336E - 220326N 1204244E - 220409N 1204246E - 220255N 1204401E - 220234N 1204336E. B區/Area B 220326N 1204244E - 220309N 1204119E - 220509N 1204110E - 220908N 1204014E - 220919N 1204145E - 220540N 1204257E - 220409N 1204246E - 220326N 1204244E.	Upper Limit: 2500 FT AMSL Lower Limit: SFC Upper Limit: 2500 FT AMSL Lower Limit: SFC	-	備註: 1. A區為進出機場之空域，活動團體不得在本區停留，且不得飛入墾丁國家公園上空。 2. B區為活動空域，活動團體不得進入車城都市計畫區。 3. 附近有C9及C15目視走廊。 Remarks: 1. Area A is only for entering and exiting aerodrome airspace, staying in this airspace and flying over Kenting National Park are prohibited. 2. Area B is the activity area. Entering Checheng urban planning area is prohibited. 3. VFR corridors C9 and C15 pass. 活動時間/Time of ACT: SAT , SUN , HOL HJ (UTC)

名稱與水平範圍 Designation and lateral limits	垂直範圍 Vertical limits	業者/使用者 電話號碼 Operator/User Tel Nr.	備註與活動時間 Remarks and time of ACT
1	2	3	4
超輕型載具 Ultra-light vehicle			
花蓮木瓜溪/Hualien Mugua River 235414N 1213411E - 235350N 1213504E - 234714N 1213105E - 234728N 1212959E - 235046N 1213104E - 235251N 1213235E - 235414N 1213411E.	Upper Limit: 500 FT AMSL Lower Limit: SFC	-	備註: 1. 不得進入「擬定東華大學城特定區主要計畫案」之範圍。 2. 本空域僅供進出花東超輕空域使用，不得於空域內盤旋活動。 3. 使用本空域請依本局網頁公布之「花蓮木瓜溪超輕空域飛行管理作業指導」辦理。 4. 南面與花東超輕空域相接。 Remarks: 1. Entering Dong Hwa University master planning area is prohibited. 2. This airspace is only for entering and exiting ULM airspace HuaTung, orbiting activity in this airspace is prohibited. 3. Details please refer to "Instructions for the operation within Hualien Mugua River" in the CAA website in Chinese version. 4. The south side is connected with ULM airspace Huatung. 活動時間/Time of ACT: SAT , SUN , HOL 0500-SS (UTC)

名稱與水平範圍 Designation and lateral limits	垂直範圍 Vertical limits	業者/使用者 電話號碼 Operator/User Tel Nr.	備註與活動時間 Remarks and time of ACT
1	2	3	4
超輕型載具 Ultra-light vehicle			
花東/Huatung A區/Area A 234840N 1212710E - 234123N 1212410E - 233904N 1213134E - 234653N 1213400E - 234840N 1212710E. B區/Area B 234123N 1212410E - 225811N 1210621E - 225551N 1210853E - 225830N 1211853E - 233904N 1213134E - 234123N 1212410E.	MAX Limit: 1000 FT AGL Upper Limit: 1500 FT AMSL Lower Limit: SFC MAX Limit: 1000 FT AGL Upper Limit: 3000 FT AMSL Lower Limit: SFC	花蓮縣超輕型 載具運動協會 Hualien Ultra-light Vehicle Association 886-933-992610 社團法人花 蓮縣航空協會 Hualien County Avi- ation Association 886-939-147523 社團法人花蓮縣非凡 輕航機休閒運動協會 Hualien Fefan Light Sport Aircraft Rec- reation Association 886-928-298196	備註: 1. 花東縱谷及海岸山脈區域， 不含壽豐、鳳林、瑞穗、玉里、 富里、豐濱、長濱、成功、東 河、池上、關山、鹿野都市計畫 區。 2. 有C6與C12目視走廊，及臺 東鹿野高臺熱氣球空域。 Remarks: 1. Excluding urban planning area. 2. VFR corridors C6 and C12 pass and Taitung Luye Gaotai Hot Air Balloon airspace over- laps. 活動時間/Time of ACT: SAT , SUN , HOL HJ (UTC)
濁水溪/Jhuoshuei River 235102N 1201742E - 234805N 1201648E - 234721N 1202841E - 234558N 1203624E - 234752N 1203840E - 234930N 1202910E - 235023N 1202352E - 235006N 1202101E - 235102N 1201742E.	Upper Limit: 1000 FT AMSL Lower Limit: SFC	台灣太亞航空休 閒觀光暨發展協會 Pacific Asia Avia- tion Association 886-49-2512908, 886-922-064787 中華民國動力 飛行傘訓練協會 Republic of Chi- na Powered Paragliding Train- ing Association 886-989-392158 社團法人順 風飛行協會 Shun Feng Flying Club Association 886-963-559885	備註: 1. 北面與北斗二林及北斗東超 輕空域相連。 2. 不含西螺都市計畫區、二水 都市計畫區。 3. 附近有C3、C11及C35目視走 廊。 Remarks: 1. The north side is connected with ULM airspace Beidou Er- lin and Beidou East. 2. Excluding urban planning area. 3. VFR corridors C3, C11 and C35 pass. 活動時間/Time of ACT: SAT , SUN , HOL HJ (UTC)

名稱與水平範圍 Designation and lateral limits	垂直範圍 Vertical limits	業者/使用者 電話號碼 Operator/User Tel Nr.	備註與活動時間 Remarks and time of ACT
1	2	3	4
超輕型載具 Ultra-light vehicle			
蘭陽溪/Lanyang River 244200N 1213800E - 244509N 1214719E - 244128N 1214757E - 244100N 1213830E - 244200N 1213800E.	Upper Limit: 1000 FT AMSL Lower Limit: SFC	-	備註: 1. 不含宜蘭縣政中心及五結學進地區都市計畫區。 2. 東面與宜蘭超輕空域相接。 3. 附近有C10目視走廊。 Remarks: 1. Excluding urban planning area. 2. The east side is connected with ULM airspace Yilan. 3. VFR corridors C10 passes. 活動時間/Time of ACT: SAT , SUN , HOL HJ (UTC)
羅東/Luodong 244100N 1213830E - 244236N 1213645E - 243839N 1213352E - 243556N 1214836E - 243632N 1214939E - 243839N 1214549E - 244008N 1214426E - 244126N 1214401E - 244100N 1213830E.	MAX Limit: 500 FT AGL Upper Limit: 1000 FT AMSL Lower Limit: SFC	-	備註: 1. 北面與蘭陽溪超輕空域相接。 2. 不得進入國有林班地、「三星都市計畫」及「梅花湖風景特定區計畫」等區域。 Remarks: 1. The north side is connected with ULM airspace Lanyang River. 2. Entering National forest compartment, Sanxing urban planning area or Meihua Lake scenic planning area is prohibited. 活動時間/Time of ACT: HJ

名稱與水平範圍 Designation and lateral limits	垂直範圍 Vertical limits	業者/使用者 電話號碼 Operator/User Tel Nr.	備註與活動時間 Remarks and time of ACT
1	2	3	4
超輕型載具 Ultra-light vehicle			
貓羅溪/Maoluo River A區/Area A 240349N 1203815E - 240325N 1203744E - 240316N 1203739E - 240055N 1203750E - 240049N 1203842E - 240349N 1203815E. B區/Area B 240055N 1203750E - 235835N 1203711E - 235714N 1203852E - 235723N 1203914E - 240049N 1203842E - 240055N 1203750E.	MAX Limit: 500 FT AGL Upper Limit: 800 FT AMSL Lower Limit: SFC MAX Limit: 500 FT AGL Upper Limit: 1000 FT AMSL Lower Limit: SFC	台灣太亞航空休閒觀光暨發展協會 Pacific Asia Aviation Association 886-49-2512908, 886-922-064787 中華民國動力飛行傘訓練協會 Republic of China Powered Paragliding Training Association 886-989-392158 社團法人順風飛行協會 Shun Feng Flying Club Association 886-963-559885	備註: 1. 東面與大里超輕空域、南面與北斗東超輕空域相連。 2. A區及B區僅供進出北斗東空域使用，不得於空域內盤旋活動 3. 附近有C35目視走廊。 Remarks: 1. The east side is connected with ULM airspace Dali while the south side is connected with Beidou East. 2. Area A and B are only for entering and exiting ULM airspace Beidou East, orbiting activity in Area A and B is prohibited. 3. VFR corridor C35 passes. 活動時間/Time of ACT: HJ
苗栗/Miaoli 243659N 1205640E - 243635N 1204703E - 242838N 1204129E - 242614N 1204902E - 242547N 1205324E - 243659N 1205640E.	MAX Limit: 500 FT AGL Upper Limit: 1000 FT AMSL Lower Limit: SFC	-	備註: 1. 活動空域不含苗栗市、後龍鎮、通霄鎮、公館鄉、頭屋鄉、銅鑼鄉都市計畫區。 2. 苗栗附近有C3及C33目視走廊。 Remarks: 1. Excluding urban planning area. 2. VFR corridors C3, C33 pass. 活動時間/Time of ACT: SAT , SUN , HOL HJ (UTC)

AD 0.6 第三部 目錄/

TABLE OF CONTENTS TO PART 3

PART 3 - 機場 (AD)/	
AERODROMES (AD)	PART 3- - 1
AD 0/	
0	AD 0.1 - 1
AD 0.1 序言/	
Preface	AD 0.1 - 1
AD 0.2 飛航指南修正紀錄/	
Record of AIP Amendments	AD 0.2 - 1
AD 0.3 飛航指南補充通知書紀錄/	
Record of AIP Supplements	AD 0.3 - 1
AD 0.4 飛航指南頁碼校對表/	
Checklist of AIP Pages	AD 0.4 - 1
AD 0.5 飛航指南手改修正表/	
List of Hand Amendments to the AIP	AD 0.5 - 1
AD 0.6 第三部 目錄/	
Table of contents to part 3	AD 0.6 - 1
AD 1 機場/直昇機機場概述/	
1 AERODROMES/HELIPORTS INTRODUCTION	AD 1.1 - 1
AD 1.1 機場/直昇機機場可用性及使用條件/	
Aerodrome/availability	AD 1.1 - 1
AD 1.1.1 一般規定/	
GENERAL CONDITIONS	AD 1.1 - 1
AD 1.1.2 適用國際民航組織文件/	
APPLICABLE ICAO DOCUMENTS	AD 1.1 - 3
AD 1.1.3 民航機使用軍用機場之規定/	
REGULATIONS CONCERNING CIVIL USE OF MILITARY AIR BASES	AD 1.1 - 3
AD 1.1.4 預期隔離作業/	
APPLICATION OF ANTICIPATING SEPARATION	AD 1.1 - 3
AD 1.1.5 第二類儀器進場作業之申請/	
APPROVAL FOR CAT II OPERATIONS	AD 1.1 - 3
AD 1.1.6 跑道摩擦係數檢測/	
SURVEY OF RUNWAY FRICTION	AD 1.1 - 4
AD 1.1.7 噪音管制程序/	
NOISE ABATEMENT PROCEDURE	AD 1.1 - 6
AD 1.2 救難、消防服務及雪情計畫/	
Rescue and fire fighting services and snow plan	AD 1.2 - 1
AD 1.2.1 救援及與消防服務/	
RESCUE AND FIRE FIGHTING SERVICES	AD 1.2 - 1
AD 1.2.2 雪情計畫/	
SNOW PLAN	AD 1.2 - 1
AD 1.3 機場/直昇機機場索引/	
Index to aerodromes	AD 1.3 - 1
AD 1.4 機場/直昇機機場之分組/	
Grouping of aerodromes/heliports	AD 1.4 - 1
AD 2 RCBS 金門KINMEN	AD 2 RCBS - 1
RCBS AD 2.1 機場航用地名及名稱	AD 2 RCBS - 1
RCBS AD 2.1 AERODROME LOCATION INDICATOR AND NAME	AD 2 RCBS - 1
RCBS AD 2.2 機場地理與管理資料	AD 2 RCBS - 1
RCBS AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA	AD 2 RCBS - 1
RCBS AD 2.3 作業時間	AD 2 RCBS - 1
RCBS AD 2.3 OPERATIONAL HOURS	AD 2 RCBS - 1
RCBS AD 2.4 裝卸服務與設備	AD 2 RCBS - 2
RCBS AD 2.4 HANDLING SERVICES AND FACILITIES	AD 2 RCBS - 2

RCBS AD 2.5 商旅服務	AD 2 RCBS - 3
RCBS AD 2.5 PASSENGER FACILITIES	AD 2 RCBS - 3
RCBS AD 2.6 救援與消防設備	AD 2 RCBS - 3
RCBS AD 2.6 RESCUE AND FIRE FIGHTING SERVICES	AD 2 RCBS - 3
RCBS AD 2.7 可用季節-清除裝備	AD 2 RCBS - 3
RCBS AD 2.7 SEASONAL AVAILABILITY-CLEARING	AD 2 RCBS - 3
RCBS AD 2.8 停機坪、滑行道及核驗點位置	AD 2 RCBS - 3
RCBS AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA	AD 2 RCBS - 3
RCBS AD 2.9 地面活動導引、管制系統及標線	AD 2 RCBS - 4
RCBS AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS	AD 2 RCBS - 4
RCBS AD 2.10 機場障礙物	AD 2 RCBS - 5
RCBS AD 2.10 AERODROME OBSTACLES	AD 2 RCBS - 5
RCBS AD 2.11 氣象資訊之提供	AD 2 RCBS - 5
RCBS AD 2.11 METEOROLOGICAL INFORMATION PROVIDED	AD 2 RCBS - 5
RCBS AD 2.12 跑道場面特性	AD 2 RCBS - 6
RCBS AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS	AD 2 RCBS - 6
RCBS AD 2.13 公布距離	AD 2 RCBS - 7
RCBS AD 2.13 DECLARED DISTANCES	AD 2 RCBS - 7
RCBS AD 2.14 進場及跑道燈光設備	AD 2 RCBS - 8
RCBS AD 2.14 APPROACH AND RUNWAY LIGHTING	AD 2 RCBS - 8
RCBS AD 2.15 其他燈光設備及備用電源	AD 2 RCBS - 9
RCBS AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY	AD 2 RCBS - 9
RCBS AD 2.16 直昇機降落區	AD 2 RCBS - 9
RCBS AD 2.16 HELICOPTER LANDING AREA	AD 2 RCBS - 9
RCBS AD 2.17 飛航服務空域	AD 2 RCBS - 10
RCBS AD 2.17 ATS AIRSPACE	AD 2 RCBS - 10
RCBS AD 2.18 飛航服務無線電通訊設施	AD 2 RCBS - 10
RCBS AD 2.18 ATS COMMUNICATION FACILITIES	AD 2 RCBS - 10
RCBS AD 2.19 無線電助導航設施	AD 2 RCBS - 11
RCBS AD 2.19 RADIO NAVIGATION AND LANDING AIDS	AD 2 RCBS - 11
RCBS AD 2.20 本場飛航規定	AD 2 RCBS - 12
RCBS AD 2.20 LOCAL AERODROME REGULATIONS	AD 2 RCBS - 12
2.20.1 機場作業規定/ AIRPORT REGULATIONS	AD 2 RCBS - 12
2.20.2 金門機場低能見度作業程序 (航機駕駛員需注意事項) / LOW VISIBILITY PROCEDURES AT KINMEN AIRPORT (FOR PILOTS'ATTENTION)	AD 2 RCBS - 13
RCBS AD 2.21 降低噪音程序	AD 2 RCBS - 13
RCBS AD 2.21 NOISE ABATEMENT PROCEDURES	AD 2 RCBS - 13
RCBS AD 2.22 飛航程序	AD 2 RCBS - 13
RCBS AD 2.22 FLIGHT PROCEDURES	AD 2 RCBS - 13
2.22.1 傳統到場/進場程序(非RNAV程序)等待點經緯度/ HOLDING FIX COORDINATES OF CONVENTIONAL ARRIVAL/APPROACH PROCE- DURES(NON-RNAV PROCEDURES)	AD 2 RCBS - 13
RCBS AD 2.23 其他資訊	AD 2 RCBS - 14
RCBS AD 2.23 ADDITIONAL INFORMATION	AD 2 RCBS - 14
2.23.1 機場附近鳥類聚集狀況/ BIRD CONCENTRATIONS IN THE VICINITY OF THE AIRPORT	AD 2 RCBS - 14
RCBS AD 2.24 本場航圖	AD 2 RCBS - 16
RCBS AD 2.24 CHARTS RELATED TO AN AERODROME	AD 2 RCBS - 16
RCBS AD 2.25 穿越目視階段保護面之障礙物	AD 2 RCBS - 53
RCBS AD 2.25 VISUAL SEGMENT SURFACE (VSS) PENETRATION	AD 2 RCBS - 53
AD 2 RCCM 七美QIMEI	AD 2 RCCM - 1
RCCM AD 2.1 機場航用地名及名稱	AD 2 RCCM - 1
RCCM AD 2.1 AERODROME LOCATION INDICATOR AND NAME	AD 2 RCCM - 1
RCCM AD 2.2 機場地理與管理資料	AD 2 RCCM - 1
RCCM AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA	AD 2 RCCM - 1
RCCM AD 2.3 作業時間	AD 2 RCCM - 1
RCCM AD 2.3 OPERATIONAL HOURS	AD 2 RCCM - 1
RCCM AD 2.4 裝卸服務與設備	AD 2 RCCM - 2
RCCM AD 2.4 HANDLING SERVICES AND FACILITIES	AD 2 RCCM - 2

RCKU AD 2.1 機場航用地名及名稱	AD 2 RCKU - 1
RCKU AD 2.1 AERODROME LOCATION INDICATOR AND NAME	AD 2 RCKU - 1
RCKU AD 2.2 機場地理與管理資料	AD 2 RCKU - 1
RCKU AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA	AD 2 RCKU - 1
RCKU AD 2.3 作業時間	AD 2 RCKU - 1
RCKU AD 2.3 OPERATIONAL HOURS	AD 2 RCKU - 1
RCKU AD 2.4 裝卸服務與設備	AD 2 RCKU - 2
RCKU AD 2.4 HANDLING SERVICES AND FACILITIES	AD 2 RCKU - 2
RCKU AD 2.5 商旅服務	AD 2 RCKU - 2
RCKU AD 2.5 PASSENGER FACILITIES	AD 2 RCKU - 2
RCKU AD 2.6 救援與消防設備	AD 2 RCKU - 2
RCKU AD 2.6 RESCUE AND FIRE FIGHTING SERVICES	AD 2 RCKU - 2
RCKU AD 2.7 可用季節-清除裝備	AD 2 RCKU - 3
RCKU AD 2.7 SEASONAL AVAILABILITY-CLEARING	AD 2 RCKU - 3
RCKU AD 2.8 停機坪、滑行道及核驗點位置	AD 2 RCKU - 3
RCKU AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA	AD 2 RCKU - 3
RCKU AD 2.9 地面活動導引、管制系統及標線	AD 2 RCKU - 4
RCKU AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS	AD 2 RCKU - 4
RCKU AD 2.10 機場障礙物	AD 2 RCKU - 4
RCKU AD 2.10 AERODROME OBSTACLES	AD 2 RCKU - 4
RCKU AD 2.11 氣象資訊之提供	AD 2 RCKU - 5
RCKU AD 2.11 METEOROLOGICAL INFORMATION PROVIDED	AD 2 RCKU - 5
RCKU AD 2.12 跑道場面特性	AD 2 RCKU - 6
RCKU AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS	AD 2 RCKU - 6
RCKU AD 2.13 公布距離	AD 2 RCKU - 7
RCKU AD 2.13 DECLARED DISTANCES	AD 2 RCKU - 7
RCKU AD 2.14 進場及跑道燈光設備	AD 2 RCKU - 7
RCKU AD 2.14 APPROACH AND RUNWAY LIGHTING	AD 2 RCKU - 7
RCKU AD 2.15 其他燈光設備及備用電源	AD 2 RCKU - 8
RCKU AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY	AD 2 RCKU - 8
RCKU AD 2.16 直昇機降落區	AD 2 RCKU - 8
RCKU AD 2.16 HELICOPTER LANDING AREA	AD 2 RCKU - 8
RCKU AD 2.17 飛航服務空域	AD 2 RCKU - 9
RCKU AD 2.17 ATS AIRSPACE	AD 2 RCKU - 9
RCKU AD 2.18 飛航服務無線電通訊設施	AD 2 RCKU - 9
RCKU AD 2.18 ATS COMMUNICATION FACILITIES	AD 2 RCKU - 9
RCKU AD 2.19 無線電助導航設施	AD 2 RCKU - 10
RCKU AD 2.19 RADIO NAVIGATION AND LANDING AIDS	AD 2 RCKU - 10
RCKU AD 2.20 本場飛航規定	AD 2 RCKU - 11
RCKU AD 2.20 LOCAL AERODROME REGULATIONS	AD 2 RCKU - 11
2.20.1 機場作業規定/ AIRPORT REGULATIONS	AD 2 RCKU - 11
RCKU AD 2.21 降低噪音程序	AD 2 RCKU - 17
RCKU AD 2.21 NOISE ABATEMENT PROCEDURES	AD 2 RCKU - 17
RCKU AD 2.22 飛航程序	AD 2 RCKU - 17
RCKU AD 2.22 FLIGHT PROCEDURES	AD 2 RCKU - 17
2.22.1 傳統到場/進場程序(非RNAV程序)等待點經緯度/ HOLDING FIX COORDINATES OF CONVENTIONAL ARRIVAL/APPROACH PROCE- DURES(NON-RNAV PROCEDURES)	AD 2 RCKU - 17
RCKU AD 2.23 其他資訊	AD 2 RCKU - 17
RCKU AD 2.23 ADDITIONAL INFORMATION	AD 2 RCKU - 17
2.23.1 機場附近鳥類聚集狀況/ BIRD CONCENTRATIONS IN THE VICINITY OF THE AIRPORT	AD 2 RCKU - 17
RCKU AD 2.24 本場航圖	AD 2 RCKU - 18
RCKU AD 2.24 CHARTS RELATED TO AN AERODROME	AD 2 RCKU - 18
RCKU AD 2.25 穿越目視階段保護面之障礙物	AD 2 RCKU - 51
RCKU AD 2.25 VISUAL SEGMENT SURFACE (VSS) PENETRATION	AD 2 RCKU - 51
AD 2 RCKW 恆春HENGCHUN	AD 2 RCKW - 1
RCKW AD 2.1 機場航用地名及名稱	AD 2 RCKW - 1
RCKW AD 2.1 AERODROME LOCATION INDICATOR AND NAME	AD 2 RCKW - 1

RCKW AD 2.2 機場地理與管理資料	AD 2 RCKW - 1
RCKW AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA	AD 2 RCKW - 1
RCKW AD 2.3 作業時間	AD 2 RCKW - 1
RCKW AD 2.3 OPERATIONAL HOURS	AD 2 RCKW - 1
RCKW AD 2.4 裝卸服務與設備	AD 2 RCKW - 2
RCKW AD 2.4 HANDLING SERVICES AND FACILITIES	AD 2 RCKW - 2
RCKW AD 2.5 商旅服務	AD 2 RCKW - 2
RCKW AD 2.5 PASSENGER FACILITIES	AD 2 RCKW - 2
RCKW AD 2.6 救援與消防設備	AD 2 RCKW - 2
RCKW AD 2.6 RESCUE AND FIRE FIGHTING SERVICES	AD 2 RCKW - 2
RCKW AD 2.7 可用季節-清除裝備	AD 2 RCKW - 3
RCKW AD 2.7 SEASONAL AVAILABILITY-CLEARING	AD 2 RCKW - 3
RCKW AD 2.8 停機坪、滑行道及核驗點位置	AD 2 RCKW - 3
RCKW AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA	AD 2 RCKW - 3
RCKW AD 2.9 地面活動導引、管制系統及標線	AD 2 RCKW - 4
RCKW AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS	AD 2 RCKW - 4
RCKW AD 2.10 機場障礙物	AD 2 RCKW - 4
RCKW AD 2.10 AERODROME OBSTACLES	AD 2 RCKW - 4
RCKW AD 2.11 氣象資訊之提供	AD 2 RCKW - 5
RCKW AD 2.11 METEOROLOGICAL INFORMATION PROVIDED	AD 2 RCKW - 5
RCKW AD 2.12 跑道場面特性	AD 2 RCKW - 5
RCKW AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS	AD 2 RCKW - 5
RCKW AD 2.13 公布距離	AD 2 RCKW - 6
RCKW AD 2.13 DECLARED DISTANCES	AD 2 RCKW - 6
RCKW AD 2.14 進場及跑道燈光設備	AD 2 RCKW - 6
RCKW AD 2.14 APPROACH AND RUNWAY LIGHTING	AD 2 RCKW - 6
RCKW AD 2.15 其他燈光設備及備用電源	AD 2 RCKW - 7
RCKW AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY	AD 2 RCKW - 7
RCKW AD 2.16 直昇機降落區	AD 2 RCKW - 8
RCKW AD 2.16 HELICOPTER LANDING AREA	AD 2 RCKW - 8
RCKW AD 2.17 飛航服務空域	AD 2 RCKW - 8
RCKW AD 2.17 ATS AIRSPACE	AD 2 RCKW - 8
RCKW AD 2.18 飛航服務無線電通訊設施	AD 2 RCKW - 9
RCKW AD 2.18 ATS COMMUNICATION FACILITIES	AD 2 RCKW - 9
RCKW AD 2.19 無線電助導航設施	AD 2 RCKW - 9
RCKW AD 2.19 RADIO NAVIGATION AND LANDING AIDS	AD 2 RCKW - 9
RCKW AD 2.20 本場飛航規定	AD 2 RCKW - 9
RCKW AD 2.20 LOCAL AERODROME REGULATIONS	AD 2 RCKW - 9
2.20.1 機場作業規定/ AIRPORT REGULATIONS	AD 2 RCKW - 9
RCKW AD 2.21 降低噪音程序	AD 2 RCKW - 10
RCKW AD 2.21 NOISE ABATEMENT PROCEDURES	AD 2 RCKW - 10
RCKW AD 2.22 飛航程序	AD 2 RCKW - 10
RCKW AD 2.22 FLIGHT PROCEDURES	AD 2 RCKW - 10
2.22.1 傳統到場/進場程序(非RNAV程序)等待點經緯度/ HOLDING FIX COORDINATES OF CONVENTIONAL ARRIVAL/APPROACH PROCEDURE(S)(NON-RNAV PROCEDURES)	AD 2 RCKW - 10
RCKW AD 2.23 其他資訊	AD 2 RCKW - 10
RCKW AD 2.23 ADDITIONAL INFORMATION	AD 2 RCKW - 10
2.23.1 機場附近鳥類聚集狀況/ BIRD CONCENTRATIONS IN THE VICINITY OF THE AIRPORT	AD 2 RCKW - 10
RCKW AD 2.24 本場航圖	AD 2 RCKW - 11
RCKW AD 2.24 CHARTS RELATED TO AN AERODROME	AD 2 RCKW - 11
RCKW AD 2.25 穿越目視階段保護面之障礙物	AD 2 RCKW - 19
RCKW AD 2.25 VISUAL SEGMENT SURFACE (VSS) PENETRATION	AD 2 RCKW - 19
AD 2 RCLY 蘭嶼 LANYU	AD 2 RCLY - 1
RCLY AD 2.1 機場航用地名及名稱	AD 2 RCLY - 1
RCLY AD 2.1 AERODROME LOCATION INDICATOR AND NAME	AD 2 RCLY - 1
RCLY AD 2.2 機場地理與管理資料	AD 2 RCLY - 1

RCLY AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA	AD 2 RCLY - 1
RCLY AD 2.3 作業時間	AD 2 RCLY - 1
RCLY AD 2.3 OPERATIONAL HOURS	AD 2 RCLY - 1
RCLY AD 2.4 裝卸服務與設備	AD 2 RCLY - 2
RCLY AD 2.4 HANDLING SERVICES AND FACILITIES	AD 2 RCLY - 2
RCLY AD 2.5 商旅服務	AD 2 RCLY - 2
RCLY AD 2.5 PASSENGER FACILITIES	AD 2 RCLY - 2
RCLY AD 2.6 救援與消防設備	AD 2 RCLY - 2
RCLY AD 2.6 RESCUE AND FIRE FIGHTING SERVICES	AD 2 RCLY - 2
RCLY AD 2.7 可用季節-清除裝備	AD 2 RCLY - 3
RCLY AD 2.7 SEASONAL AVAILABILITY-CLEARING	AD 2 RCLY - 3
RCLY AD 2.8 停機坪、滑行道及核驗點位置	AD 2 RCLY - 3
RCLY AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA	AD 2 RCLY - 3
RCLY AD 2.9 地面活動導引、管制系統及標線	AD 2 RCLY - 4
RCLY AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS	AD 2 RCLY - 4
RCLY AD 2.10 機場障礙物	AD 2 RCLY - 4
RCLY AD 2.10 AERODROME OBSTACLES	AD 2 RCLY - 4
RCLY AD 2.11 氣象資訊之提供	AD 2 RCLY - 5
RCLY AD 2.11 METEOROLOGICAL INFORMATION PROVIDED	AD 2 RCLY - 5
RCLY AD 2.12 跑道場面特性	AD 2 RCLY - 6
RCLY AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS	AD 2 RCLY - 6
RCLY AD 2.13 公布距離	AD 2 RCLY - 6
RCLY AD 2.13 DECLARED DISTANCES	AD 2 RCLY - 6
RCLY AD 2.14 進場及跑道燈光設備	AD 2 RCLY - 7
RCLY AD 2.14 APPROACH AND RUNWAY LIGHTING	AD 2 RCLY - 7
RCLY AD 2.15 其他燈光設備及備用電源	AD 2 RCLY - 8
RCLY AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY	AD 2 RCLY - 8
RCLY AD 2.16 直昇機降落區	AD 2 RCLY - 8
RCLY AD 2.16 HELICOPTER LANDING AREA	AD 2 RCLY - 8
RCLY AD 2.17 飛航服務空域	AD 2 RCLY - 9
RCLY AD 2.17 ATS AIRSPACE	AD 2 RCLY - 9
RCLY AD 2.18 飛航服務無線電通訊設施	AD 2 RCLY - 9
RCLY AD 2.18 ATS COMMUNICATION FACILITIES	AD 2 RCLY - 9
RCLY AD 2.19 無線電助導航設施	AD 2 RCLY - 9
RCLY AD 2.19 RADIO NAVIGATION AND LANDING AIDS	AD 2 RCLY - 9
RCLY AD 2.20 本場飛航規定	AD 2 RCLY - 10
RCLY AD 2.20 LOCAL AERODROME REGULATIONS	AD 2 RCLY - 10
2.20.1 機場作業規定/ AIRPORT REGULATIONS	AD 2 RCLY - 10
RCLY AD 2.21 降低噪音程序	AD 2 RCLY - 13
RCLY AD 2.21 NOISE ABATEMENT PROCEDURES	AD 2 RCLY - 13
RCLY AD 2.22 飛航程序	AD 2 RCLY - 13
RCLY AD 2.22 FLIGHT PROCEDURES	AD 2 RCLY - 13
RCLY AD 2.23 其他資訊	AD 2 RCLY - 13
RCLY AD 2.23 ADDITIONAL INFORMATION	AD 2 RCLY - 13
2.23.1 機場附近鳥類聚集狀況/ BIRD CONCENTRATIONS IN THE VICINITY OF THE AIRPORT	AD 2 RCLY - 13
RCLY AD 2.24 本場航圖	AD 2 RCLY - 13
RCLY AD 2.24 CHARTS RELATED TO AN AERODROME	AD 2 RCLY - 13
RCLY AD 2.25 穿越目視階段保護面之障礙物	AD 2 RCLY - 19
RCLY AD 2.25 VISUAL SEGMENT SURFACE (VSS) PENETRATION	AD 2 RCLY - 19
AD 2 RCMQ 臺中-清泉崗TAICHUNG-CINGCYUANGANG	AD 2 RCMQ - 1
RCMQ AD 2.1 機場航用地名及名稱	AD 2 RCMQ - 1
RCMQ AD 2.1 AERODROME LOCATION INDICATOR AND NAME	AD 2 RCMQ - 1
RCMQ AD 2.2 機場地理與管理資料	AD 2 RCMQ - 1
RCMQ AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA	AD 2 RCMQ - 1
RCMQ AD 2.3 作業時間	AD 2 RCMQ - 1
RCMQ AD 2.3 OPERATIONAL HOURS	AD 2 RCMQ - 1
RCMQ AD 2.4 裝卸服務與設備	AD 2 RCMQ - 2
RCMQ AD 2.4 HANDLING SERVICES AND FACILITIES	AD 2 RCMQ - 2

RCMQ AD 2.5 商旅服務	AD 2 RCMQ - 2
RCMQ AD 2.5 PASSENGER FACILITIES	AD 2 RCMQ - 2
RCMQ AD 2.6 救援與消防設備	AD 2 RCMQ - 2
RCMQ AD 2.6 RESCUE AND FIRE FIGHTING SERVICES	AD 2 RCMQ - 3
RCMQ AD 2.7 可用季節-清除裝備	AD 2 RCMQ - 3
RCMQ AD 2.7 SEASONAL AVAILABILITY-CLEARING	AD 2 RCMQ - 3
RCMQ AD 2.8 停機坪、滑行道及核驗點位置	AD 2 RCMQ - 3
RCMQ AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA	AD 2 RCMQ - 3
RCMQ AD 2.9 地面活動導引、管制系統及標線	AD 2 RCMQ - 5
RCMQ AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS	AD 2 RCMQ - 5
2.9.1 先進目視停靠導引系統(ADVANCED VISUAL DOCKING GUIDANCE SYSTEM, A-VDGS)之設置/ ADVANCED VISUAL DOCKING GUIDANCE SYSTEM (A-VDGS)	AD 2 RCMQ - 6
RCMQ AD 2.10 機場障礙物	AD 2 RCMQ - 8
RCMQ AD 2.10 AERODROME OBSTACLES	AD 2 RCMQ - 8
RCMQ AD 2.11 氣象資訊之提供	AD 2 RCMQ - 8
RCMQ AD 2.11 METEOROLOGICAL INFORMATION PROVIDED	AD 2 RCMQ - 8
RCMQ AD 2.12 跑道場面特性	AD 2 RCMQ - 9
RCMQ AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS	AD 2 RCMQ - 9
RCMQ AD 2.13 公布距離	AD 2 RCMQ - 10
RCMQ AD 2.13 DECLARED DISTANCES	AD 2 RCMQ - 10
RCMQ AD 2.14 進場及跑道燈光設備	AD 2 RCMQ - 10
RCMQ AD 2.14 APPROACH AND RUNWAY LIGHTING	AD 2 RCMQ - 10
RCMQ AD 2.15 其他燈光設備及備用電源	AD 2 RCMQ - 11
RCMQ AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY	AD 2 RCMQ - 11
RCMQ AD 2.16 直升機降落區	AD 2 RCMQ - 11
RCMQ AD 2.16 HELICOPTER LANDING AREA	AD 2 RCMQ - 11
RCMQ AD 2.17 飛航服務空域	AD 2 RCMQ - 11
RCMQ AD 2.17 ATS AIRSPACE	AD 2 RCMQ - 11
RCMQ AD 2.18 飛航服務無線電通訊設施	AD 2 RCMQ - 12
RCMQ AD 2.18 ATS COMMUNICATION FACILITIES	AD 2 RCMQ - 12
RCMQ AD 2.19 無線電助導航設施	AD 2 RCMQ - 13
RCMQ AD 2.19 RADIO NAVIGATION AND LANDING AIDS	AD 2 RCMQ - 13
RCMQ AD 2.20 本場飛航規定	AD 2 RCMQ - 13
RCMQ AD 2.20 LOCAL AERODROME REGULATIONS	AD 2 RCMQ - 13
2.20.1 機場作業規定/ AIRPORT REGULATIONS	AD 2 RCMQ - 13
RCMQ AD 2.21 降低噪音程序	AD 2 RCMQ - 14
RCMQ AD 2.21 NOISE ABATEMENT PROCEDURES	AD 2 RCMQ - 14
RCMQ AD 2.22 飛航程序	AD 2 RCMQ - 14
RCMQ AD 2.22 FLIGHT PROCEDURES	AD 2 RCMQ - 14
2.22.1 傳統到場/進場程序(非RNAV程序)等待點經緯度/ HOLDING FIX COORDINATES OF CONVENTIONAL ARRIVAL/APPROACH PROCEDURE- DURES(NON-RNAV PROCEDURES)	AD 2 RCMQ - 14
2.22.2 低能見度作業程序/ LOW VISIBILITY PROCEDURES	AD 2 RCMQ - 14
RCMQ AD 2.23 其他資訊	AD 2 RCMQ - 15
RCMQ AD 2.23 ADDITIONAL INFORMATION	AD 2 RCMQ - 15
2.23.1 機場附近鳥類聚集狀況/ BIRD CONCENTRATIONS IN THE VICINITY OF THE AIRPORT	AD 2 RCMQ - 15
RCMQ AD 2.24 本場航圖	AD 2 RCMQ - 16
RCMQ AD 2.24 CHARTS RELATED TO AN AERODROME	AD 2 RCMQ - 16
RCMQ AD 2.25 穿越目視階段保護面之障礙物	AD 2 RCMQ - 57
RCMQ AD 2.25 VISUAL SEGMENT SURFACE (VSS) PENETRATION	AD 2 RCMQ - 57
AD 2 RCMT 馬祖-北竿MATSU-BEIGAN	AD 2 RCMT - 1
RCMT AD 2.1 機場航用地名及名稱	AD 2 RCMT - 1
RCMT AD 2.1 AERODROME LOCATION INDICATOR AND NAME	AD 2 RCMT - 1
RCMT AD 2.2 機場地理與管理資料	AD 2 RCMT - 1
RCMT AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA	AD 2 RCMT - 1
RCMT AD 2.3 作業時間	AD 2 RCMT - 1

RCMT AD 2.3 OPERATIONAL HOURS	AD 2 RCMT - 1
RCMT AD 2.4 裝卸服務與設備	AD 2 RCMT - 2
RCMT AD 2.4 HANDLING SERVICES AND FACILITIES	AD 2 RCMT - 2
RCMT AD 2.5 商旅服務	AD 2 RCMT - 2
RCMT AD 2.5 PASSENGER FACILITIES	AD 2 RCMT - 2
RCMT AD 2.6 救援與消防設備	AD 2 RCMT - 2
RCMT AD 2.6 RESCUE AND FIRE FIGHTING SERVICES	AD 2 RCMT - 2
RCMT AD 2.7 可用季節-清除裝備	AD 2 RCMT - 3
RCMT AD 2.7 SEASONAL AVAILABILITY-CLEARING	AD 2 RCMT - 3
RCMT AD 2.8 停機坪、滑行道及核驗點位置	AD 2 RCMT - 3
RCMT AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA	AD 2 RCMT - 3
RCMT AD 2.9 地面活動導引、管制系統及標線	AD 2 RCMT - 4
RCMT AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS	AD 2 RCMT - 4
RCMT AD 2.10 機場障礙物	AD 2 RCMT - 4
RCMT AD 2.10 AERODROME OBSTACLES	AD 2 RCMT - 4
RCMT AD 2.11 氣象資訊之提供	AD 2 RCMT - 5
RCMT AD 2.11 METEOROLOGICAL INFORMATION PROVIDED	AD 2 RCMT - 5
RCMT AD 2.12 跑道場面特性	AD 2 RCMT - 6
RCMT AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS	AD 2 RCMT - 6
RCMT AD 2.13 公布距離	AD 2 RCMT - 7
RCMT AD 2.13 DECLARED DISTANCES	AD 2 RCMT - 7
RCMT AD 2.14 進場及跑道燈光設備	AD 2 RCMT - 7
RCMT AD 2.14 APPROACH AND RUNWAY LIGHTING	AD 2 RCMT - 7
RCMT AD 2.15 其他燈光設備及備用電源	AD 2 RCMT - 8
RCMT AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY	AD 2 RCMT - 8
RCMT AD 2.16 直昇機降落區	AD 2 RCMT - 9
RCMT AD 2.16 HELICOPTER LANDING AREA	AD 2 RCMT - 9
RCMT AD 2.17 飛航服務空域	AD 2 RCMT - 9
RCMT AD 2.17 ATS AIRSPACE	AD 2 RCMT - 9
RCMT AD 2.18 飛航服務無線電通訊設施	AD 2 RCMT - 10
RCMT AD 2.18 ATS COMMUNICATION FACILITIES	AD 2 RCMT - 10
RCMT AD 2.19 無線電助導航設施	AD 2 RCMT - 10
RCMT AD 2.19 RADIO NAVIGATION AND LANDING AIDS	AD 2 RCMT - 10
RCMT AD 2.20 本場飛航規定	AD 2 RCMT - 12
RCMT AD 2.20 LOCAL AERODROME REGULATIONS	AD 2 RCMT - 12
2.20.1 機場作業規定/ AIRPORT REGULATIONS	AD 2 RCMT - 12
RCMT AD 2.21 降低噪音程序	AD 2 RCMT - 12
RCMT AD 2.21 NOISE ABATEMENT PROCEDURES	AD 2 RCMT - 12
RCMT AD 2.22 飛航程序	AD 2 RCMT - 13
RCMT AD 2.22 FLIGHT PROCEDURES	AD 2 RCMT - 13
2.22.1 傳統到場/進場程序(非RNAV程序)等待點經緯度/ HOLDING FIX COORDINATES OF CONVENTIONAL ARRIVAL/APPROACH PROCE- DURES(NON-RNAV PROCEDURES)	AD 2 RCMT - 13
2.22.2 雷達備用儀器飛航程序/ BACKUP INSTRUMENT FLIGHT PROCEDURE IN MATSU TMA	AD 2 RCMT - 13
2.22.3 無線電失效程序/ PROCEDURE FOR RADIO COMMUNICATION FAILURE	AD 2 RCMT - 13
RCMT AD 2.23 其他資訊	AD 2 RCMT - 14
RCMT AD 2.23 ADDITIONAL INFORMATION	AD 2 RCMT - 14
2.23.1 機場附近鳥類聚集狀況/ BIRD CONCENTRATIONS IN THE VICINITY OF THE AIRPORT	AD 2 RCMT - 14
RCMT AD 2.24 本場航圖	AD 2 RCMT - 15
RCMT AD 2.24 CHARTS RELATED TO AN AERODROME	AD 2 RCMT - 15
RCMT AD 2.25 穿越目視階段保護面之障礙物	AD 2 RCMT - 43
RCMT AD 2.25 VISUAL SEGMENT SURFACE (VSS) PENETRATION	AD 2 RCMT - 43
AD 2 RCNN 臺南TAINAN	AD 2 RCNN - 1
RCNN AD 2.1 機場航用地名及名稱	AD 2 RCNN - 1
RCNN AD 2.1 AERODROME LOCATION INDICATOR AND NAME	AD 2 RCNN - 1

RCNN AD 2.2 機場地理與管理資料	AD 2 RCNN - 1
RCNN AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA	AD 2 RCNN - 1
RCNN AD 2.3 作業時間	AD 2 RCNN - 1
RCNN AD 2.3 OPERATIONAL HOURS	AD 2 RCNN - 1
RCNN AD 2.4 裝卸服務與設備	AD 2 RCNN - 2
RCNN AD 2.4 HANDLING SERVICES AND FACILITIES	AD 2 RCNN - 2
RCNN AD 2.5 商旅服務	AD 2 RCNN - 2
RCNN AD 2.5 PASSENGER FACILITIES	AD 2 RCNN - 2
RCNN AD 2.6 救援與消防設備	AD 2 RCNN - 2
RCNN AD 2.6 RESCUE AND FIRE FIGHTING SERVICES	AD 2 RCNN - 2
RCNN AD 2.7 可用季節-清除裝備	AD 2 RCNN - 3
RCNN AD 2.7 SEASONAL AVAILABILITY-CLEARING	AD 2 RCNN - 3
RCNN AD 2.8 停機坪、滑行道及核驗點位置	AD 2 RCNN - 3
RCNN AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA	AD 2 RCNN - 3
RCNN AD 2.9 地面活動導引、管制系統及標線	AD 2 RCNN - 4
RCNN AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS	AD 2 RCNN - 4
RCNN AD 2.10 機場障礙物	AD 2 RCNN - 4
RCNN AD 2.10 AERODROME OBSTACLES	AD 2 RCNN - 4
RCNN AD 2.11 氣象資訊之提供	AD 2 RCNN - 5
RCNN AD 2.11 METEOROLOGICAL INFORMATION PROVIDED	AD 2 RCNN - 5
RCNN AD 2.12 跑道場面特性	AD 2 RCNN - 6
RCNN AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS	AD 2 RCNN - 6
RCNN AD 2.13 公布距離	AD 2 RCNN - 7
RCNN AD 2.13 DECLARED DISTANCES	AD 2 RCNN - 7
RCNN AD 2.14 進場及跑道燈光設備	AD 2 RCNN - 7
RCNN AD 2.14 APPROACH AND RUNWAY LIGHTING	AD 2 RCNN - 7
RCNN AD 2.15 其他燈光設備及備用電源	AD 2 RCNN - 8
RCNN AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY	AD 2 RCNN - 8
RCNN AD 2.16 直昇機降落區	AD 2 RCNN - 9
RCNN AD 2.16 HELICOPTER LANDING AREA	AD 2 RCNN - 9
RCNN AD 2.17 飛航服務空域	AD 2 RCNN - 10
RCNN AD 2.17 ATS AIRSPACE	AD 2 RCNN - 10
RCNN AD 2.18 飛航服務無線電通訊設施	AD 2 RCNN - 11
RCNN AD 2.18 ATS COMMUNICATION FACILITIES	AD 2 RCNN - 11
RCNN AD 2.19 無線電助導航設施	AD 2 RCNN - 12
RCNN AD 2.19 RADIO NAVIGATION AND LANDING AIDS	AD 2 RCNN - 12
RCNN AD 2.20 本場飛航規定	AD 2 RCNN - 13
RCNN AD 2.20 LOCAL AERODROME REGULATIONS	AD 2 RCNN - 13
2.20.1 機場作業規定/ AIRPORT REGULATIONS	AD 2 RCNN - 13
2.20.2 滑行作業/ TAXIING TO AND FROM STAND	AD 2 RCNN - 14
RCNN AD 2.21 降低噪音程序	AD 2 RCNN - 15
RCNN AD 2.21 NOISE ABATEMENT PROCEDURES	AD 2 RCNN - 15
RCNN AD 2.22 飛航程序	AD 2 RCNN - 16
RCNN AD 2.22 FLIGHT PROCEDURES	AD 2 RCNN - 16
2.22.1 傳統到場/進場程序(非RNAV程序)等待點經緯度/ HOLDING FIX COORDINATES OF CONVENTIONAL ARRIVAL/APPROACH PROCEDURE(S)(NON-RNAV PROCEDURES)	AD 2 RCNN - 16
RCNN AD 2.23 其他資訊	AD 2 RCNN - 17
RCNN AD 2.23 ADDITIONAL INFORMATION	AD 2 RCNN - 17
2.23.1 機場附近鳥類聚集狀況/ BIRD CONCENTRATIONS IN THE VICINITY OF THE AIRPORT	AD 2 RCNN - 17
RCNN AD 2.24 本場航圖	AD 2 RCNN - 19
RCNN AD 2.24 CHARTS RELATED TO AN AERODROME	AD 2 RCNN - 19
RCNN AD 2.25 穿越目視階段保護面之障礙物	AD 2 RCNN - 55
RCNN AD 2.25 VISUAL SEGMENT SURFACE (VSS) PENETRATION	AD 2 RCNN - 55
AD 2 RCQC 澎湖 PENGHU	AD 2 RCQC - 1
RCQC AD 2.1 機場航用地名及名稱	AD 2 RCQC - 1

RCQC AD 2.1 AERODROME LOCATION INDICATOR AND NAME	AD 2 RCQC - 1
RCQC AD 2.2 機場地理與管理資料	AD 2 RCQC - 1
RCQC AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA	AD 2 RCQC - 1
RCQC AD 2.3 作業時間	AD 2 RCQC - 1
RCQC AD 2.3 OPERATIONAL HOURS	AD 2 RCQC - 1
RCQC AD 2.4 裝卸服務與設備	AD 2 RCQC - 2
RCQC AD 2.4 HANDLING SERVICES AND FACILITIES	AD 2 RCQC - 2
RCQC AD 2.5 商旅服務	AD 2 RCQC - 2
RCQC AD 2.5 PASSENGER FACILITIES	AD 2 RCQC - 2
RCQC AD 2.6 救援與消防設備	AD 2 RCQC - 2
RCQC AD 2.6 RESCUE AND FIRE FIGHTING SERVICES	AD 2 RCQC - 2
RCQC AD 2.7 可用季節-清除裝備	AD 2 RCQC - 3
RCQC AD 2.7 SEASONAL AVAILABILITY-CLEARING	AD 2 RCQC - 3
RCQC AD 2.8 停機坪、滑行道及核驗點位置	AD 2 RCQC - 3
RCQC AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA	AD 2 RCQC - 3
RCQC AD 2.9 地面活動導引、管制系統及標線	AD 2 RCQC - 4
RCQC AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS	AD 2 RCQC - 4
RCQC AD 2.10 機場障礙物	AD 2 RCQC - 4
RCQC AD 2.10 AERODROME OBSTACLES	AD 2 RCQC - 4
RCQC AD 2.11 氣象資訊之提供	AD 2 RCQC - 5
RCQC AD 2.11 METEOROLOGICAL INFORMATION PROVIDED	AD 2 RCQC - 5
RCQC AD 2.12 跑道場面特性	AD 2 RCQC - 6
RCQC AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS	AD 2 RCQC - 6
RCQC AD 2.13 公布距離	AD 2 RCQC - 7
RCQC AD 2.13 DECLARED DISTANCES	AD 2 RCQC - 7
RCQC AD 2.14 進場及跑道燈光設備	AD 2 RCQC - 7
RCQC AD 2.14 APPROACH AND RUNWAY LIGHTING	AD 2 RCQC - 7
RCQC AD 2.15 其他燈光設備及備用電源	AD 2 RCQC - 8
RCQC AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY	AD 2 RCQC - 8
RCQC AD 2.16 直昇機降落區	AD 2 RCQC - 9
RCQC AD 2.16 HELICOPTER LANDING AREA	AD 2 RCQC - 9
RCQC AD 2.17 飛航服務空域	AD 2 RCQC - 9
RCQC AD 2.17 ATS AIRSPACE	AD 2 RCQC - 9
RCQC AD 2.18 飛航服務無線電通訊設施	AD 2 RCQC - 10
RCQC AD 2.18 ATS COMMUNICATION FACILITIES	AD 2 RCQC - 10
RCQC AD 2.19 無線電助導航設施	AD 2 RCQC - 11
RCQC AD 2.19 RADIO NAVIGATION AND LANDING AIDS	AD 2 RCQC - 11
RCQC AD 2.20 本場飛航規定	AD 2 RCQC - 12
RCQC AD 2.20 LOCAL AERODROME REGULATIONS	AD 2 RCQC - 12
2.20.1 機場作業規定/ AIRPORT REGULATIONS	AD 2 RCQC - 12
2.20.2 低能見度作業程序(航機駕駛員需注意事項)/ LOW VISIBILITY PROCEDURES (FOR PILOTS' ATTENTION)	AD 2 RCQC - 12
RCQC AD 2.21 降低噪音程序	AD 2 RCQC - 13
RCQC AD 2.21 NOISE ABATEMENT PROCEDURES	AD 2 RCQC - 13
RCQC AD 2.22 飛航程序	AD 2 RCQC - 13
RCQC AD 2.22 FLIGHT PROCEDURES	AD 2 RCQC - 13
2.22.1 傳統到場/進場程序(非RNAV程序)等待點經緯度/ HOLDING FIX COORDINATES OF CONVENTIONAL ARRIVAL/APPROACH PROCE- DURES(NON-RNAV PROCEDURES)	AD 2 RCQC - 13
RCQC AD 2.23 其他資訊	AD 2 RCQC - 13
RCQC AD 2.23 ADDITIONAL INFORMATION	AD 2 RCQC - 13
2.23.1 機場附近鳥類聚集狀況/ BIRD CONCENTRATIONS IN THE VICINITY OF THE AIRPORT	AD 2 RCQC - 13
RCQC AD 2.24 本場航圖	AD 2 RCQC - 15
RCQC AD 2.24 CHARTS RELATED TO AN AERODROME	AD 2 RCQC - 15
RCQC AD 2.25 穿越目視階段保護面之障礙物	AD 2 RCQC - 53
RCQC AD 2.25 VISUAL SEGMENT SURFACE (VSS) PENETRATION	AD 2 RCQC - 53
AD 2 RCSP 太平TAIPING	AD 2 RCSP - 1
RCSP AD 2.1 機場航用地名及名稱	AD 2 RCSP - 1

RCSP AD 2.1 AERODROME LOCATION INDICATOR AND NAME	AD 2 RCSP - 1
RCSP AD 2.2 機場地理與管理資料	AD 2 RCSP - 1
RCSP AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA	AD 2 RCSP - 1
RCSP AD 2.3 作業時間	AD 2 RCSP - 1
RCSP AD 2.3 OPERATIONAL HOURS	AD 2 RCSP - 1
RCSP AD 2.4 裝卸服務與設備	AD 2 RCSP - 2
RCSP AD 2.4 HANDLING SERVICES AND FACILITIES	AD 2 RCSP - 2
RCSP AD 2.5 商旅服務	AD 2 RCSP - 2
RCSP AD 2.5 PASSENGER FACILITIES	AD 2 RCSP - 2
RCSP AD 2.6 救援與消防設備	AD 2 RCSP - 2
RCSP AD 2.6 RESCUE AND FIRE FIGHTING SERVICES	AD 2 RCSP - 2
RCSP AD 2.7 可用季節-清除裝備	AD 2 RCSP - 3
RCSP AD 2.7 SEASONAL AVAILABILITY-CLEARING	AD 2 RCSP - 3
RCSP AD 2.8 停機坪、滑行道及核驗點位置	AD 2 RCSP - 3
RCSP AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA	AD 2 RCSP - 3
RCSP AD 2.9 地面活動導引、管制系統及標線	AD 2 RCSP - 3
RCSP AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS ..	AD 2 RCSP - 3
RCSP AD 2.10 機場障礙物	AD 2 RCSP - 4
RCSP AD 2.10 AERODROME OBSTACLES	AD 2 RCSP - 4
RCSP AD 2.11 氣象資訊之提供	AD 2 RCSP - 4
RCSP AD 2.11 METEOROLOGICAL INFORMATION PROVIDED	AD 2 RCSP - 4
RCSP AD 2.12 跑道場面特性	AD 2 RCSP - 4
RCSP AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS	AD 2 RCSP - 4
RCSP AD 2.13 公布距離	AD 2 RCSP - 5
RCSP AD 2.13 DECLARED DISTANCES	AD 2 RCSP - 5
RCSP AD 2.14 進場及跑道燈光設備	AD 2 RCSP - 5
RCSP AD 2.14 APPROACH AND RUNWAY LIGHTING	AD 2 RCSP - 5
RCSP AD 2.15 其他燈光設備及備用電源	AD 2 RCSP - 6
RCSP AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY	AD 2 RCSP - 6
RCSP AD 2.16 直昇機降落區	AD 2 RCSP - 6
RCSP AD 2.16 HELICOPTER LANDING AREA	AD 2 RCSP - 6
RCSP AD 2.17 飛航服務空域	AD 2 RCSP - 7
RCSP AD 2.17 ATS AIRSPACE	AD 2 RCSP - 7
RCSP AD 2.18 飛航服務無線電通訊設施	AD 2 RCSP - 7
RCSP AD 2.18 ATS COMMUNICATION FACILITIES	AD 2 RCSP - 7
RCSP AD 2.19 無線電助導航設施	AD 2 RCSP - 7
RCSP AD 2.19 RADIO NAVIGATION AND LANDING AIDS	AD 2 RCSP - 7
RCSP AD 2.20 本場飛航規定	AD 2 RCSP - 8
RCSP AD 2.20 LOCAL AERODROME REGULATIONS	AD 2 RCSP - 8
RCSP AD 2.21 降低噪音程序	AD 2 RCSP - 8
RCSP AD 2.21 NOISE ABATEMENT PROCEDURES	AD 2 RCSP - 8
RCSP AD 2.22 飛航程序	AD 2 RCSP - 8
RCSP AD 2.22 FLIGHT PROCEDURES	AD 2 RCSP - 8
RCSP AD 2.23 其他資訊	AD 2 RCSP - 8
RCSP AD 2.23 ADDITIONAL INFORMATION	AD 2 RCSP - 8
RCSP AD 2.24 本場航圖	AD 2 RCSP - 8
RCSP AD 2.24 CHARTS RELATED TO AN AERODROME	AD 2 RCSP - 8
RCSP AD 2.25 穿越目視階段保護面之障礙物	AD 2 RCSP - 8
RCSP AD 2.25 VISUAL SEGMENT SURFACE (VSS) PENETRATION	AD 2 RCSP - 8
AD 2 RCSS 臺北-松山TAIPEI-SONGSHAN	AD 2 RCSS - 1
RCSS AD 2.1 機場航用地名及名稱	AD 2 RCSS - 1
RCSS AD 2.1 AERODROME LOCATION INDICATOR AND NAME	AD 2 RCSS - 1
RCSS AD 2.2 機場地理與管理資料	AD 2 RCSS - 1
RCSS AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA	AD 2 RCSS - 1
RCSS AD 2.3 作業時間	AD 2 RCSS - 1
RCSS AD 2.3 OPERATIONAL HOURS	AD 2 RCSS - 1
RCSS AD 2.4 裝卸服務與設備	AD 2 RCSS - 2
RCSS AD 2.4 HANDLING SERVICES AND FACILITIES	AD 2 RCSS - 2
RCSS AD 2.5 商旅服務	AD 2 RCSS - 2
RCSS AD 2.5 PASSENGER FACILITIES	AD 2 RCSS - 2

RCSS AD 2.6 救援與消防設備	AD 2 RCSS - 3
RCSS AD 2.6 RESCUE AND FIRE FIGHTING SERVICES	AD 2 RCSS - 3
RCSS AD 2.7 可用季節-清除裝備	AD 2 RCSS - 3
RCSS AD 2.7 SEASONAL AVAILABILITY-CLEARING	AD 2 RCSS - 3
RCSS AD 2.8 停機坪、滑行道及核驗點位置	AD 2 RCSS - 3
RCSS AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA	AD 2 RCSS - 3
RCSS AD 2.9 地面活動導引、管制系統及標線	AD 2 RCSS - 7
RCSS AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS ..	AD 2 RCSS - 7
1 自動引導停機系統 (VISUAL DOCKING GUIDANCE SYSTEM "SAFEDOCK") 之設置/	
1 VISUAL DOCKING GUIDANCE SYSTEM--SAFEDOCK	AD 2 RCSS - 7
RCSS AD 2.10 機場障礙物	AD 2 RCSS - 12
RCSS AD 2.10 AERODROME OBSTACLES	AD 2 RCSS - 12
RCSS AD 2.11 氣象資訊之提供	AD 2 RCSS - 13
RCSS AD 2.11 METEOROLOGICAL INFORMATION PROVIDED	AD 2 RCSS - 13
RCSS AD 2.12 跑道場面特性	AD 2 RCSS - 14
RCSS AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS	AD 2 RCSS - 14
RCSS AD 2.13 公布距離	AD 2 RCSS - 15
RCSS AD 2.13 DECLARED DISTANCES	AD 2 RCSS - 15
RCSS AD 2.14 進場及跑道燈光設備	AD 2 RCSS - 15
RCSS AD 2.14 APPROACH AND RUNWAY LIGHTING	AD 2 RCSS - 15
RCSS AD 2.15 其他燈光設備及備用電源	AD 2 RCSS - 16
RCSS AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY	AD 2 RCSS - 16
RCSS AD 2.16 直昇機降落區	AD 2 RCSS - 16
RCSS AD 2.16 HELICOPTER LANDING AREA	AD 2 RCSS - 17
RCSS AD 2.17 飛航服務空域	AD 2 RCSS - 17
RCSS AD 2.17 ATS AIRSPACE	AD 2 RCSS - 17
RCSS AD 2.18 飛航服務無線電通訊設施	AD 2 RCSS - 17
RCSS AD 2.18 ATS COMMUNICATION FACILITIES	AD 2 RCSS - 18
RCSS AD 2.19 無線電助導航設施	AD 2 RCSS - 18
RCSS AD 2.19 RADIO NAVIGATION AND LANDING AIDS	AD 2 RCSS - 18
RCSS AD 2.20 本場飛航規定	AD 2 RCSS - 22
RCSS AD 2.20 LOCAL AERODROME REGULATIONS	AD 2 RCSS - 22
2.20.1 機場作業規定/	
AIRPORT REGULATIONS	AD 2 RCSS - 22
2.20.2 滑行作業/	
TAXIING TO AND FROM STAND	AD 2 RCSS - 24
2.20.3 臺北 / 松山機場低能見度作業程序(航機駕駛員需注意事項)/	
LOW VISIBILITY PROCEDURES AT TAIPEI/SONGSHAN (FOR PILOTS' ATTENTION)	AD 2 RCSS - 25
RCSS AD 2.21 降低噪音程序	AD 2 RCSS - 31
RCSS AD 2.21 NOISE ABATEMENT PROCEDURES	AD 2 RCSS - 31
2.21.1 噴射機限制/	
RESTRICTIONS ON JET AIRCRAFT	AD 2 RCSS - 31
2.21.2 螺旋槳機限制/	
RESTRICTIONS ON PROPELLER AIRCRAFT	AD 2 RCSS - 31
2.21.3 直昇機限制/	
RESTRICTIONS ON HELICOPTER	AD 2 RCSS - 31
2.21.4 其他注意事項/	
OTHERS	AD 2 RCSS - 32
RCSS AD 2.22 飛航程序	AD 2 RCSS - 32
RCSS AD 2.22 FLIGHT PROCEDURES	AD 2 RCSS - 32
2.22.1 傳統到場/進場程序(非RNAV程序)等待點經緯度/	
HOLDING FIX COORDINATES OF CONVENTIONAL ARRIVAL/APPROACH PROCE-	
DURES(NON-RNAV PROCEDURES)	AD 2 RCSS - 32
2.22.2 離場航空器航管許可高度頒發作業/	
LEVEL ASSIGNMENT FOR DEPARTURE TRAFFIC	AD 2 RCSS - 32
RCSS AD 2.23 其他資訊	AD 2 RCSS - 33
RCSS AD 2.23 ADDITIONAL INFORMATION	AD 2 RCSS - 33
2.23.1 機場附近鳥類聚集狀況/	
BIRD CONCENTRATIONS IN THE VICINITY OF THE AIRPORT	AD 2 RCSS - 33
RCSS AD 2.24 本場航圖	AD 2 RCSS - 35

RCSS AD 2.24 CHARTS RELATED TO AN AERODROME	AD 2 RCSS - 35
RCSS AD 2.25 穿越目視階段保護面之障礙物	AD 2 RCSS - 105
RCSS AD 2.25 VISUAL SEGMENT SURFACE (VSS) PENETRATION	AD 2 RCSS - 105
AD 2 RCTP 臺灣桃園國際TAIPEI-TAIWAN TAOYUAN INTL	AD 2 RCTP - 1
RCTP AD 2.1 機場航用地名及名稱	AD 2 RCTP - 1
RCTP AD 2.1 AERODROME LOCATION INDICATOR AND NAME	AD 2 RCTP - 1
RCTP AD 2.2 機場地理與管理資料	AD 2 RCTP - 1
RCTP AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA	AD 2 RCTP - 1
RCTP AD 2.3 作業時間	AD 2 RCTP - 1
RCTP AD 2.3 OPERATIONAL HOURS	AD 2 RCTP - 1
RCTP AD 2.4 裝卸服務與設備	AD 2 RCTP - 2
RCTP AD 2.4 HANDLING SERVICES AND FACILITIES	AD 2 RCTP - 2
RCTP AD 2.5 商旅服務	AD 2 RCTP - 2
RCTP AD 2.5 PASSENGER FACILITIES	AD 2 RCTP - 2
RCTP AD 2.6 救援與消防設備	AD 2 RCTP - 2
RCTP AD 2.6 RESCUE AND FIRE FIGHTING SERVICES	AD 2 RCTP - 2
RCTP AD 2.7 可用季節-清除裝備	AD 2 RCTP - 3
RCTP AD 2.7 SEASONAL AVAILABILITY-CLEARING	AD 2 RCTP - 3
RCTP AD 2.8 停機坪、滑行道及核驗點位置	AD 2 RCTP - 3
RCTP AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA	AD 2 RCTP - 3
RCTP AD 2.9 地面活動導引、管制系統及標線	AD 2 RCTP - 9
RCTP AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS ..	AD 2 RCTP - 9
2.9.1 先進目視停靠導引系統(ADVANCED VISUAL DOCKING GUIDANCE SYSTEM、A-VDGS)/ ADVANCED VISUAL DOCKING GUIDANCE SYSTEM (A-VDGS)	AD 2 RCTP - 10
GIS206-2 1. RLG/	
1. RLG	AD 2 RCTP - 10
2. T2-24 2. Safedock T2-24/	
2. Safedock T2-24	AD 2 RCTP - 11
RCTP AD 2.10 機場障礙物	AD 2 RCTP - 13
RCTP AD 2.10 AERODROME OBSTACLES	AD 2 RCTP - 13
RCTP AD 2.11 氣象資訊之提供	AD 2 RCTP - 14
RCTP AD 2.11 METEOROLOGICAL INFORMATION PROVIDED	AD 2 RCTP - 14
RCTP AD 2.12 跑道場面特性	AD 2 RCTP - 15
RCTP AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS	AD 2 RCTP - 15
RCTP AD 2.13 公布距離	AD 2 RCTP - 16
RCTP AD 2.13 DECLARED DISTANCES	AD 2 RCTP - 16
RCTP AD 2.14 進場及跑道燈光設備	AD 2 RCTP - 17
RCTP AD 2.14 APPROACH AND RUNWAY LIGHTING	AD 2 RCTP - 17
RCTP AD 2.15 其他燈光設備及備用電源	AD 2 RCTP - 17
RCTP AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY	AD 2 RCTP - 18
RCTP AD 2.16 直昇機降落區	AD 2 RCTP - 18
RCTP AD 2.16 HELICOPTER LANDING AREA	AD 2 RCTP - 18
RCTP AD 2.17 飛航服務空域	AD 2 RCTP - 18
RCTP AD 2.17 ATS AIRSPACE	AD 2 RCTP - 18
RCTP AD 2.18 飛航服務無線電通訊設施	AD 2 RCTP - 19
RCTP AD 2.18 ATS COMMUNICATION FACILITIES	AD 2 RCTP - 19
RCTP AD 2.19 無線電助導航設施	AD 2 RCTP - 21
RCTP AD 2.19 RADIO NAVIGATION AND LANDING AIDS	AD 2 RCTP - 21
RCTP AD 2.20 本場飛航規定	AD 2 RCTP - 23
RCTP AD 2.20 LOCAL AERODROME REGULATIONS	AD 2 RCTP - 23
2.20.1 機場管理單位指引/ AERODROME ADMINISTRATION GUIDELINES	AD 2 RCTP - 23
2.20.2 機場作業規定/ AIRPORT REGULATIONS	AD 2 RCTP - 24
2.20.3 航管許可、開車後推及滑行程序/ ATC CLEARANCE, START-UP, PUSH BACK AND TAXIING PROCEDURES	AD 2 RCTP - 25
2.20.4 最小跑道佔用時間/ Minimum Runway Occupancy Time (ROT)	AD 2 RCTP - 26
2.20.5 場面監控強化系統/ SURFACE MOVEMENT SURVEILLANCE SYSTEM	AD 2 RCTP - 27

2.20.6 低能見度作業程序(航機駕駛員應注意事項)/ LOW VISIBILITY PROCEDURES (FOR PILOTS' ATTENTION)	AD 2 RCTP - 28
2.20.7 縮短跑道最低隔離/ REDUCED RUNWAY SEPARATION MINIMA (RRSM)	AD 2 RCTP - 30
RCTP AD 2.21 降低噪音程序	AD 2 RCTP - 31
RCTP AD 2.21 NOISE ABATEMENT PROCEDURES	AD 2 RCTP - 31
RCTP AD 2.22 飛航程序	AD 2 RCTP - 31
RCTP AD 2.22 FLIGHT PROCEDURES	AD 2 RCTP - 31
2.22.1 傳統到場/進場程序(非RNAV程序)等待點經緯度/ HOLDING FIX COORDINATES OF CONVENTIONAL ARRIVAL/APPROACH PROCE- DURES(NON-RNAV PROCEDURES)	AD 2 RCTP - 31
2.22.2 離場航空器航管許可高度頒發作業/ LEVEL ASSIGNMENT FOR DEPARTURE TRAFFIC	AD 2 RCTP - 31
2.22.3 到場速度限制/ ARRIVAL SPEED CONTROL	AD 2 RCTP - 31
2.22.4 到場持續下降操作(CONTINUOUS DESCENT OPERATION, CDO)作業/ CONTINUOUS DESCENT OPERATION (CDO)	AD 2 RCTP - 32
2.22.5 下降規劃/ DESCENT PLANNING	AD 2 RCTP - 34
RCTP AD 2.23 其他資訊	AD 2 RCTP - 35
RCTP AD 2.23 ADDITIONAL INFORMATION	AD 2 RCTP - 35
2.23.1 機場附近鳥類聚集狀況/ BIRD CONCENTRATIONS IN THE VICINITY OF THE AIRPORT	AD 2 RCTP - 35
RCTP AD 2.24 本場航圖	AD 2 RCTP - 36
RCTP AD 2.24 CHARTS RELATED TO AN AERODROME	AD 2 RCTP - 36
RCTP AD 2.25 穿越目視階段保護面之障礙物	AD 2 RCTP - 161
RCTP AD 2.25 VISUAL SEGMENT SURFACE (VSS) PENETRATION	AD 2 RCTP - 161
AD 2 RCWA 望安WANG-AN	AD 2 RCWA - 1
RCWA AD 2.1 機場航用地名及名稱	AD 2 RCWA - 1
RCWA AD 2.1 AERODROME LOCATION INDICATOR AND NAME	AD 2 RCWA - 1
RCWA AD 2.2 機場地理與管理資料	AD 2 RCWA - 1
RCWA AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA	AD 2 RCWA - 1
RCWA AD 2.3 作業時間	AD 2 RCWA - 1
RCWA AD 2.3 OPERATIONAL HOURS	AD 2 RCWA - 1
RCWA AD 2.4 裝卸服務與設備	AD 2 RCWA - 2
RCWA AD 2.4 HANDLING SERVICES AND FACILITIES	AD 2 RCWA - 2
RCWA AD 2.5 商旅服務	AD 2 RCWA - 2
RCWA AD 2.5 PASSENGER FACILITIES	AD 2 RCWA - 2
RCWA AD 2.6 救援與消防設備	AD 2 RCWA - 2
RCWA AD 2.6 RESCUE AND FIRE FIGHTING SERVICES	AD 2 RCWA - 2
RCWA AD 2.7 可用季節-清除裝備	AD 2 RCWA - 3
RCWA AD 2.7 SEASONAL AVAILABILITY-CLEARING	AD 2 RCWA - 3
RCWA AD 2.8 停機坪、滑行道及核驗點位置	AD 2 RCWA - 3
RCWA AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA	AD 2 RCWA - 3
RCWA AD 2.9 地面活動導引、管制系統及標線	AD 2 RCWA - 4
RCWA AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS	AD 2 RCWA - 4
RCWA AD 2.10 機場障礙物	AD 2 RCWA - 4
RCWA AD 2.10 AERODROME OBSTACLES	AD 2 RCWA - 4
RCWA AD 2.11 氣象資訊之提供	AD 2 RCWA - 4
RCWA AD 2.11 METEOROLOGICAL INFORMATION PROVIDED	AD 2 RCWA - 4
RCWA AD 2.12 跑道場面特性	AD 2 RCWA - 5
RCWA AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS	AD 2 RCWA - 5
RCWA AD 2.13 公布距離	AD 2 RCWA - 6
RCWA AD 2.13 DECLARED DISTANCES	AD 2 RCWA - 6
RCWA AD 2.14 進場及跑道燈光設備	AD 2 RCWA - 6
RCWA AD 2.14 APPROACH AND RUNWAY LIGHTING	AD 2 RCWA - 6
RCWA AD 2.15 其他燈光設備及備用電源	AD 2 RCWA - 8
RCWA AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY	AD 2 RCWA - 8
RCWA AD 2.16 直昇機降落區	AD 2 RCWA - 8

RCWA AD 2.16 HELICOPTER LANDING AREA	AD 2 RCWA - 8
RCWA AD 2.17 飛航服務空域	AD 2 RCWA - 9
RCWA AD 2.17 ATS AIRSPACE	AD 2 RCWA - 9
RCWA AD 2.18 飛航服務無線電通訊設施	AD 2 RCWA - 9
RCWA AD 2.18 ATS COMMUNICATION FACILITIES	AD 2 RCWA - 9
RCWA AD 2.19 無線電助導航設施	AD 2 RCWA - 9
RCWA AD 2.19 RADIO NAVIGATION AND LANDING AIDS	AD 2 RCWA - 9
RCWA AD 2.20 本場飛航規定	AD 2 RCWA - 10
RCWA AD 2.20 LOCAL AERODROME REGULATIONS	AD 2 RCWA - 10
2.20.1 本場飛航規定/ LOCAL TRAFFIC REGULATIONS	AD 2 RCWA - 10
RCWA AD 2.21 降低噪音程序	AD 2 RCWA - 10
RCWA AD 2.21 NOISE ABATEMENT PROCEDURES	AD 2 RCWA - 10
RCWA AD 2.22 飛航程序	AD 2 RCWA - 10
RCWA AD 2.22 FLIGHT PROCEDURES	AD 2 RCWA - 10
2.22.1 傳統到場/進場程序(非RNAV程序)等待點經緯度/ HOLDING FIX COORDINATES OF CONVENTIONAL ARRIVAL/APPROACH PROCE- DURES(NON-RNAV PROCEDURES)	AD 2 RCWA - 10
RCWA AD 2.23 其他資訊	AD 2 RCWA - 11
RCWA AD 2.23 ADDITIONAL INFORMATION	AD 2 RCWA - 11
2.23.1 機場附近鳥類聚集狀況/ BIRD CONCENTRATIONS IN THE VICINITY OF THE AIRPORT	AD 2 RCWA - 11
RCWA AD 2.24 本場航圖	AD 2 RCWA - 11
RCWA AD 2.24 CHARTS RELATED TO AN AERODROME	AD 2 RCWA - 11
RCWA AD 2.25 穿越目視階段保護面之障礙物	AD 2 RCWA - 23
RCWA AD 2.25 VISUAL SEGMENT SURFACE (VSS) PENETRATION	AD 2 RCWA - 23
AD 2 RCYU 花蓮HUALIEN	AD 2 RCYU - 1
RCYU AD 2.1 機場航用地名及名稱	AD 2 RCYU - 1
RCYU AD 2.1 AERODROME LOCATION INDICATOR AND NAME	AD 2 RCYU - 1
RCYU AD 2.2 機場地理與管理資料	AD 2 RCYU - 1
RCYU AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA	AD 2 RCYU - 1
RCYU AD 2.3 作業時間	AD 2 RCYU - 1
RCYU AD 2.3 OPERATIONAL HOURS	AD 2 RCYU - 1
RCYU AD 2.4 裝卸服務與設備	AD 2 RCYU - 2
RCYU AD 2.4 HANDLING SERVICES AND FACILITIES	AD 2 RCYU - 2
RCYU AD 2.5 商旅服務	AD 2 RCYU - 2
RCYU AD 2.5 PASSENGER FACILITIES	AD 2 RCYU - 2
RCYU AD 2.6 救援與消防設備	AD 2 RCYU - 2
RCYU AD 2.6 RESCUE AND FIRE FIGHTING SERVICES	AD 2 RCYU - 2
RCYU AD 2.7 可用季節-清除裝備	AD 2 RCYU - 3
RCYU AD 2.7 SEASONAL AVAILABILITY-CLEARING	AD 2 RCYU - 3
RCYU AD 2.8 停機坪、滑行道及核驗點位置	AD 2 RCYU - 3
RCYU AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA	AD 2 RCYU - 3
RCYU AD 2.9 地面活動導引、管制系統及標線	AD 2 RCYU - 4
RCYU AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS	AD 2 RCYU - 4
RCYU AD 2.10 機場障礙物	AD 2 RCYU - 4
RCYU AD 2.10 AERODROME OBSTACLES	AD 2 RCYU - 4
RCYU AD 2.11 氣象資訊之提供	AD 2 RCYU - 5
RCYU AD 2.11 METEOROLOGICAL INFORMATION PROVIDED	AD 2 RCYU - 5
RCYU AD 2.12 跑道場面特性	AD 2 RCYU - 6
RCYU AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS	AD 2 RCYU - 6
RCYU AD 2.13 公布距離	AD 2 RCYU - 7
RCYU AD 2.13 DECLARED DISTANCES	AD 2 RCYU - 7
RCYU AD 2.14 進場及跑道燈光設備	AD 2 RCYU - 7
RCYU AD 2.14 APPROACH AND RUNWAY LIGHTING	AD 2 RCYU - 7
RCYU AD 2.15 其他燈光設備及備用電源	AD 2 RCYU - 8
RCYU AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY	AD 2 RCYU - 8
RCYU AD 2.16 直昇機降落區	AD 2 RCYU - 8
RCYU AD 2.16 HELICOPTER LANDING AREA	AD 2 RCYU - 8
RCYU AD 2.17 飛航服務空域	AD 2 RCYU - 8

RCYU AD 2.17 ATS AIRSPACE	AD 2 RCYU - 8
RCYU AD 2.18 飛航服務無線電通訊設施	AD 2 RCYU - 9
RCYU AD 2.18 ATS COMMUNICATION FACILITIES	AD 2 RCYU - 9
RCYU AD 2.19 無線電助導航設施	AD 2 RCYU - 10
RCYU AD 2.19 RADIO NAVIGATION AND LANDING AIDS	AD 2 RCYU - 10
RCYU AD 2.20 本場飛航規定	AD 2 RCYU - 12
RCYU AD 2.20 LOCAL AERODROME REGULATIONS	AD 2 RCYU - 12
2.20.1 機場作業規定/ AIRPORT REGULATIONS	AD 2 RCYU - 12
2.20.2 滑行作業/ TAXIING TO AND FROM STAND	AD 2 RCYU - 12
RCYU AD 2.21 降低噪音程序	AD 2 RCYU - 17
RCYU AD 2.21 NOISE ABATEMENT PROCEDURES	AD 2 RCYU - 17
RCYU AD 2.22 飛航程序	AD 2 RCYU - 17
RCYU AD 2.22 FLIGHT PROCEDURES	AD 2 RCYU - 17
2.22.1 傳統到場/進場程序(非RNAV程序)等待點經緯度/ HOLDING FIX COORDINATES OF CONVENTIONAL ARRIVAL/APPROACH PROCE- DURES(NON-RNAV PROCEDURES)	AD 2 RCYU - 17
RCYU AD 2.23 其他資訊	AD 2 RCYU - 17
RCYU AD 2.23 ADDITIONAL INFORMATION	AD 2 RCYU - 17
2.23.1 機場附近鳥類聚集狀況/ BIRD CONCENTRATIONS IN THE VICINITY OF THE AIRPORT	AD 2 RCYU - 17
RCYU AD 2.24 本場航圖	AD 2 RCYU - 18
RCYU AD 2.24 CHARTS RELATED TO AN AERODROME	AD 2 RCYU - 18
RCYU AD 2.25 穿越目視階段保護面之障礙物	AD 2 RCYU - 61
RCYU AD 2.25 VISUAL SEGMENT SURFACE (VSS) PENETRATION	AD 2 RCYU - 61
AD 3 直昇機機場/ 3 HELIPORTS	AD 3.1 - 1
AD 3.1 臺北榮民總醫院直昇機飛行場/ Taipei Veterans General Hospital Heliport	AD 3.1 - 1
AD 3.2 溪頭米堤直昇機飛行場/ Xitou Le Midi Hotel	AD 3.2 - 1
AD 3.3 東引直昇機飛行場/ Dongyin Heliport	AD 3.3 - 1
AD 3.4 東莒直昇機飛行場/ Dongjyu Heliport	AD 3.4 - 1
AD 3.5 西莒直昇機飛行場/ Sijyu Heliport	AD 3.5 - 1
AD 3.6 天龍直昇機飛行場/ Tianlong Heliport	AD 3.6 - 1
AD 3.7 童綜合醫院緊急醫療救護直昇機飛行場/ Tungs' Taichung Metro Harbor Hospital Heliport	AD 3.7 - 1
AD 3.8 臺北市地政及災害應變中心聯合辦公大樓屋頂直昇機飛行場/ Taipei City Fire Department Heliport	AD 3.8 - 1
AD 3.9 中國醫藥大學附設醫院五權院區直昇機飛行場/ China Medical University Hospital Heliport	AD 3.9 - 1
AD 3.10 部立雙和醫院直昇機飛行場/ Shuang Ho Hospital Heliport	AD 3.10 - 1
AD 3.11 內政部消防署訓練中心直昇機飛行場/ Heliport of Training Center of National Fire Agency, Ministry of The Interior	AD 3.11 - 1
AD 3.12 國軍高雄總醫院屋頂直昇機飛行場/ Kaohsiung Armed Forces General Hospital Heliport	AD 3.12 - 1
AD 3.13 高雄市應變中心直昇機飛行場/ Heliport of Kaohsiung Emergency Operation Center	AD 3.13 - 1
AD 3.14 亞東醫院直昇機飛行場/ Far Eastern Memorial Hospital Heliport	AD 3.14 - 1
AD 3.15 員林基督教醫院直昇機飛行場/	

Yuanlin Christian Hospital HeliportAD 3.15 - 1

5	銀行及郵局 Bank and Post Office	Banks at international passenger terminal. ATM available at both domestic and international passenger terminals. Post office at international passenger terminal.
6	旅客服務中心 Tourist Office	Information counters at the arrival lobby of both domestic and international terminal on the 1st floor.
7	備註 Remarks	NIL

RCKH AD 2.6 救援與消防設備

RCKH AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

1	機場消防等級 AD category for fire fighting	CAT 9
2	救援裝備 Rescue equipment	3000 gallon foam fire engines x 4, equipped in accordance with CAT 9.
3	故障航空器之移離能力 Capability for removal of disabled aircraft	Air bag x 1 set, hoisting belt x 1 set, metal plate x 290, timber x 194, steel, cable x 5. The largest type of aircraft the AD equipped to remove is B747.
4	備註 Remarks	無跑道鋪設泡沫之設施 No facilities for foaming of runways

RCKH AD 2.7 可用季節-清除設備

RCKH AD 2.7 SEASONAL AVAILABILITY-CLEARING

1	清除設備類型 Types of clearing equipment	NIL
2	清除優先順序 Clearance priorities	NIL
3	備註 Remarks	NIL

RCKH AD 2.8 停機坪・滑行道及核驗點位置

RCKH AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA

1	停機坪之鋪面與強度 Apron surface and strength	名稱 Designator	鋪面 Surface	強度 Strength
		CARGO (Stand 33-36)	CONC	PCR 710/R/B/W/U
		MAINTENANCE (Stand D1-D3)	CONC	PCR 710/R/B/W/U
		Stand 3-8	CONC	PCR 960/R/C/W/T
		Stand 11-18	CONC	PCR 750/R/C/W/T
		Stand 21-23	CONC	PCR 1130/R/C/W/T
		Stand 24-29	CONC	PCR 780/R/C/W/T
		Stand 30-32	CONC	PCR 1130/R/C/W/T
		Stand 511-512	CONC	PCR 1280/R/B/W/T
		Stand 516	CONC	PCR 1280/R/B/W/T
		Stand 522-528	CONC	PCR 1230/R/B/W/T

2	滑行道之寬度・鋪面類型及強度 Taxiway width, surface and strength	名稱 Designator	寬度 Width	鋪面 Surface	強度 Strength
		A	30 M	CONC + ASPH	PCR 1220/R/C/W/T - COMPOSITE
		B	30 M	CONC	PCR 1090/R/B/W/T
		C	35 M	CONC + ASPH	PCR 650/R/C/W/T - COMPOSITE
		D	30 M	CONC	PCR 1180/R/B/W/T
		E	35 M	CONC + ASPH	PCR 750/R/C/W/T - COMPOSITE
		F	30 M	CONC	PCR 1180/R/B/W/T
		G	35 M	CONC + ASPH	PCR 1060/R/C/W/T - COMPOSITE
		H	30 M	CONC + ASPH	PCR 1041/R/C/W/U - COMPOSITE
		J	35 M	CONC + ASPH	PCR 1810/R/C/W/T - COMPOSITE
		L	30 M	CONC + ASPH	PCR 1220/R/C/W/T - COMPOSITE
		S	30 M	CONC + ASPH	PCR 890/F/C/X/T - COMPOSITE
		S3	30 M	CONC	PCR 1050/R/B/W/T
		S4	35 M	CONC	PCR 1041/R/C/W/U
		Taxilane K1	30 M	CONC	PCR 1130/R/C/W/T
		Taxilane K2	30 M	CONC	PCR 780/R/C/W/T
		Taxilane K3	30 M	CONC	PCR 1130/R/C/W/T
		Taxilane K4	30 M	CONC	PCR 1130/R/C/W/T
3	高度表校正地點及標高 Altimeter checkpoint location and elevation	Location: at Apron Elevation: 19FT			
4	VOR 校對點 VOR checkpoints	VOR: NIL			
5	INS 校對點 INS checkpoints	停機位編號 Bay Number	經緯度 Coordinates		最大機型 MAX ACFT Type
		D1	223423.61N 1202013.10E		B738
		D2	223423.66N 1202011.56E		B738
		D3	223423.71N 1202009.71E		B763
		3	223425.42N 1202049.64E		B752
		4	223423.84N 1202049.58E		A321
		5	223423.26N 1202043.58E		A321NEO
		6	223423.31N 1202041.77E		A321NEO

RCKH AD 2.12 跑道場面特性
RCKH AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

跑道名稱 Designations RWY	真方位 TRUE BRG	跑道範圍 Dimension of RWY (M)	跑道與緩衝區 之強度與鋪面 Strength and surface of RWY and SWY	跑道頭經緯度 跑道末端經緯度 大地基準面起伏 THR COORD RWY end COORD THR GUND	跑道頭標高 及精確進場 跑道之著陸 區最高點標高 THR ELEV and highest ELEV of TDZ of precision APCH RWY
1	2	3	4	5	6
09	091.90	3150 x 60	RWY: PCR 1180/R/A/W/T CONC+ASPH SWY: ASPH	223438.97N 1202011.10E 223435.74N 1202155.76E GUND: NIL	THR: 21 FT TDZ: 25 FT
27	271.93	3150 x 60	RWY: PCR 1180/R/A/W/T CONC+ASPH SWY: NIL	223436.22N 1202140.18E 223439.14N 1202005.55E GUND: NIL	THR: 31 FT TDZ: 31 FT
跑道名稱 Designations RWY	跑道及緩衝區之坡度 Slope OF RWY and SWY	緩衝區範圍 SWY dimensions (M)	清除區範圍 CWY dimensions (M)	跑道地帶範圍 Strip dimensions (M)	跑道端安全區範圍 RESA dimensions (M)
1	7	8	9	10	11
09	+0.1%	60 x 60	60 x 150	3330 x 252	160 x 150
27	-0.1%	NIL	60 x 150	3330 x 252	160 x 150
跑道名稱 Designations RWY	攔阻系統位置/說明 Location/ de- scription of ar- resting system	障礙物淨空區 OFZ	備註 Remarks		
1	12	13	14		
09	NIL	Available	跑道地帶寬度不符 Annex 14 之規定。 The width of strip does not meet criteria in Annex 14.		
27	NIL	Available	跑道地帶寬度不符 Annex 14 之規定。 The width of strip does not meet criteria in Annex 14.		

RCKH AD 2.13 公布距離

RCKH AD 2.13 DECLARED DISTANCES

跑道名稱 RWY Designator	TORA (M)	TODA (M)	ASDA (M)	LDA (M)	備註 Remarks
1	2	3	4	5	6
09	3150	3210	3210	2990	THR displaced by 160 M
27	3150	3210	3150	2705	THR displaced by 445 M

交叉口起飛

INTERSECTION TAKE-OFF

跑道名稱 RWY Designator	TWY	TORA (M)	TODA (M)	ASDA (M)	備註 Remarks
09	B	3056	3116	3116	NIL
	C	2495	2555	2555	NIL
	E	1690	1750	1750	NIL
27	E	1470	1530	1470	NIL
	G	2495	2555	2495	NIL
	H	3015	3075	3015	NIL

RCKH AD 2.14 進場及跑道燈光設備

RCKH AD 2.14 APPROACH AND RUNWAY LIGHTING

跑道名稱 RWY Des-ignator	進場燈 型式、長度、強度 APCH LGT type LEN INTST	跑道頭燈 顏色、有 無翼排燈 THR LGT colour WBAR	目視進 場滑降 指示燈 (最低眼 高) PAPI VASIS (MEHT) PAPI	著陸區 燈長度 TDZ, LGT LEN	跑道中心 線燈總長 度、間距、 顏色、強度 RWY Cen- tre Line LGT Length, spacing, colour, INTST	跑道邊燈總 長度、間距、 顏色、強度 RWY edge LGT LEN, spacing colour INTST	跑道末 端燈顏 色、有 無翼排燈 RWY End LGT colour WBAR	緩衝 區燈長 度、顏色 SWY LGT LEN (M) colour
1	2	3	4	5	6	7	8	9
09	MALSR 720 M LIM	Green WBAR	PAPI LEFT/3° (59.9 FT)	White, 900M	3150M, 15M, White, White/ Red, Red, LIH	3150M, 60M, Red, White, Yellow, LIH.	Red No WBAR	60M Red
27	CAT1 720M LIH	Green WBAR	PAPI RIGHT/3° (62.3 FT)	NIL	3150M, 15M, White, White/ Red, Red, LIH	3150M, 60M, Red, White, Yellow, LIH	Red No WBAR	NIL

RCKH AD 2.20 本場飛航規定 RCKH AD 2.20 LOCAL AERODROME REGULATIONS

2.20.1 機場管理單位指引

1. 航空器地面操作限制

- 航空器在停機坪(含連接停機坪之滑行道)因滑行錯誤，或已滑過指定之停機位，除經過機場管理單位允許外，禁止在原地180度迴轉，此時駕駛員應停車(或慢車)並告知塔臺須利用拖車，拖至所須之方向或指定之停放位置。
- 民用航空器(直昇機除外)在停機坪內，不得自行迴轉滑出停機坪至滑行道/滑行路徑。
- 航機滑行轉彎時應判斷採取過度轉向，以確保外側主輪軌跡與鋪面邊緣達到國際民航組織所建議之淨距。
- 由於機尾噴流可能影響相鄰機坪或棚廠，航空器於17號停機位後推時，機頭僅能朝西；12號停機位後推時機頭僅能朝東。
- A350-900、A350-1000、B787-10及B777-300ER在A或B滑行道可用時避開S4滑行道，以免損害其鋪面。

2. Boeing B747-800型機停機及滑程序

- 指定停機位33、34、35
 - 到場
09跑道-J滑行道-S滑行道-停機位
27跑道-A滑行道-S滑行道-停機位
 - 離場
停機位-S滑行道-A滑行道-09跑道
停機位-S滑行道-J滑行道-27跑道
- 因S滑行道南側有障礙物，翼尖淨距減少至13.3M，故航機沿S滑行道滑行時，介於S4及A滑行道之間應減慢速度至10哩/小時，且鼻輪保持在滑行道中心線上。
- 航機沿著上述路徑滑行時，得視需要向塔臺請求引導車(FOLLOW ME)導引。

3. 熱點位置請見AD 2.24機場圖：

- Hot Spot 1: 在接近交叉口時，駕駛員應保持警覺，避免發生衝突，以確保交通有序順暢。
- Hot Spot 2: 在接近交叉口時，駕駛員請留意511停機位後推航機。
- Hot Spot 3: 在接近交叉口時，駕駛員應保持警覺，避免發生衝突，以確保交通有序順暢。

4. 航空器引擎交叉開車作業程序

- 禁止在停機位操作大油門輔助其他引擎開車。
- 需事先經航空站航務組許可。

2.20.1 AERODROME ADMINISTRATION GUIDELINES

1. Aircraft ground maneuvering restrictions

- Aircraft are not allowed to make a 180-degree turn without airport authority's approval when deviating or taxiing over the assigned parking bays. In this case, pilots should shut down or idle engines and inform tower for towing service.
- Civil aircraft (except helicopter) are not allowed to make turns with its own power when moving from apron to taxiway/taxilane.
- Aircraft shall perform judgmental oversteering while turning into (another) taxiway to meet ICAO minimum clearance distance requirement between the outer main wheel and the edge of the taxiway.
- Due to jet blast might affect adjacent apron or hangar, aircraft pushing back from Stand 17 shall face west and from Stand 12 shall face east.
- For A350-900, A350-1000, B787-10 and B777-300ER, if TWY A or B is available, aircraft should taxi via TWY A or B instead of TWY S4, to avoid damaging the pavement.

2. Parking and taxiing procedures for Boeing B747-800

- When Stand 33, 34, 35 are assigned:
 - Arrival
RWY 09 - TWY J - TWY S - Stand
RWY 27 - TWY A - TWY S - Stand
 - Departure
Stand - TWY S - TWY A - RWY 09
Stand - TWY S - TWY J - RWY 27
 - Aircraft taxiing along TWY S between TWY S4 and A shall reduce speed to 10 KT and maintain aircraft nose gear on taxiway centerline due to reduced wingtip clearance (13.3M) caused by obstacle on south side of TWY S.
 - Aircraft taxiing along the above-mentioned path may request FOLLOW ME guidance from ATC if necessary.
- #### 3. The hot spot locations are depicted on Aerodrome Chart in AD 2.24.
- Hot Spot 1: While approaching the intersection, pilots are to maintain a lookout to prevent conflicts and ensure an orderly traffic flow.

- c. 依塔臺指示，後推於下列滑行道/滑行路徑之中心線上操作：
- i. 11-18停機位：如表2-20-1所示。
 - ii. 其餘停機位：A滑行道、L滑行道或S滑行道

- b. Hot Spot 2: While approaching the intersection, pilots shall be aware of Stand 511 pushback operations.
- c. Hot Spot 3: While approaching the intersection, pilots are to maintain a lookout to prevent conflicts and ensure an orderly traffic flow.

4. Aircraft engine cross-bleed start-up procedure

- a. Using increased power to start other engines on stands is prohibited.
- b. Engine cross-bleed start-up approval must be obtained from Flight Operation Section of Airport Office in advance.
- c. Engine cross-bleed start-up can only be performed on the TWY/TXL centre-line according to ATC push-back instructions, details are as follows:
 - i. Stand 11-18: Refer to Table 2-20-1.
 - ii. Other stands: TWY A, TWY L or TWY S

表2-20-1

Table 2-20-1

停機位 Stand	機型 ACFT type
	A321
11-13	TXL K4 Face East
14	TWY A or L
15	TWY A or L
16-18	TXL K4 Face West

2.20.2 機場作業規定

2.20.2 AIRPORT REGULATIONS

1. 本場飛行限制

- a. 由高雄機場北邊目視進場至機場之航空器於加入09跑道5邊或27跑道3邊前，不得進入海岸線以內之空域。
- b. 當風速10KT以下時，得不使用與風向一致之跑道，航空器不能遵守此規定時，應告知航管單位。
- c. 高雄機場因地形障礙而為特殊機場。

1. Local flying restrictions

- a. Aircraft approaching from the north of airport shall not enter airspace east of coastline before joining the final of RWY 09 or the downwind of RWY 27 while executing a visual approach to Kaohsiung International Airport.
- b. The runway-in-use will not necessarily be aligned with the wind when wind velocity is 10 knots or less. Aircraft unable to comply with this restriction shall so advise ATC.
- c. Kaohsiung international airport is designated as a special airport due to terrain and obstacles.

2. 儀器飛航程序起飛天氣限度

2. IFR Take-off Weather Minimum

引擎數 ENG	RWY 09/27		
	REDL & RCLL & 2RVR	REDL & RCLL or REDL & RCL MARKING	NIL (DAY ONLY)
1	Visibility/RVR 350M	Visibility/RVR 500M	Visibility/RVR 1600M
2			
3			Visibility/RVR 800M
4			

2.20.3 航管許可、開車後推及滑行作業

高雄國際機場離場航機開車、後推及滑程序：
航空器自高雄國際機場離場航機必須遵守本開車、後推及滑程序。除非獲得航管許可，航機不得自行開車、後推或進行其他活動。

1. 航管許可

- 航機在開車前5分鐘，應呼叫 "高雄地面管制" 或經由資料鏈路，申請航管許可。
- 航機呼叫 "高雄地面管制" 申請許可時，必須說明自己之呼號，停機坪位置及申請之高度。
- 航管單位為安排適當之隔離，當離場航機申請之高度被過境班機佔用時，駕駛員必須選擇另一高度或延後起飛之時間。
- 除非航管許可已經有起飛時間之限制，航機在收到航管許可5分鐘內，必須準備好後推，否則航管許可可能將被取消。當航管許可被取消時，航管人員將告知駕駛員取消之原因。駕駛員在被取消航管許可後，必須按照前述開車程序，重新申請開車及航管許可。

2. 開車及後推

- 航機在收到航管許可後，向 "高雄地面管制" 申請開車及後推。
- 除非業經航管單位同意，航機在完成後推時應已準備好滑行，以減少整體作業之延誤。

3. 滑行

- 除非經航管單位同意，否則駕駛員不得自行利用跑道滑行。
- 當航管單位指定航空器起飛之跑道，並附加等待指示時，航管單位會先說明起飛跑道之號碼，於必要時頒發滑行指示，再說明等待指示。

2.20.3 ATC CLEARANCE, START-UP, PUSH BACK AND TAXIING

Start-up, push back, and taxiing procedures for aircraft departing from Kaohsiung International Airport:
Aircraft departing from Kaohsiung International Airport shall comply with the following start-up, push back, and taxiing procedures. Aircraft shall not commence start-up, push back or other movements unless they have been approved by ATC.

1. ATC Clearance

- Aircraft are to obtain ATC clearance via Datalink or by calling Kaohsiung Ground 5 minutes before start-up.
- Aircraft are to call Kaohsiung Ground, giving their call sign, parking bay number, and proposed flight level.
- An aircraft requesting an altitude occupied by an transit flight operating through the Taipei FIR may have to accept an alternate altitude or may have to delay its departure, in order for ATC to establish the prescribed separation.
- Unless a restriction on departure time has otherwise been specified, aircraft that is not ready to push back within 5 minutes of receiving an ATC clearance may have its clearance withdrawn. In such a situation, ATC will inform the aircraft of the clearance cancellation plus the reason. Following the cancellation of an ATC clearance, aircraft will follow the normal clearance request procedure as if it is the first time they were ready to depart.

2. Start-up and Push Back

- After receiving the ATC clearance, aircraft are to call Kaohsiung Ground for start-up and push back when ready.
- Unless otherwise approved by ATC, departing aircraft, at the end of push back, must have all engines started and be ready to taxi to reduce the overall delay of traffic.

3. Taxiing

- Unless otherwise approved by ATC, pilots shall not use runway for taxiing.
- When ATC assign aircraft a takeoff runway, with a hold short instruction. ATC shall specify the run-

way, issue taxi instructions if necessary, and then state the hold short instructions.

RCKH AD 2.21 降低噪音程序

RCKH AD 2.21 NOISE ABATEMENT PROCEDURES

為減少噪音來源與降低噪音衝擊:

To reduce noise at source and to lower impact to the neighborhood:

- 宵禁時間：為防止噪音，除緊急情況外，每日16:01至22:30世界標準時間禁止起降。
- 訓練飛行
 - 外籍航空器不得於本場訓練飛行。
 - 本國籍航空器僅限於每日00:00-04:00及06:30-12:00世界標準時間實施訓練飛行，國定假日及例假日禁止實施。
- 由09跑道離場之航空器，起飛後未通過09跑道末端禁止右轉。
- 飛機停於貨運機坪應關閉APU，使用GPU電源。

- Curfew period: Due to noise abatement, take-off or landing is prohibited during the period from 16:01 to 22:30UTC except emergency.
- Training flights
 - Foreign aircraft training is not allowed.
 - R.O.C aircraft training flights are only allowed to operate during 00:00-04:00 and 06:30-12:00UTC daily. Saturday, Sunday and holidays are excluded.
- Aircraft departing from RWY 09 shall not commence right turn until passing RWY end.
- Aircraft parking in cargo aprons shall turn off APU, use GPU instead.

RCKH AD 2.22 飛航程序

RCKH AD 2.22 FLIGHT PROCEDURES

2.22.1 傳統到場/進場程序(非RNAV程序)等待點經緯度

2.22.1 HOLDING FIX COORDINATES OF CONVENTIONAL ARRIVAL/APPROACH PROCEDURES(NON-RNAV PROCEDURES)

等待點 Holding Fix	經緯度 Coordinates	等待點 Holding Fix	經緯度 Coordinates
FORKY	222553.84N 1202641.24E	OASIS	221652.19N 1201402.36E
KIZIN	223505.00N 1200533.00E	ORION	222309.77N 1200306.13E

註解: 其他資訊參照ENR 1.5.6及相關航圖。

Note: other information refer to ENR 1.5.6 and related charts.

2.22.2 目視飛航直昇機於高雄機場離場時之起飛方向及飛航路徑

2.22.2 DIRECTIONS AND ROUTES FOR VFR HELICOPTERS DEPARTING FROM KAO-HSIUNG AD

- 起飛向西：沿跑道方向至海岸線後往目的地。
- 起飛向西轉北：由中山路轉國道1號。
- 起飛向西轉南：由2港口至海岸線往南。
- 起飛向東轉南：
 - 經鳳山水庫由鳳鼻頭往南。
 - 沿跑道方向至高屏溪往南。
- 起飛向東轉北：
 - 沿跑道方向至高屏溪往北。

- Westbound departing: After departure, fly along the runway direction till the coastline, then head for the destination.
- Westbound departing then turning northbound: After departure, fly along the Zhongshan Road, then join National Highway No. 1.
- Westbound departing then turning southbound: After departure, fly toward the Harbor No. 2 till the coastline, then turn southbound.
- Eastbound departing then turning southbound

b. 沿跑道方向爬高至1000FT，北向加入國道1號。

a. After departure, fly toward the Fengshan Reservoir till the Fengbitou, then turn southbound.

b. After departure, fly along the runway direction till the Gaoping River, then turn southbound.

5. Eastbound departing then turning northbound

a. After departure, fly along the runway direction till the Gaoping River, then turn northbound.

b. After departure, fly along the runway direction and climb to 1000FT, then turn northbound to join National Highway No. 1.

2.22.3 目視飛航直昇機於高雄機場離到場飛航時之等待點與報告點

西子灣、衛武營、萬大橋、鳳山水庫、鳳鼻頭、雙園大橋。

2.22.3 VISUAL HOLDING AND REPORTING POINTS FOR VFR HELICOPTERS OPERATING AT KAOHSIUNG AD

XIZI BAY, WEIWUYING, WANDA BRIDGE, FENGSHAN RESERVOIR, FENGBITOU AND SHUANGYUAN BRIDGE.

2.22.4 低能見度作業程序

1. 第一階段低能見度作業 (RVR 低於750M)

a. 於 ATIS 廣播：「實施第一階段低能見度作業程序」(STAGE ONE LOW VISIBILITY PROCEDURES IN EFFECT)。

b. 航空器行經S滑行道位於A至S4滑行道間之各處交叉路口時，應主動向航管報告位置。

c. 航空器得視需要，請求引導車導引。

d. 當航空器飛航組員或車輛駕駛員報告迷失方向，且航管無法識別其所在位置時，所有航空器或車輛應原地等待，直至航空器或車輛位置可被航管識別為止。

e. 滑行路線(除航管另有指示外)：

i. 09跑道離場：依航管指示路線以全跑道起飛。

ii. 09跑道到場：於跑道末端脫離，並依航管指示路線至指定停機位。

iii. 27跑道離場：依航管指示路線以全跑道起飛。

2. 第二階段低能見度作業 (RVR 低於550M)，除第一階段作業外，另需：

a. 於 ATIS 廣播：「實施第二階段低能見度作業程序」(STAGE TWO LOW VISIBILITY PROCEDURES IN EFFECT)。

b. 為確保安全並避免跑道入侵，需對跑道和滑行道實施嚴格管制。

c. 以S4滑行道區隔東側及西側操作區，同一時間各只允許一架航空器活動。

1. Stage one Low Visibility Procedures (RVR is less than 750M)

a. ATIS broadcasts "STAGE ONE LOW VISIBILITY PROCEDURES IN EFFECT."

b. Aircraft shall proactively report their positions to ATC when passing each taxiway intersection on TWY S between TWY A and S4.

c. Aircraft may request follow-me vehicle guidance if necessary.

d. When the flight crew or vehicle driver become disoriented and ATC cannot identify the aircraft and vehicle's position either, all aircraft and vehicle shall hold position until their positions can be identified by ATC.

e. Taxi Routes (Unless otherwise instructed by ATC):

i. RWY 09 Departures: Departing aircraft shall follow ATC instructions for specific taxi route to use the full length of the runway for take-off.

ii. RWY 09 Arrivals: Arriving aircraft shall vacate at the runway end, then follow ATC instructions for specific taxi route to its assigned aircraft stand.

iii. RWY 27 Departures: Departing aircraft shall follow ATC instructions for specific taxi route to use the full length of the runway for take-off.

2. Stage two Low Visibility Procedures (RVR is less than 550M) In addition to Stage One procedures, the following shall apply:

a. ATIS broadcasts "STAGE TWO LOW VISIBILITY PROCEDURES IN EFFECT."

- b. To prevent runway incursion and ensure safety, strict control is required in the maneuvering area.
- c. At any given time, only one aircraft is permitted to operate in each maneuvering area separated by Taxiway S4.

RCKH AD 2.23 其他資訊

RCKH AD 2.23 ADDITIONAL INFORMATION

2.23.1 機場附近鳥類聚集狀況

2.23.1 BIRD CONCENTRATIONS IN THE VICINITY OF THE AIRPORT

鳥種 Bird Type	活動季節與時間 Activity Time	活動區域 Activity Area	飛行高度 Flight Height	特性 Characteristics
麻雀 Eurasian Tree Sparrow	全年 Whole year	跑道、滑行道、機場草坪 RWY, TWYs and grass area at the airport	GND-50FT	體重約22g · 小型鳥種。 Around 22g weight, small sized species.
鴿子 Pigeon	全年 Whole year	跑道、滑行道、機場草坪 RWY, TWYs and grass area at the airport	GND-50FT	體重約315g · 中型鳥種。 Around 315g weight, medium sized species.
紅鳩 Red Turtle Dove	全年 Whole year	09/27跑道北側草坪 North grass of RWY 09/27	GND-50FT	體重約106g · 中型鳥種。 Around 106g weight, medium sized species.
斑頸鳩 Spotted Dove	全年 Whole year	09/27跑道北側草坪 North grass of RWY 09/27	GND-50FT	體重約154g · 中型鳥種。 Around 154g weight, medium sized species.
白頭翁 Light-vented Bulbul	全年 Whole year	機場草坪 Grass area at the airport	GND-50FT	體重約39g · 小型鳥種。 Around 39g weight, small sized species.
白尾八哥 Javan Myna	全年 Whole year	機場草坪 Grass area at the airport	GND-50FT	體重約86g · 小型鳥種。 Around 86g weight, small sized species.
家燕 Barn Swallow	全年 Whole year	跑道、滑行道、機場草坪 RWY, TWYs and grass area at the airport	GND-50FT	體重約15g · 小型鳥種。 Around 15g weight, small sized species.
洋燕 Pacific Swallow	全年 Whole year	跑道、滑行道、機場草坪 RWY, TWYs and grass area at the airport	GND-50FT	體重約16g · 小型鳥種。 Around 16g weight, small sized species.

鳥種 Bird Type	活動季節與時間 Activity Time	活動區域 Activity Area	飛行高度 Flight Height	特性 Characteristics
黃頭鷺 Cattle Egret	全年 Whole year	機場草坪 Grass area at the airport	GND-100FT	體重約368g，中型鳥種。 Around 368g weight, medium sized species
	每年8月至10月份，1300至夜間遷飛活動 From AUG to OCT, migration starts from 1300 to nighttime	27跑道東方約1.5KM處、27跑道東南方約4.6KM處 1.5KM east of RWY 27; 4.6KM south-east of RWY 27	GND-1200FT	
	每年2月至4月份 From FEB to APR	由機場27跑道東南方約4.6KM處（鳳山水庫）離開，沿09跑道西方高雄港外海北上飛行 Fly from Fengshan reservoir (4.6KM south-east of the airport) toward the outer sea of Kaohsiung Port	50FT-1200FT	
鸕鷀 Great Cormorant	每年11月至翌年4月份 From NOV to next APR	由09跑道西方高雄港外海飛行至機場東南方約4.6公里處（鳳山水庫） Fly from the outer sea of Kaohsiung Port toward Fengshan reservoir (south-east 4.6KM of the airport)	180FT-500FT	體重約2600至3700g，大型鳥種。 Around 2600-3700g weight, large sized species.
	每年11月至翌年4月份上午至黃昏 From NOV to next APR, Morning till sunset	27跑道東南方約4.6公里處（鳳山水庫）至水庫以東2公里處（高屏溪）、09跑道西方高雄港外海 Fly from Fengshan reservoir (4.6KM south-east of the airport), toward Gaoping River (2KM east of Fengshan reservoir) or toward the outer sea of Kaohsiung Port		
黑翅鷗 Black-shouldered Kite	全年，晨間、日間及黃昏 Whole year, in the dusk, daytime and dawn	跑道、滑行道、跑道北側草坪、機場草坪上空 RWYs, TWYs, north grass area of RWYs and grass area at the airport	GND-100FT	體重約180g-220g，中型鳥種。 Around 180g-220g weight, medium sized species.
小白鷺 Little Egret	每年5月至10月份，日間 From MAY to OCT Daytime	機場草坪、割草作業處、積水處、機場北側排水溝 Grass area at the airport, grass cutting area, puddles, drains in north side of the airport	GND-1200FT	體重約180g-220g，中型鳥種。 Around 180g-220g weight, medium sized species.

註解: 上表所列之時間係本地時間 (UTC+8)，另鳥類飛行高度，係觀察鳥類活動所目測之概估值。


Note: The above mentioned activity times are given in local time (UTC+8) and flight height is visual estimation of bird activities.

RCKH AD 2.24 本場航圖
RCKH AD 2.24 CHARTS RELATED TO AN AERODROME

機場圖
AERODROME CHART

AD ELEV 32FT ARP: 223437N 1202101E

高雄國際機場
KAOHSIUNG INTL AD

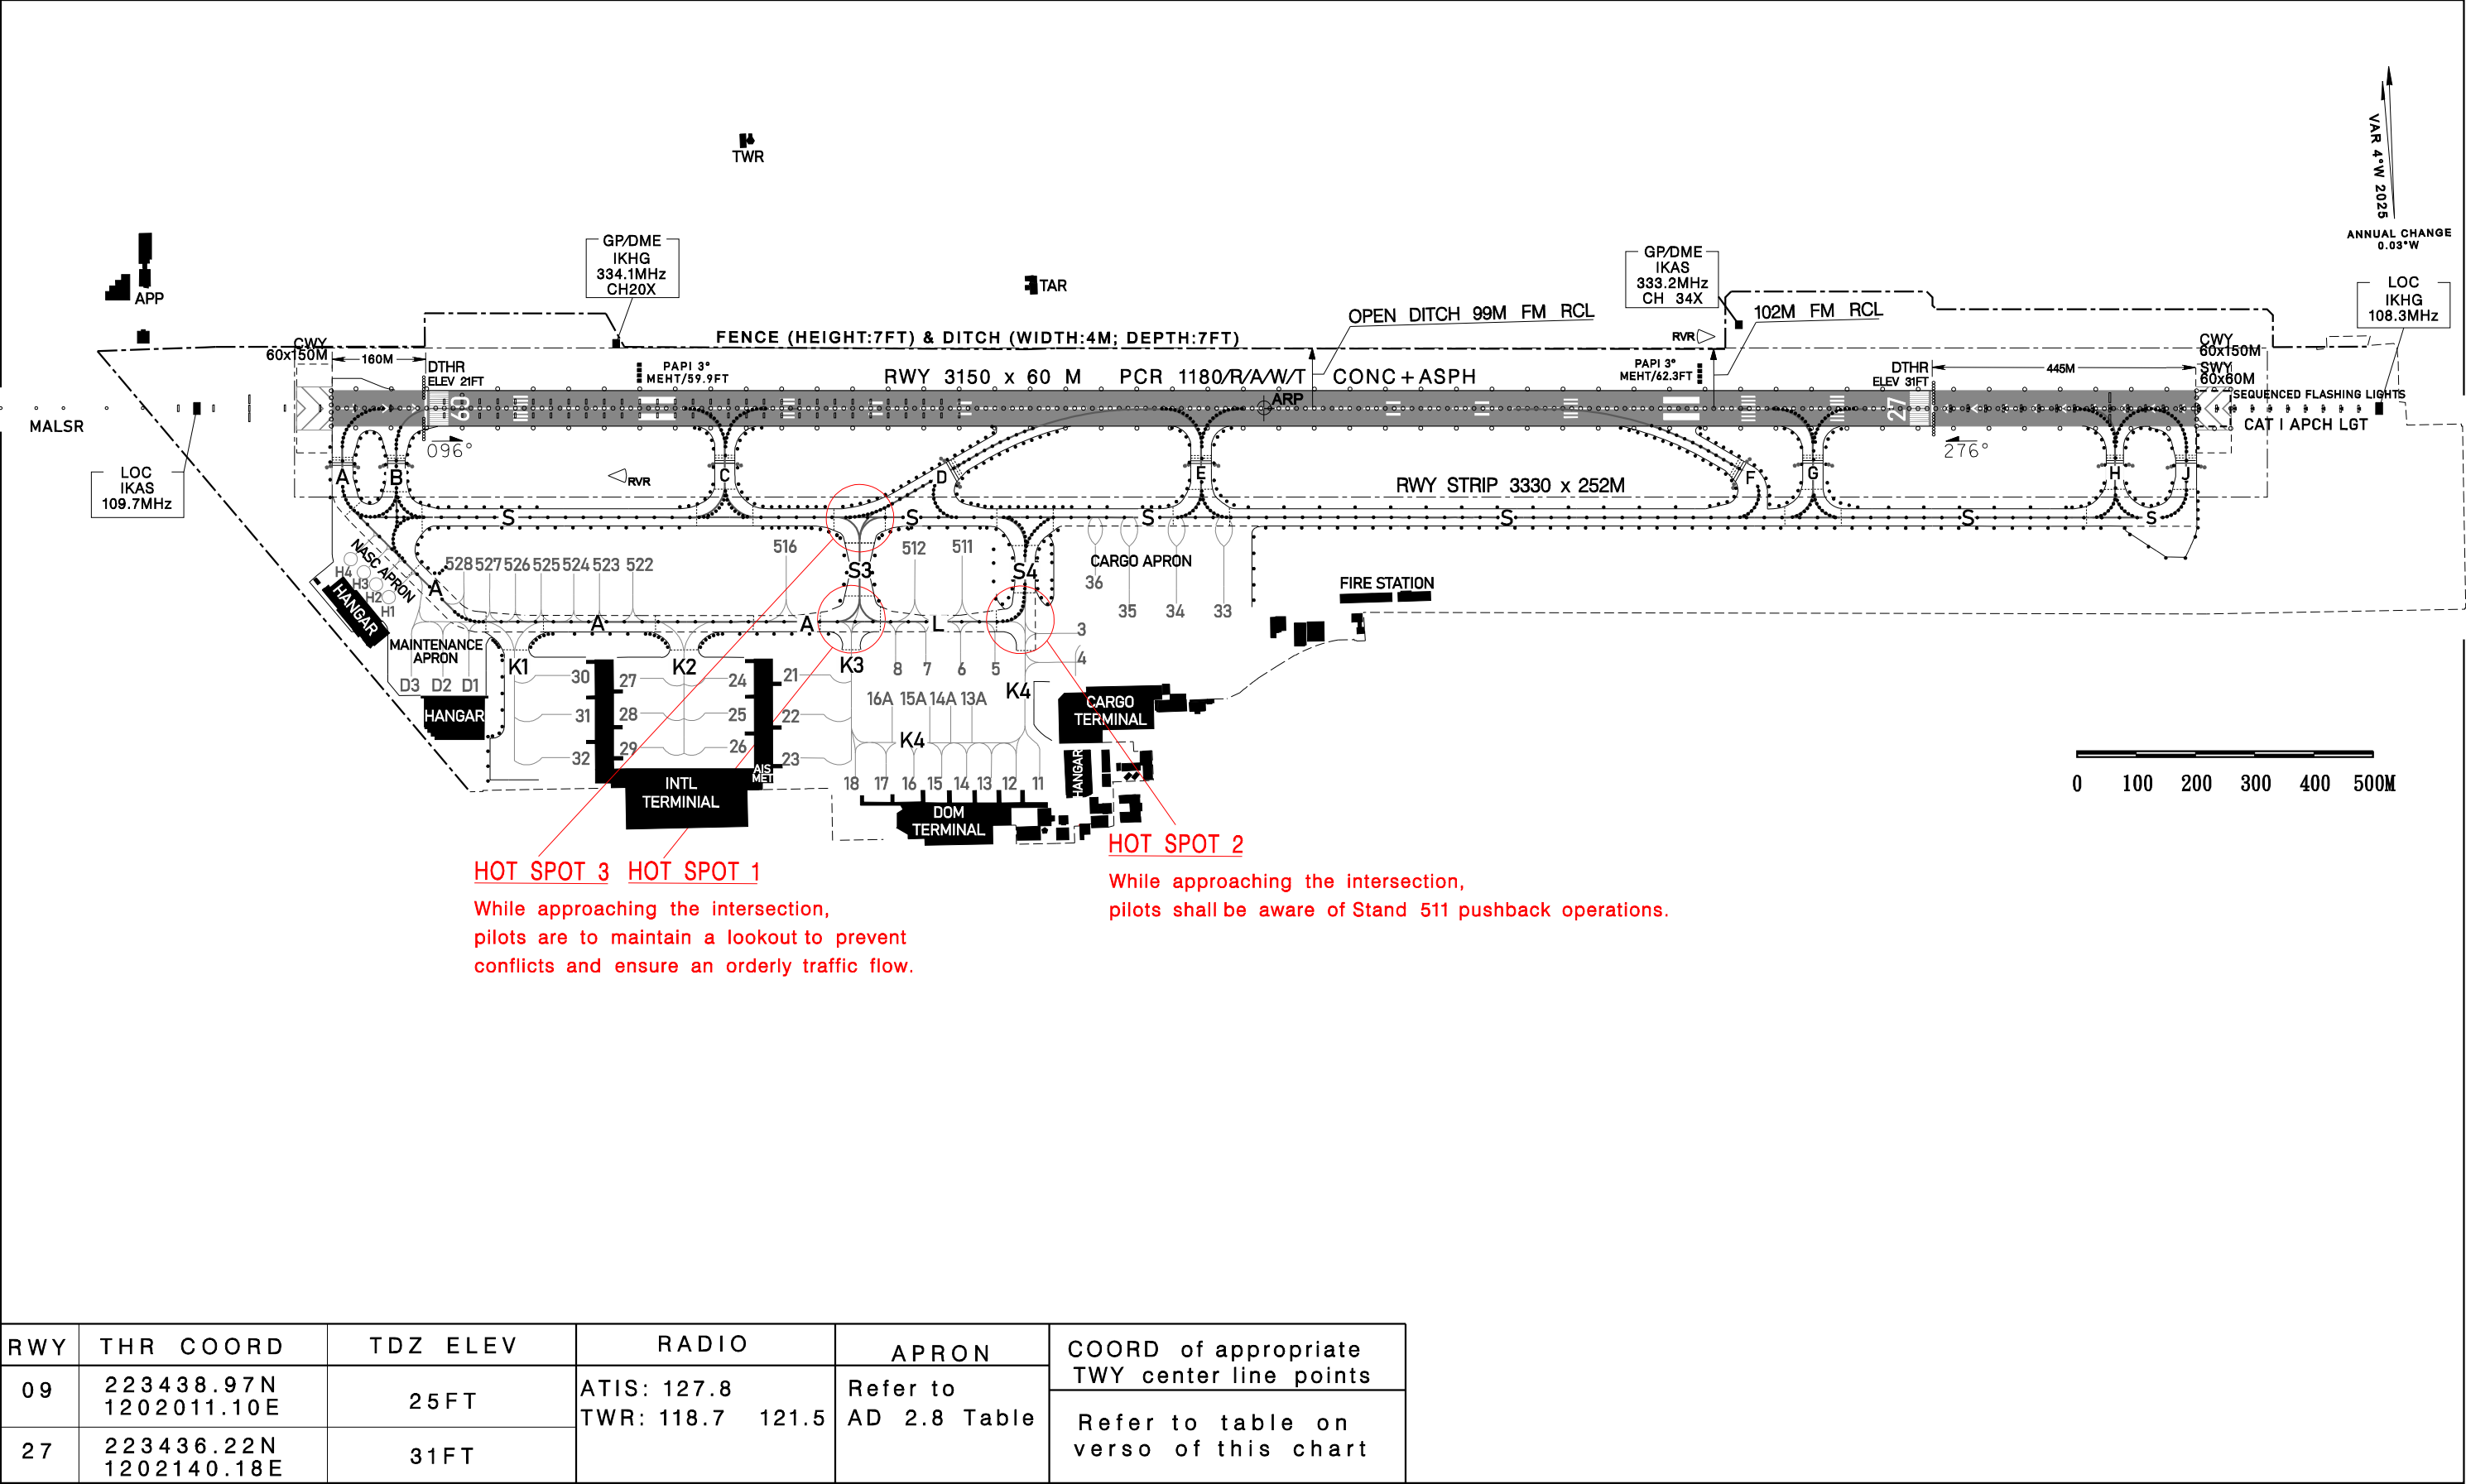

CHANGES: HOT SPOT UPDATED

THIS PAGE
INTENTIONALLY
LEFT BLANK

3	故障航空器之移離能力 Capability for removal of disabled aircraft	60 panel sheets, 57 crossties, 1 forklift, 1 flood light rescue truck, 1 flood light equipment and 1 transportation truck. The largest type of rescue ACFT the AD equipped to move is B738.
4	備註 Remarks	無跑道鋪設泡沫之設施 No facilities for foaming of runway.

RCKU AD 2.7 可用季節-清除裝備

RCKU AD 2.7 SEASONAL AVAILABILITY-CLEARING

1	清除裝備類型 Types of clearing equipment	NIL
2	清除優先順序 Clearance priorities	NIL
3	備註 Remarks	NIL

RCKU AD 2.8 停機坪・滑行道及核驗點位置

RCKU AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS DATA

1	停機坪之鋪面與強度 Apron surface and strength	名稱 Designator		鋪面 Surface	強度 Strength
		CIVIL		CONC	PCR 400/R/D/W/T
2	滑行道之寬度・鋪面類型及強度 Taxiway width, surface and strength	名稱 Designator	寬度 Width	鋪面 Surface	強度 Strength
		A	22 M	CONC + ASPH	PCR 640/R/D/W/T - COMPOSITE
		B	23 M	CONC + ASPH	PCR 520/R/D/W/T - COMPOSITE
		C	45 M	CONC + ASPH	PCR 590/R/D/W/T - COMPOSITE
		D	45 M	CONC + ASPH	PCR 760/R/D/W/T - COMPOSITE
		E	22 M	CONC + ASPH	PCR 870/R/D/W/T - COMPOSITE
		H	22 M	CONC	PCR 669/R/D/W/T
3	高度表校正地點及標高 Altimeter checkpoint location and elevation	Location: At apron ELEV: 87FT			
4	VOR 校對點 VOR checkpoints	VOR: NIL			
5	INS 校對點 INS checkpoints	停機位編號 Bay Number	經緯度 Coordinates		最大機型 MAX ACFT Type
		1	232708.13N 1202354.36E		ATR72-600
		2	232709.45N 1202354.42E		A320
		3	232710.74N 1202354.42E		ATR72-600

6	備註 Remarks	NIL
---	---------------	-----

RCKU AD 2.9 地面活動導引、管制系統及標線

RCKU AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS

1	停機位編號指示牌，滑行引導線，目視 停靠導引系統 Use of aircraft stand ID signs, TWY guide lines and visual docking/park- ing guidance system of aircraft stands	Taxiing guidance signs at apron, Aircraft stand identification signs.
2	跑道、滑行道標線及燈光 RWY and TWY markings and LGT	RWY: Designation, THR, TDZ, center line, side stripe, RWY dis- tance remaining sign, edge and runway end as appropriate, marked and lighted. TWY: Center line, holding positions at all TWY/RWY intersec- tions, marked and lighted.
3	停止線燈 Stop bars	NIL
4	備註 Remarks	NIL

RCKU AD 2.10 機場障礙物

RCKU AD 2.10 AERODROME OBSTACLES

起降航道區障礙物 In approach/TKOF areas			備註 Remarks
跑道名稱/影響區域 RWY NR/Area affected	障礙物種類、標 高、標示/障礙燈 Obstacle type, Elevation, Markings/LGT	經緯度 Coordinates	
a	b	c	
18APCH/36TKOF	Power pole 94FT	232841.33N 1202320.12E	
	Tree 105FT	232847.52N 1202319.50E	
	Tree 84FT	232841.27N 1202320.53E	
	Water tower 113FT	232905.84N 1202319.97E	
	Broadcast Pole 110FT	232903.48N 1202319.04E	
	Tree 114FT	232637.87N 1202326.85E	
	Tree 117FT	232857.26N 1202324.81E	
	Tree 113FT	232900.37N 1202323.69E	
	Tree 110FT	232855.97N 1202323.22E	
	Tree 105FT	232847.07N 1202329.47E	
	Tree 103FT	232853.26N 1202329.04E	
	Tree 104FT	232859.60N 1202320.45E	
	Tree 92FT	232848.84N 1202324.17E	
36APCH/18TKOF	Obstacle light pole 138FT	232636.80N 1202334.56E	
	Tree 160FT	232636.48N 1202335.44E	
	Building 181FT	232550.87N 1202323.13E	
	Water tower 181FT	232552.39N 1202329.06E	
	Water tower 170FT	232551.03N 1202329.59E	
	Water tower 120FT	232633.41N 1202333.23E	

起降航道區障礙物 In approach/TKOF areas			備註 Remarks
跑道名稱/影響區域 RWY NR/Area affected	障礙物種類、標高、標示/障礙燈 Obstacle type, Elevation, Markings/LGT	經緯度 Coordinates	
a	b	c	
	Tree 238FT	232514.02N 1202322.30E	
	Tree 144FT	232635.55N 1202330.67E	
	Tree 136FT	232637.06N 1202332.73E	
	Tree 132FT	232639.99N 1202323.70E	
	Tree 130FT	232628.47N 1202331.47E	
	Water pipe 125FT	232629.46N 1202331.75E	
	Tree 121FT	232632.10N 1202333.45E	
	Tree 120FT	232643.58N 1202322.44E	
	Tree 116FT	232635.91N 1202329.61E	

註解：B型機場障礙物圖及相關障礙物資訊請洽本局飛航管制組索取。

電話：02-23496118

電子郵件：ais@mail.caa.gov.tw

Note: Please contact Air Traffic Services Division, Civil Aviation Administration for Aerodrome Obstacle Chart-Type B and related obstacle information.

TEL: 886-2-23496118

e-mail: ais@mail.caa.gov.tw

RCKU AD 2.11 氣象資訊之提供

RCKU AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

1	相關氣象單位 Associated MET Office	嘉義空軍基地 Chiayi Air Base
2	作業時間 作業時間外負責之氣象單位 Hours of service MET Office outside hours	H24
3	機場氣象預報負責單位 有效時間 Office responsible for TAF preparation Period of validity	嘉義空軍基地 Chiayi Air Base H24
4	趨勢預報 發布間隔 Trend forecast Interval of issuance	TREND Hourly
5	簡報/諮詢方式 Briefing/consultation provided	Specific personnel briefing
6	飛航文件之資料型態使用語言 Flight documentation Language(s) used	Charts, abbreviated plain language text Chinese, English
7	供簡報或諮詢之氣象圖或其他資訊 Charts and other information available for briefing or consultation	Surface Wx Chart, Upper Level Wx Chart
8	輔助裝備 Supplementary equipment available for providing information	氣象資訊之提供：航空氣象服務網 MET INFO Supply: Aeronautical Meteorological Service Page (https://aoaws.anws.gov.tw)
9	收受氣象資料之飛航服務單位 ATS units provided with information	嘉義塔臺 Chiayi TWR

10	其他資訊 (服務限制等) Additional information (limitation of service, etc.)	NIL
----	--	-----

RCKU AD 2.12 跑道場面特性

RCKU AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

跑道名稱 Designations RWY	真方位 TRUE BRG	跑道範圍 Dimension of RWY (M)	跑道與緩衝區 之強度與鋪面 Strength and surface of RWY and SWY	跑道頭經緯度 跑道末端經緯度 大地基準面起伏 THR COORD RWY end COORD THR GUND	跑道頭標高 及精確進場 跑道之著陸 區最高點標高 THR ELEV and highest ELEV of TDZ of precision APCH RWY
1	2	3	4	5	6
18	179.35	3050 x 45	RWY: PCR 520/R/C/W/T CONC SWY: NIL	232838.55N 1202325.38E 232659.33N 1202326.57E GUND: 68 FT	THR: 75 FT TDZ: 76 FT
36	359.35	3050 x 45	RWY: PCR 520/R/C/W/T CONC SWY: NIL	232659.33N 1202326.57E 232838.55N 1202325.38E GUND: 68 FT	THR: 85 FT TDZ: 85 FT
跑道名稱 Designations RWY	跑道及緩衝區之坡度 Slope OF RWY and SWY	緩衝區範圍 SWY dimensions (M)	清除區範圍 CWY dimensions (M)	跑道地帶範圍 Strip dimensions (M)	跑道端安全區範圍 RESA dimensions (M)
1	7	8	9	10	11
18	NIL	NIL	NIL	3170 x 300	240 x 90
36	NIL	NIL	NIL	3170 x 300	240 x 90
跑道名稱 Designations RWY	攔阻系統位置/說明 Location/ de- scription of ar- resting system	障礙物淨空區 OFZ	備註 Remarks		
1	12	13	14		
18	THR 3095 M 61QSII ELEV 98 FT THR 2589 M BAK_14_HOOK	NIL	跑道地帶寬度不符 Annex 14 之規定。 The width of strip does not meet criteria in Annex 14.		
36	THR 3088 M 61QSII ELEV 88 FT THR 2592 M BAK_14_HOOK	NIL	跑道地帶寬度不符 Annex 14 之規定。 The width of strip does not meet criteria in Annex 14.		

RCKU AD 2.13 公布距離
RCKU AD 2.13 DECLARED DISTANCES

跑道名稱 RWY Designator	TORA (M)	TODA (M)	ASDA (M)	LDA (M)	備註 Remarks
1	2	3	4	5	6
18	3050	3050	3050	3050	NIL
36	3050	3050	3050	3050	NIL

RCKU AD 2.14 進場及跑道燈光設備
RCKU AD 2.14 APPROACH AND RUNWAY LIGHTING

跑道名稱 RWY Des-ignator	進場燈 型式、長 度、強度 APCH LGT type LEN INTST	跑道頭燈 顏色、有 無翼排燈 THR LGT colour WBAR	目視進 場滑降 指示燈 (最低眼 高) PAPI VASIS (MEHT) PAPI	著陸區 燈長度 TDZ, LGT LEN	跑道中心 線燈總長 度、間距、 顏色、強度 RWY Cen- tre Line LGT Length, spacing, colour, INTST	跑道邊燈總 長度、間距、 顏色、強度 RWY edge LGT LEN, spacing colour INTST	跑道末 端燈顏 色、有 無翼排燈 RWY End LGT colour WBAR	緩衝 區燈長 度、顏色 SWY LGT LEN (M) colour
1	2	3	4	5	6	7	8	9
18	ALS 245M LIM, RTIL White Uni-dir.	Green WBAR	PAPI LEFT/3°	NIL	NIL	3050M, 60M, White	Red No WBAR	NIL
36	MALSR 725 M LIM	Green WBAR	PAPI LEFT/3°	NIL	NIL	3050M, 60M, White	Red No WBAR	NIL
跑道名稱 RWY Des-ignator	備註 Remarks							
1	10							
18	NIL							
36	MALSR為中亮度進場燈光系統，配有跑道對正指示燈，屬FAA規範。 MALSR is FAA standard, equipped with RAI.							

RCKU AD 2.15 其他燈光設備及備用電源

RCKU AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	機場標燈 / 識別標燈之位置、特性及開放時間 ABN/IBN location, characteristics and hours of operation	ABN: On top of the tower. White/Green every 5 sec. HN or IMC.
2	降落方向指示器位置及燈光 風向風速計位置及燈光 LDI location and LGT Anemometer location and LGT	LDI: NIL Anemometer: Beside TWY A2. Not lighted.
3	滑行道邊燈與中心線燈 TWY edge and centre line lighting	TWY edge light: blue
4	備用電源 / 切換時間 Secondary power supply/switch-over time	Secondary power supply/every 15 sec.
5	備註 Remarks	NIL

RCKU AD 2.16 直昇機降落區

RCKU AD 2.16 HELICOPTER LANDING AREA

1	起降區中心或最後進離場區跑道頭之經緯度大地基準面起伏 Coordinates TLOF or THR of FATO Geoid undulation	232724.00N 1202350.00E
2	起降區及最後進離場區之標高 TLOF and/or FATO elevation M/FT	84 FT
3	起降區及最後進離場區之範圍、鋪面、強度、標線 TLOF and FATO area dimensions, surface, strength, marking	25 x 25 M 600PSI/anti-flexure
4	進場及起飛區之真方位 True BRG of FATO	NIL
5	公布距離 Declared distance available	NIL
6	進場及最後進離場區之燈光 APP and FATO lighting	NIL
7	備註 Remarks	NIL

RCKU AD 2.17 飛航服務空域
RCKU AD 2.17 ATS AIRSPACE

1	空域名稱及水平範圍 Designation and lateral limits	嘉義機場 CHIAYI AERODROME
2	空域上下限 Vertical limits	2500FT MSL
3	空域類別 Airspace classification	Aerodrome traffic circuit. Located in the Chiayi Class D Airspace
4	航管單位呼號 使用語言 ATS unit call sign Language(s)	CHIAYI TOWER Chinese , English
5	轉換飛行高度 Transition altitude	11000FT
6	備註 Remarks	1. 高雄近場管制塔臺負責此空域內所有儀器飛航航空器之管制。 2. 於目視天氣情況時，嘉義塔臺負責機場航線上航空器活動之管制。 1. ATC service is provided to all IFR aircraft by Kaohsiung approach in this area. 2. Chiayi tower provides service to aircraft within the aerodrome traffic pattern under VMC.

RCKU AD 2.18 飛航服務無線電通訊設施
RCKU AD 2.18 ATS COMMUNICATION FACILITIES

任務 Service designation	呼號 Call sign	頻率 Frequency	作業時間 Hours of operation	備註 Remarks
1	2	3	4	5
TWR	CHIAYI TOWER	118.60 MHZ	2300-1400 (UTC)	民用航空器主波道 Primary frequency for civil aircraft.
		121.50 MHZ		NIL
		122.70 MHZ		民用航空器主波道 Primary frequency for civil aircraft.
		126.18 MHZ		NIL
		236.60 MHZ		NIL
		243.00 MHZ		NIL
		265.40 MHZ		NIL
		275.80 MHZ		NIL

註解：嘉義塔臺由中華民國空軍管理。

NOTE: CHIAYI TWR operated by ROCAF.


RCKU AD 2.19 無線電助導航設施

RCKU AD 2.19 RADIO NAVIGATION AND LANDING AIDS

設施類別、磁差、ILS/MLS類別 (VOR/ILS/MLS 磁偏角) Type of aid MAG VAR CAT of ILS/MLS (for VOR/ILS/MLS, give declination)	識別 ID	頻率 Frequency	作業 時間 Hours of operation	電臺發射 天線位置 Site of transmitting antenna coordinates	DME 天線標高 Elevation of DME transmitting antenna	備註 Remarks
1	2	3	4	5	6	7
LOC 18 ILS CAT I	IKUI	110.30 MHZ	H24	232648.9N 1202326.7E		前航道區角：3.63° Front course sector angle: 3.63°
GP 18 ILS CAT I		335.00 MHZ	H24	232828.1N 1202329.7E		滑降角3° Angle 3°, RDH 50FT
DME 18 ILS CAT I	IKUI	(CH40X)	H24	232827.9N 1202329.6E	89 FT	與18跑道儀器降落系統滑降臺同址。 Co-located with RWY 18 ILS GP.
LOC 36 ILS CAT I	ICHI	109.90 MHZ	H24	232848.5N 1202325.3E		前航道區角：3.65° Front course sector angle: 3.65°
GP 36 ILS CAT I		333.80 MHZ	H24	232710.2N 1202331.7E		滑降角3° Angle 3°, RDH 56FT
DME 36 ILS CAT I	ICHI	(CH36X)	H24	232710.3N 1202331.7E	99 FT	與36跑道儀器降落系統滑降臺同址。 Co-located with RWY 36 ILS GP.
L	KU	525.00 KHZ	H24	233503.1N 1202320.8E		
VOR/DME (04° W)	TNN	113.30 MHZ (CH80X)	H24	230807.1N 1201222.3E	46 FT	

AERODROME OBSTACLE CHART-TYPE A (OPERATING LIMITATIONS)

嘉義機場
CHIAYI AD

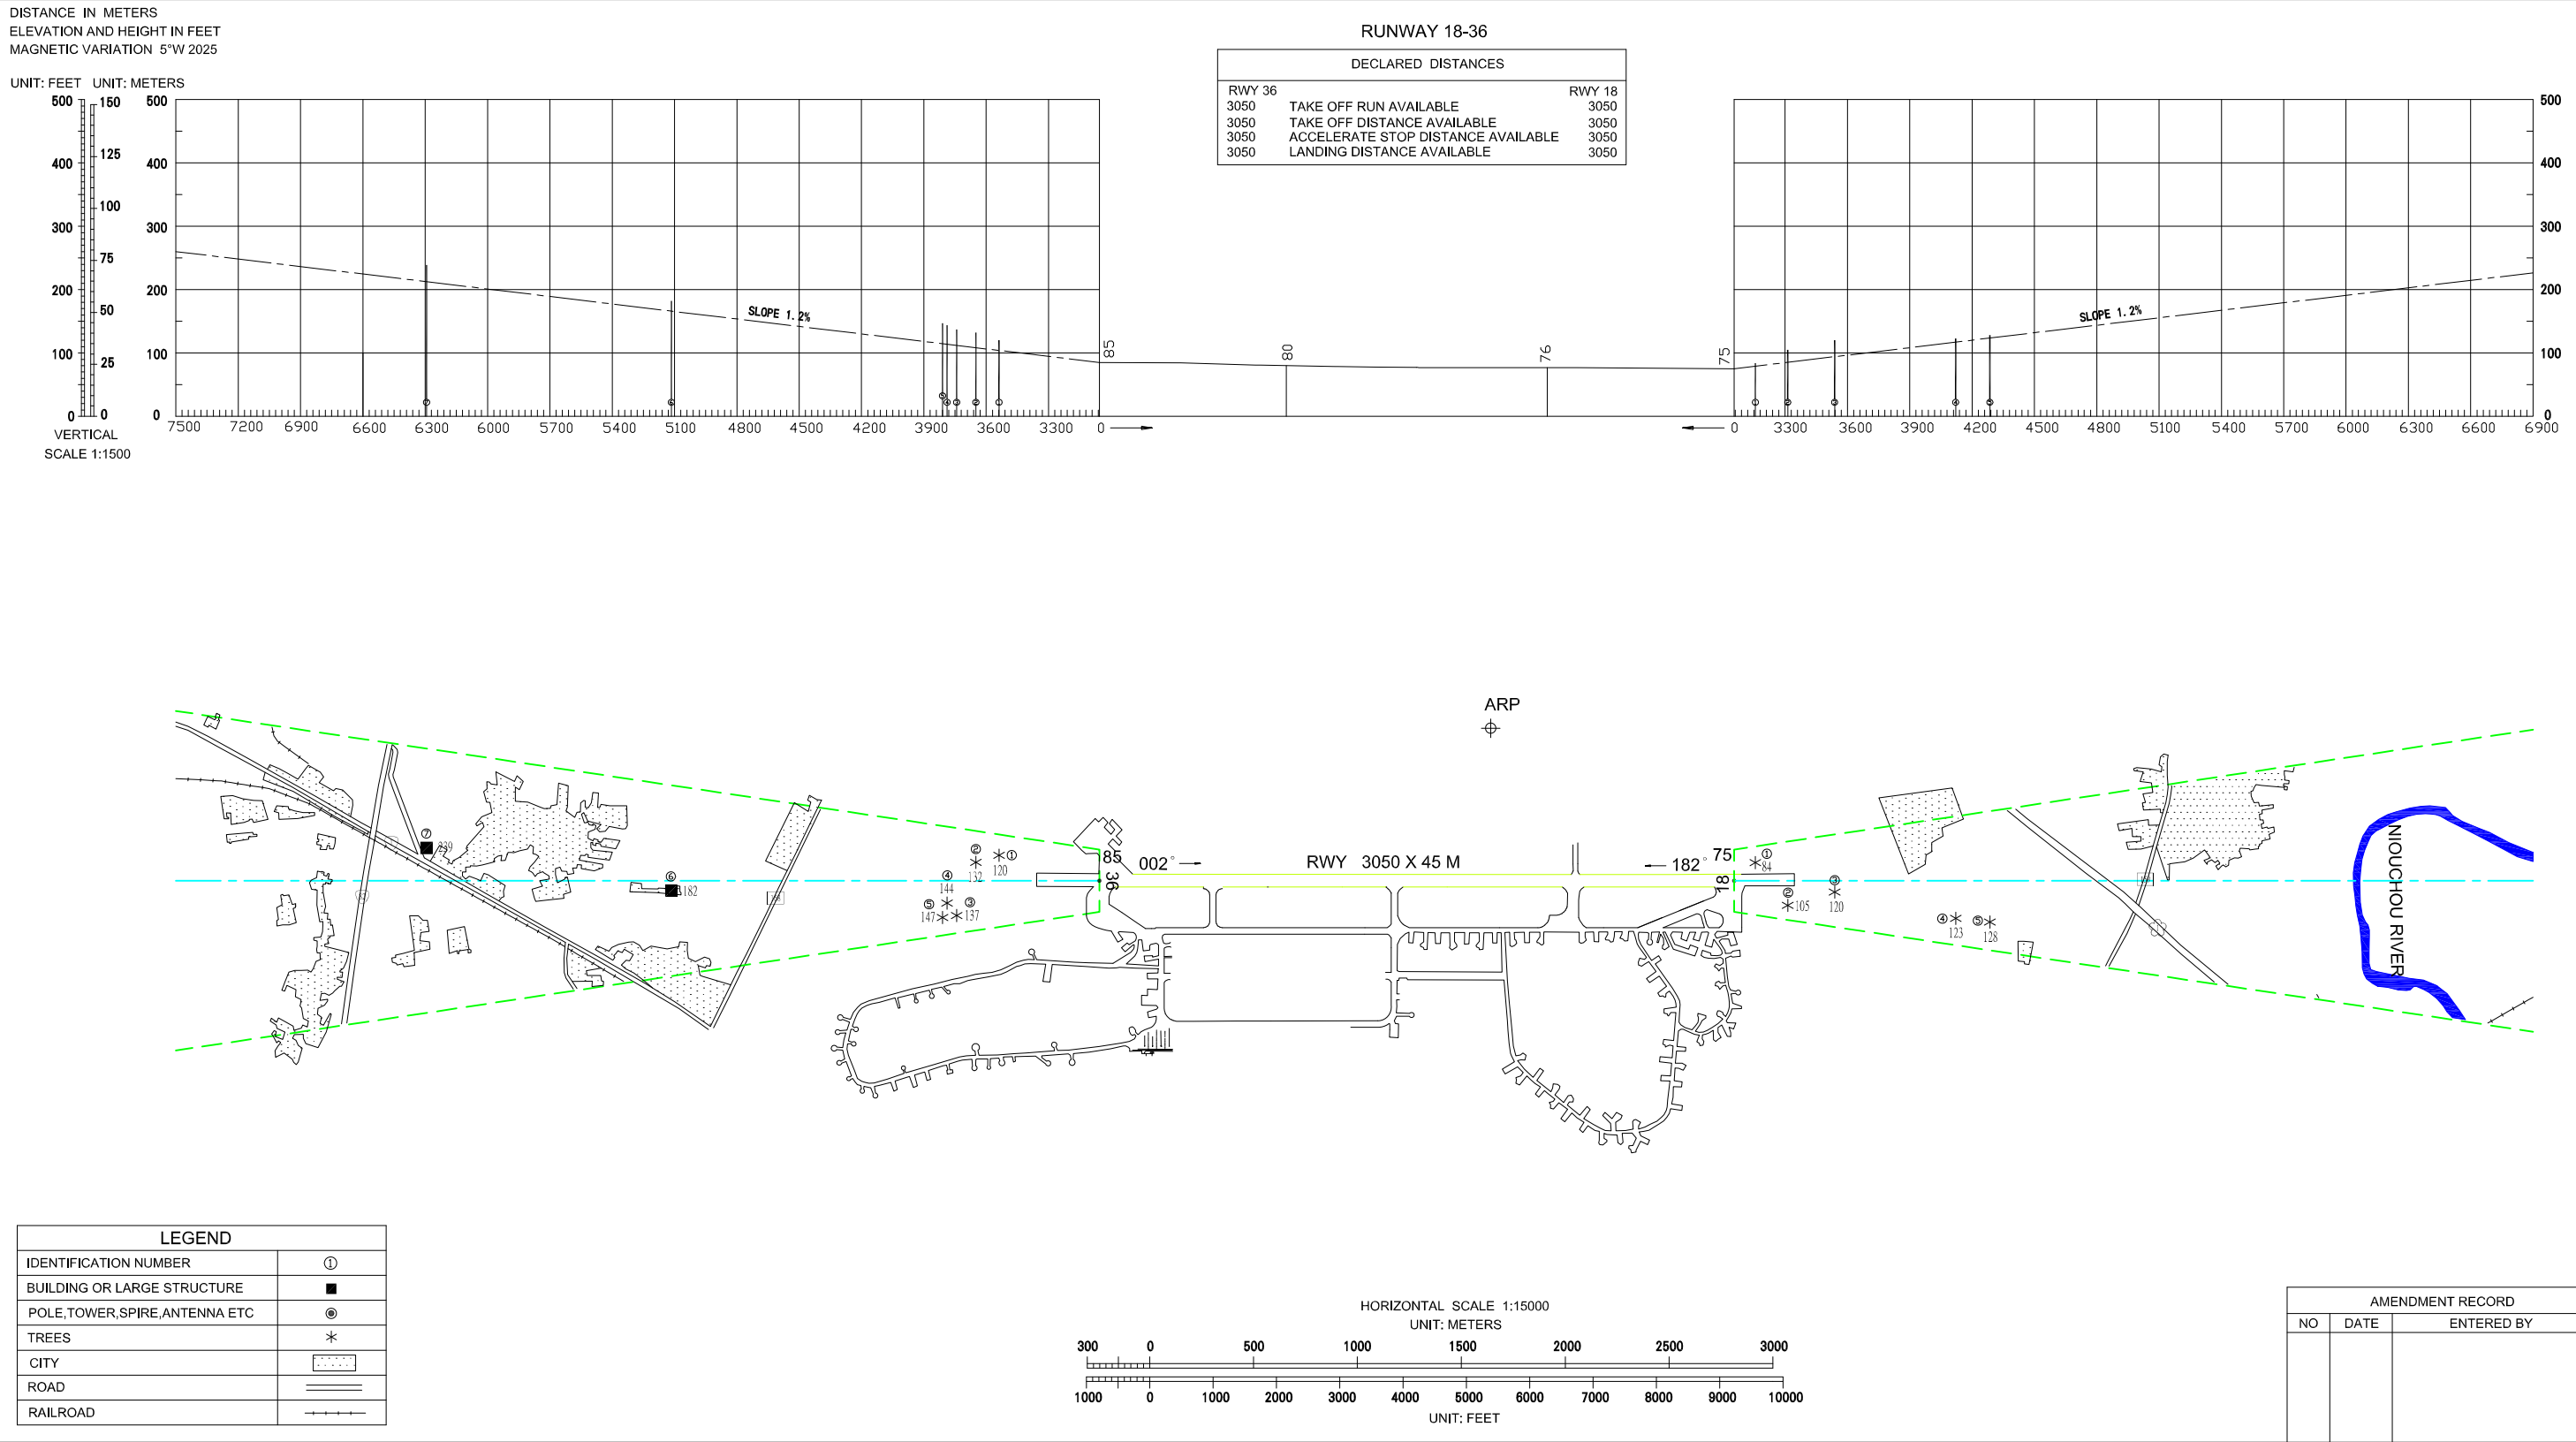

CHANGES: OBST. UPDATED.

THIS PAGE
INTENTIONALLY
LEFT BLANK

		停機位編號 Bay Number	經緯度 Coordinates	最大機型 MAX ACFT Type
		4 (HEL)	241527.09N 1203607.67E	UH1H
		5 (HEL)	241527.04N 1203608.52E	UH1H
6	備註 Remarks	滑行道縱坡度超過1.5%處: a. W滑行道(與W3滑行道交叉處起算, 終點為18跑道頭, 全長3362M。) 40-1560M坡度1.88%, 2640-2700M坡度2.08%, 2700-2780M坡度3.56%, 2780-3000M坡度6.18%, 3000-3060M坡度5.04%, 3060-3120M坡度4.21%, 3120-3230M坡度3.30% b. C1滑行道坡度1.64% (南側較高) TWY longitudinal slopes where exceed 1.5% are listed as follows: a. TWY W (Begin at the intersection of TWY W3, end at THR 18. Length: 3362M) 40-1560M slopes 1.88%, 2640-2700M slopes 2.08%, 2700-2780M slopes 3.56%, 2780-3000M slopes 6.18%, 3000-3060M slopes 5.04%, 3060-3120M slopes 4.21%, 3120-3230M slopes 3.3% b. TWY C1 slopes 1.64% (higher level on the south side)		

RCMQ AD 2.9 地面活動導引、管制系統及標線

RCMQ AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS

1	停機位編號指示牌, 滑行引導線, 目視停靠導引系統 Use of aircraft stand ID signs, TWY guide lines and visual docking/parking guidance system of aircraft stands	Taxiing guidance signs at all intersections with TWY and at all holding positions. Aircraft stand ID signs, Guide lines.
2	跑道、滑行道標線及燈光 RWY and TWY markings and LGT	RWY markings: RWY Designation, TDZ, THR, centre line, edge, end. RWY LGT: THR, end, edge TWY markings: Centre line, edge, RWY-HLDG position, intermediate HLDG position TWY LGT: edge

3	停止線燈 Stop bars	Stop bar: NIL RWY guard LGT: RWY-HLDG position
4	備註 Remarks	NIL

2.9.1 先進目視停靠導引系統(ADVANCED VISUAL DOCKING GUIDANCE SYSTEM, A-VDGS)之設置


ADB SAFEGATE Safedock FleX A-VDGS
設置於1-8號停機位。

2.9.1 ADVANCED VISUAL DOCKING GUIDANCE SYSTEM (A-VDGS)

ADB SAFEGATE Safedock FleX A-VDGS
Installed at Stand 1-8.

系統簡介 Description of System	
1. 顯示器及雷射掃描單元安裝於停機位前方。 The Display and Laser Scanning Unit mounted in front of the aircraft stand. 2. 如系統螢幕出現下列錯誤訊息，航機應立即停止，由引導員人工導引。 When any of the following messages is displayed, pilot should stop the aircraft immediately and must manual guidance by a marshaller. • STOP ID FAIL • WAIT GATE BLOCK • WAIT VIEW BLOCK • STOP SBU • ERROR • No display	

顯示訊息 Display Information		
請檢查顯示的機型是否正確。滾動箭頭表示系統已啟動。 Check that the correct aircraft type is displayed. The scrolling arrows indicate that the system is activated.		當航機被雷射偵測到時，系統會檢查該航機是否為正確機型。驗證成功後，航機ID將從黃色變為綠色，顯示器會提供方位導引資訊。當黃色中心線出現時，表示系統正在追蹤該航機。在箭頭被黃色中心線取代之前，航機不得前進超越空橋。 When the aircraft has been caught by the laser, the system checks that the aircraft is the correct type. Upon successful verification, the aircraft ID will change from yellow to green and the display provides azimuth guidance information. When the yellow center line indicator appears, the aircraft is being tracked by the system. The aircraft must not proceed beyond the bridge, unless the arrows have been superseded by the yellow center line indicator. 

顯示訊息 Display Information			
閃爍的紅色箭頭表示需要調整的方向，而黃色航機圖示則表示航機偏離中心線的程度。 The flashing red arrow shows which direction to steer, while the yellow aircraft icon indicator gives an indication of how far the aircraft is off the centerline.		當航機距離停止位置30M，黃色中心線隨著航機前進而縮短，數字顯示停止位置前的距離。 When the aircraft is 30M from the stop-position, the yellow center line indicator reduced and the digital countdown will indicate the remaining distance toward the stop position.	
當到達正確的停止位置時，以紅框字體顯示STOP。 When the correct stop-position is reached, the STOP sign in red with red border will be displayed.		若航機停妥於正確位置，稍候顯示OK。 If the aircraft stops at the correct position, OK will be displayed after a few seconds.	
地面人員已放置輪檔。 The aircraft wheel chocks have been set by ground personnel.		若航機超過停止位置，顯示TOO FAR。 If the aircraft has overshot the stop position, TOO FAR will be displayed.	
航機必須在正確停止位置前15M完成識別，否則系統顯示WAIT、STOP及ID FAIL。 The aircraft must be identified at least 15m before the correct stop position. Otherwise, WAIT, STOP and ID FAIL will be displayed.			
航機應以最低速滑行進入停機位，若航機進入時超過允許速度，或遇濃霧/大雨造成系統視程降低，系統顯示SLOW。 Aircraft shall taxi into the stand at minimum speed. If the aircraft is approaching faster than the accepted speed, or the visibility of system is reduced due to heavy fog/rain, SLOW will be displayed.		任何在停靠程序中無法恢復的錯誤將導致SBU (Safety back-up) 狀態。系統停用，航機由引導員人工導引。 Any unrecoverable error during the docking procedure will generate an SBU (Safety back-up) condition. The system will be suspended, and the aircraft must be manually guided in by marshaller.	
若系統與進入航機之間視線受阻，例如雷射透鏡或雷射視窗有髒污，或最近之目視區有其他障礙物，停靠程序中止並顯示WAIT與VIEW BLOCK訊息。系統停用，航機由引導員人工導引。 If the view towards the approaching aircraft is hindered, for example, internally in the unit of the laser lens or on the laser window by dirt, or another obstacle in the closest view area, the docking procedure will be halted with a WAIT and VIEW BLOCK message. The system will be suspended, and the aircraft must be manually guided in by marshaller.		若發現有物體阻擋系統與航機預定停止位置的視線，停靠程序中止並顯示WAIT與GATE BLOCK訊息。系統停用，航機由引導員人工導引。 If an object is found blocking the approach to gate view from the system to the planned stop-position for the aircraft, the docking procedure will be halted with a WAIT and GATE BLOCK message. The system will be suspended, and the aircraft must be manually guided in by marshaller.	

RCMQ AD 2.10 機場障礙物 RCMQ AD 2.10 AERODROME OBSTACLES

起降航道區障礙物 In approach/TKOF areas			備註 Remarks
跑道名稱/影響區域 RWY NR/Area affected	障礙物種類、標高、標示、障礙燈 Obstacle type, Elevation, Markings/LGT	經緯度 Coordinates	
a	b	c	
18APCH/36TKOF	Tree 684FT	241709.69N 1203706.34E	
	Tree 675FT	241705.41N 1203711.40E	
	LGT 672FT	241658.77N 1203712.01E	
	LGT 673FT	241656.45N 1203712.14E	

註解：B型機場障礙物圖及相關障礙物資訊請洽本局飛航管制組索取。

電話：02-23496118

電子郵件：ais@mail.caa.gov.tw

Note: Please contact Air Traffic Services Division, Civil Aviation Administration for Aerodrome Obstacle Chart-Type B and related obstacle information.

TEL: 886-2-23496118

e-mail: ais@mail.caa.gov.tw

RCMQ AD 2.11 氣象資訊之提供 RCMQ AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

1	相關氣象單位 Associated MET Office	清泉崗空軍基地 Cingcyuangang Air Base
2	作業時間 作業時間外負責之氣象單位 Hours of service MET Office outside hours	H24
3	機場氣象預報負責單位 有效時間 Office responsible for TAF preparation Period of validity	天氣中心 WX Center H24
4	趨勢預報 發布間隔 Trend forecast Interval of issuance	TREND Hourly
5	簡報/諮詢方式 Briefing/consultation provided	Telephone
6	飛航文件之資料型態使用語言 Flight documentation Language(s) used	Abbreviated plain language, charts Chinese
7	供簡報或諮詢之氣象圖或其他資訊 Charts and other information available for briefing or consultation	S12, U85, U7, U5, U3, U2 (Remark: S: Surface analysis chart, U: upper level analysis chart)
8	輔助裝備 Supplementary equipment available for providing information	氣象資訊之提供：航空氣象服務網 MET INFO Supply: Aeronautical Meteorological Service Page (https://aoaws.anws.gov.tw)
9	收受氣象資料之飛航服務單位 ATS units provided with information	NIL

跑道名稱 RWY Designator	備註 Remarks
1	10
18	NIL
36	NIL

RCMQ AD 2.15 其他燈光設備及備用電源

RCMQ AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	機場標燈 / 識別標燈之位置、特性及開放時間 ABN/IBN location, characteristics and hours of operation	ABN: White/Green every 5 sec. HN
2	降落方向指示器位置及燈光 風向風速計位置及燈光 LDI location and LGT Anemometer location and LGT	LDI: NIL Anemometer: Two sets of anemometers, one located at 300M from THR RWY 18, 75M from RCL; another located at 300M from THR RWY 36, 75M from RCL
3	滑行道邊燈與中心線燈 TWY edge and centre line lighting	Edge LGT: TWY C, C1, C2, D, D1, D2, W, W2, W3, W4, W5 and W6. Center line LGT: NIL
4	備用電源 / 切換時間 Secondary power supply/switch-over time	2 sets of 200KW secondary power supply/13 sec.
5	備註 Remarks	NIL

RCMQ AD 2.16 直昇機降落區

RCMQ AD 2.16 HELICOPTER LANDING AREA

1	起降區中心或最後進離場區跑道頭之經緯度大地基準面起伏 Coordinates TLOF or THR of FATO Geoid undulation	NIL
2	起降區及最後進離場區之標高 TLOF and/or FATO elevation M/FT	NIL
3	起降區及最後進離場區之範圍、鋪面、強度、標線 TLOF and FATO area dimensions, surface, strength, marking	NIL
4	進場及起飛區之真方位 True BRG of FATO	NIL
5	公布距離 Declared distance available	NIL
6	進場及最後進離場區之燈光 APP and FATO lighting	NIL
7	備註 Remarks	直昇機使用W滑行道或跑道起降。 Taxiway W or runway are used for helicopter take off and landing.

RCMQ AD 2.17 飛航服務空域

RCMQ AD 2.17 ATS AIRSPACE

1	空域名稱及水平範圍 Designation and lateral limits	臺中/清泉崗機場 TAICHUNG/CINGCYUANGANG AERODROME
2	空域上下限 Vertical limits	3000FT MSL
3	空域類別 Airspace classification	Aerodrome traffic circuit. Located in the Taichng Class D Airspace
4	航管單位呼號 使用語言 ATS unit call sign Language(s)	CCK TOWER Chinese , English
5	轉換飛行高度 Transition altitude	11000FT
6	備註	1. 臺北近場管制塔臺負責此空域內所有儀器航空器之管制。 2. 於目視天氣情況時，清泉崗塔臺負責機場航線上航空器活動之管制。 3. 臺中/清泉崗機場使用西航線。 1. ATC service is provided to all IFR aircraft by Taipei approach in this area. 2. CCK tower is responsible for aircraft movement in the aerodrome traffic pattern under VMC. 3. West traffic pattern is used for Taichung/Cingcyuangang AD.

RCMQ AD 2.18 飛航服務無線電通訊設施
RCMQ AD 2.18 ATS COMMUNICATION FACILITIES

任務 Service designation	呼號 Call sign	頻率 Frequency	作業時間 Hours of operation	備註 Remarks
1	2	3	4	5
APP	TAIPEI APPROACH	121.50 MHZ	H24	NIL
		129.60 MHZ		NIL
		130.10 MHZ		NIL
		257.80 MHZ		NIL
		301.00 MHZ		NIL
		301.50 MHZ		NIL
	TAIPEI FLIGHT FOLLOW	135.80 MHZ		目視飛航通訊追蹤 VFR Flight following
		318.20 MHZ		目視飛航通訊追蹤 VFR Flight following
		329.50 MHZ		目視飛航通訊追蹤 VFR Flight following
ATIS	CINGCYUAN-GANG AIRPORT	127.75 MHZ	2300-1500 (UTC)	Data-link D-ATIS AVBL
EMERG	As appropriate	121.50 MHZ	H24	Emergency
		243.00 MHZ		Emergency
TWR	CCK GROUND	120.25 MHZ	2300-1500 (UTC)	由中華民國空軍管理。 Operated by ROCAF.
	CCK TOWER	118.75 MHZ		由中華民國空軍管理。 Operated by ROCAF.

RCMQ AD 2.19 無線電助導航設施

RCMQ AD 2.19 RADIO NAVIGATION AND LANDING AIDS

設施類別、磁差、ILS/MLS類別 (VOR/ILS/MLS 磁偏角) Type of aid MAG VAR CAT of ILS/MLS (for VOR/ILS/MLS, give declination)	識別 ID	頻率 Frequency	作業 時間 Hours of operation	電臺發射 天線位置 Site of transmitting antenna coordinates	DME 天線標高 Elevation of DME transmitting antenna	備註 Remarks
1	2	3	4	5	6	7
LOC 18 ILS CAT I	ITCG	111.70 MHZ	H24	241444.8N 1203719.2E		前航道區角：3.1° Front course sector angle: 3.1°
GP 18 ILS CAT I		333.50 MHZ	H24	241643.5N 1203708.3E		滑降角3° Angle 3°, RDH 52.85FT
DME 18 ILS CAT I	ITCG	(CH54X)	H24	241643.3N 1203708.4E	728 FT	與18跑道儀器降落系統滑降臺同址。 Co-located with RWY 18 ILS GP
LOC 36 ILS CAT I	ICCK	111.50 MHZ	H24	241703.9N 1203710.0E		前航道區角：3.08° Front course sector angle: 3.08°
GP 36 ILS CAT I		332.90 MHZ	H24	241505.4N 1203722.1E		滑降角3° Angle 3°, RDH 54.13FT
DME 36 ILS CAT I	ICCK	(CH52X)	H24	241505.8N 1203722.2E	675 FT	與36跑道儀器降落系統滑降臺同址。 Co-located with RWY 36 ILS GP
NDB (05° W)	HL	362.00 KHZ	H24	243349.0N 1204349.4E		
VOR/DME (04° W)	HLG	114.00 MHZ (CH87X)	H24	243335.3N 1204337.8E	575 FT	
VOR/DME (04° W)	MKG	115.20 MHZ (CH99X)	H24	233543.6N 1193814.2E	77 FT	
L	TC	210.00 KHZ	H24	241512.8N 1203707.2E		
DME	TCK	(CH21X)	H24	241513.0N 1203707.5E	679 FT	

RCMQ AD 2.20 本場飛航規定

RCMQ AD 2.20 LOCAL AERODROME REGULATIONS

2.20.1 機場作業規定

2.20.1 AIRPORT REGULATIONS

1. 本機場為軍民合用機場，民用航空器於正常運作情形下不得使用下列滑行道：E、E1、E2、E3、E4及W1。
2. 航空器因滑行錯誤，或已滑過指定之停機位置，禁止自行180度迴轉，此時駕駛員應停車(或慢車)並告知塔臺須利用拖車，拖至所須之方向或指定之停放位置。
3. 為減少跑道占用時間，落地航空器在著陸後儘快由W4滑行道脫離18跑道或由W5滑行道脫離36跑道。
4. 航空器引擎交叉開車作業程序
 - a. 禁止在停機位操作大油門輔助其他引擎開車。
 - b. 依塔臺指示，後推於W滑行道之中心線上操作。
5. 為免機尾噴流造成損害，航空器使用最小推力供滑行所需，不得加大油門，尤其在靠近建築物、停機坪時，以保護地勤人員、停機坪車輛及停放之航空器。
6. 儀器飛航程序起飛天氣限度

1. This is a joint civil and military aerodrome. Under normal circumstance, civil aircraft shall not taxi on taxiway E, E1, E2, E3, E4 and W1.
2. Aircraft are not permitted to make a 180-degree turn when they deviate or taxi over the assigned parking bay. In this case, pilots are required to shut down or idle engines and inform tower to send tow tractor.
3. Arriving aircraft upon landing are reminded that it is imperative to vacate RWY 18 via TWY W4 or to vacate RWY 36 via TWY W5 as quickly as practicable to minimize runway occupancy time.
4. Aircraft engine cross-bleed start-up procedure
 - a. Using increased power to start other engines on stands is prohibited.
 - b. Engine cross-bleed start-up can only be performed on the TWY W centre-line according to ATC push-back instructions.
5. To protect ground handling staff, apron vehicles and parked aircraft from jet blast and to avoid damage, aircraft are to use minimum power necessary for taxiing and not allowed to increase engine power significantly, especially close to buildings and aprons.
6. IFR Take-off Weather Minimum

引擎數 ENG	RWY 18/36	
	REDL & RCL MARKING	NIL (DAY ONLY)
1	Visibility/RVR 550M	Visibility 1600M
2		
3		Visibility/RVR 800M
4		

RCMQ AD 2.21 降低噪音程序 RCMQ AD 2.21 NOISE ABATEMENT PROCEDURES NIL

RCMQ AD 2.22 飛航程序 RCMQ AD 2.22 FLIGHT PROCEDURES

2.22.1 傳統到場/進場程序(非RNAV程序)等待點經緯度

等待點 Holding Fix	經緯度 Coordinates	等待點 Holding Fix	經緯度 Coordinates
FATAN	240407.43N 1203246.16E	HLG VOR	243335.30N 1204337.80E
WUCHI	241203.79N 1201907.35E		

註解: 其他資訊參照ENR 1.5.6及相關航圖。

2.22.1 HOLDING FIX COORDINATES OF CONVENTIONAL ARRIVAL/APPROACH PROCEDURES(NON-RNAV PROCEDURES)

Note: other information refer to ENR 1.5.6 and related charts.

2.22.2 低能見度作業程序

2.22.2 LOW VISIBILITY PROCEDURES

1. 第一階段低能見度作業(RVR低於1200M)

- 能見度/RVR降至800M時，離場航機應使用全跑道起飛。

2. 第二階段低能見度作業(RVR低於550M)

- Area 1 (請參閱機場圖)同一時間只允許1架航機活動。

1. Stage one Low Visibility Procedures (RVR below 1200m)

- When the visibility/RVR falls to 800M, the aircraft shall use full length runway for take-off.

2. Stage two Low Visibility Procedures (RVR below 550m)

- Only one aircraft at a time is permitted to maneuver in Area 1 (see ADC for reference).

RCMQ AD 2.23 其他資訊

RCMQ AD 2.23 ADDITIONAL INFORMATION

2.23.1 機場附近鳥類聚集狀況

本場18跑道頭及36跑道頭以外約3500FT範圍內的農地及樹林，全年常見小型及中型鳥類飛行高度約100FT至500FT，機場內鳥類活動資訊如下：

2.23.1 BIRD CONCENTRATIONS IN THE VICINITY OF THE AIRPORT

Small and medium sized species are mostly seen at the flight height 100-500FT in the farmlands and woods within 3500FT radius of thresholds. Bird activities information is as follows:

鳥種 Bird Type	活動季節與時間 Activity Time	活動區域 Activity Area	飛行高度 Flight Height	特性 Characteristics
麻雀 Eurasian Tree Sparrow	全年 Whole year	跑道兩側草坪 Grass beside RWY	GND-100FT	體重約22g，小型鳥種。 Around 22g weight, small sized species.
紅鳩 Red Turtle Dove	全年 Whole year	跑道及滑行道兩側、18跑道頭鄰側樹林 Grass beside RWY and TWYs, woods near THR 18	GND-150FT	體重約106g，中型鳥種。 Around 106g weight, medium sized species.
鴿子 Pigeon	全年 Whole year	36跑道頭附近、跑道西側農地 Near THR 36, west farmlands of RWY	GND-300FT	體重約315g，中型鳥種。 Around 315g weight, medium sized species.
黑翅鳶 Black-winged Kite	每年4月至11月份在早晨及黃昏時間出現 From APR to NOV, Morning and dusk time	機場內 At the airport	100FT-350FT	體重約106至154g，中型鳥種。 Around 106-154g weight, medium sized species.
小白鷺、黃頭鷺 Little Egret, Cattle Egret	每年3月至10月份 From MAR to OCT	跑道及滑行道兩側草坪 Grass beside RWY and TWYs	GND-300FT	體重約322至 341g，中型鳥種。 Around 322-341g weight, medium sized species
	全年 Whole year	18跑道西北方約9.7KM處 9.7KM north-west from RWY 18 36跑道南方約1KM處(十三寮滯洪池)、36跑道南方約8.2KM處(國道1號高速公路中港交流道)、36跑道西南方約3.7KM處(大肚山垃圾掩埋場) 1KM south from RWY 36 (Shisanliao detention pond); 8.2KM south from RWY 36 (Zhonggang System Interchange, National Highway No. 1); 3.7KM south-west from RWY 36 (Dadushan landfill site)	GND-1200FT	
燕鴿 Oriental Pratincole	每年4至10月份 From APR to OCT	跑道及滑行道 RWY and TWYs	GND-50FT	體重約80g，小型鳥種。 Around 80g weight, small sized species.

鳥種 Bird Type	活動季節與時間 Activity Time	活動區域 Activity Area	飛行高度 Flight Height	特性 Characteristics
臺灣夜鷹 Savanna Nightjar	每年5月至10月份夜間 From MAY to OCT, Night time	跑道及滑行道 RWY and TWYs	GND-100FT	體重約80g，小型鳥種。 Around 80g weight, small sized species.
雨燕、家燕 House Swift, Barn Swallow	每年4月至10月份 From APR to OCT	跑道及滑行道 RWY and TWYs	GND-50FT	體重約16至21g，小型鳥種。 Around 16-21g weight, small sized species.
環頸雉 Ring-necked Pheasant	全年 Whole year	跑道及滑行道 RWY and TWYs	GND-70FT	體重約1100g，大型鳥種。 Around 1100g weight, large sized species.
灰面鵟鷹 Butastur indicus	每年3至4月份 From MAR to APR	由36跑道南方約20KM處(八卦山)向北飛行 Fly north from 20KM south of RWY 36 (Baguashan)	300FT-2000FT	體重約350至550g，大型鳥種。 Around 350-550g weight, large sized species.
赤腹鷹 Accipiter soloensis	每年3至4月份 From MAR to APR	由36跑道南方約20KM處(八卦山)向北飛行 Fly north from 20KM south of RWY 36 (Baguashan)	300FT-2000FT	體重約170至230g，中型鳥種。 Around 170-230g weight, medium sized species.
東方環頸雉、小環頸雉 Kentish Plover, Little Ringed Plover	每年4月至12月份 From APR to DEC	跑道及滑行道 RWY and TWYs	GND-100FT	體重約40g，小型鳥種。 Around 40g weight, small sized species.
埃及聖鸛 Sacred Ibis	全年 Whole year	跑道兩側草坪、18跑道西北方約9.7KM處、36跑道西南方約3.7KM處(大肚山垃圾掩埋場) Grass beside RWY; 9.7KM north-west from RWY 18; 3.7KM south-west from RWY 36 (Dadushan landfill site)	GND-2000FT	體重約1100至1600g，大型鳥種。 Around 1100-1600g weight, large sized species.
短耳鸛 Short-eared Owl	每年11月至翌年4月份夜間 From NOV to next APR, Night time	跑道及滑行道 RWY and TWYs	GND-300FT	體重約280至450g，中型鳥種。 Around 280-450g weight, medium sized species.

註解: 上表所列之時間係本地時間 (UTC+8)，另鳥類飛行高度，係觀察鳥類活動所目測之概估值。


Note: The above mentioned activity times are given in local time (UTC+8) and flight height is visual estimation of bird activities.

RCMQ AD 2.24 本場航圖 RCMQ AD 2.24 CHARTS RELATED TO AN AERODROME

機場圖
AERODROME CHART

AD ELEV 665FT ARP: 241554N 1203715E

清泉崗機場
CINGCYUANGANG AD

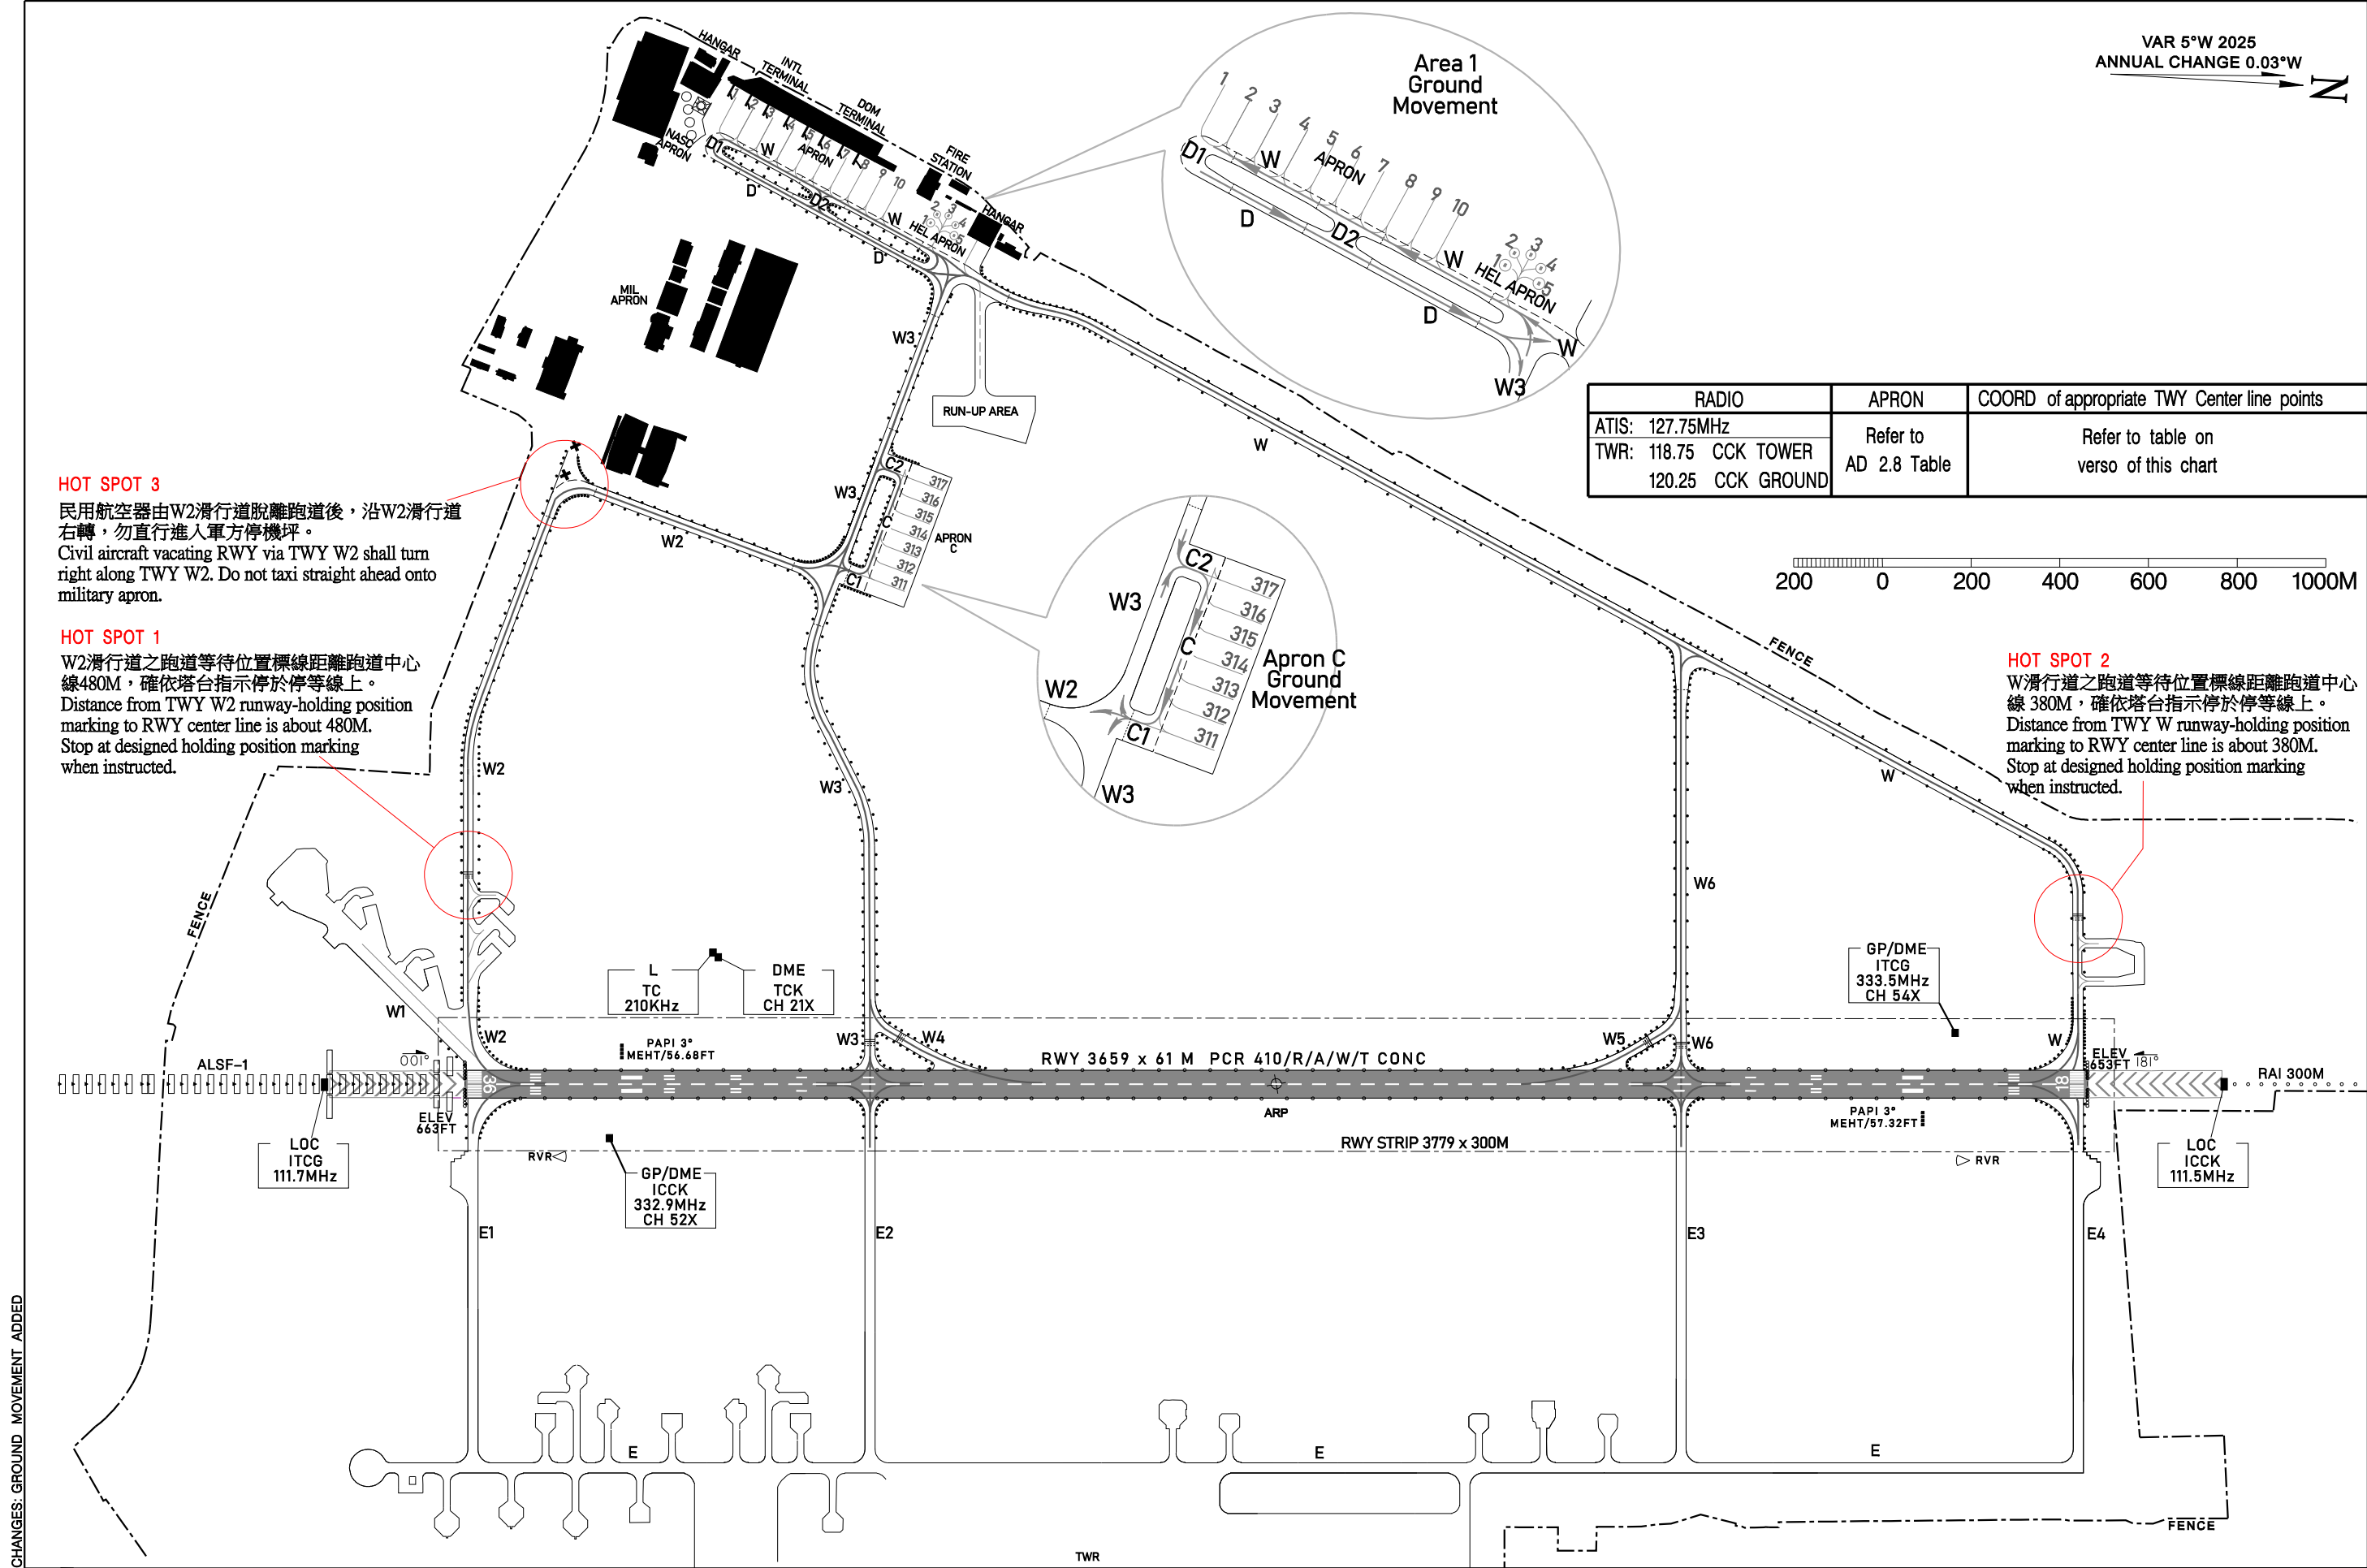

THIS PAGE
INTENTIONALLY
LEFT BLANK

AERODROME OBSTACLE CHART-TYPE A (OPERATING LIMITATIONS)





臺中/清泉崗機場
TAICHUNG/CINGCYUANGANG AD

RUNWAY 18-36

DECLARED DISTANCES			
RWY 18		RWY 36	
3659	TAKE OFF RUN AVAILABLE	3659	
3659	TAKE OFF DISTANCE AVAILABLE	3659	
3659	ACCELERATE STOP DISTANCE AVAILABLE	3659	
3659	LANDING DISTANCE AVAILABLE	3659	

DISTANCE IN METERS
ELEVATION AND HEIGHT IN FEET
MAGNETIC VARIATION 5°W 2025

UNIT: FEET UNIT: METERS

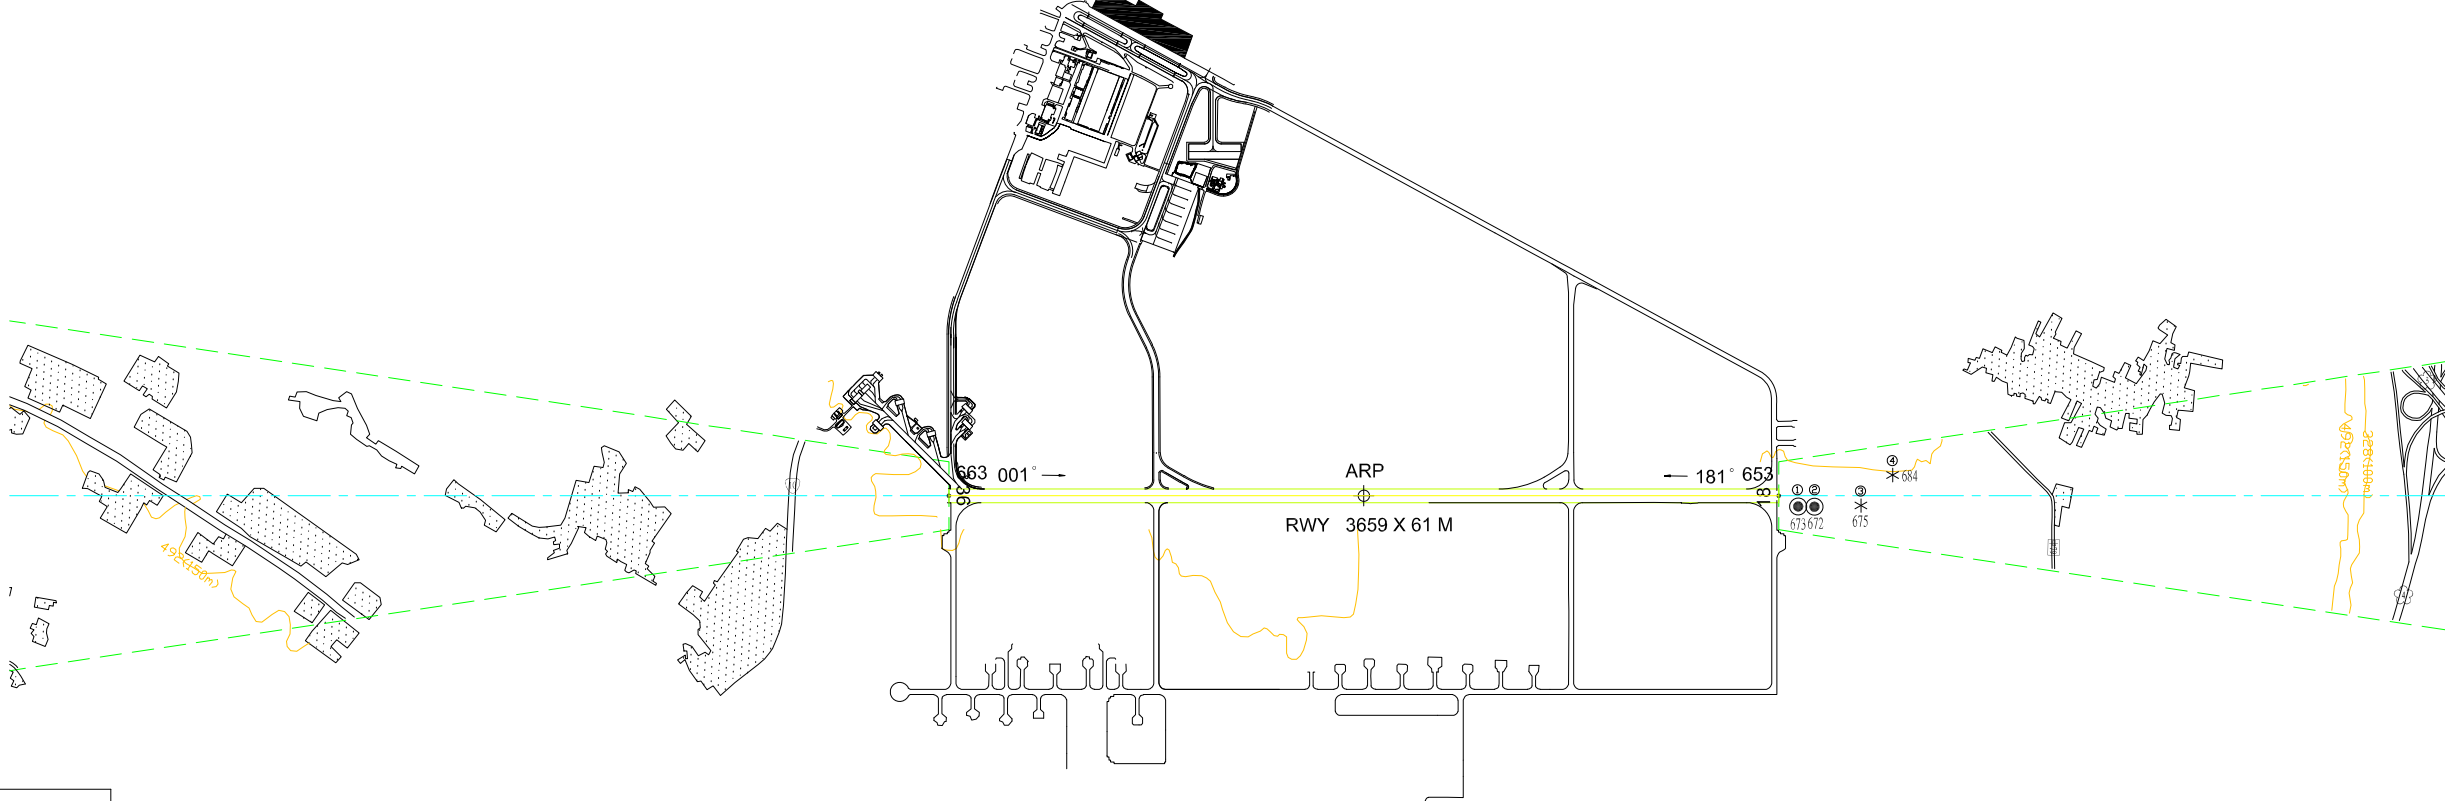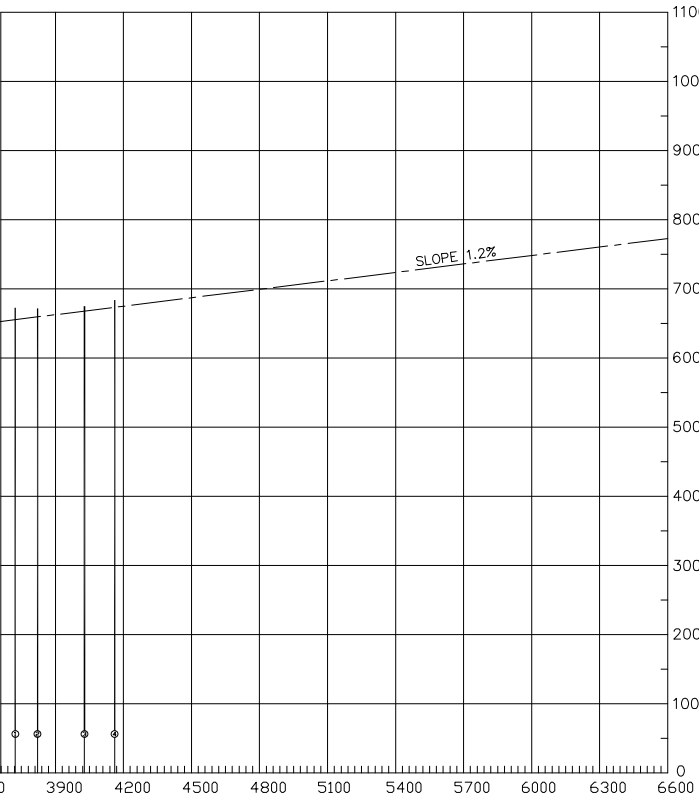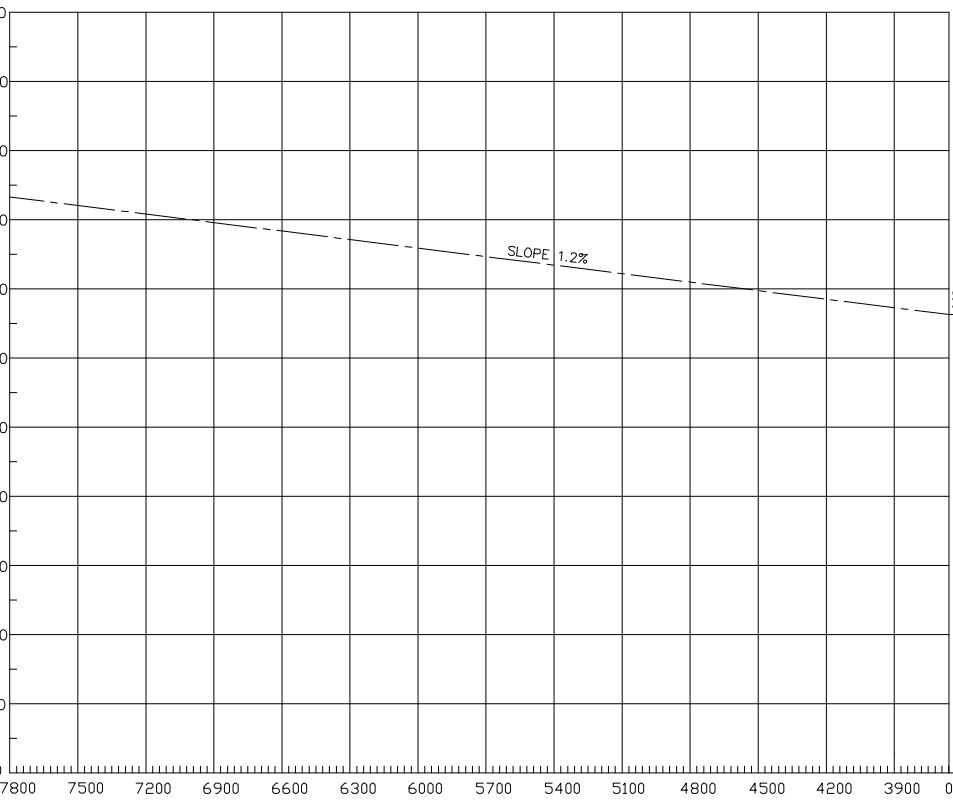

LEGEND	
IDENTIFICATION NUMBER	①
POLE,TOWER,SPIRE,ANTENNA ETC	⊙
TREES	*
BUILDING OR STRUCTURE	▢
ROAD	—
RAILROAD	—+—+—+—
HSRAIL	—X—X—X—X—

AMENDMENT RECORD		
NO	DATE	ENTERED BY

CHANGES:OBST UPDATED.

THIS PAGE
INTENTIONALLY
LEFT BLANK

RCTP AD 2.20 本場飛航規定 RCTP AD 2.20 LOCAL AERODROME REGULATIONS

2.20.1 機場管理單位指引

1. 滑行

a. 熱點位置請見AD 2.24機場圖。

- Hot Spot 1: 跑道入侵事件之潛在風險區。
- Hot Spot 2: 跑道入侵事件之潛在風險區。
- Hot Spot 3: 跑道入侵事件之潛在風險區。
- Hot Spot 4: 603停機位之到場航機自S7滑行道脫離05R跑道時，應依603停機位引導員人工導引持續滑行。603停機位導入線與S7滑行道中心線無銜接。
- Hot Spot 5: 609/610停機位之到場航機自S6滑行道脫離05R跑道時，應依609/610停機位引導員人工導引持續滑行。609/610停機位導入線與S6滑行道中心線無銜接。

b. 航空器在停機坪(含連接停機坪之滑行道)因滑行錯誤，或已滑過指定之停機位置，禁止在原地180度轉彎，此時駕駛員應停車(或慢車)並告知塔臺須利用拖車，拖至所須之方向或指定之停放位置。

c. 機場參考代碼F航空器地面操作作業限制

2.20.1 AERODROME ADMINISTRATION GUIDELINES

1. Taxi

a. The hot spot locations are depicted on Aerodrome Chart in AD 2.24.

- Hot Spot 1: Potential risk of runway incursion.
- Hot Spot 2: Potential risk of runway incursion.
- Hot Spot 3: Potential risk of runway incursion.
- Hot Spot 4: When assigned to Stand 603, arriving aircraft vacating RWY 05R via TWY S7 shall follow the marshaller's guidance to continue taxiing. The lead-in line of Stand 603 from TWY S7 center line is discontinuous.

- Hot Spot 5: When assigned to Stand 609/610, arriving aircraft vacating RWY 05R via TWY S6 shall follow the marshaller's guidance to continue taxiing. The lead-in line of Stand 609/610 from TWY S6 center line is discontinuous.

b. Aircraft are not permitted to make a 180-degree turn when they deviate or taxi over the assigned stand. In this case, pilots are required to shut down or idle engines and inform ATC to send tow tractor.

c. Ground Maneuvering Restrictions for Aerodrome Reference Code Letter F Aircraft

機型 Aircraft Type	不可使用滑行道 TWY not available	僅供拖機或FOLLOW ME引導時使用滑行道 TWY only available for aircraft under tow or FOLLOW ME guidance
Airbus A380	E, Q6, Q7, W	P10
Boeing B748	W	NIL

← 2. 停機坪

a. 航空器在停機坪須靠已啟動之引擎使用大油門輔助其他引擎啟動時，禁止在停機坪實施。如作業上確切需要，經機場公司航務處許可後轉告塔臺，通知駕駛員可將航空器利用拖車拖至滑行道上並平行後始可實施。在作業時，地面工作人員仍須隨時注意，以免危害後面其他航空器之活動。

b. 到場航空器於無停機引導員或先進目視停靠導引系統(A-VDGS)進行導引之狀況下，不得逕行滑入停機位，應通知塔臺並依其指示停等。

c. 607停機位

- i. 翼展小於52M航機(機場參考代碼A、B、C、D)若不後推而選擇以自有動力滑出，應以FOLLOW ME引導自停機位至滑行道Q，再通知塔臺並依其指示滑行。

2. Apron

a. Using high power on a running engine to start other engines is not permitted on the apron. However in special cases, bleed starts will be permitted after towing to a position parallel to the assigned taxiway, and after approval from flight operation section of airport office and as directed by ATC. The above must be conducted in such a manner that other aircraft movements are not affected.

b. When Marshaller or Advanced Visual Docking Guidance System (A-VDGS) is not available, the aircraft shall stop and inform ATC for further parking instruction.

c. Stand 607

- i. with wingspan up to but not including 52M (Aerodrome Reference Code Letter A, B, C, D)

ii. 翼展小於65M航機(機場參考代碼A、B、C、D、E)
若不後推而選擇拖出，應以拖車自停機位拖至滑行道Q，再通知塔臺並依其指示滑行。

d. 610停機位

翼展小於36M航機(機場參考代碼A、B、C)若不後推而選擇以自有動力滑出，應以FOLLOW ME引導自停機位至滑行道Q，再通知塔臺並依其指示滑行。

3. 訓練及測試飛行

僅限每日1700-2200世界標準時間實施訓練及測試飛行。

4. 跑道定期關閉

chooses to move forward under its own power rather than pushback, the aircraft shall request FOLLOW ME guidance from stand to TWY Q and then inform ATC for further taxiing instruction.

ii. with wingspan up to but not including 65M (Aerodrome Reference Code Letter A, B, C, D, E) chooses towing rather than pushback, the aircraft shall be towed from stand to TWY Q and then inform ATC for further taxiing instruction.

d. Stand 610

If departing aircraft with wingspan up to but not including 36M (Aerodrome Reference Code Letter A, B, C) chooses to move forward under its own power rather than pushback, the aircraft shall request FOLLOW ME guidance from stand to TWY Q and then inform ATC for further taxiing instruction.

3. Training and Test Flights

Training and test flights are only allowed to be performed during 1700-2200UTC daily.

4. Runway Scheduled Closure

跑道 Runway	時段 Period (UTC)	日期 Date (UTC)	備註 Remarks
05L/23R	0300-0330	每日 Daily	NIL
	1700-2230	每月雙數日及1月31日, 2月29日, 3月31日, 5月31日, 7月31日, 8月31日, 10月31日, 12月31日 Even days of month, JAN 31, FEB 29, MAR 31, MAY 31, JUL 31, AUG 31, OCT 31, DEC 31	關閉區域不含05L/23R跑道與N11/L2滑行道交叉 The intersection of RWY 05L/23R and TWY N11/L2 is not included in the closure area
05R/23L	0400-0430	每日 Daily	NIL
	1700-2230	每月單數日，除外: 1月31日, 2月29日, 3月31日, 5月31日, 7月31日, 8月31日, 10月31日, 12月31日 Odd days of month, except JAN 31, FEB 29, MAR 31, MAY 31, JUL 31, AUG 31, OCT 31, DEC 31	NIL

註解: 跑道定期關閉時段可能取消，並以NOTAM通知。

Note: The scheduled closure period of runway may be canceled and will be made known through NOTAM.

2.20.2 機場作業規定

1. 本場飛行規定

- 航線: 05L/05R跑道左航線, 23R/23L跑道右航線。
- 降落航空器，因突發情況，必須重飛時，應立即通知塔臺。
- 為加速飛航流量，減少地面等待，每日0000-0300, 0600-1000世界標準時間，將對部份航機頒發雷達離場。
- 由於塔臺視界障礙，航空器、車輛及人員在下列地區操作時，應特別小心:
A1, B1, C10及501至508停機位。

2.20.2 AIRPORT REGULATIONS

1. Local flight restrictions

- Traffic pattern:
Runway 05L/05R: Left traffic pattern
Runway 23R/23L: Right traffic pattern
- When landing aircraft is to go-around, the pilot must notify the control tower immediately.
- For expediting air traffic flow and reducing ground delay, 0000-0300UTC and 0600-1000UTC daily, ATC may initiate radar departures.
- Due to view problem from tower, pilots, vehicle drivers and working personnel are caution advised while operating on the following areas:
Parking bays A1, B1, C10, 501 to 508.

2. 儀器飛航程序起飛天氣限度

2. IFR Take-off Weather Minimum

引擎數 ENG	RWY 05L/23R				RWY 05R/23L			
	REDL, RCLL & 3RVR	REDL, RCLL & ANY 2RVR	REDL & RCLL or REDL & RCL MARKING	NIL (DAY ONLY)	REDL, RCLL & 3RVR	REDL, RCLL & ANY 2RVR	REDL & RCLL or REDL & RCL MARKING	NIL (DAY ONLY)
1	RVR 175M	RVR 350M	RVR 500M	Visibility 1600M	RVR 175M	RVR 350M	RVR 500M	Visibility 1600M
2				Visibility/ RVR 800M				Visibility/ RVR 800M
3								
4								

2.20.3 航管許可、開車後推及滑行程序

2.20.3 ATC CLEARANCE, START-UP, PUSH BACK AND TAXIING PROCEDURES

1. 航管許可

- 航空器在開車前5分鐘，按照下列時刻呼叫“臺北許可頒發”或“臺北地面管制”，申請開車及航管許可。
 - 自2300至1500UTC，臺北許可頒發121.8MHZ。
 - 自1500至2300UTC，臺北地面管制121.7MHZ。
- 航空器呼叫“臺北許可頒發”或“臺北地面管制”申請許可時，必須說明自己之呼號，停機坪位置及申請之高度。駕駛員在作業許可之情況下，可預先說明可接受之數個高度，再由航管單位分配合適之高度後開車，以減少通話量。
- 航管單位為安排適當之隔離，當離場航空器申請之高度被過境班機佔用時，駕駛員必須選擇另一高度或延後起飛之時間。
- 除非航管許可已經有起飛時間之限制，航空器在收到航管許可5分鐘內，必須準備好後推，否則航管許可可能會被取消。當航管許可被取消時，航管人員將告知駕駛員取消之原因。駕駛員在被取消航管許可後，必須按照前述開車程序，重新申請開車及航管許可。

2. 開車及後推

- 臺灣桃園國際機場地面管制作業
 - 自2200至1600UTC，使用APRON B、APRON C及REMOTE-PARKING APRON (601~615)航機呼叫“臺北地面管制”121.6 MHZ，使用其餘停機位者呼叫“臺北地面管制”121.7 MHZ。
 - 自1600至2200UTC，臺北地面管制121.7 MHZ。
- 航空器在收到航管許可後，向“臺北地面管制”申請開車及後推。
- 除非業經航管單位同意，航空器在完成後推時，應已準備好滑行，以減少整體作業之延誤。

3. 滑行

- 全日/全天候使用停止線燈。

1. ATC Clearance

- Aircraft shall call "Taipei Delivery" or "Taipei Ground" for obtaining ATC clearance 5 minutes ahead of engine start-up:
 - 2300-1500UTC, Taipei Delivery on 121.8MHZ.
 - 1500-2300UTC, Taipei Ground on 121.7MHZ.
- Aircraft are to call "Taipei Delivery" or "Taipei Ground", as appropriate, giving their call sign, parking bay number, and proposed flight level. When flight operations permit, pilots are encouraged to identify a strata of acceptable altitudes so that an altitude may be assigned with one message in order to avoid communication congestion; then, ATC will assign a suitable altitude.
- An aircraft requesting an altitude occupied by an transit flight operating through the Taipei FIR may have to accept an alternate altitude or may have to delay its departure, in order for ATC to establish the prescribed separation.
- Unless a restriction on departure time has otherwise been specified, an aircraft that is not ready to push back within five minutes of receiving an ATC clearance may have its clearance withdrawn. In such a situation, ATC will inform the aircraft of the clearance cancellation plus the reason. Following the cancellation of an ATC clearance, aircraft will follow the normal clearance request procedure as if it is the first time they were ready to depart.

2. Start-up and Push Back

- Ground control at Taipei/Taiwan Taoyuan International Airport
 - 2200-1600UTC, Aircraft using APRON B, APRON C and REMOTE-PARKING APRON (601~615) call "Taipei Ground" on 121.6MHZ. Aircraft using the rest of APRON call "Taipei Ground" on 121.7MHZ.

- b. 航空器與車輛駕駛員僅能在同時符合以下條件時才能進入或穿越跑道：
- i. 已接獲管制員明確的進入/穿越跑道許可；
 - ii. 確認停止線燈已熄滅。
- c. 如有需要，航空器得向塔臺要求FOLLOW ME引導。

- ii. 1600-2200UTC, Aircraft call "Taipei Ground" on 121.7MHZ.

- b. After receiving the ATC clearance, aircraft are to call Taipei Ground for start-up and push back when ready.
- c. Unless otherwise approved by ATC, departing aircraft must be ready to taxi at the end of push back to reduce the overall delay of traffic.

3. Taxiing

- a. Stop bars are operated 24 hours per day in all weather conditions.
- b. Aircrafts and drivers shall enter / cross the runway only when both the following conditions are met: The crew have
 - i. Received positive ATC clearance to enter / cross the runway, and
 - ii. Observed that the stop bars are turned off.
- c. Aircraft may request tower for FOLLOW ME guidance if necessary.

2.20.4 最小跑道佔用時間

1. 落地航空器在著陸後儘快脫離跑道，俾使管制員能夠維持最後進場階段之最短間隔並降低重飛之可能。
2. 駕駛員得使用下表所列之快速出口滑行道並以短於對應之跑道佔用時間脫離跑道，或依照管制員指示脫離跑道。如需使用非表列的快速出口滑行道，駕駛員應在與管制員初次聯絡時告知。
3. 駕駛員可預期在離開快速出口滑行道前，收到管制員的初步滑行指示。正在脫離使用中跑道的航空器應確保機身通過跑道等待位置標線之前，不得在快速出口滑行道上停止。

2.20.4 Minimum Runway Occupancy Time (ROT)

1. Arriving aircraft upon landing are reminded that it is imperative to vacate the runway as quickly as practicable to enable ATC to apply minimum spacing on final approach and minimize the occurrence of "go-arounds".
2. Pilots should use the rapid exit taxiways listed in the table below and vacate the runway in less time than the corresponding ROT, or follow the ATC's instructions to vacate the runway. If a non-listed rapid exit taxiway is required, pilots shall inform the ATC upon initial contact.
3. Pilots can expect initial taxi instructions from ATC before leaving the rapid exit taxiway. Aircraft vacating the runway shall not stop on the rapid exit taxiway until the entire aircraft has passed the runway-holding position marking.

跑道 RWY	快速出口滑行道 Rapid Exit Taxiway	降落出口距離 LED (M)	跑道佔用時間 ROT (SEC)
05L	N7	1714	75
	N8	2159	80
23R	N6	1261	70
	N4	1958	80
05R	S6	1454	70
	S7	2094	80
23L	S5	1459	70
	S4	2159	85

註1：降落出口距離 (Landing Exit Distance, LED)：自跑道頭起算至快速出口滑行道中心線開始偏離跑道中心線的切點。

註2：跑道佔用時間 (Runway Occupancy Time, ROT)：自跑道頭起算至機身完全脫離跑道等待位置標線。

2.20.5 場面監控強化系統

航空業者應確保機載Mode S雷達迴波器於地面上得以依國際民航組織第10號附約第4冊3.1.2.8.5.3節及3.1.2.10.3.10節之規範正常工作。

1. 當配備Mode S雷達迴波器之航空器於地面作業時，航空器駕駛員應依下列程序作業：

- a. 請求後推或滑行之離場航空器 (以先請求之項目為準)：
 - i. 航空器駕駛員應由FMS或雷達迴波器控制面板輸入：
 - 航空器飛行班次呼號，該呼號需與國際民航組織所定義之飛航計畫格式第7欄位所填內容相同。
 - 若無航空器飛行班次呼號，則輸入該航空器註冊 (機尾) 編號。
 - ii. 選擇XPNDR或按裝備性能不同但能達成相等作用之功能選項。
 - iii. 如有配備，選擇AUTO Mode。
 - iv. 請勿選擇OFF或STAND-BY Mode之功能。
 - v. 將航管指定電碼設定於Mode A並開啟Mode S 雷達迴波器。
- b. 落地航空器落地、至落地後滑至停機位置停妥為止：
 - i. 選擇XPNDR或按裝備性能不同但能達成相等作用之功能選項。
 - ii. 如有配備，選擇AUTO Mode。
 - iii. 請勿選擇OFF或STAND-BY Mode之功能。
 - iv. 保持航管指定電碼設定於Mode A。
 - v. 航空器停妥後應立即關閉Mode S雷達迴波器。

2. 未配置機載Mode S雷達迴波器或機載Mode S雷達迴波器故障之航空器駕駛員應依下列程序作業：

- a. 離場航空器：
保持Mode A與Mode C雷達迴波器為關閉狀態直至許可進入起飛跑道；
- b. 到場航空器：
當落地脫離跑道後，應即刻關閉Mode A與Mode C雷達迴波器。
- c. 離場航空器駕駛員應於初次呼叫「臺北許可頒發」時告知「無Mode S雷達迴波器」或「Mode S雷達迴波器故障」。

Note 1: Landing Exit Distance (LED) is measured from threshold to tangent point where the rapid exit taxiway centre line starts to curve away from the runway center-line

Note 2: ROT is measured from the threshold to the point where the entire aircraft passes the runway-holding position marking.

2.20.5 SURFACE MOVEMENT SURVEILLANCE SYSTEM

Aircraft operators should ensure that the Mode S transponders are able to operate when the aircraft is on the ground according to ICAO specifications (Annex 10, volume IV, 3.1.2.8.5.3 and 3.1.2.10.3.10).

1. Aircraft equipped with Mode S transponder, Pilots shall adhere to the following procedures:

- a. Departing aircraft, from either push-back or taxi request, whichever is earlier:
 - i. Enter through the FMS or transponder control panel:
 - Flight Identification as specified in item 7 of ICAO flight plan form; or
 - In the absence of Flight Identification, the Aircraft Registration;
 - ii. Select XPNDR or its equivalent depending on the specification of the installed model;
 - iii. Select AUTO Mode, if the function is available;
 - iv. Do not select the OFF or STAND BY functions;
 - v. Set the Mode A code assigned by ATC and activate the Mode S transponder.
- b. Arriving aircraft, after landing until it is stationary at the aircraft stand:
 - i. Select XPNDR or its equivalent depending on the specification of the installed model;
 - ii. Select AUTO Mode, if the function is available;
 - iii. Do not select the OFF or STAND BY functions;
 - iv. Maintain the Mode A code assigned by ATC;
 - v. Deactivate the Mode S transponder immediately after fully parked.

2. Aircraft not equipped with Mode S transponder or with unserviceable Mode S transponder; Pilots shall adhere to the following procedures:

- a. Departing aircraft:
Maintain Mode A + C transponder to OFF until line up;
- b. Arriving aircraft:

3. 為避免影響其它依賴次級雷達頻率運作系統之效能(包含機載防撞系統及次級雷達系統)，駕駛員於獲得許可進入起飛跑道以前，不應選擇開啟機載防撞系統。航空器落地脫離跑道後，駕駛員應立即取消選擇機載防撞系統。

Set the Mode A + C transponder to OFF as soon as the runway is vacated;

- c. Pilots of departing aircraft are requested to state "No Mode S transponder" or "Mode S transponder unserviceable " to "Taipei Delivery" at initial contact.

3. To avoid that the performance of systems based on SSR frequencies (including airborne TCAS units and SSR radars) from being compromised; TCAS should not be selected before cleared to line up on the departure runway. For arriving aircraft, TCAS should be deselected as soon as possible after vacating the runway.

2.20.6 低能見度作業程序(航機駕駛員應注意事項)

1. 駕駛組員在低能見度情況滑行時應注意：

- a. 駕駛員及航空器使用人應了解，於低能見度情況時，塔臺管制員可能無法看到機場上航空器及車輛之活動，無法目視確認航空器是否遵守滑行指示。因此，駕駛員應特別注意並謹慎滑行。
- b. 如駕駛員遭遇視覺上之困難或有迷失方向之跡象時，應立即告知管制員。

2. 低能見度作業天氣標準為：RVR低於550M (無RVR值時以測報之能見度800M為準)

- a. 當RVR數值低於550M時 (無RVR值時以測報之能見度800M為準)

i. ATIS廣播「實施低能見度作業程序」。

ii. 塔臺依飛航管理程序規定，頒發逐步滑行指示。

iii. 塔臺得要求航機報告通過特定交叉口，或指示航機於特定交叉口前等待。

- b. 當能見度/RVR低於300M時(仍屬低能見度作業)：塔台應持續提供駕駛員RVR變更數值。

- c. 當能見度/RVR低於175M時(仍屬低能見度作業)：

i. 塔臺應告知離場航機能見度/RVR低於175M。

ii. 離場航機開車及後推前，塔臺應提供即時RVR，確認航機意向，同意航機開車及後推。滑出時依低能見度作業實施。

iii. 塔臺應提供已滑出航機即時RVR並詢問其意向，安排離場、協助航機至適當位置停等或返回停機坪。

3. 當低能見度情況下，停止線燈無法亮起時：

- a. ATIS 廣播「停止線燈故障」。

- b. 離場或穿越跑道航空器需於跑道停止線燈(Stop Bar)前一交叉口等待。

4. 當低能見度情況下或雲幕高低於800 呎，停止線燈無法熄滅時：

2.20.6 LOW VISIBILITY PROCEDURES (FOR PILOTS' ATTENTION)

1. Pilots are expected to note the following while taxiing under low visibility conditions:

- a. Pilots and aircraft operators shall constantly be aware that under low visibility conditions aircraft and vehicle movement may not be visible to the tower controller, which may prevent visual confirmation of pilots compliance with taxiing instructions. Pilots should, therefore, exercise extreme vigilance and proceed with caution under such conditions.

- b. When visual difficulties are encountered, or at the first indication of becoming disoriented, pilots should immediately inform the controller.

2. The weather criteria of Low Visibility Procedures (LVP) is defined as 'When RVR is below 550M or when RVR is not available but VIS 800M'.

- a. When RVR is below 550M or when RVR is not available but VIS 800M.

i. ATIS broadcasts "Low Visibility Procedure in effect."

ii. Tower may issue progressive taxi instructions in accordance with air traffic management procedure.

iii. Tower may request aircraft to report when passing specific intersection, or instruct aircraft to hold short of specific intersection.

- b. When VIS/RVR is below 300M (Still Low Visibility Procedures):
Tower shall provide updated RVR values continuously.

- c. When VIS/RVR is below 175M (Still Low Visibility Procedures):

i. Tower shall advise all aircraft on maneuvering area that the VIS/RVR is below 175M.

- a. ATIS 廣播「停止線燈故障」。
 - b. 使用引導車引導航空器穿越停止線燈進入/穿越跑道。
5. 當低能見度情況下，場面監控強化系統(Surface Movement Surveillance System)故障時：
- a. ATIS 廣播「場面監控強化系統故障」。
 - b. ATIS 廣播「落地航機必須由跑道末端脫離跑道」。
 - c. 塔臺採用區塊隔離方式管制航機/車輛活動。(區塊隔離：將機場操作區，依跑道、滑行道交叉口為分界點劃分為個別區域，每一區塊只准許一架航機活動之隔離方式)。
 - d. 航空器必須依標準滑行路徑滑行。當滑行道施工或特定機型之滑行路徑限制(如：A380)，以致無法遵循既定之滑行路徑時，塔臺應另行安排適當滑行路徑。
 - e. 除航管因建立區塊隔離需求，指定落地航機停留於跑道上之情形外，落地航機脫離跑道後應繼續前進至下列交叉口核對點前等待：
05L跑道：N/N10或L/L2滑行道交叉口；
23R跑道：P/P1或N/N2/P2滑行道交叉口；
05R跑道：S/S9滑行道交叉口；
23L跑道：R/R1或S/S3滑行道交叉口。
 - f. 允許於操作區活動之航空器數量將明顯降低。
6. 當低能見度情況下，場面監控強化系統(Surface Movement Surveillance System)及停止線燈(Stop Bar)故障時：
- a. ATIS 廣播「場面監控強化系統及停止線燈故障」。
 - b. 塔臺採用降等區塊隔離方式管制航機/車輛活動。
 - c. 允許於操作區活動之航空器數量將限於4架以下。
7. 施低能見度作業時之標準滑行路徑及區塊/降等區塊如 AD 2.24 機場地面活動圖。
- ii. Tower shall provide current RVR to the departure aircraft and obtain their intentions before approving start-up and pushback, thereafter, the Low Visibility Procedure will be exercised.
 - iii. Tower shall provide current RVR to the departure aircraft which have already taxied out and arrange them to depart, taxi back to apron or wait on suitable points according to pilot's intention.
3. When Stop Bars are unable to be turned on under Low Visibility Condition:
- a. ATIS broadcasts "Stop Bars out of service."
 - b. Aircraft ready for departure or needing to cross the runway shall hold short at the intermediate holding position before the runway holding position at which the Stop Bar is out of service.
4. When Stop Bars are unable to be switched off under Low Visibility Condition or the cloud ceiling is less than 800 feet:
- a. ATIS broadcasts "Stop Bars out of service."
 - b. Aircraft should follow follow-me vehicle to enter or cross the runway.
5. When Surface Movement Surveillance System is out of service under Low Visibility Condition:
- a. ATIS broadcasts "Surface Movement Surveillance System out of service."
 - b. ATIS broadcasts "Landing aircraft shall vacate runway via the end."
 - c. Tower may provide "block separation" to aircraft/vehicles on the maneuvering area. (Block separation: Maneuvering area is divided into blocks according to the intersections of runways and taxiways. No more than one aircraft is allowed in each block at any time).
 - d. Aircraft shall taxi via the standard taxi route. Tower shall issue alternative taxi route when the standard taxi route is not available due to construction works or designated taxi route for specific aircraft type (ex: A380).
 - e. Unless ATC instructs the landing aircraft to remain on runway for the separation purpose, arriving aircraft shall vacate runway and continue proceeding to the checkpoints as follows:
RWY 05L: intersection of TWY N/N10 or L/L2
RWY 23R: intersection of TWY P/P1 or N/N2/P2
RWY 05R: intersection of TWY S/S9
RWY 23L: intersection of TWY R/R1 or S/S3.
 - f. The number of traffic allowed on maneuvering area will be significantly reduced.

6. When Surface Movement Surveillance System and Stop Bars are out of service under Low Visibility Condition:
 - a. ATIS broadcasts "Surface Movement Surveillance System and Stop Bars out of service."
 - b. Tower may provide "degraded block separation" to aircraft/vehicles on the maneuvering area.
 - c. The number of traffic allowed on maneuvering area will be reduced to 4 and under.
7. Low Visibility Procedure standard taxi route chart and block/degraded block diagrams are as AD 2.24 Aerodrome Ground Movement Charts.

2.20.7 縮短跑道最低隔離

1. 當航情組合為前起飛後落地或連續落地且符合下列限制條件時，管制員即可運用縮短跑道最低隔離作業：
 - a. 於本地時間日出後30分鐘至日落前30分鐘期間；
 - b. 適用機尾亂流最低隔離；
 - c. 能見度5公里以上，且雲幕高1500呎以上；
 - d. 順風向量不得超過每小時5哩；
 - e. 應對後方航空器提供相關航空器之位置資訊；
 - f. 剎車狀況不受跑道汙染物如積冰、泥、雪、水等影響。
2. 塔臺管制員確定第2架航空器在越過落地跑道頭前，前一架落地或離場航空器能滿足下列條件時，管制員即可先行頒發落地許可給第2架航空器：
 - a. 連續落地
前方航空器已經落地，並通過距離落地跑道頭至少2400公尺處且持續移動中，無需以反向滑行方式即可脫離跑道；
 - b. 前起飛後落地
前方起飛航空器已離地或即將離地，並已通過距離跑道頭至少2400公尺處。
3. 管制員提供相關航空器之位置資訊並頒發落地許可之標準術語範例如下：
 - "(呼號)，前方落地波音拐四拐正脫離跑道，洞五左跑道，洞五洞風么么哩，許可落地。"
 - "(呼號)，前方離場空中巴士三三零即將離地，兩三右跑道，兩三洞風六哩，許可落地。"

2.20.7 REDUCED RUNWAY SEPARATION MINIMA (RRSM)

1. RRSM may be applied between a departing aircraft and a succeeding landing aircraft or between two successive landing aircrafts on the same runway provided the following conditions exist:
 - a. During the hours of daylight from 30 minutes after local sunrise to 30 minutes before local sunset;
 - b. Wake turbulence separation minima shall be applied;
 - c. Visibility shall be at least 5 KM and ceiling shall not be lower than 1500 FT;
 - d. Tailwind component shall not exceed 5 KT;
 - e. Traffic information shall be provided to the flight crew of the succeeding aircraft concerned;
 - f. The braking action shall not be adversely affected by runway contaminants such as ice, slush, snow and water.
2. Landing clearance may be issued to an arriving aircraft while the runway is still occupied provided that there is reasonable assurance that the following separation distance will exist when the arriving aircraft crosses the runway threshold:
 - a. Landing aircraft following Landing aircraft
Preceding aircraft has landed and has passed a point at least 2400M from the threshold of the landing runway, is in motion and will vacate the runway without backtracking;
 - b. Landing traffic following departing traffic
Preceding aircraft is/will be airborne and has passed a point at least 2400 M from the threshold of the landing runway.
3. ATC will provide traffic information when issuing the landing clearance. The following ICAO standard phraseology examples will be used:

- "(Call sign), preceding B747 landing about to vacate the runway, Runway 05L, wind 050 degrees 11 KT, cleared to land."
- "(Call sign), departing A330 ahead about to rotate, Runway 23R, wind 230 degrees 6 KT, cleared to land."

RCTP AD 2.21 降低噪音程序

RCTP AD 2.21 NOISE ABATEMENT PROCEDURES

- | | |
|--|--|
| <ol style="list-style-type: none"> 1. 除非有關單位准許，否則禁止在1600至2200世界標準時間內試車，以減低噪音。 2. 516-525停機位之航機，需掛上拖車預備後推時方可啟動APU，並後推至L滑行道方可開車。 3. 離場程序中有關沿跑道方向爬昇至3NM後再轉彎之程序，除航管指示或緊急情況外，不得提前轉彎。 4. 每日1400至 2300世界標準時間，當使用23R/23L跑道時，北向離場航機應使用RNAV離場程序。 | <ol style="list-style-type: none"> 1. Except as authorized by appropriate authority, no aircraft shall make engine test from 1600 to 2200 UTC due to noise abatement. 2. Aircraft from parking bays 516-525 do not start APU unless being connected to the tow tractor and do not start up engine until being pushed back onto TWY L. 3. SIDs comprise the 3NM initial climb on runway heading are mandatory. No early turn should be made unless ATC instruction or in emergency. 4. North bound aircraft shall use RNAV departures during 1400-2300 UTC when runway 23R/23L is active. |
|--|--|

RCTP AD 2.22 飛航程序

RCTP AD 2.22 FLIGHT PROCEDURES

2.22.1 傳統到場/進場程序(非RNAV程序)等待點經緯度

2.22.1 HOLDING FIX COORDINATES OF CONVENTIONAL ARRIVAL/APPROACH PROCEDURES(NON-RNAV PROCEDURES)

等待點 Holding Fix	經緯度 Coordinates
BRAVO	244027.24N 1203641.87E
FLASH	251506.52N 1212800.20E
FRANK	251542.95N 1212724.44E
JAMMY	245508.77N 1205109.37E
SEDUM	250909.10N 1210140.30E

註解: 其他資訊參照ENR 1.5.6及相關航圖。

Note: other information refer to ENR 1.5.6 and related charts.

2.22.2 離場航空器航管許可高度頒發作業

由臺灣桃園國際機場離場之航班，一律頒發3000FT空層(有相關航情時不在此限)，起飛後再由臺北近場管制塔臺及臺北區域管制中心頒發適當空層。

2.22.2 LEVEL ASSIGNMENT FOR DEPARTURE TRAFFIC

All traffic departing from Taipei/Taiwan Taoyuan International Airport shall anticipate an initial level / 3000FT / assignment, and further be assigned to a proper level by Taipei Approach and Taipei Area Control Center.

2.22.3 到場速度限制

為增進飛航效率及飛航流量管理，至臺灣桃園國際機場落地之航空器，除航管另有指示或實施等待航線外，應依下列規定操作：

1. FL250(含)至FL130(含)：保持指示空速280KT。

2.22.3 ARRIVAL SPEED CONTROL

In order to improve overall efficiency and to facilitate an orderly traffic flow, aircraft arriving to Taipei/Taiwan Taoyuan International Airport shall comply with the arrival speed control listed below, unless otherwise instructed by ATC or entering holding pattern.

2. FL130(不含)至10000FT(含)：指示空速不得超過280KT。

註解：

- a. 使用標準儀器到場程序或於雷達引導/天氣偏航狀態下之到場航空器均適用前述速度限制。
- b. 航管單位得視航情需要給予加速或減速之指示，後續如再指示航機恢復正常速度時，駕駛員仍應照前述到場速度限制操作；如因特殊情況（例如穿越亂流等）而須使用不同之到場速度限制時，應儘速告知航管單位。
- c. 航空器無法達到指定速度者應先通知航管單位。

1. At or below FL250 and at or above FL130: maintain 280KT IAS.
2. Below FL130 and at or above 10000FT: maximum 280KT IAS.

Note:

- a. The speed control applies to all aircraft arriving via STARs, under radar vectoring, or weather deviation.
- b. Aircraft may be instructed to increase or reduce speed as dictated by actual overall traffic. If ATC unit has given instruction to increase or reduce speed, and later instructed to resume normal speed, pilots shall revert to the aforementioned arrival speed control. If any change in airspeed, other than the speed control listed above, is necessary due to turbulence, etc., pilots shall inform ATC as soon as possible.
- c. Aircraft unable to meet the specified speed shall inform ATC in advance.

2.22.4 到場持續下降操作(CONTINUOUS DESCENT OPERATION, CDO)作業

1. 實施持續下降操作應具備之條件

- a. 降落跑道之儀器降落系統須正常運作；
- b. 降落跑道之跑道視程未低於ILS進場程序CAT I 之最低標準；
- c. 全球衛星導航系統及ILS儀器降落系統無降等情形；
- d. 持續下降操作適用時段：每日1700UTC至2300UTC。

2. 各航機應具備之要件

配備RNAV且具有以下飛航處理電腦功能之航空器，航管得依航情允許其實施持續下降操作：

- a. 左右導航與垂直導航；
- b. 區域航行標準儀器到場程序連結ILS進場程序，並依規劃之垂直路徑持續下降。

3. 持續下降操作之準備+為確保有效實施持續下降操作，駕駛員應遵守以下事項：

- a. 確認是否符合實施持續下降操作之條件；
- b. 確認航機是否具備實施持續下降操作之能力，且
- c. 根據進入飛航情報區之航點與降落跑道，於航機飛航處理電腦規劃航線。終端資料自動廣播服務（頻率：127.6MHZ）將提供降落跑道資訊。

2.22.4 CONTINUOUS DESCENT OPERATION (CDO)

1. Conditions for conducting a CDO

- a. ILS for the intended runway of landing is in operation;
- b. RVR for the intended runway of landing are not lower than ILS CAT I minimum;
- c. No other system degradation that may affect a GNSS or ILS operation; and
- d. Eligible time window to operate CDO: 1700UTC till 2300UTC daily.

2. Requirements for individual flights

Flights that fulfill the following requirements can be allowed to conduct a CDO subject to ATC and real-time traffic condition. RNAV-equipped aircraft with FMC capable of:

- a. LNAV and VNAV;
- b. Continuing on planned vertical path from RNAV STAR onto ILS of intended runway of landing.

3. CDO Preparation

To ensure that the CDO can be effectively carried out, pilots are advised to abide by the following;

- a. Check if conditions for conducting the CDO are met;
- b. Check if flight meets requirement for executing a CDO; and
- c. Plan the lateral route in your FMC as shown below based on FIR entry point and landing runway-in-

use. The landing runway-in-use is available from ATIS (frequency 127.6MHz).

進入飛航情報區之航點 FIR entry point	跑道 RWY	標準儀器到場程序 STAR
SALMI/SULEM/KASKA	05L/05R	BAKER 1A
	23L/23R	BAKER 1B
BULAN	05L/05R	DRAKE 1A
	23L/23R	DRAKE 1B
SEDKU	05L/05R	GRACE 1A
	23L/23R	GRACE 1B
ENVAR/OLDID	05L/05R	TONGA 1A
	23L/23R	TONGA 1B
KAPLI/POTIB	05L/05R	TNN 1A
	23L/23R	TNN 1B

d.各航點參考剩餘距離 (Distance To Go: DTG):

Distance to GO (DTG):

BAKER 1A/DRAKE 1A/GRACE 1A		BAKER 1B/DRAKE 1B/GRACE 1B		
WAYPOINT	DTG TO MARCH (NM)	WAYPOINT	DTG to THR 23R (NM)	DTG to THR 23L (NM)
BAKER	60.9	BAKER	50.5	51.4
DRAKE	70.2	DRAKE	59.8	60.7
GRACE	86.9	GRACE	76.5	77.4
SEPIA	41.9	SEPIA AUGUR	31.5	32.4
AUGUR	33.9		23.5	24.4
APRIL	8			
TNN 1A/TONGA 1A			TNN 1B/TONGA 1B	
WAYPOINT	DTG to THR 05L (NM)	DTG to THR 05R (NM)	WAYPOINT	DTG TO JUNTA (NM)
TNN	138.2	138.4	TNN	148.8
MEICH	104	104.2	MEICH	114.6
TONGA	148.8	149	TONGA	159.4
BOCCA	127.9	128.1	BOCCA	138.5
ELBER	83.1	83.3	ELBER	93.7
BRAVO	43.1	43.3 23.6	BRAVO	53.7
JAMMY	23.4		JAMMY MAYOR	34 8

4. 實施持續下降操作

- a. 初次與臺北區域管制中心聯絡時，駕駛員得請求持續下降操作。

例：

"Taipei control, ABC123, Request C-D-O" [read as See-Dee-Oh]

臺北區域管制中心將視情況進行初步評估與協調，以同意 / 不同意駕駛員之請求。倘航管認為實施持續下降操作明顯無益時，航管應不予同意並告知駕駛員。

- b. 倘同意持續下降操作，臺北區域管制中心應儘速告知駕駛員，並頒發相關航管許可。

例：

ABC123, C-D-O approved and cleared DRAKE 1B RNAV Arrival, when ready descend and maintain FL140.

注意：

4. CDO Execution

- a. On first contact with Taipei ACC, pilots may initiate the request for a CDO.

Example:

"Taipei control, ABC123, Request C-D-O" [read as See-Dee-Oh]

Depending on the situation, Taipei ACC will make an early assessment and coordination to approve/disapprove your request accordingly. When it is obvious to ATC that the conduct of CDO flight will not reap any operational benefit, ATC shall disapprove your request and inform you accordingly.

- b. If CDO is approved, Taipei ACC shall inform pilots and issue related ATC clearance as soon as possible.

Example:

- i. 與臺北近場管制塔臺聯繫後，航管應儘速頒發後續許可，便於航機最後階段之持續下降操作。
- ii. 持續下降操作過程中，仍適用標準之飛航管理程序。航管可能許可航機下降至某中間空層，該空層原則不影響持續下降操作剖面。航管於航機下降到達指定中間空層3000FT前，應頒發另一下降許可，以避免造成航機平飛。
- iii. 倘航機已開始持續下降操作，且於實施該下降操作過程中，臺灣桃園國際機場跑道更換使用方向，如：RWY 05L更改為RWY 23R，或由 RWY 23R更改為 RWY 05L，航管應指示該持續下降操作之航機是否繼續，必要時，再次頒發許可。駕駛員應就建議之降落跑道，再行計劃到場航線，並告知航管是否得繼續實施持續下降操作。
- c. 左右或垂直路徑之偏離-航管或有可能因航情而需要航機暫時偏離航線或停止下降於中間空層。駕駛員接收指示後，應遵守航管單位之指示，直至通知駕駛員可再行持續下降操作。
- d. 駕駛員反向到場時，應以MARCH建議高度4000FT(RWY 05L/05R) 及JUNTA建議高度4700FT (RWY 23R/23L)為下降規劃；另航管可能指示自MARCH/JUNTA進場，或實施雷達引導。
- e. 持續下降操作之終止-因航情必須取消航機之持續下降操作時，航管單位應頒發許可，以終止該持續下降操作。
例：
ABC123, due to traffic, C-D-O terminated. Maintain FL160."
- f. 無線電通信失效-發生無線電通信失效時，立即終止持續下降操作，駕駛員應依飛航規則第50條無線電通信失效程序及/或飛航指南ENR 1.6.4雷達引導航空器雙向無線電失效作業程序辦理。

ABC123, C-D-O approved and cleared DRAKE 1B RNAV Arrival, when ready descend and maintain FL140.

Note:

- i. Once in contact with Taipei Approach, ATC shall issue onward clearance to facilitate final phase of the CDO flight.
- ii. During CDO, standard ATM procedures continue to apply. ATC may at times clear flight to an intermediate level which would still facilitate a CDO profile. In doing so, ATC shall endeavor to issue further descent clearance prior to the CDO flight reaching 3000FT from last assigned level so as to prevent leveling off.
- iii. If CDO flight has commenced and in the course of the CDO execution, Taipei/Taiwan Taoyuan International Airport changes direction of its runway-in-use, i.e. RWY 05L to RWY 23R or vice versa, ATC shall advise if the CDO flight can resume and issue the necessary re-clearance. Pilot shall then re-plan arrival route to the revised landing runway and advise ATC if the flight would still be able to continue CDO.
- c. Deviation from lateral or vertical path - At times, it may be necessary for ATC to take you off track temporarily or stop descent at an intermediate level due to a change in traffic situation. When instructed, pilot shall comply with ATC instructions until such a time when informed that the CDO flight can resume.
- d. For traffic arriving on the opposite direction aligned with runway-in-use, pilot should plan to cross MARCH at 4000FT (RWY 05L/05R), or cross JUNTA at 4700FT (RWY 23R/23L) for overall arrival/approach descent planning; ATC may issue the approach clearance in conjunction with direct route from MARCH/JUNTA or radar vectoring for final approach.
- e. Termination of a CDO - In the event that traffic complexity reaches a stage where cancellation of the CDO flight becomes necessary, ATC shall issue a clearance to terminate the CDO flight.
Example:
ABC123, due to traffic, C-D-O terminated. Maintain FL160."
- f. Radio Communication Failure - In the event of a radio communication failure, CDO is to be terminated immediately and pilot is to apply the radio communication failure procedures stated in the Rule of the Air (Article 50) and/or AIP ENR 1.6.4 "Radio communication failure procedures for IFR aircraft under radar vector".

2.22.5 下降規劃

2.22.5 DESCENT PLANNING

1. 經由BAKER 1 / DRAKE 1 / GRACE 1 RNAV到場之航機應依下列方式規劃下降:
 - i. 使用05L/05R跑道時：通過COPRA/DRAKE/GRACE到達並保持飛航空層200。
 - ii. 使用23L/23R跑道時：通過COPRA/DRAKE/GRACE到達飛航空層140。
2. 經由TONGA 1 / TNN 1 RNAV到場之航機應依下列方式規劃下降:
通過BOCCA/MENON/ARLEN/ABSOL到達並保持飛航空層290。
3. 實際下降許可將由航管單位頒發。

1. Arriving traffic via BAKER 1 / DRAKE 1 / GRACE 1 RNAV ARRIVAL should plan to descend as follows:
 - i. RWY05L/05R: Cross COPRA/DRAKE/GRACE at and maintain FL200.
 - ii. RWY23R/23L: Cross COPRA/DRAKE/GRACE at FL140.
2. Arriving traffic via TONGA 1 / TNN 1 RNAV ARRIVAL should plan to descend as follows:
Cross BOCCA/MENON/ARLEN/ABSOL at and maintain FL290
3. Actual descent clearance will be issued by ATC.

RCTP AD 2.23 其他資訊 RCTP AD 2.23 ADDITIONAL INFORMATION

2.23.1 機場附近鳥類聚集狀況

本場全年有鳥類活動，3月至5月上旬為鳥類種類及數量最高的季節，尤其是候鳥過境時，常因天氣惡劣或場內草地積水而吸引大量的燕鷗、鸕鶿、鷺鷥進場覓食休息。在這個時期，應特別留意鳥類短暫但大群出現的可能性，各種鳥類活動資訊如下：

2.23.1 BIRD CONCENTRATIONS IN THE VICINITY OF THE AIRPORT

Activities of bird flocks are found in the whole year. The largest variety and quantity of bird species occurred from MAR to MAY. Especially when migratory birds cross the border, they often attract a large number of terns, scolopacidae, charadriidae, and egrets to feed and rest due to bad weather or stagnant grassland. During this period, special attention should be paid to the large quantity of bird flocks appeared temporarily. Bird activities information is as follows:

鳥種 Bird Type	活動季節與時間 Activity Time	活動區域 Activity Area	飛行高度 Flight Height	特性 Characteristics
埃及聖鸛 Sacred Ibis	全年，偶被場內草地積水吸引進來或在埔心溪覓食 Whole year, occasionally attracted by standing water in grass or foraging in Pusin River	05L跑道頭至N5滑行道之北側草坪 North grass from THR 05L to TWY N5	GND-328FT	體重約1500g，大型鳥種，數量少 Around 1500g weight, large sized species, small amount of quantities
花嘴鴨 Eastern Spot-billed Duck	全年，下午時段較常出現在機場周邊 Whole year, appear at the airport more frequently in the afternoon	05L跑道頭埔心溪流域 Pusin River near THR 05L	GND-66FT	體重約750-1500g，大型鳥種，數量少 Around 750-1500g weight, large sized species, small amount of quantities
夜鷺 Black-crowned Night Heron	全年，日出及日落前後1小時為活動的高峰時段 Whole year, 1 hour before/after the sunrise/sunset are highly active	05L、05R跑道頭埔心溪流域及23L跑道頭南崁溪流域 Pusin River near THR 05L, 05R and Nankan River near THR 23L	GND-100FT	體重約525-800g，大型鳥種，數量多 Around 525-800g weight, large sized species, large amount of quantities
黃頭鷺 Cattle Egret	全年，4-5月、9-10月份會有大量出現 Whole year, mainly appear in APR to MAY and SEP to OCT.	05L/23R北側及05R/23L南側草坪 North grass of RWY 05L/23R and south RWY 05R/23L	GND-164FT	體重約370g，中型鳥種，割草作業會吸引黃頭鷺大量聚集覓食 Around 370g weight, medium sized species. A large quantity of Cattle Egret are attracted by mowing activities.

鳥種 Bird Type	活動季節與時間 Activity Time	活動區域 Activity Area	飛行 高度 Flight Height	特性 Characteristics
鴿子 Pigeon	全年，在日出後3小時內及日落前2小時可能有兩波活動高峰 Whole year, within 3 hours after the sunrise and 2 hours before the sunset may be highly active	機場內 At the airport	GND-230FT	體重約180-355g，中型鳥種 Around 180-355g weight, medium sized species
小雲雀 Oriental Skylark	全年，2-4月有較多群聚活動，高峰時段為日出後3小時內及日落前2小時 Whole year, more gathering activities from FEB to APR. Three hours after the sunrise and two hours before the sunset are highly active.	機場內各處草坪 Grass at the airport	GND-197FT	體重約27g，小型鳥種 Around 27g weight, small sized species
家燕 Barn Swallow	全年，3-8月有較多的數量 Whole year, mainly appear from MAR to AUG	05L、05R、23L、23R跑道頭草坪、05L/23R跑道北側草坪、05R/23L跑道南側草坪 Grass beside THRs; north grass of RWY 05L/23R and south grass of RWY 05R/23L	6FT-131FT	體重約19g，小型鳥種 Around 19g weight, small sized species
鷓鴣、鶺鴒科 Scolopacidae, Charadriidae	全年，3-4月、9-10月過境期活動頻繁，多在夜間過境本場 Whole year, be active more frequently from MAR to APR and SEP to OCT, usually transit during night time.	05L跑道頭兩側草坪、23L跑道頭至S4滑行道的南側草坪 Grass beside THR 05L; south grass from THR 23L to TWY S4	GND-164FT	體重約35-110g，小型及中型鳥種 Around 35-110g weight, small and medium sized species
南亞夜鷹 Savanna Nightjar	全年，4月至9月的活動頻繁，大部分在日落後至夜間2200 Whole year, be active more frequently from APR to SEP, mainly appear after sunset till 2200	機場內、05L/23R跑道北側草坪 At the airport; north grass of RWY 05L/23R	GND-33FT	體重54-110g，中型鳥種 Around 54-110g weight, medium sized species
蒼鷺 Grey Heron	每年8月至翌年5月 from AUG to next MAY	05L、05R跑道頭埔心溪流域及23L跑道頭南崙溪流域 Pusin River near THR 05L and 05R; Nankan River near THR 23L	GND-164FT	體重約1020-2070g，大型鳥種 Around 1020-2070g weight, large sized species, small amount of quantities
燕鴒 Oriental Pratincole	每年4-11月 from APR to NOV	05L/23R北邊草坪、05R南側草坪 North grass of RWY 05L/23R, south grass of RWY 05R	GND-49FT	體重約87g，小型鳥種，機場內的割草作業會吸引燕鴒大量聚集覓食 Around 87g weight, small sized species. A large quantity of Oriental Pratincole are attracted by mowing activities at the airport.
黑翅鳶 Blackwinged kite	全年，2-5月的活動頻繁 Whole year, be active more frequently from FEB to MAY	05L、05R、23L、23R跑道頭草坪、05L/23R跑道北側草坪、05R/23L跑道南側草坪 Grass beside THRs; north grass of RWY 05L/23R and south grass of RWY 05R/23L	GND-150FT	體重約200-340g，中型鳥種 Around 200g-340g weight, medium sized species

註解: 上表所列之時間係本地時間 (UTC+8)，另鳥類飛行高度，係觀察鳥類活動所目測之概估值。

Note: The above mentioned activity times are given in local time (UTC+8) and flight height is visual estimation of bird activities.

RCTP AD 2.24 本場航圖

RCTP AD 2.24 CHARTS RELATED TO AN AERODROME