
SPECIFICATION

Calypso Terminal API

Calypso Card

Version 3.0.0-SNAPSHOT, 2026-07-20



Warning. The present document cancels and replaces the previous release.

Link and Contact



Website
<https://calypsonet.org>



Support
support@calypsonet.org

Copyright © Calypso Networks Association, <https://calypsonet.org>.

*This specification is licensed under the **Creative Commons Attribution-NoDerivatives 4.0 International** (CC BY-ND 4.0).*

*You are free to **share**—copy and redistribute this document in any medium or format for any purpose, even commercially—under the following terms:*

- **Attribution**—You *MUST* give appropriate credit to the Calypso Networks Association, provide a link to the license, and indicate if changes were made. You *MAY* do so in any reasonable manner, but not in any way that suggests the Calypso Networks Association endorses you or your use.
- **NoDerivatives**—If you remix, transform, or build upon this document, you *MAY NOT* distribute the modified material.

*No additional restrictions—You **MAY NOT** apply legal terms or technological measures that legally restrict others from doing anything the license permits.*

Implementation grant—The **NoDerivatives** condition above applies to this specification **document** only—its text, tables and diagrams. It does **not** restrict the use of the technical information the document contains. The Calypso Networks Association hereby grants everyone an irrevocable, worldwide, royalty-free permission to use the information contained in this specification to design, develop, and distribute software implementations of this API, in any programming language, under the license of their choice.

The full license text is available at <https://creativecommons.org/licenses/by-nd/4.0/>.

Table of Contents

1. Abstract	8
2. Introduction	9
2.1. Purpose	9
2.2. Scope	9
2.3. Conformance	9
2.4. Document Conventions	10
2.4.1. Naming	10
2.4.2. Data types	10
2.4.3. Type tables	10
2.4.4. Operation tables	11
2.4.5. Operation contracts	11
2.4.6. Concurrency	11
2.5. References and Resources	12
2.5.1. Calypso References	12
2.5.2. Normative References	12
2.5.3. External Resources	12
3. Glossary and Acronyms	13
3.1. Glossary	13
3.2. Acronyms	13
4. Architectural Overview	14
4.1. Functional positioning	14
4.2. Logical namespaces	14
4.3. Command exchange duration bounds	15
4.3.1. Measured duration	15
4.3.2. Resolution rule	15
4.3.3. Behaviour on overrun	15
4.3.4. Card serial number	16
4.3.5. FCI matching	16
4.3.6. FCI integrity	16
4.3.7. Duplicates	16
4.4. UML class diagram	16
5. API Specification	18
5.1. Constants	18
5.1.1. Calypso Card API Properties	18
5.2. Data	18
5.2.1. Directory Header	18
5.2.2. Elementary File	18
5.2.3. File Header	19
5.2.4. Search Command Data	19
5.2.5. SV Debit Log Record	20
5.2.6. SV Load Log Record	20
5.3. API Interfaces	21
5.3.1. Asymmetric Crypto Security Settings	21
Add CA Certificate	21
Add CA Certificate Parser	21
Add Card Certificate Parser	22
Add PCA Certificate	22

<i>Assign Close Secure Session Max Duration By CSN</i>	22
<i>Assign Close Secure Session Max Duration By FCI</i>	23
<i>Assign Open Secure Session Max Duration By CSN</i>	23
<i>Assign Open Secure Session Max Duration By FCI</i>	24
5.3.2. Calypso Card	24
<i>Get Application Serial Number</i>	24
<i>Get Application Subtype</i>	25
<i>Get Application Type</i>	25
<i>Get CA Certificate</i>	25
<i>Get Card Certificate</i>	25
<i>Get Card Public Key</i>	26
<i>Get Counter Values By LID</i>	26
<i>Get Counter Values By SFI</i>	26
<i>Get DF Name</i>	26
<i>Get Directory Header</i>	27
<i>Get File By LID</i>	27
<i>Get File By SFI</i>	27
<i>Get Files</i>	27
<i>Get Matching Record Numbers</i>	28
<i>Get PIN Attempt Remaining</i>	28
<i>Get Platform</i>	28
<i>Get Product Type</i>	28
<i>Get Session Modification</i>	29
<i>Get Software Issuer</i>	29
<i>Get Software Revision</i>	29
<i>Get Software Version</i>	29
<i>Get Startup Info Raw Data</i>	29
<i>Get SV Balance</i>	30
<i>Get SV Debit Log All Records</i>	30
<i>Get SV Debit Log All Records Raw Data</i>	30
<i>Get SV Debit Log Last Record</i>	30
<i>Get SV Debit Log Last Record Raw Data</i>	31
<i>Get SV Last T Num</i>	31
<i>Get SV Load Log Record</i>	31
<i>Get SV Load Log Record Raw Data</i>	32
<i>Get Traceability Information</i>	32
<i>Get Transaction Counter</i>	32
<i>Is DF Invalidated</i>	32
<i>Is DF Ratified</i>	33
<i>Is Extended Mode Supported</i>	33
<i>Is HCE</i>	33
<i>Is PIN Blocked</i>	33
<i>Is PIN Feature Available</i>	34
<i>Is PKI Mode Supported</i>	34
<i>Is Ratification On Deselect Supported</i>	34
<i>Is SV Feature Available</i>	34
5.3.3. Calypso Card API Factory	35
<i>Create Asymmetric Crypto Security Settings</i>	35
<i>Create Calypso Card Selection Extension</i>	35

Create Free Transaction Manager	35
Create Secure Extended Mode Transaction Manager	36
Create Secure PKI Mode Transaction Manager	36
Create Secure Regular Mode Transaction Manager	36
Create Symmetric Crypto Security Settings	37
5.3.4. Calypso Card Selection Extension	37
Accept Invalidated Card	38
Prepare Get Data	38
Prepare Pre Open Secure Session	38
Prepare Read Binary	39
Prepare Read Counter	39
Prepare Read Record	40
Prepare Select File By Control	40
Prepare Select File By LID	41
5.3.5. Free Transaction Manager	41
5.3.6. Secure Extended Mode Transaction Manager	41
Prepare Activate Encryption	41
Prepare Deactivate Encryption	42
Prepare Early Mutual Authentication	42
5.3.7. Secure PKI Mode Transaction Manager	42
Prepare Open Secure Session	43
5.3.8. Secure Regular Mode Transaction Manager	43
5.3.9. Secure Symmetric Crypto Transaction Manager	43
Prepare Change Key	43
Prepare Invalidate	44
Prepare Open Secure Session	44
Prepare Rehabilitate	45
Prepare SV Debit	45
Prepare SV Get	45
Prepare SV Reload	46
Prepare SV Undebit	46
5.3.10. Secure Transaction Manager	47
Get Crypto Extension	47
Prepare Cancel Secure Session	47
Prepare Close Secure Session	47
5.3.11. Symmetric Crypto Security Settings	48
Add Authorized Session Key	48
Add Authorized SV Key	48
Assign Default KIF	48
Assign Default KVC	49
Assign KIF	49
Assign Close Secure Session Max Duration By CSN	49
Assign Close Secure Session Max Duration By FCI	50
Assign Open Secure Session Max Duration By CSN	50
Assign Open Secure Session Max Duration By FCI	50
Assign SV Command Max Duration By CSN	51
Assign SV Command Max Duration By FCI	51
Authorize SV Negative Balance	52
Disable Read On Session Opening	52

<i>Enable Multiple Session</i>	52
<i>Enable PIN Plain Transmission</i>	52
<i>Enable Ratification Mechanism</i>	53
<i>Enable SV Load And Debit Log</i>	53
<i>Init Crypto Context For Next Transaction</i>	53
<i>Set PIN Modification Ciphering Key</i>	53
<i>Set PIN Verification Ciphering Key</i>	54
5.3.12. Transaction Manager	54
<i>Get Secure Session State</i>	54
<i>Get Transaction Audit Data</i>	55
<i>Prepare Append Record</i>	55
<i>Prepare Change PIN</i>	55
<i>Prepare Check PIN Status</i>	55
<i>Prepare Decrease Counter</i>	56
<i>Prepare Decrease Counters</i>	56
<i>Prepare Generate Asymmetric Key Pair</i>	57
<i>Prepare Get Data</i>	57
<i>Prepare Increase Counter</i>	57
<i>Prepare Increase Counters</i>	58
<i>Prepare Put Data</i>	58
<i>Prepare Read Binary</i>	58
<i>Prepare Read Counter</i>	59
<i>Prepare Read Record</i>	59
<i>Prepare Read Records</i>	60
<i>Prepare Read Records Partially</i>	60
<i>Prepare Search Records</i>	61
<i>Prepare Select File By Control</i>	61
<i>Prepare Select File By LID</i>	62
<i>Prepare Set Counter</i>	62
<i>Prepare SV Read All Logs</i>	63
<i>Prepare Update Binary</i>	63
<i>Prepare Update Record</i>	63
<i>Prepare Verify PIN</i>	64
<i>Prepare Write Binary</i>	64
<i>Prepare Write Record</i>	65
5.4. SPI Interfaces	65
5.4.1. Asymmetric Crypto Card Transaction Manager Factory	65
5.4.2. CA Certificate	65
5.4.3. CA Certificate Parser	65
5.4.4. Card Certificate	66
5.4.5. Card Certificate Parser	66
5.4.6. Card Transaction Crypto Extension	66
5.4.7. PCA Certificate	66
5.4.8. Symmetric Crypto Card Transaction Manager Factory	66
5.5. Enumerations	67
5.5.1. Calypso Card Product Type	67
5.5.2. Elementary File Type	67
5.5.3. Get Data Tag	67
5.5.4. Put Data Tag	68

5.5.5. Secure Session State 68

5.5.6. Select File Control 69

5.5.7. SV Operation 69

5.5.8. Write Access Level..... 69

5.6. Errors..... 70

5.6.1. Card Signature Not Verifiable 70

5.6.2. Crypto 70

5.6.3. Crypto IO 70

5.6.4. Inconsistent Data 70

5.6.5. Invalid Card Signature 71

5.6.6. Invalid Certificate 71

5.6.7. Invalid PIN 71

5.6.8. Session Buffer Overflow..... 71

5.6.9. Unauthorized Key 72

1. Abstract

This document is the official technical specification of the **Terminal Calypso Card API** standardised by the **Calypso Networks Association** (CNA). It defines, in a language-agnostic way (using a notation inspired by the Kotlin language), the interfaces, classes, enumerations, errors, structural relationships and behavioural requirements that any conforming implementation of the Terminal Calypso Card API MUST satisfy.

The Terminal Calypso Card API is the **application-facing** surface used by terminal applications to operate Calypso transit and ticketing cards. It builds on top of the **Terminal Reader API** ([CNA-TR-API](#)) and delegates every cryptographic operation to a symmetric ([CNA-TCCS-API](#)) or asymmetric ([CNA-TCCA-API](#)) crypto module.

Document Status

Reference	YYMMDD-SP-CNATerminalAPI-CalypsoCard
Short name	CNA-TCC-API
Version	3.0.0-SNAPSHOT
Revision date	2026-07-20
Editor	Calypso Networks Association
Source repository	https://github.com/calypsonet/calypsonet-terminal-calypso-card-uml-api
Reference license	Creative Commons Attribution-NoDerivatives 4.0 International (CC BY-ND 4.0)



The present document specifies the 3.0.0-SNAPSHOT of the Terminal Calypso Card API. It defines a single, coherent baseline against which conforming implementations are evaluated; the **Since** column indicates the version in which each member was introduced.

Revision List



This section lists the high-level changes per version. The complete, fine-grained changelog is maintained in the [CHANGELOG.md](#) file at the root of the source repository.

Version / Date	Modifications
v3.0.0-SNAPSHOT 2026-07-20	Baseline.

2. Introduction

2.1. Purpose

The Terminal Calypso Card API defines the public surface used by terminal applications to:

- select a Calypso card through a [CNA-TR-API](#) selection scenario enriched with Calypso-specific commands;
- operate read-only transactions without involving a crypto module (**free** transaction);
- operate fully authenticated transactions using a **symmetric** crypto module ([CNA-TCCS-API](#))—either in the **regular** mode (compatible with every Calypso product) or in the **extended** mode (additional features only available on Calypso Prime Extended);
- operate fully authenticated transactions using an **asymmetric** crypto module ([CNA-TCCA-API](#)) in **PKI** mode;
- expose a dynamic view of the card (**CalypsoCard**) updated throughout the transaction.

2.2. Scope

This specification covers:

- the factory used to instantiate the public types of the API (**CalypsoCardApiFactory**);
- the data model of a Calypso card (**CalypsoCard**, **ElementaryFile**, **FileHeader**, **DirectoryHeader**, **Stored Value** log records);
- the selection extension (**CalypsoCardSelectionExtension**);
- the family of transaction managers (Free, Secure Regular, Secure Extended, Secure PKI);
- the **symmetric** and **asymmetric** security settings carriers;
- the **Stored Value** operations and **Search Record Multiple** support;
- the SPIs implemented by **crypto modules** to plug into the secure transaction managers;
- the family of errors raised during a Calypso transaction.

The following topics are **out of scope**:

- the on-the-wire APDU dialog with the card (handled internally by the implementation);
- the cryptographic algorithms themselves—only the SPI contract is normative;
- the on-the-wire transport between the terminal and any remote ticketing system.

2.3. Conformance

A software product conforms to this specification if and only if:

1. it implements every interface and class defined in [Chapter 5](#) with the operations and semantics prescribed in this document,
2. it raises errors exclusively of the types defined in [Section 5.6](#) for the situations described,
3. it preserves the structural relationships described in [Chapter 4](#).

Throughout this specification, the key words **MUST**, **MUST NOT**, **SHOULD**, **SHOULD NOT**, **RECOMMENDED**, **MAY** and **OPTIONAL** are to be interpreted as described in [RFC 2119](#) and [RFC 8174](#) when, and only when, they appear in all capitals.

In conformance with [RFC 2119](#), **SHALL** is equivalent to **MUST**; this specification uses **MUST** exclusively in order to avoid ambiguity.

2.4. Document Conventions

2.4.1. Naming

Type names follow **UpperCamelCase**; operation, parameter and enumeration-member names follow **lowerCamelCase** except for enumeration values which use **UPPER_SNAKE_CASE**. Names defined by this specification are reproduced as-is in the UML class diagram ([Section 4.4](#)).

2.4.2. Data types

The following type names, whose notation is inspired by the Kotlin language, are used in operation signatures and are mapped, in each binding, to the closest equivalent native type. Implementations **MUST** preserve the semantic intent rather than the syntactic form.

Type	Description	Typical bindings
String	Sequence of characters, UTF-8 encoded by default.	String , string , str .
Boolean	Two-state truth value.	boolean , bool .
Byte	Signed 8-bit value.	byte , i8 .
Short	Signed 16-bit integer.	short , Int16 , i16 .
Int	Signed 32-bit integer.	int , Int32 , i32 .
ByteArray	Ordered sequence of octets.	byte[] , [u8] , bytes .
List<T>	Ordered collection of T values, may contain duplicates.	List<T> , Vec<T> .
Set<T>	Unordered collection of unique T values.	Set<T> , HashSet<T> .
Map<K, V>	Associative array binding keys of type K to values of type V .	Map<K, V> , Dictionary<K, V> , HashMap<K, V> .
SortedMap<K, V>	Associative array sorted by key.	SortedMap<K, V> , BTreeMap<K, V> .
Any	Value of any type, root of the type hierarchy.	Object , Any , object , Box<dyn Any> .
T?	Nullable value: either a T value or null .	Integer/Short/Byte (boxed), Optional<T> , T? , Option<T> .
null	Absence of value, the alternative held by a nullable type.	null , nil , None .
Self	Own type of the receiver: a fluent operation returns the instance it was called on.	Self , T (recursive generic).
Unit	Indicates that an operation returns no value.	void , Unit , () .

2.4.3. Type tables

Each interface, class, enumeration and error defined in this document is described by a table of the form:

Name	The type's normalized name.
Kind	The category of the type (interface, class, enumeration, error, etc.).
Namespace	The namespace in which the type is defined.
Extends	The type extended by this type, when applicable.

Implements	The interface implemented by this type, when applicable.
Since	The version of the API in which the type was introduced.
Purpose	A normative description of the type's responsibility.
See also	Cross-references to related operations or types, each a hyperlink to the corresponding table. Present only when applicable.

The **Purpose** row states, in one or two sentences, the responsibility of the type and the way an instance is obtained. It is meant to be scanned, not read: any content that requires structure or depth—rules, lists, notes, value tables or examples—is placed as prose below the table.

2.4.4. Operation tables

Each operation defined in this document is described by a table of the form:

Signature	The operation's signature.
Since	The version of the API in which the operation was introduced.
Description	A normative description of the operation's behaviour.
Parameters	A description of each input parameter.
Returns	A description of the returned value, if any.
Pre-conditions	The conditions the caller MUST satisfy before invoking the operation, each prefixed by its nature.
Errors	A list of error conditions a correct caller must handle, each mapped to a specific error type.
See also	Cross-references to related operations or types, each a hyperlink to the corresponding table. Present only when applicable.

2.4.5. Operation contracts

To avoid repetition, the following rules apply to every operation table in [Chapter 5](#) and are therefore not restated for each operation:

- **Pre-conditions.** The **Pre-conditions** row states what the caller **MUST** guarantee before invoking the operation. Violating one is a contract error, never listed in the **Errors** row, which describes only the outcomes a correct caller must handle. Each entry is prefixed by its nature, which determines the error raised when the condition is not met:
 - **Argument**—an illegal argument error. Applies to any invalid argument, including values bounded by a card or SAM protocol.
 - **Range**—an index out of bounds error. Applies when the argument designates a position within a collection or memory image exposed by the API.
 - **State**—an illegal state error.
 - **Capability**—an unsupported operation error.
- **Non-null results.** Unless the return type is marked nullable (**T?**) or the **Returns** row states otherwise, an operation returns a non-**null** value.
- **Collections.** Unless the return type is marked nullable (**T?**), an operation whose return type is a collection (e.g. **List**, **Set**, **Map**) returns an empty collection rather than **null**.
- **Fluent composition.** Builder-style operations return the current instance so that calls can be chained.

2.4.6. Concurrency

Unless explicitly stated otherwise, the stateful types defined by this specification are **not** thread-safe. A given instance **MUST** be accessed from a single thread at a time; concurrent use of the same instance without

external synchronisation results in undefined behaviour. Distinct instances MAY be used concurrently.

2.5. References and Resources

2.5.1. Calypso References

References to CNA Terminal APIs designate the indicated **major** version; any later release within the same major is backward-compatible per that API's evolution policy.

Reference	Document
[CNA-TR-API]	CNA Terminal API—Reader (SP-CNATerminalAPI-Reader), version 3.0, Calypso Networks Association.
[CNA-TCCS-API]	CNA Terminal API—Calypso Crypto Symmetric (SP-CNATerminalAPI-CalypsoCryptoSymmetric), version 0.1, Calypso Networks Association.
[CNA-TCCA-API]	CNA Terminal API—Calypso Crypto Asymmetric (SP-CNATerminalAPI-CalypsoCryptoAsymmetric), version 0.2, Calypso Networks Association.

2.5.2. Normative References

Reference	Document
[RFC 2119]	Key words for use in RFCs to Indicate Requirement Levels , S. Bradner, March 1997.
[RFC 8174]	Ambiguity of Uppercase vs Lowercase in RFC 2119 Key Words , B. Leiba, May 2017.
[ISO/IEC 7816]	Identification cards—Integrated circuit cards.

2.5.3. External Resources

Resource	Link
Calypso Networks Association	https://calypsonet.org
Terminal APIs website	https://terminal-api.calypsonet.org
Terminal APIs documentation	https://docs.terminal-api.calypsonet.org

3. Glossary and Acronyms

3.1. Glossary

Term	Definition
Calypso Card	Smart card compliant with the Calypso specifications.
Secure Session	Authenticated and integrity-protected exchange between the terminal and the card.
Regular Mode	Secure session mode compatible with every Calypso product.
Extended Mode	Secure session mode supporting additional features (early mutual authentication, encryption of session APDUs, larger sessions). Available on Calypso Prime Extended.
PKI Mode	Secure session mode using asymmetric cryptography (Calypso 3.3+).
Stored Value (SV)	Calypso feature exposing a card-resident monetary counter.
Crypto Module	Component implementing the SPI exposed by CNA-TCCS-API or CNA-TCCA-API .
KIF / KVC	Calypso Key Identifier / Key Version Code.
HCE	Host Card Emulation.

3.2. Acronyms

Abbreviation	Expansion
AID	Application IDentifier
APDU	Application Protocol Data Unit
CNA	Calypso Networks Association
CSN	Calypso Serial Number (Application Serial Number)
DF	Dedicated File
EF	Elementary File
FCI	File Control Information
FCP	File Control Parameters
HCE	Host Card Emulation
KIF	Key Identifier
KVC	Key Version Code
LID	Long IDentifier (file id)
MAC	Message Authentication Code
PIN	Personal Identification Number
PKI	Public Key Infrastructure
SAM	Secure Application Module
SFI	Short File Identifier
SPI	Service Provider Interface
SV	Stored Value
UML	Unified Modelling Language

4. Architectural Overview

4.1. Functional positioning

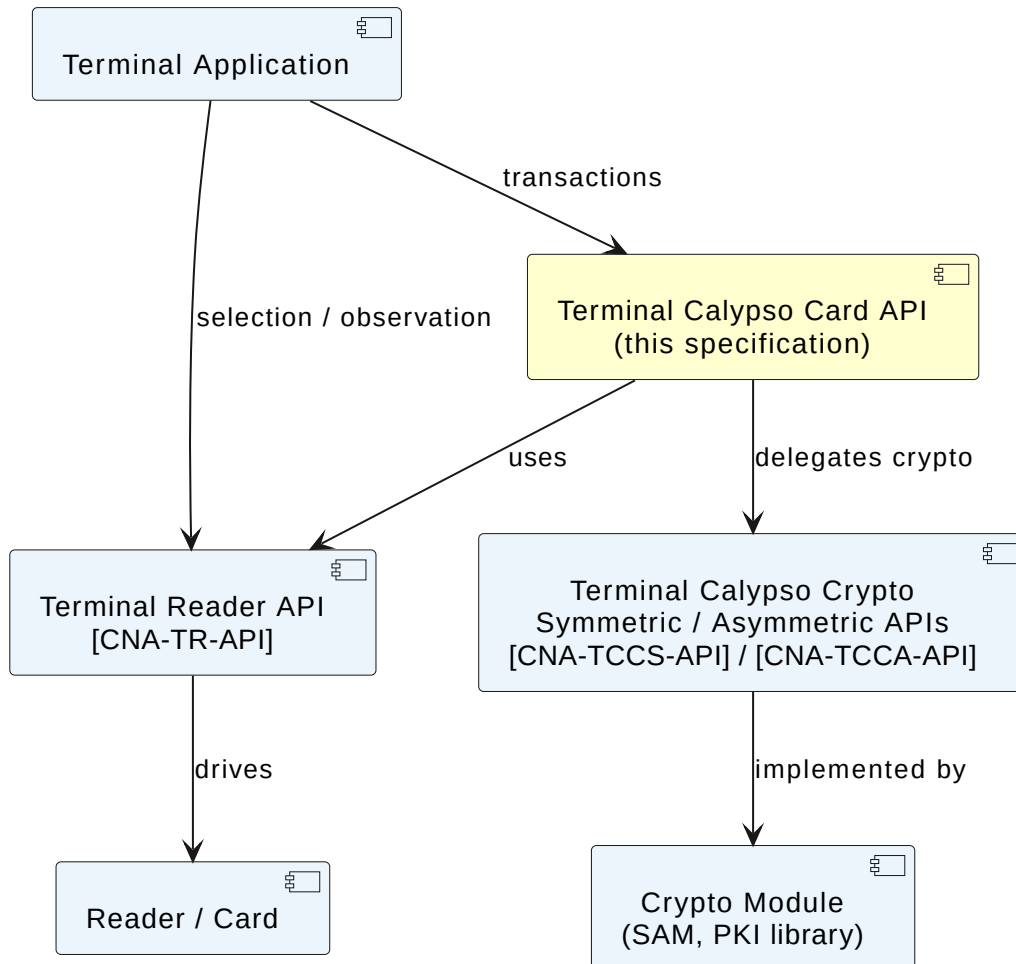


Figure 1. Terminal Calypso Card API—Architecture Overview

4.2. Logical namespaces

Namespace	Role	Summary
<code>calypso.card</code>	Public API	Factory, properties, enumerations (<code>GetDataTag</code> , <code>PutDataTag</code> , <code>SelectFileControl</code> , <code>WriteAccessLevel</code>).
<code>calypso.card.card</code>	Public API	Data model of a Calypso card: <code>CalypsoCard</code> , files, headers, SV logs and selection extension.
<code>calypso.card.transaction</code>	Public API	Transaction managers (Free / Secure Regular / Secure Extended / Secure PKI), security settings carriers, <code>SearchCommandData</code> , <code>SvOperation</code> and the family of errors.
<code>calypso.card.transaction.spi</code>	SPI	Marker interfaces implemented by crypto extensions (<code>SymmetricCryptoCardTransactionManagerFactory</code> , <code>AsymmetricCryptoCardTransactionManagerFactory</code> , certificate markers, <code>CardTransactionCryptoExtension</code>).

4.3. Command exchange duration bounds

As a countermeasure against relay attacks, the security settings allow the integrator to bound the duration of the most sensitive command exchanges: a relay adds a transmission delay, so that an abnormally long exchange can reveal that the card is not actually present in front of the reader. The bounds are declared through the `assign...MaxDuration...` operations of `SymmetricCryptoSecuritySettings` and `AsymmetricCryptoSecuritySettings`, each available in a CSN-based (`...ByCsn`) and an FCI-based (`...ByFci`) form.

4.3.1. Measured duration

Each bound applies to a single command exchange, measured from the transmission of the command to the reception of its response; the other commands of the secure session or of the Stored Value operation are not included. The bounded exchanges are:

- the **Open Secure Session** command (`assignOpenSecureSessionMaxDuration...`);
- the **Close Secure Session** command (`assignCloseSecureSessionMaxDuration...`);
- the **SV Reload**, **SV Debit** or **SV Undebit** command (`assignSvCommandMaxDuration...`, symmetric security settings only).

The settings are recorded separately for each security settings instance and for each kind of bounded command exchange.

4.3.2. Resolution rule

For a given card, the applicable bound is determined as follows:

1. **CSN-based settings.** Each `...ByCsn(...)` call defines a **range** bounded by its `csnMin` and the immediately higher declared `csnMin` (or $+\infty$ for the highest threshold). If the card's CSN belongs to a range and the `maxDuration` of that range is not `Long.MAX_VALUE`, this value applies and the resolution stops.
2. **FCI-based settings.** Otherwise, the `...ByFci(...)` settings are evaluated in their declaration order and the first one whose `fciRegex` matches the card's FCI applies; a `maxDuration` equal to `Long.MAX_VALUE` then means that no bound applies.
3. Otherwise, no bound applies.

CSN-based settings therefore act as **overrides** of the FCI-based settings. A default bound for every card is expressed by a last FCI-based setting with the expression `.*`, not by a CSN-based setting with the lowest `csnMin`, which would shadow every FCI-based setting. Assigning `Long.MAX_VALUE` to a CSN range hands the decision back to the FCI-based settings for the cards of that range. The CSN-based mechanism allows the integrator to introduce or tighten duration bounds progressively as new generations of cards (with higher CSNs) are issued.

4.3.3. Behaviour on overrun

When the effective duration of a bounded command exchange exceeds the applicable bound, the exchange is reported as failed and the error is propagated to the application as an `InvalidCardResponse` ([CNA-TR-API](#)).

- **A secure session is open.** The session MUST be cancelled automatically before the error is propagated, so that no modification performed during the session is validated by the card.
- **No secure session is open** (a Stored Value command executed outside a session). There is nothing to cancel: only the error is propagated, and the ticketing application decides what to do according to its own context (for example retrying the operation, rejecting the card or raising an alert).

4.3.4. Card serial number

The card serial number (CSN) is the Application Serial Number (see `getApplicationSerialNumber()`) interpreted as an unsigned 64-bit big-endian integer; `csnMin` is interpreted as the same unsigned 64-bit value, so that the comparison is unsigned.

4.3.5. FCI matching

- The FCI is the data returned by the **Select Application** command (see `IsoSmartCard.getSelectApplicationResponse()` in [CNA-TR-API](#)), excluding the status word. When no FCI is available, no FCI-based setting matches.
- The FCI is represented as an uppercase hexadecimal string without separators (two characters per byte).
- The match is complete: the whole string MUST match the expression, as if it were anchored at both ends. Since `.` matches a single hexadecimal digit, a byte is matched by `..`.
- To remain portable across implementation languages, the expression MUST be restricted to the following subset: literal characters, `.`, character classes `[...]` (including ranges and negation), the quantifiers `*`, `+`, `?`, `{n}`, `{n,}` and `{n,m}`, the alternation `|` and the groups `(...)`. Backreferences, lookahead assertions, anchors and inline flags are excluded.

4.3.6. FCI integrity

The FCI is obtained during the card selection, outside any secure session, and is therefore not authenticated. When an expression filters on the startup information data contained in the FCI, the integrator MUST schedule a `prepareGetData(FCI_FOR_CURRENT_DF)` inside the secure session, so that the integrity of the FCI obtained during the selection is guaranteed by the session: the following `processCommands()` raises `InconsistentData` if the returned FCI differs from the one obtained during the selection.

4.3.7. Duplicates

A `...ByCsn(...)` call with an already declared `csnMin` replaces the previous value. A `...ByFci(...)` call with an already declared `fciRegex` (identical character string) replaces the previous value and keeps its position in the evaluation order.

4.4. UML class diagram

The following UML class diagram provides a visual representation of the types and relationships defined by this specification:



5. API Specification

5.1. Constants

5.1.1. Calypso Card API Properties

Name	CalypsoCardApiProperties
Kind	Constants
Namespace	calypso.card
Since	1.0
Purpose	Exposes the immutable properties of the Terminal Calypso Card API.

Name	Type	Since	Description
VERSION	String	1.0	String representation of the version of the API implemented by the conforming binding. The value is a dotted decimal of the form MAJOR.MINOR; it is "3.0" for this revision of the specification.

5.2. Data

5.2.1. Directory Header

Name	DirectoryHeader
Kind	Data
Namespace	calypso.card.card
Since	1.0
Purpose	Carries the metadata of a Calypso DF.

Name	Type	Default	Since	Description
lid	Short	—	1.0	LID, the 2-byte identifier of the associated file structure (DF or EF).
dfStatus	Byte	—	1.0	Status byte of the DF (Dedicated File) described by this header.
accessConditions	ByteArray	—	1.0	Access conditions of the DF. Non-empty.
keyIndexes	ByteArray	—	1.0	Key indexes of the DF. Non-empty.
kifByAccessLevel	Map<WriteAccessLevel, Byte>	—	1.0	KIF of each write access level, indexed by <u>WriteAccessLevel</u> . Contains one entry per write access level.
kvcByAccessLevel	Map<WriteAccessLevel, Byte>	—	1.0	KVC of each write access level, indexed by <u>WriteAccessLevel</u> . Contains one entry per write access level.

5.2.2. Elementary File

Name	ElementaryFile
Kind	Data
Namespace	calypso.card.card

Since	1.0
Purpose	Calypso Elementary File. Carries an SFI , a FileHeader and the content of its records.

Name	Type	Default	Since	Description
sfi	Byte	—	1.0	Short File Identifier (SFI) of this Elementary File.
header	<u>FileHeader</u> ?	—	1.0	Metadata of the file. null when not yet set.
records	SortedMap< Int, ByteArray>	—	3.0	Known content of every record, indexed by record number. For a binary file, the whole content is carried by record #1. Empty when no record content is known; a record absent from the map has not been read.

5.2.3. File Header

Name	FileHeader
Kind	Data
Namespace	calypso.card.card
Since	1.0
Purpose	Carries the metadata of a Calypso EF.

Name	Type	Default	Since	Description
lid	Short	—	1.0	LID, the 2-byte identifier of the associated file structure (DF or EF).
dfStatus	Byte?	—	1.0	DF status. null when not available—for example when the header is built from the response to a Get Data with the EF_LIST tag.
efType	<u>Elementary</u> <u>FileType</u>	—	1.0	Type of this Elementary File (EF).
recordsNumber	Int	—	1.0	Number of records. Always 1 for a counter file and for a binary file. For a counter file, the extra bytes—the remainder of the division of the file size by 3—are not accessible.
recordSize	Int	—	1.0	Size of a record. For a counter file, the original size of record #1; the extra bytes—the remainder of the division of the file size by 3—are not accessible. For a binary file, the size of the file.
accessConditions	ByteArray	—	1.0	Access conditions. Empty when not available.
keyIndexes	ByteArray	—	1.0	Key indexes. Empty when not available.
sharedReference	Short?	—	1.0	Non-zero unique identifier of the shared data when the file data is shared, 0 when it is not shared. null when the information is not available.

5.2.4. Search Command Data

Name	SearchCommandData
Kind	Data
Namespace	calypso.card.transaction
Since	1.1
Purpose	Carries the search criteria of <u>TransactionManager.prepareSearchRecords</u> , built directly by the application.

Name	Type	Default	Since	Description
sfi	Byte	—	1.1	SFI of the EF in which the search is performed.
searchData	ByteArray	—	1.1	Byte sequence to search for within the targeted record.
startAtRecord	Int	1	1.1	Record number at which the search begins.
offset	Int	0	1.1	Offset, in bytes, at which the analysis starts within each record.
repeatedOffset	Boolean	false	1.1	When true, the data is analysed at offset , then repeatedly at each following offset until the end of the record.
mask	ByteArray?	null	1.1	Comparison mask specifying precisely the bits to take into account in the comparison. Its length MUST be ≤ the length of searchData ; missing bytes are right-padded with FFh. null applies no mask.
fetchFirstMatchingResult	Boolean	false	1.1	When true, the content of the first matching record is fetched into the <u>CalypsoCard</u> .

5.2.5. SV Debit Log Record

Name	SvDebitLogRecord
Kind	Data
Namespace	calypso.card.card
Since	1.0
Purpose	One record of a Stored Value debit log.

Name	Type	Default	Since	Description
debitDate	ByteArray	—	1.0	2-byte debit date. Non-empty.
debitTime	ByteArray	—	1.0	2-byte debit time. Non-empty.
amount	Int	—	1.0	Debit amount.
balance	Int	—	1.0	SV balance after the debit.
kvc	Byte	—	1.0	KVC of the debit key.
samId	ByteArray	—	1.0	4-byte SAM ID. Non-empty.
samTNum	Int	—	1.0	SAM transaction number.
svTNum	Int	—	1.0	SV transaction number.

5.2.6. SV Load Log Record

Name	SvLoadLogRecord
Kind	Data
Namespace	calypso.card.card
Since	1.0
Purpose	One record of a Stored Value load log.

Name	Type	Default	Since	Description
loadDate	ByteArray	—	1.0	2-byte load date. Non-empty.
loadTime	ByteArray	—	1.0	2-byte load time. Non-empty.

Name	Type	Default	Since	Description
amount	Int	—	1.0	Load amount.
balance	Int	—	1.0	SV balance after the load.
freeData	ByteArray	—	1.0	2-byte free data. Non-empty.
kvc	Byte	—	1.0	KVC of the load key.
samId	ByteArray	—	1.0	4-byte SAM ID. Non-empty.
samTNum	Int	—	1.0	SAM transaction number.
svTNum	Int	—	1.0	SV transaction number.

5.3. API Interfaces

5.3.1. Asymmetric Crypto Security Settings

Name	AsymmetricCryptoSecuritySettings
Kind	Interface
Namespace	calypso.card.transaction
Since	2.1
Purpose	Security settings carrier for PKI Calypso card transactions. An instance is obtained via CalypsoCardApiFactory.createAsymmetricCryptoSecuritySettings .

Add CA Certificate

Signature	addCaCertificate(caCertificate: CaCertificate) → Self
Since	2.1
Description	Registers a CA certificate. The issuer's certificate MUST be loaded first. Preloading a CA certificate avoids having to read it from the card. Various checks are performed to ensure the integrity and validity of the supplied CA certificate: verification of the certificate's signature using the issuer's public key, check of the validity period to ensure the certificate is neither expired nor prematurely valid, confirmation of the authenticity of the issuer and subject details, and compliance with any constraints or extensions required for CA certificates.
Parameters	caCertificate (CaCertificate)—the CA certificate to register.
Returns	The current instance (Self).
Pre-conditions	Argument —every parameter is non- <code>null</code> . State —the contained public key is not already registered.
Errors	InvalidCertificate —if the check of the supplied certificate failed.
See also	addPcaCertificate

Add CA Certificate Parser

Signature	addCaCertificateParser(caCertificateParser: CaCertificateParser) → Self
Since	2.1

Description	Registers a CA certificate parser, used when the CA certificate is not already available. The parser provides the means to build a CA certificate from the raw data read from the card.
Parameters	<code>caCertificateParser</code> (<u>CaCertificateParser</u>)—the CA certificate parser to register.
Returns	The current instance (<code>Self</code>).
Pre-conditions	Argument —every parameter is non- <code>null</code> . State —no parser is registered for the same certificate type.
Errors	None.

Add Card Certificate Parser

Signature	<pre>addCardCertificateParser(cardCertificateParser: CardCertificateParser) → Self</pre>
Since	2.1
Description	Registers a card certificate parser. The parser provides the means to build a card certificate from the raw data read from the card. Only one parser MAY be registered per certificate type.
Parameters	<code>cardCertificateParser</code> (<u>CardCertificateParser</u>)—the card certificate parser to register.
Returns	The current instance (<code>Self</code>).
Pre-conditions	Argument —every parameter is non- <code>null</code> . State —no parser is registered for the same certificate type.
Errors	None.

Add PCA Certificate

Signature	<pre>addPcaCertificate(pcaCertificate: PcaCertificate) → Self</pre>
Since	2.1
Description	Registers a self-signed PCA certificate. Various checks are performed to ensure the integrity and validity of the supplied PCA certificate: verification of the certificate's signature to ensure it is self-signed, check of the validity period to ensure the certificate is neither expired nor prematurely valid, confirmation of the authenticity of the issuer and subject details, and compliance with any constraints or extensions required for PCA certificates.
Parameters	<code>pcaCertificate</code> (<u>PcaCertificate</u>)—the self-signed PCA certificate to register.
Returns	The current instance (<code>Self</code>).
Pre-conditions	Argument —every parameter is non- <code>null</code> . Argument —the certificate is valid. State —the contained public key is not already registered.
Errors	<u>InvalidCertificate</u> —if the check of the supplied certificate failed.

Assign Close Secure Session Max Duration By CSN

Signature	<pre>assignCloseSecureSessionMaxDurationByCsn(maxDuration: Long, csnMin: Long) → Self</pre>
Since	3.0

Description	Sets the maximum duration (in milliseconds) of the Close Secure Session command exchange of a PKI secure session for the cards whose CSN falls within the range starting at csnMin . See Command exchange duration bounds .
Parameters	maxDuration —the maximum duration of the Close Secure Session command exchange, in milliseconds, or Long.MAX_VALUE to defer to the FCI-based settings for this range. csnMin —the lowest card serial number (CSN) of the range, compared as an unsigned 64-bit value.
Returns	The current instance (Self).
Pre-conditions	Argument —every parameter is non- null . Argument — maxDuration is strictly positive.
Errors	None.

Assign Close Secure Session Max Duration By FCI

Signature	<pre>assignCloseSecureSessionMaxDurationByFci(maxDuration: Long, fciRegex: String) → Self</pre>
Since	3.0
Description	Sets the maximum duration (in milliseconds) of the Close Secure Session command exchange of a PKI secure session for the cards whose FCI matches fciRegex . The FCI-based settings are evaluated in declaration order and only when no CSN-based setting applies. When fciRegex filters on the startup information data, a prepareGetData(FCI_FOR_CURRENT_DF) MUST be scheduled inside the secure session to guarantee the integrity of the FCI obtained during the selection. See Command exchange duration bounds .
Parameters	maxDuration —the maximum duration of the Close Secure Session command exchange, in milliseconds, or Long.MAX_VALUE for no bound. fciRegex —the regular expression matched against the whole FCI, represented as an uppercase hexadecimal string.
Returns	The current instance (Self).
Pre-conditions	Argument —every parameter is non- null . Argument — maxDuration is strictly positive. Argument — fciRegex is a valid regular expression within the portable subset defined by Command exchange duration bounds .
Errors	None.

Assign Open Secure Session Max Duration By CSN

Signature	<pre>assignOpenSecureSessionMaxDurationByCsn(maxDuration: Long, csnMin: Long) → Self</pre>
Since	3.0
Description	Sets the maximum duration (in milliseconds) of the Open Secure Session command exchange of a PKI secure session for the cards whose CSN falls within the range starting at csnMin . See Command exchange duration bounds .
Parameters	maxDuration —the maximum duration of the Open Secure Session command exchange, in milliseconds, or Long.MAX_VALUE to defer to the FCI-based settings for this range. csnMin —the lowest card serial number (CSN) of the range, compared as an unsigned 64-bit value.
Returns	The current instance (Self).
Pre-conditions	Argument —every parameter is non- null . Argument — maxDuration is strictly positive.
Errors	None.

Assign Open Secure Session Max Duration By FCI

Signature	<code>assignOpenSecureSessionMaxDurationByFci(maxDuration: Long, fciRegex: String) → Self</code>
Since	3.0
Description	Sets the maximum duration (in milliseconds) of the Open Secure Session command exchange of a PKI secure session for the cards whose FCI matches fciRegex . The FCI-based settings are evaluated in declaration order and only when no CSN-based setting applies. When fciRegex filters on the startup information data, a prepareGetData(FCI_FOR_CURRENT_DF) MUST be scheduled inside the secure session to guarantee the integrity of the FCI obtained during the selection. See Command exchange duration bounds .
Parameters	maxDuration —the maximum duration of the Open Secure Session command exchange, in milliseconds, or Long.MAX_VALUE for no bound. fciRegex —the regular expression matched against the whole FCI, represented as an uppercase hexadecimal string.
Returns	The current instance (Self).
Pre-conditions	Argument —every parameter is non- null . Argument — maxDuration is strictly positive. Argument — fciRegex is a valid regular expression within the portable subset defined by Command exchange duration bounds .
Errors	None.

5.3.2. Calypso Card

Name	CalypsoCard
Kind	Interface
Namespace	calypso.card.card
Extends	IsoSmartCard (CNA-TR-API)
Since	1.0
Purpose	Dynamic view of the card's content, updated from selection to the end of the transaction.

An instance of **CalypsoCard** is obtained by casting the **IsoSmartCard** object produced by the selection process defined in [CNA-TR-API](#).

A **CalypsoCard** carries: application identification (revision, class, DF name, serial number, ATR, issuer), the indication of optional features (Stored Value, PIN, Rev 3.2 mode, ratification management), the management information of the modification buffer, the invalidation status and the files / counters / SV data read or modified during the transaction.

The **CalypsoCard** instance bound to a transaction is a **dynamic view** of the card image, updated after every successful command. Failed write commands do not update the in-memory image.

Get Application Serial Number

Signature	<code>getApplicationSerialNumber() → ByteArray</code>
Since	1.0
Description	Returns the Application Serial Number, an 8-byte value uniquely identifying the card application.
Returns	A non-empty ByteArray .
Pre-conditions	None.

Errors	None.
--------	-------

Get Application Subtype

Signature	getApplicationSubtype() → Byte
Since	1.0
Description	Returns the application subtype byte, which references the card's file structure.
Returns	A Byte value.
Pre-conditions	None.
Errors	None.

Get Application Type

Signature	getApplicationType() → Byte
Since	1.0
Description	Returns the application type byte, which encodes the product type together with its options.
Returns	A Byte value.
Pre-conditions	None.
Errors	None.

Get CA Certificate

Signature	getCaCertificate() → ByteArray
Since	2.1
Description	CA certificate; empty if not available.
Returns	A ByteArray ; empty if not available.
Pre-conditions	None.
Errors	None.
See also	CalypsoCardSelectionExtension.prepareGetData TransactionManager.prepareGetData SecurePkiModeTransactionManager.prepareOpenSecureSession

Get Card Certificate

Signature	getCardCertificate() → ByteArray
Since	2.1
Description	Card certificate; empty if not available.
Returns	A ByteArray ; empty if not available.
Pre-conditions	None.
Errors	None.
See also	CalypsoCardSelectionExtension.prepareGetData TransactionManager.prepareGetData SecurePkiModeTransactionManager.prepareOpenSecureSession

Get Card Public Key

Signature	<code>getCardPublicKey() → ByteArray</code>
Since	2.1
Description	Card public key; empty if not available.
Returns	A <code>ByteArray</code> ; empty if not available.
Pre-conditions	None.
Errors	None.
See also	<code>CalypsoCardSelectionExtension.prepareGetData</code> <code>TransactionManager.prepareGetData</code> <code>SecurePkiModeTransactionManager.prepareOpenSecureSession</code>

Get Counter Values By LID

Signature	<code>getCounterValuesByLid(lid: Short) → SortedMap<Int, Int>?</code>
Since	3.0
Description	Values of the counters carried by the EF whose LID matches, indexed by counter number. Each value is decoded from the 3-byte slice at offset $(n - 1) * 3$ of record #1, for both COUNTERS and SIMULATED_COUNTERS files; a trailing slice shorter than 3 bytes yields no entry.
Parameters	lid —the LID of the EF whose counter values are requested.
Returns	A <code>SortedMap<Int, Int></code> , empty if record #1 of that EF has not been read yet. <code>null</code> if no EF with this LID is known, or if its type carries no counters.
Pre-conditions	Argument —every parameter is non- <code>null</code> .
Errors	None.

Get Counter Values By SFI

Signature	<code>getCounterValuesBySfi(sfi: Byte) → SortedMap<Int, Int>?</code>
Since	3.0
Description	Values of the counters carried by the EF whose SFI matches, indexed by counter number. Each value is decoded from the 3-byte slice at offset $(n - 1) * 3$ of record #1, for both COUNTERS and SIMULATED_COUNTERS files; a trailing slice shorter than 3 bytes yields no entry.
Parameters	sfi —the SFI of the EF whose counter values are requested.
Returns	A <code>SortedMap<Int, Int></code> , empty if record #1 of that EF has not been read yet. <code>null</code> if no EF with this SFI is known, or if its type carries no counters.
Pre-conditions	Argument —every parameter is non- <code>null</code> .
Errors	None.

Get DF Name

Signature	<code>getDfName() → ByteArray</code>
Since	1.0
Description	DF name (5 to 16 bytes), as per ISO/IEC 7816-4 . It also corresponds to the complete representation of the target covered by the AID value supplied in the selection command: the AID selects the application by specifying all or part of the targeted DF name (5 bytes minimum).
Returns	A non-empty <code>ByteArray</code> .
Pre-conditions	None.

Errors	None.
--------	-------

Get Directory Header

Signature	getDirectoryHeader() → DirectoryHeader?
Since	1.0
Description	Metadata of the current DF; null if not set.
Returns	A <u>DirectoryHeader</u> , or null if not set.
Pre-conditions	None.
Errors	None.
See also	<u>CalypsoCardSelectionExtension.prepareSelectFileByLid</u> <u>CalypsoCardSelectionExtension.prepareSelectFileByControl</u> <u>TransactionManager.prepareSelectFileByLid</u> <u>TransactionManager.prepareSelectFileByControl</u>

Get File By LID

Signature	getFileByLid(lid: Short) → ElementaryFile?
Since	1.0
Description	EF whose LID matches; null if not found. Note that when a secure session is running, the returned object carries all in-session modifications, which are rolled back if the secure session fails.
Parameters	lid —the LID to search.
Returns	An <u>ElementaryFile</u> , or null if not found.
Pre-conditions	Argument —every parameter is non- null .
Errors	None.

Get File By SFI

Signature	getFileBySfi(sfi: Byte) → ElementaryFile?
Since	1.0
Description	EF whose SFI matches; null if not found, or if sfi == 0 . Note that when a secure session is running, the returned object carries all in-session modifications, which are rolled back if the secure session fails.
Parameters	sfi —the SFI to search.
Returns	An <u>ElementaryFile</u> , or null if not found, or if sfi == 0 .
Pre-conditions	Argument —every parameter is non- null .
Errors	None.

Get Files

Signature	getFiles() → Set<ElementaryFile>
Since	1.1
Description	All known EFs of the current DF. During a secure session, this set reflects every in-session modification (which is rolled back on session failure).

Returns	A <code>Set<ElementaryFile></code> ; empty if no EF is known.
Pre-conditions	None.
Errors	None.

Get Matching Record Numbers

Signature	<code>getMatchingRecordNumbers(commandId: Int) → List<Int>?</code>
Since	3.0
Description	Numbers of the records that matched the search command prepared with this identifier. When several search commands share the same identifier, the numbers returned are those of the most recently processed one.
Parameters	<code>commandId</code> —the identifier attached to the search command when it was prepared.
Returns	A <code>List<Int></code> , empty if the search matched no record. <code>null</code> if no search command carrying this identifier has been processed.
Pre-conditions	Argument —every parameter is non- <code>null</code> .
Errors	None.
See also	<code>TransactionManager.prepareSearchRecords</code>

Get PIN Attempt Remaining

Signature	<code>getPinAttemptRemaining() → Int</code>
Since	1.0
Description	Returns the number of PIN presentation attempts still remaining before the PIN becomes blocked.
Returns	An <code>Int</code> value.
Pre-conditions	State —the PIN has been checked.
Errors	None.
See also	<code>TransactionManager.prepareCheckPinStatus</code> <code>TransactionManager.prepareVerifyPin</code>

Get Platform

Signature	<code>getPlatform() → Byte</code>
Since	1.0
Description	Returns the platform identification byte, which references the card's chip.
Returns	A <code>Byte</code> value.
Pre-conditions	None.
Errors	None.

Get Product Type

Signature	<code>getProductType() → CalypsoCardProductType</code>
Since	1.0
Description	Returns the card product type (<code>PRIME_REVISION_1</code> / <code>PRIME_REVISION_2</code> / <code>PRIME_REVISION_3</code> / <code>LIGHT</code> / <code>BASIC</code> / <code>UNKNOWN</code>).
Returns	A <code>CalypsoCardProductType</code> .
Pre-conditions	None.

Errors	None.
---------------	-------

Get Session Modification

Signature	<code>getSessionModification()</code> → Byte
Since	1.0
Description	Returns the session modification byte, which—depending on the card—caps either the number of bytes modifiable or the number of write commands allowed within a secure session.
Returns	A Byte value.
Pre-conditions	None.
Errors	None.

Get Software Issuer

Signature	<code>getSoftwareIssuer()</code> → Byte
Since	1.0
Description	Returns the software issuer byte, identifying the issuer of the card's embedded software.
Returns	A Byte value.
Pre-conditions	None.
Errors	None.

Get Software Revision

Signature	<code>getSoftwareRevision()</code> → Byte
Since	1.0
Description	Returns the software revision byte of the card's embedded software.
Returns	A Byte value.
Pre-conditions	None.
Errors	None.

Get Software Version

Signature	<code>getSoftwareVersion()</code> → Byte
Since	1.0
Description	Returns the software version byte of the card's embedded software.
Returns	A Byte value.
Pre-conditions	None.
Errors	None.

Get Startup Info Raw Data

Signature	<code>getStartupInfoRawData()</code> → ByteArray
Since	1.0
Description	Returns the raw Calypso startup information block—the sequence of bytes from which the individual startup fields (platform, application type and subtype, software issuer, version and revision, etc.) are derived.

Returns	A non-empty <code>ByteArray</code> .
Pre-conditions	None.
Errors	None.

Get SV Balance

Signature	<code>getSvBalance() → Int</code>
Since	1.0
Description	Returns the current Stored Value (SV) balance held by the card, expressed in its monetary unit.
Returns	An <code>Int</code> value.
Pre-conditions	State —an SV Get command has been executed.
Errors	None.
See also	<code>SecureSymmetricCryptoTransactionManager.prepareSvGet</code> <code>SecureSymmetricCryptoTransactionManager.prepareSvDebit</code> <code>SecureSymmetricCryptoTransactionManager.prepareSvReload</code> <code>SecureSymmetricCryptoTransactionManager.prepareSvUndebit</code>

Get SV Debit Log All Records

Signature	<code>getSvDebitLogAllRecords() → List<SvDebitLogRecord></code>
Since	1.0
Description	All SV debit log records read from the card. Each call returns snapshots decoded from the values returned by <code>getSvDebitLogAllRecordsRawData</code> at the time of the call, in the same order.
Returns	A <code>List<SvDebitLogRecord></code> ; empty if no debit log record has been read.
Pre-conditions	None.
Errors	None.
See also	<code>getSvDebitLogAllRecordsRawData</code> <code>SecureSymmetricCryptoTransactionManager.prepareSvGet</code> <code>SecureSymmetricCryptoTransactionManager.prepareSvDebit</code> <code>SecureSymmetricCryptoTransactionManager.prepareSvReload</code> <code>SecureSymmetricCryptoTransactionManager.prepareSvUndebit</code>

Get SV Debit Log All Records Raw Data

Signature	<code>getSvDebitLogAllRecordsRawData() → List<ByteArray></code>
Since	3.0
Description	Returns the raw bytes of all SV debit log records read from the card. The list returned by <code>getSvDebitLogAllRecords</code> at the same time has the same size and order, each <code>SvDebitLogRecord</code> being the decoding of the raw record at the same position.
Returns	A <code>List<ByteArray></code> of non-empty raw records; empty if no debit log record has been read.
Pre-conditions	None.
Errors	None.
See also	<code>getSvDebitLogAllRecords</code>

Get SV Debit Log Last Record

Signature	<code>getSvDebitLogLastRecord() → SvDebitLogRecord?</code>
-----------	--

Since	1.0
Description	Last SV debit log record; <code>null</code> if not available. Each call returns a snapshot decoded from the value returned by <code>getSvDebitLogLastRecordRawData</code> at the time of the call.
Returns	A <u>SvDebitLogRecord</u> , or <code>null</code> if not available.
Pre-conditions	None.
Errors	None.
See also	<u>getSvDebitLogLastRecordRawData</u> <u>SecureSymmetricCryptoTransactionManager.prepareSvGet</u> <u>SecureSymmetricCryptoTransactionManager.prepareSvDebit</u> <u>SecureSymmetricCryptoTransactionManager.prepareSvReload</u> <u>SecureSymmetricCryptoTransactionManager.prepareSvUndebit</u>

Get SV Debit Log Last Record Raw Data

Signature	<code>getSvDebitLogLastRecordRawData() → ByteArray?</code>
Since	3.0
Description	Returns the raw bytes of the last SV debit log record; <code>null</code> if not available. The <u>SvDebitLogRecord</u> returned by <code>getSvDebitLogLastRecord</code> at the same time is the decoding of this value; both are <code>null</code> together.
Returns	The non-empty raw bytes of the record, or <code>null</code> if not available.
Pre-conditions	None.
Errors	None.
See also	<u>getSvDebitLogLastRecord</u>

Get SV Last T Num

Signature	<code>getSvLastTNum() → Int</code>
Since	1.0
Description	Returns the number of the last Stored Value (SV) transaction recorded on the card.
Returns	An <code>Int</code> value.
Pre-conditions	State —an SV Get command has been executed.
Errors	None.
See also	<u>SecureSymmetricCryptoTransactionManager.prepareSvGet</u> <u>SecureSymmetricCryptoTransactionManager.prepareSvDebit</u> <u>SecureSymmetricCryptoTransactionManager.prepareSvReload</u> <u>SecureSymmetricCryptoTransactionManager.prepareSvUndebit</u>

Get SV Load Log Record

Signature	<code>getSvLoadLogRecord() → SvLoadLogRecord?</code>
Since	1.0
Description	Last SV load log record; <code>null</code> if not available. Each call returns a snapshot decoded from the value returned by <code>getSvLoadLogRecordRawData</code> at the time of the call.
Returns	A <u>SvLoadLogRecord</u> , or <code>null</code> if not available.
Pre-conditions	None.
Errors	None.

See also	getSvLoadLogRecordRawData SecureSymmetricCryptoTransactionManager.prepareSvGet SecureSymmetricCryptoTransactionManager.prepareSvDebit SecureSymmetricCryptoTransactionManager.prepareSvReload SecureSymmetricCryptoTransactionManager.prepareSvUndebit
----------	--

Get SV Load Log Record Raw Data

Signature	getSvLoadLogRecordRawData() → ByteArray?
Since	3.0
Description	Returns the raw bytes of the last SV load log record; <code>null</code> if not available. The SvLoadLogRecord returned by getSvLoadLogRecord at the same time is the decoding of this value; both are <code>null</code> together.
Returns	The non-empty raw bytes of the record, or <code>null</code> if not available.
Pre-conditions	None.
Errors	None.
See also	getSvLoadLogRecord

Get Traceability Information

Signature	getTraceabilityInformation() → ByteArray
Since	1.1
Description	Traceability information (software issuer ID and discretionary data); empty if not available.
Returns	A <code>ByteArray</code> ; empty if not available.
Pre-conditions	None.
Errors	None.
See also	CalypsoCardSelectionExtension.prepareGetData TransactionManager.prepareGetData

Get Transaction Counter

Signature	getTransactionCounter() → Int
Since	1.2
Description	Transaction counter from the output of the last successful Open Secure Session . Note: commands such as Change Key , Change/Verify PIN , SV Debit/Undebit/Reload decrement the card counter but do not update this returned value.
Returns	An <code>Int</code> value.
Pre-conditions	State —a secure session is open.
Errors	None.
See also	CalypsoCardSelectionExtension.preparePreOpenSecureSession SecureSymmetricCryptoTransactionManager.prepareOpenSecureSession

Is DF Invalidated

Signature	isDfInvalidated() → Boolean
Since	1.0

Description	Tells whether the current DF is invalidated. The invalidation status is determined either from the response to the Select Application command or from the response to a Select File (DF) command. For a PRIME_REVISION_3 card, a 6283h status word is returned in response to the Select Application command when the corresponding DF is invalidated. For older Calypso cards, it may be necessary to execute a Select File command in order to determine the invalidation status.
Returns	true if the current DF has been invalidated, false otherwise.
Pre-conditions	None.
Errors	None.

Is DF Ratified

Signature	<code>isDfRatified() → Boolean</code>
Since	1.0
Description	Tells whether the last session has been ratified.
Returns	A Boolean value.
Pre-conditions	State —a secure session is open.
Errors	None.
See also	<code>CalypsoCardSelectionExtension.preparePreOpenSecureSession</code> <code>SecureSymmetricCryptoTransactionManager.prepareOpenSecureSession</code>

Is Extended Mode Supported

Signature	<code>isExtendedModeSupported() → Boolean</code>
Since	1.0
Description	Indicates whether the Extended Mode is supported. This indication is initially interpreted from the Application Type byte, but MAY be updated once the secure session is opened: depending on the type of key used, the extended mode functionalities may not be available (for example with a non-AES key).
Returns	A Boolean value.
Pre-conditions	None.
Errors	None.

Is HCE

Signature	<code>isHce() → Boolean</code>
Since	1.0
Description	Indicates whether the card is a Calypso HCE.
Returns	A Boolean value.
Pre-conditions	None.
Errors	None.

Is PIN Blocked

Signature	<code>isPinBlocked() → Boolean</code>
Since	1.0
Description	Indicates whether the PIN is blocked.

Returns	A Boolean value.
Pre-conditions	State —the PIN has been checked.
Errors	None.
See also	<u>TransactionManager.prepareCheckPinStatus</u> <u>TransactionManager.prepareVerifyPin</u>

Is PIN Feature Available

Signature	<code>isPinFeatureAvailable()</code> → Boolean
Since	1.0
Description	Indicates whether the Calypso PIN feature is available. This indication is interpreted from the Application Type byte.
Returns	true if the card has the PIN feature, false otherwise.
Pre-conditions	None.
Errors	None.

Is PKI Mode Supported

Signature	<code>isPkiModeSupported()</code> → Boolean
Since	1.0
Description	Indicates whether Public Key Authentication is supported. This indication is interpreted from the Application Type byte.
Returns	A Boolean value.
Pre-conditions	None.
Errors	None.

Is Ratification On Deselect Supported

Signature	<code>isRatificationOnDeselectSupported()</code> → Boolean
Since	1.0
Description	Indicates whether ratification happens on deselect (ratification command not required). This indication is interpreted from the Application Type byte.
Returns	A Boolean value.
Pre-conditions	None.
Errors	None.

Is SV Feature Available

Signature	<code>isSvFeatureAvailable()</code> → Boolean
Since	1.0
Description	Indicates whether the SV feature is available. This indication is interpreted from the Application Type byte.
Returns	true if the card has the Stored Value feature, false otherwise.
Pre-conditions	None.
Errors	None.

5.3.3. Calypso Card API Factory

Name	CalypsoCardApiFactory
Kind	Interface
Namespace	calypso.card
Since	2.0
Purpose	Factory used to obtain instances of every public type provided by the API.

Create Asymmetric Crypto Security Settings

Signature	<code>createAsymmetricCryptoSecuritySettings(cryptoCardTransactionManagerFactory: AsymmetricCryptoCardTransactionManagerFactory) → AsymmetricCryptoSecuritySettings</code>
Since	2.1
Description	Creates the AsymmetricCryptoSecuritySettings that carries the asymmetric-key (PKI) cryptographic configuration required by createSecurePkiModeTransactionManager . The supplied factory provides the cryptographic module that performs those computations.
Parameters	<code>cryptoCardTransactionManagerFactory (</code> AsymmetricCryptoCardTransactionManagerFactory) — the factory of the crypto card transaction manager to be used.
Returns	An AsymmetricCryptoSecuritySettings .
Pre-conditions	Argument — every parameter is non-null. Argument — the factory is valid.
Errors	None.

Create Calypso Card Selection Extension

Signature	<code>createCalypsoCardSelectionExtension() → CalypsoCardSelectionExtension</code>
Since	2.0
Description	Creates a CalypsoCardSelectionExtension that enriches a CNA-TR-API selection scenario with Calypso-specific commands and the optional pre-opening of a secure session.
Returns	A CalypsoCardSelectionExtension .
Pre-conditions	None.
Errors	None.

Create Free Transaction Manager

Signature	<code>createFreeTransactionManager(cardReader: CardReader, card: CalypsoCard) → FreeTransactionManager</code>
Since	2.0
Description	Creates a FreeTransactionManager for exchanges with <code>card</code> (reached through <code>cardReader</code>) that require no cryptographic computation — that is, no secure session and no security settings. For secured transactions, use one of the <code>createSecure*ModeTransactionManager</code> factories instead.
Parameters	<code>cardReader</code> (<code>CardReader</code> (CNA-TR-API)) — the reader through which the card is reached. <code>card</code> (CalypsoCard) — the selected card on which to operate the transaction.
Returns	A FreeTransactionManager .

Pre-conditions	Argument —every parameter is non-null.
Errors	None.

Create Secure Extended Mode Transaction Manager

Signature	<code>createSecureExtendedModeTransactionManager(cardReader: CardReader, card: CalypsoCard, securitySettings: SymmetricCryptoSecuritySettings) → SecureExtendedModeTransactionManager</code>
Since	2.0
Description	Creates a SecureExtendedModeTransactionManager that runs a symmetric-key secure session in extended mode , adding the operations available only on Calypso Prime Extended products (e.g. session encryption and early mutual authentication). For other products, use createSecureRegularModeTransactionManager . Cryptographic operations rely on the supplied <code>securitySettings</code> .
Parameters	<code>cardReader</code> (<code>CardReader</code> (CNA-TR-API))—the reader through which the card is reached. <code>card</code> (CalypsoCard)—the selected card on which to operate the transaction. <code>securitySettings</code> (SymmetricCryptoSecuritySettings)—the security settings to be used.
Returns	A SecureExtendedModeTransactionManager .
Pre-conditions	Argument —every parameter is non-null.
Errors	None.

Create Secure PKI Mode Transaction Manager

Signature	<code>createSecurePkiModeTransactionManager(cardReader: CardReader, card: CalypsoCard, securitySettings: AsymmetricCryptoSecuritySettings) → SecurePkiModeTransactionManager</code>
Since	2.1
Description	Creates a SecurePkiModeTransactionManager that runs a secure session in PKI mode , using asymmetric-key (PKI) cryptography. PKI mode is available only if the card declares support for it (<code>CalypsoCard.isPkiModeSupported() == true</code>). For symmetric-key sessions, use createSecureRegularModeTransactionManager or createSecureExtendedModeTransactionManager instead. Cryptographic operations rely on the supplied <code>securitySettings</code> .
Parameters	<code>cardReader</code> (<code>CardReader</code> (CNA-TR-API))—the reader through which the card is reached. <code>card</code> (CalypsoCard)—the selected card on which to operate the transaction. <code>securitySettings</code> (AsymmetricCryptoSecuritySettings)—the security settings to be used.
Returns	A SecurePkiModeTransactionManager .
Pre-conditions	Argument —every parameter is non-null. State —the card supports PKI mode (<code>isPkiModeSupported() == true</code>).
Errors	None.

Create Secure Regular Mode Transaction Manager

Signature	<code>createSecureRegularModeTransactionManager(cardReader: CardReader, card: CalypsoCard, securitySettings: SymmetricCryptoSecuritySettings) → SecureRegularModeTransactionManager</code>
-----------	--

Since	2.0
Description	Creates a SecureRegularModeTransactionManager that runs a symmetric-key secure session in regular mode , the baseline mode compatible with every Calypso product. To access Calypso Prime Extended features use createSecureExtendedModeTransactionManager , or createSecurePkiModeTransactionManager for PKI cards. Cryptographic operations rely on the supplied securitySettings .
Parameters	cardReader (CardReader (CNA-TR-API)) —the reader through which the card is reached. card (CalypsoCard) —the selected card on which to operate the transaction. securitySettings (SymmetricCryptoSecuritySettings) —the security settings to be used.
Returns	A SecureRegularModeTransactionManager .
Pre-conditions	Argument —every parameter is non-null.
Errors	None.

Create Symmetric Crypto Security Settings

Signature	<code>createSymmetricCryptoSecuritySettings(cryptoCardTransactionManagerFactory: SymmetricCryptoCardTransactionManagerFactory) → SymmetricCryptoSecuritySettings</code>
Since	2.0
Description	Creates the SymmetricCryptoSecuritySettings that carries the symmetric-key (e.g. SAM-backed) cryptographic configuration required by the regular- and extended-mode secure transaction managers. The supplied factory provides the cryptographic module that performs those computations.
Parameters	cryptoCardTransactionManagerFactory (SymmetricCryptoCardTransactionManagerFactory) —the factory of the crypto card transaction manager to be used.
Returns	A SymmetricCryptoSecuritySettings .
Pre-conditions	Argument —every parameter is non-null. Argument —the factory is valid.
Errors	None.

5.3.4. Calypso Card Selection Extension

Name	CalypsoCardSelectionExtension
Kind	Interface
Namespace	calypso.card.card
Extends	CardSelectionExtension (CNA-TR-API)
Since	2.0
Purpose	Enriches the CNA-TR-API selection scenario with Calypso-specific commands and pre-opening of a secure session. An instance is obtained via CalypsoCardApiFactory.createCalypsoCardSelectionExtension .

By default the selection rejects PRIME revision 3 cards that have been **invalidated**. The application MUST call [acceptInvalidatedCard](#) to stop ignoring them. For earlier revisions, the application MAY have to handle invalidation itself (typically via a **Select File** on the DF).

For all **prepare*** operations, unless otherwise specified, the following parameter ranges apply:

Parameter	Range
SFI	[0..30] (0 indicates the current EF)

Parameter	Range
Record number	[1..250]
Counter number	[1..83]
Counter value	[0..16777215]
Offset	[0..249], or [0..32767] for binary files
Input data length	[1..250], or [1..32767] for binary files

Accept Invalidated Card

Signature	acceptInvalidatedCard() → Self
Since	1.0
Description	Requests to accept invalidated cards during the selection stage. Works only with cards that indicate their invalidation status at the time of selection (e.g., all PRIME Revision 3+ cards and certain PRIME Revision 2 cards).
Returns	The current instance (Self).
Pre-conditions	None.
Errors	None.

Prepare Get Data

Signature	prepareGetData(tag: GetDataTag) → Self
Since	1.0
Description	Adds a Get Data command for the supplied tag. This is the way to obtain FCI information when it is not supplied directly by Select Application (e.g. the OMAPI case). Caution: the resulting APDU command is compliant with PRIME revision 3 cards. It may therefore be rejected by some earlier revision cards.
Parameters	tag (<u>GetDataTag</u>) — the data object tag to read.
Returns	The current instance (Self).
Pre-conditions	Argument — every parameter is non-null.
Errors	None.

Prepare Pre Open Secure Session

Signature	preparePreOpenSecureSession(writeAccessLevel: WriteAccessLevel) → Self
Since	1.7

Description	Adds a specific Open Secure Session command attempting a pre-opening . Enables a future single-exchange session execution by anticipating the APDU responses.
	The objective of the pre-opening is to allow the grouping of all the commands of a secure session. It is only relevant for a distributed system where the ticketing processing is done remotely, so that a complete secure session can be carried out in a single exchange between the server and the terminal.
	To achieve that single exchange, all the data that will have to be read in session MUST first be read locally, outside the session—otherwise additional exchanges take place. The remote ticketing processing then prepares all the commands of the session, from opening to closing, before executing it: <code>prepareOpenSecureSession(...)</code> , then the other <code>prepare*</code> calls, then <code>prepareCloseSecureSession()</code> , and finally a single <code>processCommands()</code> .
	The mechanism is ineffective if: • the card or crypto module does not support extended mode; • the session needs intermediate exchanges (PIN, SV, encryption, early mutual authentication, unread session data); • the session opens with a different access level; • an intermediate <code>processCommands()</code> is called; • asymmetric cryptography is used.
Parameters	<code>writeAccessLevel</code> (<u><code>WriteAccessLevel</code></u>)—the write access level of the session to pre-open.
Returns	The current instance (<code>Self</code>).
Pre-conditions	Argument —every parameter is non- <code>null</code> . State —no pre-open is already prepared.
Errors	None.

Prepare Read Binary

Signature	<code>prepareReadBinary(sfi: Byte, offset: Int, nbBytesToRead: Int) → Self</code>
Since	1.7
Description	Adds one or more Read Binary commands to read all or part of the supplied binary EF. Once processed, the result is available in the <u><code>CalypsoCard</code></u> if the requested file exists in the file structure of the card and if the offset and the number of bytes to read are valid (best-effort mode). Caution: the resulting APDU command is compliant with PRIME revision 3 cards. It may therefore be rejected by some earlier revision cards.
Parameters	<code>sfi</code> —the SFI of the EF. <code>offset</code> —the offset (0 indicates the first byte). <code>nbBytesToRead</code> —the number of bytes to read.
Returns	The current instance (<code>Self</code>).
Pre-conditions	Argument —every parameter is non- <code>null</code> . Argument —every supplied argument is within range.
Errors	None.

Prepare Read Counter

Signature	<code>prepareReadCounter(sfi: Byte, nbCountersToRead: Int) → Self</code>
Since	1.7
Description	Adds a Read Records command to read a part of a record of the supplied EF, which SHOULD be a counter file. The record is read up to the supplied counter number, so all preceding counters are also read. Once processed, the result is available in the CalypsoCard if the requested file and counter number exist in the file structure of the card (best-effort mode). Caution: the resulting APDU command is compliant with PRIME revision 3 cards. It may therefore be rejected by some earlier revision cards.
Parameters	sfi—the SFI of the EF. nbCountersToRead—the number of counters to read.
Returns	The current instance (Self).
Pre-conditions	Argument—every parameter is non-null. Argument—every supplied argument is within range.
Errors	None.

Prepare Read Record

Signature	<code>prepareReadRecord(sfi: Byte, recordNumber: Int) → Self</code>
Since	1.1
Description	Adds a Read Records command for a single record of a linear or cyclic EF. Once processed, the result is available in the CalypsoCard if the requested file and record exist in the file structure of the card (best-effort mode: the command does not fail if the file or the record is absent). Caution: the resulting APDU command is compliant with PRIME revision 3 cards. It may therefore be rejected by some earlier revision cards.
Parameters	sfi—the SFI of the EF to read. recordNumber—the record number to read.
Returns	The current instance (Self).
Pre-conditions	Argument—every parameter is non-null. Argument—every supplied argument is within range.
Errors	None.

Prepare Select File By Control

Signature	<code>prepareSelectFileByControl(selectFileControl: SelectFileControl) → Self</code>
Since	1.0
Description	Adds a Select File command using a navigation control (FIRST, NEXT or CURRENT). Caution: the resulting APDU command is compliant with PRIME revision 3 cards. It may therefore be rejected by some earlier revision cards.
Parameters	selectFileControl (SelectFileControl)—the navigation control to apply.
Returns	The current instance (Self).
Pre-conditions	Argument —every parameter is non- null .

Errors	None.
--------	-------

Prepare Select File By LID

Signature	prepareSelectFileByLid(lid: Short) → Self
Since	1.0
Description	Adds a Select File command targeting an EF by its LID. Caution: PRIME 3 compatible only. The command fails if the selected file is not an EF.
Parameters	lid —the LID of the EF to select.
Returns	The current instance (Self).
Pre-conditions	Argument —every parameter is non- null .
Errors	None.

5.3.5. Free Transaction Manager

Name	FreeTransactionManager
Kind	Interface
Namespace	calypso.card.transaction
Extends	<u>TransactionManager</u>
Since	2.0
Purpose	Transaction manager that does not require any cryptographic computation. An instance is obtained via <u>CalypsoCardApiFactory.createFreeTransactionManager</u> .

FreeTransactionManager does not add any operation.

5.3.6. Secure Extended Mode Transaction Manager

Name	SecureExtendedModeTransactionManager
Kind	Interface
Namespace	calypso.card.transaction
Extends	<u>SecureSymmetricCryptoTransactionManager</u>
Since	2.0
Purpose	Symmetric-key transaction manager exposing additional operations only available on Calypso Prime Extended products. An instance is obtained via <u>CalypsoCardApiFactory.createSecureExtendedModeTransactionManager</u> .

Prepare Activate Encryption

Signature	prepareActivateEncryption() → Self
Since	2.0

Description	Requests encryption for all following session commands. This ensures data confidentiality and prevents man-in-the-middle attacks. This command only makes sense in the context of a secure session. Encryption is resource intensive and increases transaction times: it is therefore RECOMMENDED to limit it to the commands that require it. Furthermore, when early mutual authentication is also required, it is RECOMMENDED for performance reasons to place the <u>prepareEarlyMutualAuthentication</u> and <u>prepareActivateEncryption</u> calls consecutively (in any order).
Returns	The current instance (Self).
Pre-conditions	Capability —the Manage Secure Session command is available for this context, that is, both the card and the cryptographic module support the extended mode.
Errors	None.
See also	<u>SecureExtendedModeTransactionManager.prepareDeactivateEncryption</u> <u>SecureExtendedModeTransactionManager.prepareEarlyMutualAuthentication</u>

Prepare Deactivate Encryption

Signature	<code>prepareDeactivateEncryption() → Self</code>
Since	2.0
Description	Requests to stop the encryption, which restores the exchanges with the card to their normal mode. This command only makes sense in the context of a secure session in which encryption of the commands has previously been requested. NOTE: <code>prepareCloseSecureSession()</code> automatically stops the encryption.
Returns	The current instance (Self).
Pre-conditions	Capability —the Manage Secure Session command is available for this context, that is, both the card and the cryptographic module support the extended mode.
Errors	None.
See also	<u>SecureExtendedModeTransactionManager.prepareActivateEncryption</u> <u>SecureExtendedModeTransactionManager.prepareEarlyMutualAuthentication</u> <u>SecureTransactionManager.prepareCloseSecureSession</u>

Prepare Early Mutual Authentication

Signature	<code>prepareEarlyMutualAuthentication() → Self</code>
Since	2.0
Description	Requests to mutually authenticate the card and the terminal before the secure session is closed. The use of this feature penalises the execution time of the secure session and SHOULD be used only when needed (e.g. before sending sensitive commands).
Returns	The current instance (Self).
Pre-conditions	Capability —the Manage Secure Session command is available for this context, that is, both the card and the cryptographic module support the extended mode.
Errors	None.
See also	<u>SecureExtendedModeTransactionManager.prepareActivateEncryption</u> <u>SecureExtendedModeTransactionManager.prepareDeactivateEncryption</u>

5.3.7. Secure PKI Mode Transaction Manager

Name	<code>SecurePkiModeTransactionManager</code>
Kind	Interface

Namespace	calypso.card.transaction
Extends	<u>SecureTransactionManager</u>
Since	2.1
Purpose	Asymmetric-key transaction manager, compatible with Calypso cards in PKI mode . An instance is obtained via <u>CalypsoCardApiFactory.createSecurePkiModeTransactionManager</u> .

Prepare Open Secure Session

Signature	prepareOpenSecureSession() → Self
Since	2.1
Description	Schedules an Open Secure Session command in PKI mode. If the next prepared command is a Read One Record or Read One Or More Counters , it will be merged with the session opening for optimisation.
Returns	The current instance (Self).
Pre-conditions	None.
Errors	None.

5.3.8. Secure Regular Mode Transaction Manager

Name	SecureRegularModeTransactionManager
Kind	Interface
Namespace	calypso.card.transaction
Extends	<u>SecureSymmetricCryptoTransactionManager</u>
Since	2.0
Purpose	Symmetric-key transaction manager compatible with every Calypso product. An instance is obtained via <u>CalypsoCardApiFactory.createSecureRegularModeTransactionManager</u> .

No additional operation declared.

5.3.9. Secure Symmetric Crypto Transaction Manager

Name	SecureSymmetricCryptoTransactionManager
Kind	Interface
Namespace	calypso.card.transaction
Extends	<u>SecureTransactionManager</u>
Since	2.0
Purpose	Common operations for every transaction manager backed by symmetric cryptography.

Prepare Change Key

Signature	<pre> prepareChangeKey(keyIndex: Int, newKif: Byte, newKvc: Byte, issuerKif: Byte, issuerKvc: Byte) → Self </pre>
-----------	---

Since	2.0
Description	Schedules a Change Key command. MUST be performed outside a secure session . All KIFs/KVCs MUST be available in the crypto module.
Parameters	keyIndex — the index of the key to be replaced (1 for the issuer key, 2 for the load key, 3 for the debit key). newKif — the KIF of the new key. newKvc — the KVC of the new key. issuerKif — the KIF of the current card's issuer key. issuerKvc — the KVC of the current card's issuer key.
Returns	The current instance (Self).
Pre-conditions	Argument — every parameter is non- null . Capability — the Change Key command is available for this card. Argument — the provided key index is within range. State — no secure session is open.
Errors	None.

Prepare Invalidate

Signature	<code>prepareInvalidate() → Self</code>
Since	2.0
Description	Schedules an Invalidate command, which marks the card application as invalidated, blocking further use until it is rehabilitated. This command is usually executed within a secure session with the DEBIT key, depending on the access rights granted to it in the file structure of the card. The resulting DF status is available in the CalypsoCard via isDfInvalidated .
Returns	The current instance (Self).
Pre-conditions	State — the card is not already invalidated.
Errors	SessionBufferOverflow — if the command would overflow the modifications buffer and the multiple-session mode is not allowed.

Prepare Open Secure Session

Signature	<code>prepareOpenSecureSession(writeAccessLevel: WriteAccessLevel) → Self</code>
Since	2.0
Description	Schedules an Open Secure Session command. The secure session is opened with the supplied WriteAccessLevel, depending on whether the transaction profile is personalisation, reload or debit. If the next prepared command is a Read One Record or Read One Or More Counters, it is merged with the session opening for optimisation, unless the pre-open mode is active or the read-merge optimisation has been disabled. This mechanism may in some cases be incompatible with the security constraints; it can then be disabled via SymmetricCryptoSecuritySettings.disableReadOnSessionOpening.
Parameters	writeAccessLevel (WriteAccessLevel) — the write access level to be used.
Returns	The current instance (Self).
Pre-conditions	Argument — every parameter is non- null . State — a SymmetricCryptoSecuritySettings is available, no secure session opening is already prepared, and no secure session is already open.
Errors	None.
See also	CalypsoCardSelectionExtension.preparePreOpenSecureSession

Prepare Rehabilitate

Signature	prepareRehabilitate() → Self
Since	2.0
Description	Schedules a Rehabilitate command, which clears the card application's invalidation status, making it usable again. This command is usually executed within a secure session with the PERSONALIZATION key, depending on the access rights granted to it in the file structure of the card. The resulting DF status is available in the CalypsoCard via isDfInvalidated .
Returns	The current instance (Self).
Pre-conditions	State —the card is invalidated.
Errors	SessionBufferOverflow —if the command would overflow the modifications buffer and the multiple-session mode is not allowed.

Prepare SV Debit

Signature	prepareSvDebit(amount: Int, date: ByteArray, time: ByteArray) → Self
Since	2.0
Description	Schedules an SV Debit command, which decreases the current SV balance by the supplied amount. Amount: 0..32767 . The date and time data fields are recorded in the SV debit log. The key used is the debit key. Once processed, the data is available in the CalypsoCard through its dedicated SV data management operations.
Parameters	amount —the amount to be subtracted (0..32767). date —a 2-byte free value. time —a 2-byte free value.
Returns	The current instance (Self).
Pre-conditions	Argument —every parameter is non- null . Argument — amount is in 0..32767 , and date and time are 2 bytes long. State —the new value is non-negative or negative balances are allowed, no other SV command has been prepared inside the same secure session, the SV command comes first in the list of prepared commands, it follows an SV Get command prepared with SvOperation.DEBIT_UNDEBIT .
Errors	SessionBufferOverflow —if the command would overflow the modifications buffer and the multiple-session mode is not allowed.

Prepare SV Get

Signature	prepareSvGet(svOperation: SvOperation) → Self
Since	2.0
Description	Schedules an SV Get command, which reads the Stored Value data (balance and logs) that MUST precede any SV debit, undebit or reload. Once processed, the data is available in the CalypsoCard through its dedicated SV data management operations.
Parameters	svOperation (SvOperation)—the nature of the intended operation: DEBIT_UNDEBIT for a debit or an undebit, RELOAD for a reload.
Returns	The current instance (Self).
Pre-conditions	Argument —every parameter is non- null . Capability —the SV feature is available for this card.
Errors	None.

Prepare SV Reload

Signature	<pre>prepareSvReload(amount: Int, date: ByteArray, time: ByteArray, free: ByteArray) → Self</pre>
Since	2.0
Description	Schedules an SV Reload command. Amount range: -8388608..8388607 . The date , time and free data fields are recorded in the SV load log. The key used is the reload key. Once processed, the data is available in the CalypsoCard through its dedicated SV data management operations.
Parameters	amount —the value to be reloaded, positive or negative integer in the range -8388608..8388607 . date —a 2-byte free value. time —a 2-byte free value. free —a 2-byte free value.
Returns	The current instance (Self).
Pre-conditions	Argument —every parameter is non- null . Argument — amount is in -8388608..8388607 , and date , time and free are 2 bytes long. State —no other SV command has been prepared inside the same secure session, the SV command comes first in the list of prepared commands, it follows an SV Get command prepared with SvOperation.RELOAD .
Errors	SessionBufferOverflow —if the command would overflow the modifications buffer and the multiple-session mode is not allowed.

Prepare SV Undebit

Signature	<pre>prepareSvUndebit(amount: Int, date: ByteArray, time: ByteArray) → Self</pre>
Since	3.0
Description	Schedules an SV Undebit command, which cancels, totally or partially, a previous debit by increasing the current SV balance by the supplied amount. Amount: 0..32768. The date and time data fields are recorded in the SV debit log. The key used is the debit key. Once processed, the data is available in the CalypsoCard through its dedicated SV data management operations.
Parameters	amount —the amount to be added back (0..32768). date —a 2-byte free value. time —a 2-byte free value.
Returns	The current instance (Self).
Pre-conditions	Argument —every parameter is non- null . Argument — amount is in 0..32768 , and date and time are 2 bytes long. State —no other SV command has been prepared inside the same secure session, the SV command comes first in the list of prepared commands, and it follows an SV Get command prepared with SvOperation.DEBIT_UNDEBIT .
Errors	SessionBufferOverflow —if the command would overflow the modifications buffer and the multiple-session mode is not allowed.

5.3.10. Secure Transaction Manager

Name	SecureTransactionManager
Kind	Interface
Namespace	calypso.card.transaction
Extends	<u>TransactionManager</u>
Since	2.0
Purpose	Common operations for every secure (cryptographically-backed) transaction manager.

Get Crypto Extension

Signature	getCryptoExtension() → CardTransactionCryptoExtension
Since	2.0
Description	Returns the <u>CardTransactionCryptoExtension</u> instance created for this card transaction by the crypto module factory attached to the security settings. Successive calls return the same instance. The caller converts the returned instance to the concrete extension type defined by the crypto module in use. Commands prepared through the crypto extension are queued together with the card commands, in call order, and are processed by the same <code>processCommands()</code>. This allows card and crypto commands to be interleaved within a single card transaction.
Returns	The crypto extension of this card transaction.
Pre-conditions	None.
Errors	None.

Prepare Cancel Secure Session

Signature	prepareCancelSecureSession() → Self
Since	2.0
Description	Schedules a special Close Secure Session command aborting the current secure session. Executed in safe mode—never raises errors.
Returns	The current instance (Self).
Pre-conditions	None.
Errors	None.

Prepare Close Secure Session

Signature	prepareCloseSecureSession() → Self
Since	2.0
Description	Schedules a Close Secure Session command. The ratification mechanism is disabled by default but MAY be enabled via <u>SymmetricCryptoSecuritySettings.enableRatificationMechanism</u> . In this case, a ratification command MUST be added after the Close Secure Session command when in contactless mode.
Returns	The current instance (Self).
Pre-conditions	State —a secure session is open or its opening is prepared, and neither a closing nor a cancelling is already prepared.
Errors	None.

5.3.11. Symmetric Crypto Security Settings

Name	SymmetricCryptoSecuritySettings
Kind	Interface
Namespace	calypso.card.transaction
Since	2.0
Purpose	Security settings carrier for symmetric-key Calypso card transactions (e.g. SAM-backed). An instance is obtained via CalypsoCardApiFactory.createSymmetricCryptoSecuritySettings .

Add Authorized Session Key

Signature	<pre>addAuthorizedSessionKey(kif: Byte, kvc: Byte) → Self</pre>
Since	2.0
Description	Adds an authorised session key. Default: every key accepted; once at least one key is added, only listed keys are accepted.
Parameters	kif —the KIF value. kvc —the KVC value.
Returns	The current instance (Self).
Pre-conditions	Argument —every parameter is non- null .
Errors	None.

Add Authorized SV Key

Signature	<pre>addAuthorizedSvKey(kif: Byte, kvc: Byte) → Self</pre>
Since	2.0
Description	Adds an authorised Stored Value (SV) key, identified by its KIF/KVC. Default: every SV key accepted; once at least one key is added, only listed keys are accepted.
Parameters	kif —the KIF value. kvc —the KVC value.
Returns	The current instance (Self).
Pre-conditions	Argument —every parameter is non- null .
Errors	None.

Assign Default KIF

Signature	<pre>assignDefaultKif(writeAccessLevel: WriteAccessLevel, kif: Byte) → Self</pre>
Since	2.0
Description	Defines the default KIF for a write access level.
Parameters	writeAccessLevel (WriteAccessLevel)—the write access level concerned. kif —the default KIF to use.

Returns	The current instance (Self).
Pre-conditions	Argument —every parameter is non- null .
Errors	None.

Assign Default KVC

Signature	<pre>assignDefaultKvc(writeAccessLevel: WriteAccessLevel, kvc: Byte) → Self</pre>
Since	2.0
Description	Defines the default KVC for a write access level.
Parameters	writeAccessLevel (WriteAccessLevel)—the write access level concerned. kvc —the default KVC to use.
Returns	The current instance (Self).
Pre-conditions	Argument —every parameter is non- null .
Errors	None.

Assign KIF

Signature	<pre>assignKif(writeAccessLevel: WriteAccessLevel, kvc: Byte, kif: Byte) → Self</pre>
Since	2.0
Description	Defines, for a write access level, the KIF to use when the card only provides a KVC.
Parameters	writeAccessLevel (WriteAccessLevel)—the write access level concerned. kvc —the KVC provided by the card. kif —the KIF to associate with that KVC.
Returns	The current instance (Self).
Pre-conditions	Argument —every parameter is non- null .
Errors	None.

Assign Close Secure Session Max Duration By CSN

Signature	<pre>assignCloseSecureSessionMaxDurationByCsn(maxDuration: Long, csnMin: Long) → Self</pre>
Since	3.0
Description	Sets the maximum duration (in milliseconds) of the Close Secure Session command exchange for the cards whose CSN falls within the range starting at csnMin . See Command exchange duration bounds .
Parameters	maxDuration —the maximum duration of the Close Secure Session command exchange, in milliseconds, or Long.MAX_VALUE to defer to the FCI-based settings for this range. csnMin —the lowest card serial number (CSN) of the range, compared as an unsigned 64-bit value.
Returns	The current instance (Self).
Pre-conditions	Argument —every parameter is non- null . Argument — maxDuration is strictly positive.

Errors	None.
--------	-------

Assign Close Secure Session Max Duration By FCI

Signature	<code>assignCloseSecureSessionMaxDurationByFci(maxDuration: Long, fciRegex: String) → Self</code>
Since	3.0
Description	Sets the maximum duration (in milliseconds) of the Close Secure Session command exchange for the cards whose FCI matches fciRegex . The FCI-based settings are evaluated in declaration order and only when no CSN-based setting applies. When fciRegex filters on the startup information data, a prepareGetData(FCI_FOR_CURRENT_DF) MUST be scheduled inside the secure session to guarantee the integrity of the FCI obtained during the selection. See Command exchange duration bounds .
Parameters	maxDuration —the maximum duration of the Close Secure Session command exchange, in milliseconds, or Long.MAX_VALUE for no bound. fciRegex —the regular expression matched against the whole FCI, represented as an uppercase hexadecimal string.
Returns	The current instance (Self).
Pre-conditions	Argument —every parameter is non- null . Argument — maxDuration is strictly positive. Argument — fciRegex is a valid regular expression within the portable subset defined by Command exchange duration bounds .
Errors	None.

Assign Open Secure Session Max Duration By CSN

Signature	<code>assignOpenSecureSessionMaxDurationByCsn(maxDuration: Long, csnMin: Long) → Self</code>
Since	3.0
Description	Sets the maximum duration (in milliseconds) of the Open Secure Session command exchange for the cards whose CSN falls within the range starting at csnMin . See Command exchange duration bounds .
Parameters	maxDuration —the maximum duration of the Open Secure Session command exchange, in milliseconds, or Long.MAX_VALUE to defer to the FCI-based settings for this range. csnMin —the lowest card serial number (CSN) of the range, compared as an unsigned 64-bit value.
Returns	The current instance (Self).
Pre-conditions	Argument —every parameter is non- null . Argument — maxDuration is strictly positive.
Errors	None.

Assign Open Secure Session Max Duration By FCI

Signature	<code>assignOpenSecureSessionMaxDurationByFci(maxDuration: Long, fciRegex: String) → Self</code>
Since	3.0

Description	Sets the maximum duration (in milliseconds) of the Open Secure Session command exchange for the cards whose FCI matches fciRegex . The FCI-based settings are evaluated in declaration order and only when no CSN-based setting applies. When fciRegex filters on the startup information data, a prepareGetData(FCI_FOR_CURRENT_DF) MUST be scheduled inside the secure session to guarantee the integrity of the FCI obtained during the selection. See Command exchange duration bounds .
Parameters	maxDuration —the maximum duration of the Open Secure Session command exchange, in milliseconds, or Long.MAX_VALUE for no bound. fciRegex —the regular expression matched against the whole FCI, represented as an uppercase hexadecimal string.
Returns	The current instance (Self).
Pre-conditions	Argument —every parameter is non- null . Argument — maxDuration is strictly positive. Argument — fciRegex is a valid regular expression within the portable subset defined by Command exchange duration bounds .
Errors	None.

Assign SV Command Max Duration By CSN

Signature	<code>assignSvCommandMaxDurationByCsn(maxDuration: Long, csnMin: Long) → Self</code>
Since	3.0
Description	Sets the maximum duration (in milliseconds) of an SV Reload , SV Debit or SV Undebit command exchange for the cards whose CSN falls within the range starting at csnMin . See Command exchange duration bounds .
Parameters	maxDuration —the maximum duration of an SV Reload , SV Debit or SV Undebit command exchange, in milliseconds, or Long.MAX_VALUE to defer to the FCI-based settings for this range. csnMin —the lowest card serial number (CSN) of the range, compared as an unsigned 64-bit value.
Returns	The current instance (Self).
Pre-conditions	Argument —every parameter is non- null . Argument — maxDuration is strictly positive.
Errors	None.

Assign SV Command Max Duration By FCI

Signature	<code>assignSvCommandMaxDurationByFci(maxDuration: Long, fciRegex: String) → Self</code>
Since	3.0
Description	Sets the maximum duration (in milliseconds) of an SV Reload , SV Debit or SV Undebit command exchange for the cards whose FCI matches fciRegex . The FCI-based settings are evaluated in declaration order and only when no CSN-based setting applies. When fciRegex filters on the startup information data, a prepareGetData(FCI_FOR_CURRENT_DF) MUST be scheduled inside the secure session to guarantee the integrity of the FCI obtained during the selection. See Command exchange duration bounds .
Parameters	maxDuration —the maximum duration of an SV Reload , SV Debit or SV Undebit command exchange, in milliseconds, or Long.MAX_VALUE for no bound. fciRegex —the regular expression matched against the whole FCI, represented as an uppercase hexadecimal string.
Returns	The current instance (Self).

Pre-conditions	Argument —every parameter is non- <code>null</code> . Argument — <code>maxDuration</code> is strictly positive. Argument — <code>fciRegex</code> is a valid regular expression within the portable subset defined by Command exchange duration bounds .
Errors	None.

Authorize SV Negative Balance

Signature	<code>authorizeSvNegativeBalance()</code> → <code>Self</code>
Since	2.0
Description	Allows the SV balance to become negative. Default: disabled.
Returns	The current instance (<code>Self</code>).
Pre-conditions	None.
Errors	None.

Disable Read On Session Opening

Signature	<code>disableReadOnSessionOpening()</code> → <code>Self</code>
Since	2.0
Description	Disables the automatic merging of Open Secure Session with a possible Read Record command. By default, the optimisation is performed; it may however be incompatible with the security requirements in some cases.
Returns	The current instance (<code>Self</code>).
Pre-conditions	None.
Errors	None.

Enable Multiple Session

Signature	<code>enableMultipleSession()</code> → <code>Self</code>
Since	2.0
Description	Enables multiple-session mode to handle more changes than the session buffer allows.
Returns	The current instance (<code>Self</code>).
Pre-conditions	None.
Errors	None.

Enable PIN Plain Transmission

Signature	<code>enablePinPlainTransmission()</code> → <code>Self</code>
Since	2.0
Description	Enables the PIN transmission in plain text.
Returns	The current instance (<code>Self</code>).
Pre-conditions	None.
Errors	None.

Enable Ratification Mechanism

Signature	<code>enableRatificationMechanism() → Self</code>
Since	2.0
Description	Enables the ratification mechanism to handle early card removal preventing reception of the closing ACK.
Returns	The current instance (<code>Self</code>).
Pre-conditions	None.
Errors	None.

Enable SV Load And Debit Log

Signature	<code>enableSvLoadAndDebitLog() → Self</code>
Since	2.0
Description	Enables retrieval of both load and debit log records. Default: disabled.
Returns	The current instance (<code>Self</code>).
Pre-conditions	None.
Errors	None.

Init Crypto Context For Next Transaction

Signature	<code>initCryptoContextForNextTransaction() → Unit</code>
Since	2.0
Description	Prepares the crypto module for the next transaction by anticipating the security context configuration. This feature is only useful when the currently allocated cryptographic module will be used for the next transaction. It is particularly relevant to optimise the transaction time in a ticketing context of user card validation. For the optimisation to be effective, this operation MUST be called at the very end of the current transaction, that is, after the user has been notified of the access right (e.g. after opening the gate).
Pre-conditions	None.
Errors	Crypto—if an error occurred when computing a crypto operation. CryptoIO—if a communication error with the crypto module occurred (e.g. timeout with the reader or the computing unit, network error, etc.).

Set PIN Modification Ciphering Key

Signature	<pre>setPinModificationCipheringKey(kif: Byte, kvc: Byte) → Self</pre>
Since	2.0
Description	Sets the KIF/KVC of the PIN modification ciphering key. Default: 0/0.
Parameters	kif—the KIF value. kvc—the KVC value.
Returns	The current instance (<code>Self</code>).
Pre-conditions	Argument —every parameter is non- <code>null</code> .
Errors	None.

Set PIN Verification Ciphering Key

Signature	setPinVerificationCipheringKey(kif: Byte, kvc: Byte) → Self
Since	2.0
Description	Sets the KIF/KVC of the PIN verification ciphering key. Default: 0/0.
Parameters	kif—the KIF value. kvc—the KVC value.
Returns	The current instance (Self).
Pre-conditions	Argument —every parameter is non-null.
Errors	None.

5.3.12. Transaction Manager

Name	TransactionManager
Kind	Interface
Namespace	calypso.card.transaction
Extends	IsoCardTransactionManager (CNA-TR-API)
Since	2.0
Purpose	Common operations for every Calypso card transaction. Prepare/process model. Extending IsoCardTransactionManager grants access to the multi-channel cast asMultichannelCardTransactionManager() defined by CNA-TR-API when the underlying ISO/IEC 7816-4 card supports multi-channel.

TransactionManager defines the full **prepare** command surface (file selection, reads, writes, counters, PIN, asymmetric key-pair generation). The preparation step makes it possible to group commands together in order to minimise network data exchanges, which is especially useful in a distributed architecture. The bound **CalypsoCard** is updated after each successful APDU exchange, and parameter ranges are validated as documented in [Section 5.3.4](#).

Processing of prepared commands is inherited from **CardTransactionManager** ([CNA-TR-API](#)) via the **IsoCardTransactionManager** supertype. The Calypso **TransactionManager** does **not** redefine **processCommands()**; it relies on the inherited contract. Multi-channel operations (**processCommandsAndCloseChannel**, **closeChannel**) are reached on demand through **asMultichannelCardTransactionManager()** of [CNA-TR-API](#) when the underlying card supports multi-channel.



Every write operation MAY raise **SessionBufferOverflow** if the command would overflow the modification buffer and the multiple-session mode is not allowed.

Get Secure Session State

Signature	getSecureSessionState() → SecureSessionState
Since	3.0
Description	Returns the state of the secure session at the moment of the call.
Returns	A SecureSessionState value; NO_SESSION if no secure session is open.
Pre-conditions	None.

Errors	None.
--------	-------

Get Transaction Audit Data

Signature	getTransactionAuditData() → List<ByteArray>
Since	1.2
Description	Returns the audit data of the transaction (every APDU exchange with the card and the crypto module).
Returns	A List<ByteArray>; empty if no exchange has taken place.
Pre-conditions	None.
Errors	None.

Prepare Append Record

Signature	prepareAppendRecord(sfi: Byte, recordData: ByteArray) → Self
Since	1.0
Description	Adds an Append Record command: a new record is added, and the oldest record is deleted in a cyclic file. Once processed, the data is available in the CalypsoCard through its dedicated file and data management operations.
Parameters	sfi —the SFI of the EF. recordData —the new record data to write.
Returns	The current instance (Self).
Pre-conditions	Argument —every parameter is non-null. Argument —every supplied argument is within range.
Errors	None.

Prepare Change PIN

Signature	prepareChangePin(newPin: ByteArray) → Self
Since	1.6
Description	Adds a Change PIN command. It MUST be performed outside a secure session. If transmitted plain, the command MUST be preceded by a successful Verify PIN . Once processed, the PIN status is available in the CalypsoCard through getPinAttemptRemaining and isPinBlocked .
Parameters	newPin —the new PIN code value (4-byte long ByteArray).
Returns	The current instance (Self).
Pre-conditions	Argument —every parameter is non-null. Capability —the PIN feature is available for this card. Argument —the provided argument is within range. State —no secure session is open.
Errors	None.

Prepare Check PIN Status

Signature	prepareCheckPinStatus() → Self
-----------	--------------------------------

Since	1.0
Description	Adds a Verify PIN command without PIN presentation, in order to read the attempt counter. Once processed, the PIN status is available in the CalypsoCard through getPinAttemptRemaining and isPinBlocked .
Returns	The current instance (Self).
Pre-conditions	Capability —the PIN feature is available for this card.
Errors	None.

Prepare Decrease Counter

Signature	<pre>prepareDecreaseCounter(sfi: Byte, counterNumber: Int, decValue: Int) → Self</pre>
Since	1.0
Description	Adds a Decrease command, which subtracts the supplied value from the designated counter of the selected EF. If several counters of the same file have to be decremented at the same time of the transaction, it is RECOMMENDED to use prepareDecreaseCounters for optimisation reasons. Once processed, the data is available in the CalypsoCard through its dedicated file and data management operations.
Parameters	sfi — the SFI of the EF. counterNumber — the number of the counter (MUST be zero in case of a simulated counter). decValue — the value to subtract from the counter (positive integer € 16777215).
Returns	The current instance (Self).
Pre-conditions	Argument —every parameter is non- null . Argument —every supplied argument is within range.
Errors	None.

Prepare Decrease Counters

Signature	<pre>prepareDecreaseCounters(sfi: Byte, decrementValues: Map<Int, Int>) → Self</pre>
Since	1.1
Description	Adds a Decrease Multiple command, or multiple Decrease commands. The decision to execute one or the other is made according to the type of card. Once processed, the data is available in the CalypsoCard through its dedicated file and data management operations.
Parameters	sfi — the SFI of the EF. decrementValues — the decrement values to apply, indexed by the numbers of the counters to be decremented.
Returns	The current instance (Self).
Pre-conditions	Argument —every parameter is non- null .
Errors	None.

Prepare Generate Asymmetric Key Pair

Signature	<code>prepareGenerateAsymmetricKeyPair() → Self</code>
Since	2.1
Description	Adds a Generate Asymmetric Key Pair command. The public part can be retrieved via <code>prepareGetData(GetDataTag.CARD_PUBLIC_KEY)</code> .
Returns	The current instance (<code>Self</code>).
Pre-conditions	None.
Errors	None.

Prepare Get Data

Signature	<code>prepareGetData(tag: GetDataTag) → Self</code>
Since	1.0
Description	Adds one or more Get Data commands. Security warning: this command MUST NOT be used within a secure session, in both contact and contactless modes, except with the tag <code>FCI_FOR_CURRENT_DF</code>. With the tag <code>FCI_FOR_CURRENT_DF</code> inside a secure session, the command is used to check the integrity of the FCI obtained in response to the Select Application command: the following <code>processCommands()</code> raises <u>InconsistentData</u> if the returned FCI differs from that response. Once processed, the data is available in the <u>CalypsoCard</u> through <u>ElementaryFile.header</u> or <u>getDirectoryHeader</u>, depending on the supplied tag.
Parameters	<code>tag</code> (<u>GetDataTag</u>) — the data type to retrieve.
Returns	The current instance (<code>Self</code>).
Pre-conditions	Argument — every parameter is non-<code>null</code>. Capability — the Get Data command is supported for the provided tag. State — no secure session is open, unless <code>tag</code> is <code>FCI_FOR_CURRENT_DF</code>.
Errors	None.

Prepare Increase Counter

Signature	<pre>prepareIncreaseCounter(sfi: Byte, counterNumber: Int, incValue: Int) → Self</pre>
Since	1.0
Description	Adds an Increase command. If several counters of the same file have to be incremented at the same time of the transaction, it is RECOMMENDED to use <u>prepareIncreaseCounters</u> for optimisation reasons. Once processed, the data is available in the <u>CalypsoCard</u> through its dedicated file and data management operations.
Parameters	<code>sfi</code> — the SFI of the EF. <code>counterNumber</code> — the number of the counter (MUST be zero in case of a simulated counter). <code>incValue</code> — the value to add to the counter (positive integer € 16777215).
Returns	The current instance (<code>Self</code>).
Pre-conditions	Argument — every parameter is non-<code>null</code>. Argument — every supplied argument is within range.
Errors	None.

Prepare Increase Counters

Signature	<pre>prepareIncreaseCounters(sfi: Byte, incrementValues: Map<Int, Int>) → Self</pre>
Since	1.1
Description	Adds an Increase Multiple command, or multiple Increase commands. The decision to execute one or the other is made according to the type of card. Once processed, the data is available in the <u>CalypsoCard</u> through its dedicated file and data management operations.
Parameters	sfi — the SFI of the EF. incrementValues — the increment values to apply, indexed by the numbers of the counters to be incremented.
Returns	The current instance (Self).
Pre-conditions	Argument — every parameter is non- <code>null</code> .
Errors	None.

Prepare Put Data

Signature	<pre>preparePutData(tag: PutDataTag, data: ByteArray) → Self</pre>
Since	2.1
Description	Adds one or more Put Data commands. MUST be called outside a secure session.
Parameters	tag (<u>PutDataTag</u>) — the data type to inject. data — the data to inject.
Returns	The current instance (Self).
Pre-conditions	Argument — every parameter is non-<code>null</code>. Capability — the Put Data command is supported for the provided tag. Argument — data is not empty. State — no secure session is open.
Errors	None.

Prepare Read Binary

Signature	<pre>prepareReadBinary(sfi: Byte, offset: Int, nbBytesToRead: Int) → Self</pre>
Since	1.1

Description	Adds Read Binary commands.
	The following <code>processCommands()</code> does not fail if the targeted file is not found (status word 6A82h), inside or outside a secure session: the CalypsoCard may then simply not be filled. For the validity of the offset and the number of bytes to read, two behaviours apply depending on whether the command is placed inside a secure session. Outside a secure session (best-effort mode), it does not fail whatever their validity. Inside a secure session (strict mode), it fails if they are invalid.
Parameters	Once processed, the data is available in the CalypsoCard through its dedicated file and data management operations.
	sfi — the SFI of the EF. offset — the offset (0 indicates the first byte). nbBytesToRead — the number of bytes to read.
Returns	The current instance (Self).
Pre-conditions	Argument — every parameter is non- null . Capability — this command is supported by this card. Argument — every supplied argument is within range.
Errors	None.

Prepare Read Counter

Signature	<code>prepareReadCounter(sfi: Byte, nbCountersToRead: Int) → Self</code>
Since	1.1
Description	Adds a Read Records command targeting the supplied counter. The record is read up to the counter location supplied as parameter, so all preceding counters are also read.
	The following <code>processCommands()</code> does not fail if the targeted file is not found (status word 6A82h), inside or outside a secure session: the CalypsoCard may then simply not be filled. For the existence of the targeted counter, two behaviours apply depending on whether the command is placed inside a secure session. Outside a secure session (best-effort mode), it does not fail if the counter is not found. Inside a secure session (strict mode), it fails in that case.
Parameters	Once processed, the data is available in the CalypsoCard through its dedicated file and data management operations.
	sfi — the SFI of the EF. nbCountersToRead — the number of counters to read.
Returns	The current instance (Self).
Pre-conditions	Argument — every parameter is non- null . Argument — every supplied argument is within range.
Errors	None.

Prepare Read Record

Signature	<code>prepareReadRecord(sfi: Byte, recordNumber: Int) → Self</code>
Since	1.1

Description	Adds a Read Records command for a single record. Security warning: this command MUST NOT be used within a secure session, in both contact and contactless modes. For the in-session case, use <u>prepareReadRecords</u> instead, with valid parameters. Once processed, the data is available in the <u>CaLypsoCard</u> through its dedicated file and data management operations. The following <code>processCommands()</code> does not fail whatever the existence of the targeted file or record: the <u>CaLypsoCard</u> may then simply not be filled (best-effort mode).
Parameters	<code>sfi</code> —the SFI of the EF. <code>recordNumber</code> —the record to read.
Returns	The current instance (<code>Self</code>).
Pre-conditions	Argument—every parameter is non-<code>null</code>. Argument—every supplied argument is within range.
Errors	None.

Prepare Read Records

Signature	<pre>prepareReadRecords(sfi: Byte, fromRecordNumber: Int, toRecordNumber: Int, recordSize: Int) → Self</pre>
Since	1.1
Description	Adds a Read Records command for one or more records. The following <code>processCommands()</code> does not fail if the targeted file is not found (status word 6A82h), inside or outside a secure session: the <u>CaLypsoCard</u> may then simply not be filled. For the existence of the targeted record, two behaviours apply depending on whether the command is placed inside a secure session. Outside a secure session (best-effort mode), it does not fail if the record is not found. Inside a secure session (strict mode), it fails in that case. Once processed, the data is available in the <u>CaLypsoCard</u> through its dedicated file and data management operations.
Parameters	<code>sfi</code> —the SFI of the EF. <code>fromRecordNumber</code> —the number of the first record to read. <code>toRecordNumber</code> —the number of the last record to read. <code>recordSize</code> —the record length.
Returns	The current instance (<code>Self</code>).
Pre-conditions	Argument—every parameter is non-<code>null</code>. Argument—every supplied argument is within range.
Errors	None.

Prepare Read Records Partially

Signature	<pre>prepareReadRecordsPartially(sfi: Byte, fromRecordNumber: Int, toRecordNumber: Int, offset: Int, nbBytesToRead: Int) → Self</pre>
Since	1.1

Description	Adds Read Record Multiple commands. Security warning: this command MUST NOT be used within a secure session, in both contact and contactless modes. The following <code>processCommands()</code> does not fail whatever the existence of the targeted file or the validity of the offset and the number of bytes to read: the <code>CalypsoCard</code> may then simply not be filled (best-effort mode). Once processed, the data is available in the <code>CalypsoCard</code> through its dedicated file and data management operations.
Parameters	<code>sfi</code> — the SFI of the EF. <code>fromRecordNumber</code> — the number of the first record to read. <code>toRecordNumber</code> — the number of the last record to read. <code>offset</code> — the offset in the records where to start reading (0 indicates the first byte). <code>nbBytesToRead</code> — the number of bytes to read from each record.
Returns	The current instance (<code>Self</code>).
Pre-conditions	Argument — every parameter is non-<code>null</code>. Capability — this command is supported by this card. Argument — every provided argument is within range. State — no secure session is open.
Errors	None.

Prepare Search Records

Signature	<pre>prepareSearchRecords(commandId: Int, data: SearchCommandData) → Self</pre>
Since	1.1
Description	Adds a Search Record Multiple command. The command searches whether the supplied data are present in the records of the file; an optional mask MAY be applied to specify precisely the bits to take into account in the comparison. It is only possible with a linear, cyclic, Counters or Simulated Counter EF. Security warning: this command MUST NOT be used within a secure session, in both contact and contactless modes. Once processed, the numbers of the matching records are available in the <code>CalypsoCard</code> through <code>getMatchingRecordNumbers</code> called with <code>commandId</code>, and the content of the first matching record in the same <code>CalypsoCard</code> when requested. The following <code>processCommands()</code> does not fail whatever the existence of the targeted file or the validity of the record number and offset: the <code>CalypsoCard</code> may then simply not be updated (best-effort mode).
Parameters	<code>commandId</code> — the application-supplied identifier of this command. <code>data</code> (<code>SearchCommandData</code>) — the search criteria.
Returns	The current instance (<code>Self</code>).
Pre-conditions	Argument — every parameter is non-<code>null</code>. Capability — the Search Record Multiple command is available for this card. Argument — the input data is consistent. State — no secure session is open.
Errors	None.
See also	<code>SearchCommandData</code> , <code>CalypsoCard.getMatchingRecordNumbers</code>

Prepare Select File By Control

Signature	<code>prepareSelectFileByControl(selectFileControl: SelectFileControl) → Self</code>
------------------	--

Since	1.0
Description	Adds a Select File command using a navigation control. The following <code>processCommands()</code> does not fail if the targeted file is not found (status word 6A82h), inside or outside a secure session: the CalypsoCard may then simply not be updated. Once processed, the data is available in the CalypsoCard through ElementaryFile.header.
Parameters	<code>selectFileControl</code> (SelectFileControl)—a SelectFileControl enum entry.
Returns	The current instance (Self).
Pre-conditions	Argument —every parameter is non- <code>null</code> .
Errors	None.

Prepare Select File By LID

Signature	<code>prepareSelectFileByLid(lid: Short) → Self</code>
Since	1.1
Description	Adds a Select File command targeting an EF by LID. Caution: the command fails if the selected file is not an EF. The following <code>processCommands()</code> does not fail if the targeted file is not found (status word 6A82h), inside or outside a secure session: the CalypsoCard may then simply not be updated. Once processed, the data is available in the CalypsoCard through <code>getFileBySfi</code> / <code>getFileByLid</code> and ElementaryFile.header.
Parameters	<code>lid</code> —the LID of the EF to select.
Returns	The current instance (Self).
Pre-conditions	Argument —every parameter is non- <code>null</code> .
Errors	None.

Prepare Set Counter

Signature	<pre>prepareSetCounter(sfi: Byte, counterNumber: Int, newValue: Int) → Self</pre>
Since	1.0
Description	Adds either an Increase or a Decrease command to set the counter to the supplied value. The operation is selected according to whether the difference between the current value and the desired value is negative (Increase) or positive (Decrease). Two assumptions are made, and neither is checked by this operation: the counter value has been read beforehand, and the type of session—and its associated access rights—is consistent with the requested operation (a reload session if the counter is to be incremented, a debit session if it is to be decremented). An inconsistency is only detected when the session is closed. Once processed, the data is available in the CalypsoCard through its dedicated file and data management operations.
Parameters	<code>sfi</code> — the SFI of the EF. <code>counterNumber</code>—the counter number (<code>>= 1</code> for a counters file, <code>0</code> for a simulated "counter" file). <code>newValue</code> — the desired value for the counter (positive integer $\in$ 16777215).
Returns	The current instance (Self).

Pre-conditions	Argument —every parameter is non- <code>null</code> . State —the current counter value is known. Argument —every supplied argument is within range.
Errors	None.

Prepare SV Read All Logs

Signature	<code>prepareSvReadAllLogs() → Self</code>
Since	1.0
Description	Schedules the reading of every Stored Value log, that is, both the load and the debit log records. This operation requires the selected application to be of type Store Value (file structure 20h). The SV transaction logs are contained in two files with fixed identifiers: the file whose SFI is 14h holds one record carrying the unique reload log, and the file whose SFI is 15h holds three records carrying the last three debit logs. Once processed, the data is available in the CalypsoCard in raw format through its dedicated file and data management operations, or as dedicated objects through getSvLoadLogRecord and getSvDebitLogAllRecords.
Returns	The current instance (<code>Self</code>).
Pre-conditions	Capability —the SV feature is available for this card.
Errors	None.

Prepare Update Binary

Signature	<pre>prepareUpdateBinary(sfi: Byte, offset: Int, data: ByteArray) → Self</pre>
Since	1.1
Description	Adds one or more Update Binary commands. The data of the file before the offset and after the supplied data are left unchanged. Once processed, the data is available in the CalypsoCard through its dedicated file and data management operations.
Parameters	sfi —the SFI of the EF. offset —the offset (0 indicates the first byte). data —the new data.
Returns	The current instance (<code>Self</code>).
Pre-conditions	Argument —every parameter is non- <code>null</code> . Capability —this command is supported by this card. Argument —every supplied argument is within range.
Errors	None.

Prepare Update Record

Signature	<pre>prepareUpdateRecord(sfi: Byte, recordNumber: Int, recordData: ByteArray) → Self</pre>
------------------	--

Since	1.0
Description	Adds an Update Record command. Bytes beyond <code>recordData.Length</code> are left unchanged. Once processed, the data is available in the CalypsoCard through its dedicated file and data management operations.
Parameters	sfi — the SFI of the EF. recordNumber — the record to update. recordData — the new record data. If length is less than the record size, bytes beyond length are left unchanged.
Returns	The current instance (Self).
Pre-conditions	Argument — every parameter is non-null. Argument — every supplied argument is within range.
Errors	None.

Prepare Verify PIN

Signature	<code>prepareVerifyPin(pin: ByteArray) → Self</code>
Since	1.6
Description	Adds a Verify PIN command. This command MAY be performed both inside and outside a secure session. The PIN code is transmitted in plain text or enciphered, according to the parameter set in the SymmetricCryptoSecuritySettings. Once processed, the PIN status is available in the CalypsoCard through getPinAttemptRemaining and isPinBlocked.
Parameters	pin — the PIN code value (4-byte long ByteArray).
Returns	The current instance (Self).
Pre-conditions	Argument — every parameter is non-null. Capability — the PIN feature is available for this card. Argument — the provided argument is within range.
Errors	None.

Prepare Write Binary

Signature	<pre>prepareWriteBinary(sfi: Byte, offset: Int, data: ByteArray) → Self</pre>
Since	1.1
Description	Adds one or more Write Binary commands, performing a binary OR with the existing data. The data of the file before the offset and after the supplied data are left unchanged. Once processed, the data is available in the CalypsoCard through its dedicated file and data management operations.
Parameters	sfi — the SFI of the EF. offset — the offset (0 indicates the first byte). data — the data to write over the existing data.
Returns	The current instance (Self).
Pre-conditions	Argument — every parameter is non-null. Capability — this command is supported by this card. Argument — every supplied argument is within range.
Errors	None.

Prepare Write Record

Signature	<pre>prepareWriteRecord(sfi: Byte, recordNumber: Int, recordData: ByteArray) → Self</pre>
Since	1.0
Description	Adds a Write Record command, performing a binary OR with the existing data. Once processed, the data is available in the CalypsoCard through its dedicated file and data management operations.
Parameters	sfi — the SFI of the EF. recordNumber — the record to write. recordData — the data to overwrite in the record. If length is less than the record size, bytes beyond length are left unchanged.
Returns	The current instance (Self).
Pre-conditions	Argument — every parameter is non-null. Argument — every supplied argument is within range.
Errors	None.

5.4. SPI Interfaces

5.4.1. Asymmetric Crypto Card Transaction Manager Factory

Name	AsymmetricCryptoCardTransactionManagerFactory
Kind	Marker interface (SPI)
Namespace	calypso.card.transaction.spi
Since	2.0
Purpose	Marker provided by crypto extensions to secure Calypso card transactions with asymmetric keys (PKI). Declares no operation.

5.4.2. CA Certificate

Name	CaCertificate
Kind	Marker interface (SPI)
Namespace	calypso.card.transaction.spi
Since	2.1
Purpose	Marker for a CA certificate exposed by a CNA-TCCA-API extension. Registered through AsymmetricCryptoSecuritySettings.addCaCertificate .

5.4.3. CA Certificate Parser

Name	CaCertificateParser
Kind	Marker interface (SPI)
Namespace	calypso.card.transaction.spi
Since	2.1

Purpose	Marker for a CA certificate parser exposed by a CNA-TCCA-API extension. Registered through <code>AsymmetricCryptoSecuritySettings.addCaCertificateParser</code> .
----------------	---

5.4.4. Card Certificate

Name	<code>CardCertificate</code>
Kind	Marker interface (SPI)
Namespace	<code>calypso.card.transaction.spi</code>
Since	2.1
Purpose	Marker for a card certificate exposed by a CNA-TCCA-API extension. Consumed by the asymmetric crypto extension when authenticating a card; it is not registered directly through <code>AsymmetricCryptoSecuritySettings</code> .

5.4.5. Card Certificate Parser

Name	<code>CardCertificateParser</code>
Kind	Marker interface (SPI)
Namespace	<code>calypso.card.transaction.spi</code>
Since	2.1
Purpose	Marker for a card certificate parser exposed by a CNA-TCCA-API extension. Registered through <code>AsymmetricCryptoSecuritySettings.addCardCertificateParser</code> .

5.4.6. Card Transaction Crypto Extension

Name	<code>CardTransactionCryptoExtension</code>
Kind	Marker interface (SPI)
Namespace	<code>calypso.card.transaction.spi</code>
Since	2.0
Purpose	Marker enriching the card transaction command set with specific crypto commands (e.g. signature computation/verification). Declares no operation at the API level.

5.4.7. PCA Certificate

Name	<code>PcaCertificate</code>
Kind	Marker interface (SPI)
Namespace	<code>calypso.card.transaction.spi</code>
Since	2.1
Purpose	Marker for a self-signed PCA certificate exposed by a CNA-TCCA-API extension. Registered through <code>AsymmetricCryptoSecuritySettings.addPcaCertificate</code> .

`PcaCertificate`, `CaCertificate` and `CardCertificate` declare no operation at the API level. Their concrete content is exposed through the [CNA-TCCA-API](#) extension that produced them.

5.4.8. Symmetric Crypto Card Transaction Manager Factory

Name	<code>SymmetricCryptoCardTransactionManagerFactory</code>
Kind	Marker interface (SPI)

Namespace	calypso.card.transaction.spi
Since	2.0
Purpose	Marker provided by crypto extensions to secure Calypso card transactions with symmetric keys (e.g. SAM). Declares no operation.

5.5. Enumerations

5.5.1. Calypso Card Product Type

Name	CalypsoCardProductType
Kind	Enumeration
Namespace	calypso.card.card
Since	1.0
Purpose	Product type of a Calypso card.

Value	Since	Description
PRIME_REVISION_1	1.0	Calypso Prime revision 1.x.
PRIME_REVISION_2	1.0	Calypso Prime revision 2.x.
PRIME_REVISION_3	1.0	Calypso Prime revision 3.x.
LIGHT	1.0	Calypso Light.
BASIC	1.0	Calypso Basic.
UNKNOWN	1.0	Application Type is 0 or FFh , or selection data could not be properly parsed.

5.5.2. Elementary File Type

Name	ElementaryFileType
Kind	Enumeration
Namespace	calypso.card.card
Since	1.0
Purpose	Type of a Calypso Elementary File.

Value	Since	Description
LINEAR	1.0	Linear EF (1 to several records).
BINARY	1.0	Binary EF (single continuous sequence of data bytes).
CYCLIC	1.0	Cyclic EF (records organised in a cycle, from the most recent to the oldest).
COUNTERS	1.0	Counters EF (single record containing K counters of three bytes each).
SIMULATED_COUNTERS	1.0	Simulated counter EF (linear file with a single record, kept for Calypso Rev 2 compatibility).

5.5.3. Get Data Tag

Name	GetDataTag
------	------------

Kind	Enumeration
Namespace	calypso.card
Since	1.0
Purpose	Output data tags retrievable through the Get Data command. MAY NOT be applicable to all products.

Value	Since	Description
FCP_FOR_CURRENT_FILE	1.0	FCP for the current file, as returned by Select File .
FCI_FOR_CURRENT_DF	1.0	FCI for the current DF, as returned by Select Application .
EF_LIST	1.1	List of EFs in the current DF.
TRACEABILITY_INFORMATION	1.1	Product traceability information.
CARD_PUBLIC_KEY	2.1	Card public key.
CARD_CERTIFICATE	2.1	Card certificate.
CA_CERTIFICATE	2.1	CA certificate.

5.5.4. Put Data Tag

Name	PutDataTag
Kind	Enumeration
Namespace	calypso.card
Since	2.1
Purpose	Input data tags injectable through the Put Data command. MAY NOT be applicable to all products.

Value	Since	Description
CARD_KEY_PAIR	2.1	Card key pair.
CARD_CERTIFICATE	2.1	Card certificate.
CA_CERTIFICATE	2.1	CA certificate.

5.5.5. Secure Session State

Name	SecureSessionState
Kind	Enumeration
Namespace	calypso.card.transaction
Since	3.0
Purpose	State of the secure session, returned by <u>TransactionManager.getSecureSessionState</u> .

The value reflects the state of the secure session at the moment of the call; a new call to [getSecureSessionState](#) is required to observe later changes. A secure session is open if and only if the value differs from NO_SESSION.



The values reflect the **cryptographic nature** of the session and not the **application mode** (Regular / Extended). Both symmetric modes share the same underlying cryptography and only differ in their configuration at the **TransactionManager** level; the integrator who needs to know the application mode obtains it directly via the sub-type of **TransactionManager** that has been instantiated.

Value	Since	Description
NO_SESSION	3.0	No secure session is open: none has been opened yet, or the last one has been closed or cancelled.
ASYMMETRIC	3.0	PKI secure session.
SYMMETRIC_PERSONALIZATION	3.0	Symmetric secure session opened with the personalisation write access level.
SYMMETRIC_LOAD	3.0	Symmetric secure session opened with the load write access level.
SYMMETRIC_DEBIT	3.0	Symmetric secure session opened with the debit write access level.

5.5.6. Select File Control

Name	SelectFileControl
Kind	Enumeration
Namespace	calypso.card
Since	1.0
Purpose	Expected behaviour of the Select File command (cf. ISO/IEC 7816-4 and Calypso specifications).

Value	Since	Description
FIRST_EF	1.0	The first EF of the current Calypso DF.
NEXT_EF	1.0	The next EF of the current Calypso DF.
CURRENT_DF	1.0	The current Calypso DF.

5.5.7. SV Operation

Name	SvOperation
Kind	Enumeration
Namespace	calypso.card.transaction
Since	1.0
Purpose	SV operation announced by the SV Get command: reload, or debit/undebit.

Value	Since	Description
RELOAD	1.0	Reload operation: increase the SV balance.
DEBIT_UNDEBIT	1.0	Debit or undebit operation: decrease the SV balance, or cancel a previous debit.

5.5.8. Write Access Level

Name	WriteAccessLevel
Kind	Enumeration
Namespace	calypso.card
Since	1.0
Purpose	Write access level for a Calypso secure session. Each level induces the use of a different session-key role.

Value	Since	Description
PERSONALIZATION	1.0	Personalisation, load and debit operations—uses the issuer key.
LOAD	1.0	Load and debit operations—uses the load key.
DEBIT	1.0	Debit operations only—uses the debit key.

5.6. Errors

Every error defined below carries two properties: **message** (**String**), which describes the condition, and **cause** (**Any?**), the underlying error that triggered it, **null** when there is none. They are not restated for each error.

5.6.1. Card Signature Not Verifiable

Name	CardSignatureNotVerifiable
Kind	Error
Namespace	calypso.card.transaction
Since	1.2
Purpose	Indicates that the card has correctly closed the secure session but that the authenticity of the session cannot be verified because the crypto module is no longer available (timeout, network problem, etc.).

5.6.2. Crypto

Name	Crypto
Kind	Error
Namespace	calypso.card.transaction
Since	2.0
Purpose	Indicates that an error occurred when computing a crypto operation.

5.6.3. Crypto IO

Name	CryptoIO
Kind	Error
Namespace	calypso.card.transaction
Since	2.0
Purpose	Indicates a communication error with the crypto module.

5.6.4. Inconsistent Data

Name	InconsistentData
Kind	Error
Namespace	calypso.card.transaction
Since	1.2
Purpose	Indicates the detection of inconsistent data.

The inconsistency falls into one of the following cases:

- a **de-synchronisation of the APDU exchanges**, that is, a number of APDU responses different from the number of APDU requests;
- an **inconsistency in the card data**, which can happen for example when the data read outside the secure session differs from the data read inside it.

5.6.5. Invalid Card Signature

Name	InvalidCardSignature
Kind	Error
Namespace	calypso.card.transaction
Since	1.2
Purpose	Indicates that the card signature is incorrect. For a transaction secured by symmetric cryptography (e.g. SAM), this indicates that the card has correctly closed the secure session, but that the card session is not authentic because the MAC it produced is wrong. This typically happens when the Digest Authenticate or SV Check status word is 6988h. For a transaction secured by asymmetric cryptography (e.g. PKI), this indicates only that the card signature is incorrect.

5.6.6. Invalid Certificate

Name	InvalidCertificate
Kind	Error
Namespace	calypso.card.transaction
Since	2.1
Purpose	Indicates that a certificate failed validation (signature, validity period, issuer or subject details, constraints, extensions, expiration, revocation).

5.6.7. Invalid PIN

Name	InvalidPin
Kind	Error
Namespace	calypso.card.transaction
Since	2.0
Purpose	Indicates that the provided PIN is invalid.

5.6.8. Session Buffer Overflow

Name	SessionBufferOverflow
Kind	Error
Namespace	calypso.card.transaction
Since	1.2
Purpose	Indicates that the secure session cannot be performed atomically because the modification buffer capacity is insufficient.

5.6.9. Unauthorized Key

Name	UnauthorizedKey
Kind	Error
Namespace	calypso.card.transaction
Since	1.0
Purpose	Indicates that the card requires an unauthorised session key.