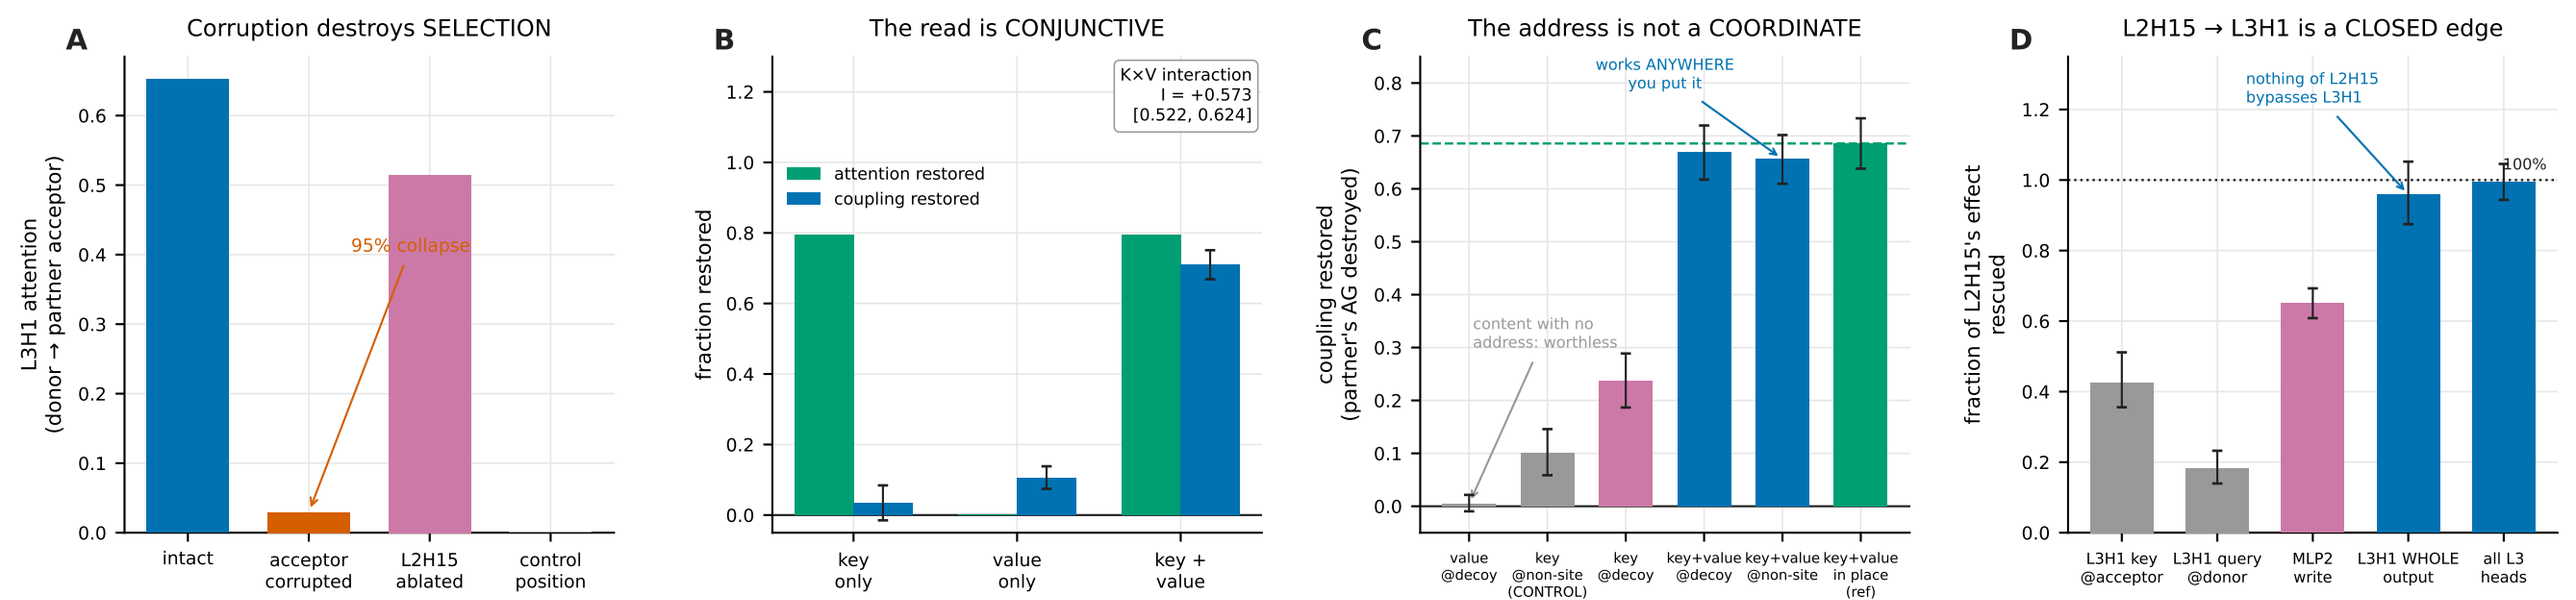
A
Corruption destroys SELECTION
L3H1 attention
(donor → partner acceptor)
95% collapse
intact
acceptor corrupted
L2H15 ablated
control position
B
The read is CONJUNCTIVE
K×V interaction
I = +0.573
[0.522, 0.624]
attention restored
coupling restored
fraction restored
key only
value only
key + value
C
The address is not a COORDINATE
works ANYWHERE
you put it
content with no
address: worthless
coupling restored
(partner's AG destroyed)
value @decoy
key @non-site (CONTROL)
key @decoy
key+value @decoy
key+value @non-site
key+value in place (ref)
D
L2H15 → L3H1 is a CLOSED edge
nothing of L2H15
bypasses L3H1
100%
fraction of L2H15's effect rescued
L3H1 key @acceptor
L3H1 query @donor
MLP2 write
L3H1 WHOLE output
all L3 heads