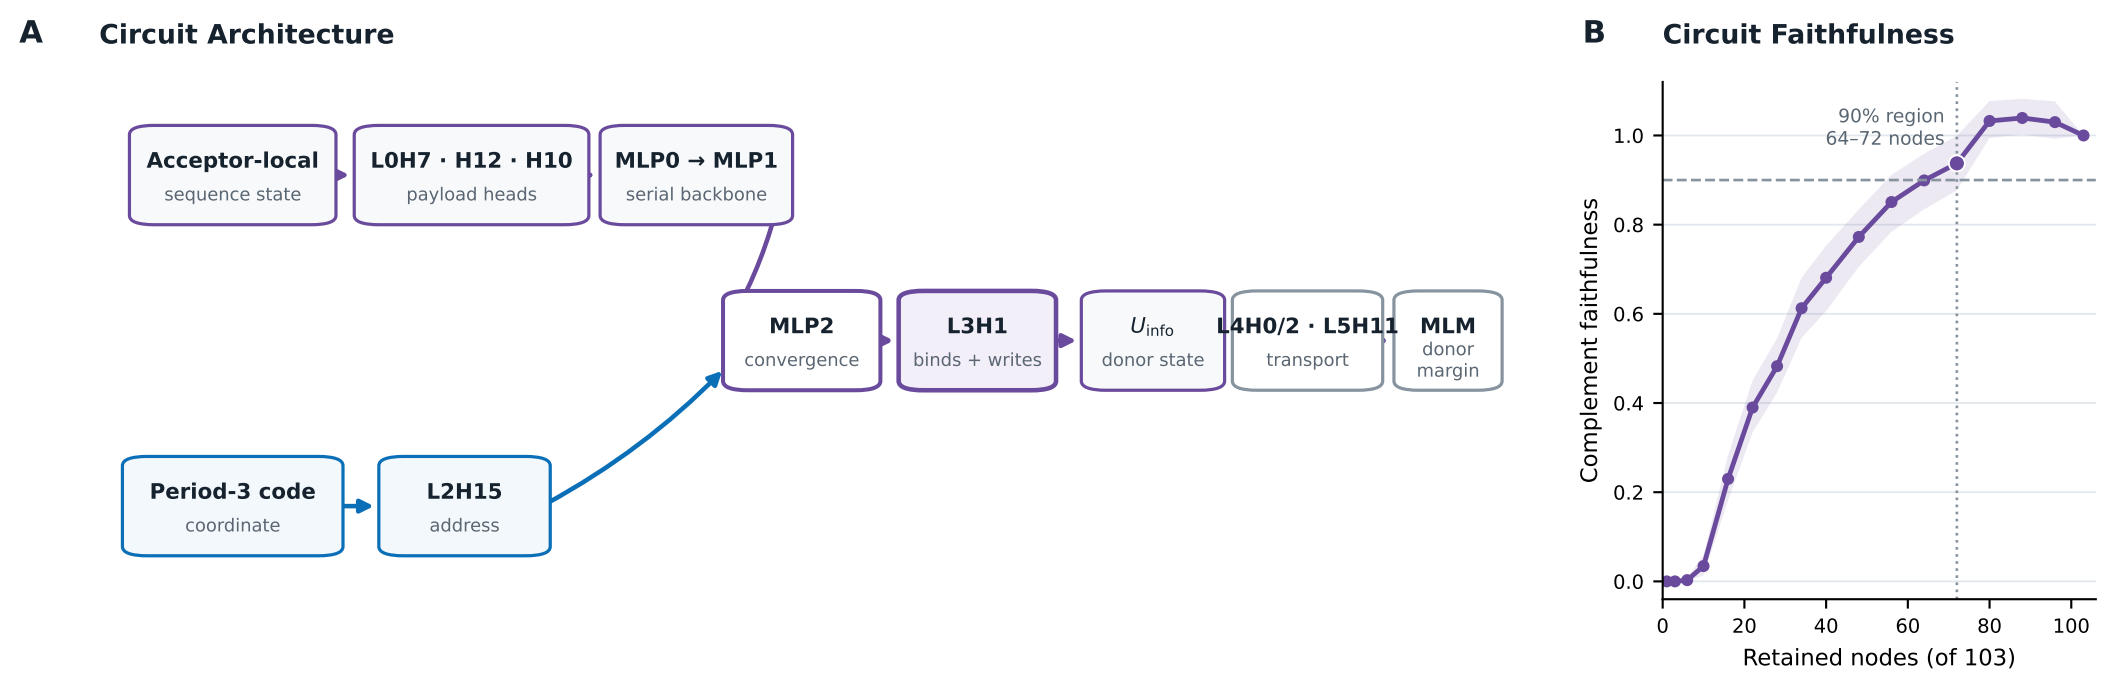
A
Circuit Architecture
Acceptor-local
sequence state
L0H7 · H12 · H10
payload heads
MLP0 → MLP1
serial backbone
MLP2
convergence
L3H1
binds + writes
U_{info}
donor state
L4H0/2 · L5H11
transport
MLM
donor margin
Period-3 code
coordinate
L2H15
address
B
Circuit Faithfulness
90% region
64–72 nodes
Complement faithfulness
1.0
0.8
0.6
0.4
0.2
0.0
0
20
40
60
80
100
Retained nodes (of 103)