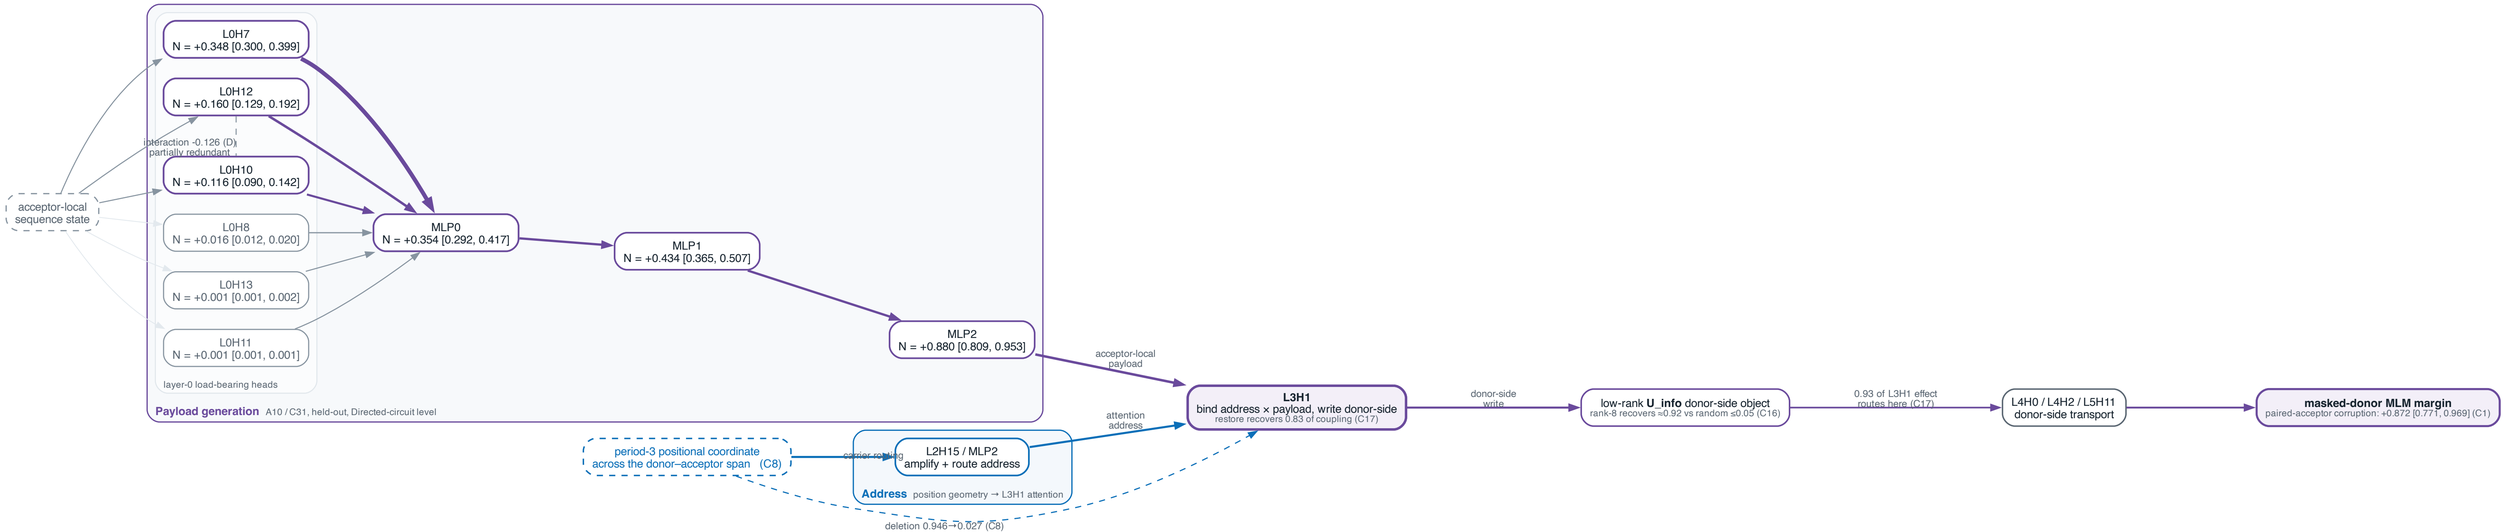


The donor–acceptor mechanism, front to back a structured top-ranked causal core: address × acceptor-local payload → L3H1 write → distributed readout
Payload-branch heads, N values, CIs, the H12–H10 interaction and the MLP0 mediation are read from a10_generator_edges.json (C31); n = 220 pairs / 196 genes; generator ceiling 0.282.
MLP0 mediates the layer-0 contribution: heads alone R = 0.136, heads + MLP0 R = 0.356. {L3H1, L2H15} removes 81.6% of coupling at 99.2% MLM health (C3).
N are conditional causal necessities on held-out splits — they do NOT sum and are not additive fractions; the chain is strictly serial.
This is a structured top-ranked core inside an irreducibly distributed computation, NOT the smallest sufficient circuit: F(C)≈0.005 when the complement is scrubbed and the held-out size curve has no knee — no minimality or completeness claim is made.