A structured causal core: address × acceptor-local payload → L3H1 write → distributed readout

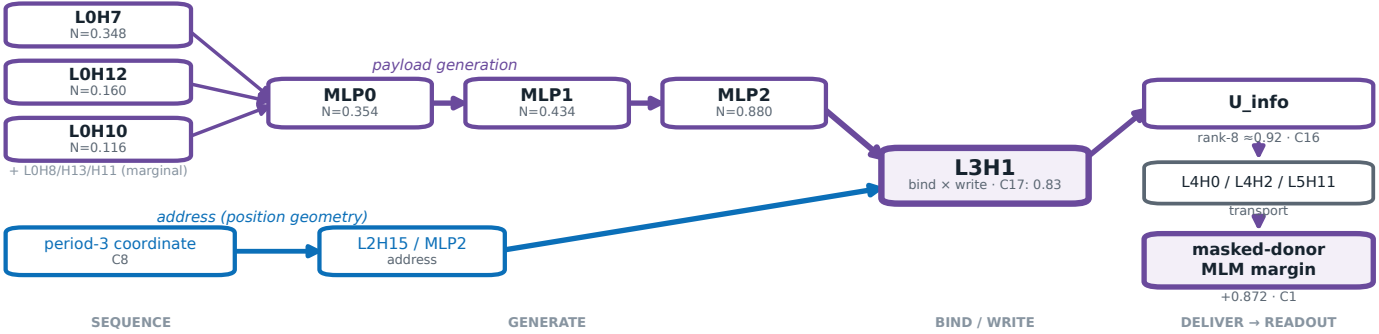

Front-to-back donor–acceptor mechanism (SpliceBERT.1024nt). Blue = positional address; purple = payload/coupling. N are conditional causal necessities on held-out splits (non-additive; the chain is strictly serial). A structured top-ranked core inside an irreducibly distributed computation — not a minimal or complete circuit.