Sample User Creation and REST API Call to Send Password via SMS to Given Cell Phone Number from IBM Sterling B2B Integrator / File Gateway

Authors: Mehmet Cambaz

Version: 1.0

Date Created: 02.11.2016

Last Updated:

Disclaimer:

All of the information is given "as-is" basis and author do not give any kind of guarantee of any sort, use it as your own risk.

Document Revision History

Revision	Date	Description	Author
1.0	02.11.2016	First Draft	Mehmet Cambaz

Document Approval History

Name	Signature	Date	Version Approved/Comments

Reference Documents

Document Name	Description	Owner	Location

Table of Contents

- 1. Introduction
- 2. Business Process Implementation on Sterling B2B Integrator / File Gateway

1. Introduction

This document's purpose is to give helpful information on how to integrate with REST APIs, it also includes creating a user via automatically with given parameters.

- The sample REST API was provided by the client and was used to send SMS with given data
- IBM Sterling B2B Integrator, IBM Sterling File Gateway are products of IBM which are used for file-based-integration middleware which have adapters FTP/SFTP/FTPS/C:D etc. and have capabilities of business processes developed by BPML. Used version is 5.2.4

All related assets:

1-Sample input file as xml to give username and cell phone number

```
<Bank>
<Partner>
<Name>User12345</Name>
<Phone>123456789</Phone>
<Email>user1@si.com</Email>
</Partner>
</Bank>
```

2-File System Adapter needed

```
<?xml version="1.0" encoding="UTF-8"?><SI_RESOURCES
xmlns="http://www.stercomm.com/SI/SI_IE_Resources"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" GISVersion="6000"
passphraseCheckString="r00ABXQABkRFU2VkZXVyAAJbQqzzF/gGCFTgAgAAeHAAAAAI8Kc/AQRuELBzcgARamF2YS5
sYW5nLkludGVnZXIS4qCk94GHOAIAAUkABXZhbHVleHIAEGphdmEubGFuZy5OdW1iZXKGrJUdC5TgiwIAAHhwAAAAZXVxA
H4AAQAAABAR6iYa3dsEJsphkhNdFt28"</pre>
```

FrameworkVersion="2"><SERVICE_INSTANCES><SERVICE_INSTANCE><parentdefname>FileSystem</parentdefname><name>CLIENTNAME_FSA</name><groupname></groupname><displayname>CLIENTNAME_FSA</displayname><description>v</description><targetenv>node1</targetenv><activestatus>1</activestatus><systemservice>0</systemservice><parentdefid>-

1</parentdefid><PARM><name>assignFilename</name><value>false</parm><PARM><name>bootstr ap</name><value>false</parm><PARM><PARM><PARM><name>collectionFolder</name><value>C:\</value></PARM><PARM><PARM><name>extractionFolder</name><value>c:\</value></PARM><PARM><name>filter</name><value>PartnerTemplate.xml</value></PARM><PARM><name>keepPath</name><value>false</value></PARM><PARM><name>unobscure</name><value>false</value></PARM><PARM><parm></parname><value>false</parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm></parm>
parm></parm>
parm>
parm<

3-Business Process implemented

Shared at the end as addendum 1

4-User creation Business Process uses this Partner Template

Shared at the end as addendum 2

5-Security Context is needed for User creation

Shared at the document below

2. Business Process Implementation on Sterling B2B Integrator / File Gateway

This is a sample business process which creates a user at B2B Integrator and sends the password data to the given cellphone number. By this the user onboarding could be automated and the IT operations will not know what is the password for the user in the future.

Input file to get parameters from:

This is a sample input file content which has data to create the user (testpartner.xml)

For the sample provided, security context must be created, it is created just once for the B2B Integrator, the sample I created was:

install_dir\bin>securityContext.cmd set Mehmet Partner password

UNIX: <code>install_dir/bin>securityContext.sh</code> set <code>context</code> identity <code>passphrase</code> Windows: <code>install_dir/bin>securityContext.cmd</code> set <code>context</code> identity <code>passphrase</code> Returns the following message: Context saved.

More info:

http://www.ibm.com/support/knowledgecenter/SS3JSW 5.2.0/com.ibm.help.svcs adpts a l.doc/l mport svc.html

Used as at the BPML:

```
<assign to="Context">Mehmet</assign>
<assign to="Identity">Partner</assign>
<assign to="Passphrase">password</assign>
```

This BPML part gets the input file content, parses it and sets the values to variables:

```
<operation name="XML Encoder">
      <participant name="XMLEncoder"/>
      <output message="XMLEncoderTypeInputMessage">
       <assign to="." from="*"></assign>
        <assign to="exhaust_input">YES</assign>
       <assign to="mode">xml_to_process_data</assign>
        <assign to="output_to_process_data">YES</assign>
      </output>
      <input message="inmsg">
        <assign to="." from="*"></assign>
      </input>
    </operation>
    <assign to="username" from="//Partner/Name/text()"></assign>
    <assign to="folder" from="//Partner/Name/text()"></assign>
    <assign to="phone" from="//Partner/Phone/text()"></assign>
    <assign to="email" from="//Partner/Email/text()"></assign>
    <operation name="File System Adapter">
     <participant name="CLIENTNAME FSA"/>
      <output message="FileSystemInputMessage">
        <assign to="." from="*"></assign>
       <assign to="Action">FS COLLECT</assign>
        <assign to="deleteAfterCollect">false</assign>
      </output>
      <input message="inmsg">
        <assign to="." from="*"></assign>
      </input>
    </operation>
    <operation name="getBPMetaDataInfo">
      <participant name="BPMetaDataInfoService"/>
      <output message="Xout">
        <assign to="DISPOSITION">false</assign>
        <assign to="." from="*"></assign>
      </output>
      <input message="inmsg">
        <assign to="." from="*"></assign>
    </operation>
    <assign to="WFID" from="/ProcessData/BPDATA/WORKFLOW ID/text()"></assign>
    <operation name="Document Keyword Replace">
      <participant name="DocumentKeywordReplace"/>
      <output message="DocKeywordReplaceInputMessage">
       <assign to="." from="*"></assign>
        <assign to="literal mode">true</assign>
        <assign to="keyword1">$$username$$</assign>
        <assign to="replace1" from="/ProcessData/username/text()"></assign>
        <assign to="keyword2">$$usermailbox$$</assign>
        <assign to="replace2" from="/ProcessData/folder/text()"></assign>
        <assign to="keyword3">$$userguid$$</assign>
        <assign to="replace3" from="/ProcessData/BPDATA/WORKFLOW_ID/text()"></assign>
        <assign to="keyword4">$$phonenumber$$</assign>
        <assign to="replace4" from="/ProcessData/ph</pre>
                                                        <mark>text()</mark>"></assign>
       <assign to="keyword5">$$emailaddress$$</assign>
        <assign to="replace5" from="/ProcessData/Email/text()"></assign>
      <input message="inmsg">
        <assign to="." from="*"></assign>
      </input>
    </operation>
```

The url given by the client was like this:

```
http://URLOFTHECLIENT/API/GET/SMS?UserName=&Password=&JobId=1819a7b9-f829-45d1-8dcf-a35b00a8a428&Message=SMSMESSAGETOSEND&MobilePhone=CELLPHONENUMBER
```


Success sample response:

```
3021477; SUCCESSFUL. MESSAGE HAS BEEN QUEUED WITH HIGH PRIORIY
```

This part of the BPML begins a HTTP session and uses HTTP GET to call the REST API which does the SMS sending and ends the created HTTP session.

```
<sequence name="SequenceHttpStart">
    <assign to="url"
from="concat(' http://URLOFTHECLIENT/API/GET/SMS?UserName=
& Password=& JobId=1819a7b9-f829-45d1-8dcf-
a35b00a8a428& Message=' ,//Partner/Name/text(), ' password& MobilePhon
e=',//Partner/Phone/text(),')"></assign>
    <operation name="HTTP Client Begin Session Service">
     <participant name="HTTPClientBeginSession"/>
     <output message="HTTPClientBeginSessionServiceTypeInputMessage">
       <assign to="HTTPClientAdapter">HTTPClientAdapter</assign>
       <assign to="RemoteHost">URLOFTHECLIENT</assign>
       <assign to="RemotePort">80</assign>
       <assign to="." from="*"></assign>
     </output>
     <input message="inmsg">
       <assign to="HTTPClientBeginSessionServiceResults" from="*"></assign>
     </input>
   </operation>
    <operation name="HTTP Client Get Service">
     <participant name="HTTPClientGet"/>
     <output message="HTTPClientPostServiceTypeInputMessage">
       <assign to="SessionToken"</pre>
from="HTTPClientBeginSessionServiceResults/SessionToken/text()"></assign>
     <assign to="RawResponse">true</assign>
     <assign to="ResponseTimeout">60</assign>
     <assign to="ShowResponseCode">true</assign>
     <assign from="//url/text()" to="URI"></assign>
     <assign to="." from="*"></assign>
     </output>
     <input message="inmsg">
       <assign to="." from="*"></assign>
     </input>
    </operation>
    <operation name="HTTP Client End Session Service">
     <participant name="HTTPClientEndSession"/>
     <output message="HTTPClientEndSessionServiceTypeInputMessage">
       <assign to="SessionToken"</pre>
from="HTTPClientBeginSessionServiceResults/SessionToken/text()"></assign>
       <assign to="." from="*"></assign>
     </output>
     <input message="inmsg">
       <assign to="." from="*"></assign>
     </input>
    </operation>
 <operation name="HTTP Client End Session Service">
```

Sample business process instance sends the username and password as SMS to given cellphone:

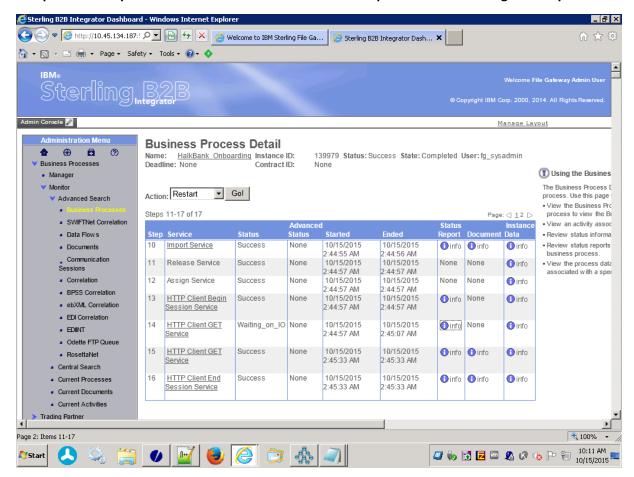

Complete BPML - addendum 1

```
cprocess name="CLIENTNAME Onboarding">
 <sequence name="SequenceStart">
   <operation name="XML Encoder">
      <participant name="XMLEncoder"/>
      <output message="XMLEncoderTypeInputMessage">
       <assign to="." from="*"></assign>
       <assign to="exhaust input">YES</assign>
       <assign to="mode">xml_to_process_data</assign>
        <assign to="output_to_process_data">YES</assign>
      </output>
      <input message="inmsg">
       <assign to="." from="*"></assign>
      </input>
   </operation>
   <assign to="username" from="//Partner/Name/text()"></assign>
   <assign to="folder" from="//Partner/Name/text()"></assign>
   <assign to="phone" from="//Partner/Phone/text()"></assign>
   <assign to="email" from="//Partner/Email/text()"></assign>
   <operation name="File System Adapter">
     <participant name="CLIENTNAME_FSA"/>
      <output message="FileSystemInputMessage">
       <assign to="." from="*"></assign>
       <assign to="Action">FS_COLLECT</assign>
       <assign to="deleteAfterCollect">false</assign>
      </output>
      <input message="inmsg">
        <assign to="." from="*"></assign>
      </input>
   </operation>
   <operation name="getBPMetaDataInfo">
      <participant name="BPMetaDataInfoService"/>
      <output message="Xout">
       <assign to="DISPOSITION">false</assign>
       <assign to="." from="*"></assign>
      </output>
      <input message="inmsg">
```

```
<assign to="." from="*"></assign>
  </input>
</operation>
<assign to="WFID" from="/ProcessData/BPDATA/WORKFLOW ID/text()"></assign>
<operation name="Document Keyword Replace">
  <participant name="DocumentKeywordReplace"/>
  <output message="DocKeywordReplaceInputMessage">
   <assign to="." from="*"></assign>
   <assign to="literal_mode">true</assign>
    <assign to="keyword1">$$username$$</assign>
    <assign to="replace1" from="/ProcessData/username/text()"></assign>
    <assign to="keyword2">$$usermailbox$$</assign>
    <assign to="replace2" from="/ProcessData/folder/text()"></assign>
   <assign to="keyword3">$$userguid$$</assign>
    <assign to="replace3" from="/ProcessData/BPDATA/WORKFLOW ID/text()"></assign>
    <assign to="keyword4">$$phonenumber$$</assign>
   <assign to="replace4" from="/ProcessData/phone/text()"></assign>
    <assign to="keyword5">$$emailaddress$$</assign>
    <assign to="replace5" from="/ProcessData/Email/text()"></assign>
  </output>
  <input message="inmsg">
    <assign to="." from="*"></assign>
  </input>
</operation>
<operation name="Create User">
  <participant name="ImportService"/>
  <output message="ImportTypeInputMessage">
   <assign to="." from="*"></assign>
   <assign to="Context">Mehmet</assign>
   <assign to="Identity">Partner</assign>
    <assign to="Passphrase">password</assign>
  </output>
  <input message="inmsg">
   <assign to="." from="*"></assign>
  </input>
</operation>
    <operation name="Release Service">
```

```
<participant name="ReleaseService"/>
      <output message="ReleaseServiceTypeInputMessage">
        <assign to="TARGET" from="'PrimaryDocument'"></assign>
      </output>
      <input message="inmsg">
      </input>
    </operation>
       <sequence name="SequenceHttpStart">
   <assign to="url" from="concat(&apos;http://URLOFTHECLIENT/API/GET/SMS?UserName=</pre>
& Password& JobId=1819a7b9-f829-45d1-8dcf-
a35b00a8a428&Message=',//Partner/Name/text(),'password&MobilePhone=',//
Partner/Phone/text(), ' </assign>
    <operation name="HTTP Client Begin Session Service">
      <participant name="HTTPClientBeginSession"/>
      <output message="HTTPClientBeginSessionServiceTypeInputMessage">
        <assign to="HTTPClientAdapter">HTTPClientAdapter</assign>
       <assign to="RemoteHost">URLOFTHECLIENT</assign>
       <assign to="RemotePort">80</assign>
        <assign to="." from="*"></assign>
      </output>
      <input message="inmsg">
        <assign to="HTTPClientBeginSessionServiceResults" from="*"></assign>
      </input>
    </operation>
    <operation name="HTTP Client Get Service">
      <participant name="HTTPClientGet"/>
      <output message="HTTPClientPostServiceTypeInputMessage">
       <assign to="SessionToken"</pre>
from="HTTPClientBeginSessionServiceResults/SessionToken/text()"></assign>
      <assign to="RawResponse">true</assign>
      <assign to="ResponseTimeout">60</assign>
      <assign to="ShowResponseCode">true</assign>
      <assign from="//url/text()" to="URI"></assign>
      <assign to="." from="*"></assign>
      </output>
      <input message="inmsg">
        <assign to="." from="*"></assign>
      </input>
```

```
</operation>
    <operation name="HTTP Client End Session Service">
      <participant name="HTTPClientEndSession"/>
      <output message="HTTPClientEndSessionServiceTypeInputMessage">
        <assign to="SessionToken"
from="HTTPClientBeginSessionServiceResults/SessionToken/text()"></assign>
        <assign to="." from="*"></assign>
      </output>
      <input message="inmsg">
        <assign to="." from="*"></assign>
      </input>
    </operation>
       <onFault>
 <operation name="HTTP Client End Session Service">
      <participant name="HTTPClientEndSession"/>
      <output message="HTTPClientEndSessionServiceTypeInputMessage">
        <assign to="SessionToken"</pre>
from="HTTPClientBeginSessionServiceResults/SessionToken/text()"></assign>
        <assign to="." from="*"></assign>
      </output>
      <input message="inmsg">
        <assign to="." from="*"></assign>
      </input>
    </operation>
       </onFault>
  </sequence>
  </sequence>
</process>
```

Complete BPML - Addendum 2

```
<?xml version="1.0" encoding="UTF-8"?>
<SI RESOURCES xmlns="http://www.stercomm.com/SI/SI IE Resources"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" GISVersion="6000"
passphraseCheckString="r00ABXQABkRFU2VkZXVyAAJbQqzzF/gGCFTqAqAAeHAAAAAIOv1iF/aaKRNzcqARamF2YS5
H4AAQAAABCnKV3yNb5L1veHuEEOPWYA" FrameworkVersion="2">
   <FG PARTNERS>
     <FG_PARTNER>
        <NAME>$$username$$</NAME>
        <SCI ENTITIES>$$username$$</SCI ENTITIES>
        <SCI PACKAGES>$$username$$ CONSUMER</SCI PACKAGES>
        <SCI_PACKAGES>$$username$$_PRODUCER</SCI_PACKAGES>
        <USERS>$$username$$</USERS>
        <MBXVIRTUAL>$$username$$</MBXVIRTUAL>
        <MBXMETA>/$$username$$$$usermailbox$$</MBXMETA>
        <MBXMETA>/$$username$$/archive</MBXMETA>
        <MBXMETA>/$$username$$</MBXMETA>
        <FG PARTNERXREF>
           <COMMUNITY>Demo FileGateway</COMMUNITY>
           <PARTNERUSER>$$username$$</PARTNERUSER>
           <PARTNERGROUP>All Partners</PARTNERGROUP>
        </FG PARTNERXREF>
     </FG PARTNER>
   </FG PARTNERS>
   <USERS>
     <USER>
        <METADATA>
           <USER_ID>$$username$$</USER_ID>
           <PASSWORD>br4sfhq3J23u2wnDlwXusf+oTcqmQ3JL2mxoNIB1gY0=</PASSWORD>
           <SALT>ChJUi9MkL6zrP7vmtSBW2w==</sALT>
           <LANG>en</LANG>
           <EMAIL>$$emailaddress$$</EMAIL>
           <FNAME>Demo</FNAME>
           <LNAME>DrJohnDoe</LNAME>
           <PAGER />
           <VERSION />
           <DOWNLOAD TIME />
           <SUPER>false</SUPER>
```

```
<PARENT ID />
   <MENU ID>PLTADM MENU</MENU ID>
   <THEME>sapphire</THEME>
   <ENTITY ID>$$userguid$$aac32:1436daff9a0:-7cc8</ENTITY ID>
   <STATUS>1</STATUS>
   <TIMEOUT>900</TIMEOUT>
   <POLICY ID />
   <PWD_MOD_DATE>$$userguid$$15079287</pwd_MOD_DATE>
   <DASH_USER_ID>0</DASH_USER_ID>
   <CONFIRM_VALUE />
   <MODIFIED>$$userguid$$17084508</modIFIED>
   <CREATED>$$userguid$$15079287</CREATED>
   <LAST_LOGIN />
   <DISABLED />
   <SECURITY CODE>0</SECURITY CODE>
   <USER TYPE>INTERNAL</USER TYPE>
   <CHANGE PASS NEXT>false/CHANGE PASS NEXT>
   <RESTRICTED_USER>false/RESTRICTED_USER>
</METADATA>
<USERDEPENDENTS>
   <USERXPERMS>
      <USERXPERM>
         <METADATA>
            <USER_ID>$$username$$</USER_ID>
            <PERMISSION ID>/$$username$$.mbx</PERMISSION ID>
            <STATUS>1</STATUS>
            <RIGHTS>2047</RIGHTS>
            <POST UI RLZTN>true</post UI RLZTN>
         </METADATA>
      </userxperm>
      <USERXPERM>
         <METADATA>
            <USER ID>$$username$$</USER ID>
            <PERMISSION_ID>/$$username$$$$usermailbox$$.mbx</PERMISSION_ID>
            <STATUS>1</STATUS>
            <RIGHTS>2047</RIGHTS>
            <post_ui_rlztn>true</post_ui_rlztn>
         </METADATA>
      </userxperm>
```

```
</USERXPERMS>
         <USERXGROUPS>
            <USERXGROUP>
               <METADATA>
                  <GROUP_ID>mbiusers</GROUP_ID>
                  <USER_SUB_GROUP_ID>$$username$$</USER_SUB_GROUP_ID>
               </METADATA>
            </userxgroup>
            <USERXGROUP>
               <METADATA>
                  <GROUP_ID>fg_partnerusers</GROUP_ID>
                  <USER SUB GROUP ID>$$username$$</USER SUB GROUP ID>
               </METADATA>
            </userxgroup>
         </userxgroups>
     </userdependents>
   </USER>
</USERS>
<MBXVIRTUAL>
   <MBXVIRTUAL>
     <VIRTUALROOT>
         <USER ID>$$username$$</USER ID>
         <ROOT_MAILBOX_PATH>/$$username$$</ROOT_MAILBOX_PATH>
      </VIRTUALROOT>
      <MBXVIRTUALDEPENDENTS>
         <MAILBOX>
            <BASEPATH>/$$username$$</BASEPATH>
            <METADATA>
              <PARENT_PATH />
               <PATH>/</PATH>
            </METADATA>
            <METADATA>
               <parent_path>/</parent_path>
               <PATH>/$$username$$</PATH>
            </METADATA>
         </MAILBOX>
      </mbxvirtualdependents>
   </MBXVIRTUAL>
</MBXVIRTUAL>
```

```
<SCI ENTITIES>
   <SCI ENTITY>
      <OBJECT_ID>$$userguid$$aac32:1436daff9a0:-7cc8</OBJECT_ID>
      <EXTERNAL OBJECT ID />
     <OBJECT_VERSION>1</OBJECT_VERSION>
      <OBJECT_NAME>$$username$$</OBJECT_NAME>
      <OBJECT CODE>$$username$$</OBJECT CODE>
     <REF_URL />
      <DUNS />
      <address_line1 />
     <address_Line2 />
     <ADDRESS LINE3 />
      <address_Line4 />
     <ADDRESS LINE5 />
     <ADDRESS LINE6 />
      <ADDRESS LINE7 />
      <CITY />
      <STATE />
     <ZIP />
     <TIME ZONE>-05</TIME ZONE>
      <COUNTRY>US</COUNTRY>
      <IDENTIFIER />
     <VAT CODE />
      <EMAIL_ADDR />
      <LOOKUP ID />
      <LOOKUP_ID_COMMENTS />
      <LAST_MODIFICATION>2014-01-07 12:17:59.0/LAST_MODIFICATION>
      <LAST_MODIFIER>fg_sysadmin</LAST_MODIFIER>
      <OBJECT_STATE>true</OBJECT_STATE>
      <EXTENDS OBJECT ID />
      <EXTENDS OBJECT VERSION>0</EXTENDS OBJECT VERSION>
      <EMAIL_ADDRESS>$$emailaddress$$</EMAIL_ADDRESS>
      <PHONE_NUMBER>$$phonenumber$$/PHONE_NUMBER>
      <ORGANIZATION_KEY>$$username$$</ORGANIZATION_KEY>
      <ISO 20022 TYPE />
      <ISO_CLEARING_SYSTEM_MEMBER_ENTITY />
      <ISO_OTHER_ENTITY />
     <ISO_ID_ENTITY />
      <ISO_CONTACT_ENTITY />
```

```
<ISSUER />
<SCHEME_NAME_CODE />
<SCHEME_NAME_PROPRIETARY />
<CLEARING SYSTEM MEMBER ID />
<COUNTRY OF RESIDENCE />
<DEPARTMENT />
<SUB DEPARTMENT />
<STREET NAME />
<BUILDING NUMBER />
<TITLE />
<MOBILE PHONE />
<DAY FAX NO />
<OTHER />
<BIRTH DATE />
<STATE OF BIRTH />
<CITY OF BIRTH />
<COUNTRY OF BIRTH />
<address_type />
<DELIVERY CHANNELS>
  <SCI DELIVERY CHANNEL>
      <OBJECT_ID>$$userguid$$aac32:1436daff9a0:-7cb3</OBJECT_ID>
      <EXTERNAL OBJECT ID />
     <OBJECT VERSION>1</OBJECT VERSION>
      <OBJECT_NAME>delivery_$$userguid$$1507899537</OBJECT_NAME>
      <TRANSPORT ID>$$userguid$$aac32:1436daff9a0:-7cb4</TRANSPORT ID>
      <DOC_EXCHANGE_ID>$$userguid$$aac32:1436daff9a0:-7cb5</DOC_EXCHANGE_ID>
      <SYNC REPLY MODE>None</SYNC REPLY MODE>
      <NON REPUDIATION OF ORIGIN>no/NON REPUDIATION OF ORIGIN>
      <NON_REPUDIATION_OF_RECEIPT>no</NON_REPUDIATION_OF_RECEIPT>
      <SECURE TRANSPORT>no</secure TRANSPORT>
      <CONFIDENTIALITY>no</CONFIDENTIALITY>
      <AUTHENTICATED>no</AUTHENTICATED>
      <AUTHORIZED>no</AUTHORIZED>
      <RECEIPT_TYPE>0</RECEIPT_TYPE>
      <RECEIPT SIGNATURE TYPE>0</RECEIPT SIGNATURE TYPE>
      <RECEIPT_TO_ADDRESS />
      <RECEIPT DELIVERY MODE>0</RECEIPT DELIVERY MODE>
      <ALWAYS VERIFY />
      <RECEIPT TIMEOUT />
```

```
<LAST MODIFICATION>2014-01-07 12:17:58.996/LAST MODIFICATION>
  <LAST MODIFIER>InstallProcess/LAST MODIFIER>
  <OBJECT_STATE>true</OBJECT_STATE>
   <SYNC REPLY MODE INH>0</SYNC REPLY MODE INH>
   <NON REPUDIATION OF ORIGIN INH>0</NON REPUDIATION OF ORIGIN INH>
   <NON_REPUDIATION_OF_RECEIPT_INH>0</NON_REPUDIATION_OF_RECEIPT_INH>
   <SECURE TRANSPORT INH>0</SECURE TRANSPORT INH>
   <CONFIDENTIALITY INH>0</CONFIDENTIALITY INH>
   <AUTHENTICATED INH>0</AUTHENTICATED INH>
   <authorized_inh>0</authorized_inh>
   <RECEIPT SIGNATURE TYPE INH>0</RECEIPT SIGNATURE TYPE INH>
  <RECEIPT TO ADDRESS INH>0</RECEIPT TO ADDRESS INH>
   <RECEIPT_DELIVERY_MODE_INH>0</recEIPT_DELIVERY_MODE_INH>
  <RECEIPT TYPE INH>0</RECEIPT TYPE INH>
  <RECEIPT TIMEOUT INH>0</RECEIPT TIMEOUT INH>
   <ALWAYS VERIFY INH>0</ALWAYS VERIFY INH>
  <EXTENDS OBJECT ID />
  <EXTENDS_OBJECT_VERSION>0</EXTENDS OBJECT VERSION>
</SCI DELIVERY CHANNEL>
<SCI DELIVERY CHANNEL>
   <OBJECT_ID>$$userguid$$aac32:1436daff9a0:-7cac</OBJECT_ID>
  <EXTERNAL OBJECT ID />
  <OBJECT VERSION>1</OBJECT VERSION>
  <OBJECT_NAME>delivery_$$userguid$$1507905838</OBJECT_NAME>
  <TRANSPORT ID>$$userguid$$aac32:1436daff9a0:-7cad</TRANSPORT ID>
   <DOC EXCHANGE ID>$$userguid$$aac32:1436daff9a0:-7cae/DOC EXCHANGE ID>
   <SYNC REPLY MODE>None</SYNC REPLY MODE>
   <NON REPUDIATION OF ORIGIN>no</NON REPUDIATION OF ORIGIN>
   <NON_REPUDIATION_OF_RECEIPT>no</NON_REPUDIATION_OF_RECEIPT>
   <SECURE TRANSPORT>no</secure TRANSPORT>
   <CONFIDENTIALITY>no</CONFIDENTIALITY>
   <AUTHENTICATED>no</AUTHENTICATED>
   <AUTHORIZED>no</AUTHORIZED>
   <RECEIPT TYPE>0</RECEIPT TYPE>
  <RECEIPT SIGNATURE TYPE>0</RECEIPT SIGNATURE TYPE>
  <RECEIPT TO ADDRESS />
   <RECEIPT DELIVERY MODE>0</RECEIPT DELIVERY MODE>
  <ALWAYS VERIFY />
   <RECEIPT TIMEOUT />
```

```
<LAST MODIFICATION>2014-01-07 12:17:59.06</LAST MODIFICATION>
     <LAST MODIFIER>InstallProcess/LAST MODIFIER>
     <OBJECT_STATE>true</OBJECT_STATE>
      <SYNC REPLY MODE INH>0</SYNC REPLY MODE INH>
      <NON REPUDIATION OF ORIGIN INH>0</NON REPUDIATION OF ORIGIN INH>
      <NON_REPUDIATION_OF_RECEIPT_INH>0</NON_REPUDIATION_OF_RECEIPT_INH>
      <SECURE TRANSPORT INH>0</SECURE TRANSPORT INH>
      <CONFIDENTIALITY INH>0</CONFIDENTIALITY INH>
      <AUTHENTICATED INH>0</AUTHENTICATED INH>
      <AUTHORIZED_INH>0</AUTHORIZED_INH>
     <RECEIPT SIGNATURE TYPE INH>0</RECEIPT SIGNATURE TYPE INH>
     <RECEIPT TO ADDRESS INH>0</RECEIPT TO ADDRESS INH>
     <RECEIPT_DELIVERY_MODE_INH>0</RECEIPT_DELIVERY_MODE_INH>
     <RECEIPT TYPE INH>0</RECEIPT TYPE INH>
     <RECEIPT TIMEOUT INH>0</RECEIPT TIMEOUT INH>
      <ALWAYS VERIFY INH>0</ALWAYS VERIFY INH>
     <EXTENDS OBJECT ID />
     <EXTENDS_OBJECT_VERSION>0</EXTENDS OBJECT VERSION>
   </SCI DELIVERY CHANNEL>
<DOC_EXCHANGES>
   <SCI DOC EXCHANGE>
     <OBJECT ID>$$userguid$$aac32:1436daff9a0:-7cae/OBJECT ID>
     <EXTERNAL_OBJECT_ID />
     <OBJECT VERSION>1</OBJECT VERSION>
     <OBJECT_NAME>$$username$$_CONSUMER</OBJECT_NAME>
     <NO OF RETRIES>3</NO OF RETRIES>
      <RETRY INTERVAL>30</RETRY INTERVAL>
     <PERSIST DURATION>300/PERSIST DURATION>
     <ENVELOPE PROTOCOL>2</ENVELOPE PROTOCOL>
      <ENVELOPE ENCRYPTION ALGORITHM />
     <KEY MODEL />
     <SIGNING KEY CERTIFICATES />
      <SIGNING_KEY_CERT_PASSWORD />
     <SIGNING USER CERTIFICATES />
     <MSG SIGNING ALG />
     <MSG SYMMETRIC ALG STRENGTH />
     <IDEMPOTENCY />
      <LAST MODIFICATION>2014-01-07 12:17:59.05</LAST MODIFICATION>
```

```
<LAST MODIFIER>InstallProcess/LAST MODIFIER>
   <OBJECT STATE>true</OBJECT STATE>
   <NO_OF_RETRIES_INH>0</NO_OF_RETRIES_INH>
   <RETRY INTERVAL INH>0</RETRY INTERVAL INH>
  <PERSIST DURATION INH>0</PERSIST DURATION INH>
   <ENVELOPE PROTOCOL INH>0</ENVELOPE PROTOCOL INH>
   <ENVELOPE ENCRYPTION ALG INH>0</ENVELOPE ENCRYPTION ALG INH>
   <KEY MODEL INH>0</KEY MODEL INH>
   <SIGNING_KEY_CERT_ID_INH>0</SIGNING_KEY_CERT_ID_INH>
   <SIGNING_KEY_CERT_PASSWORD_INH>0</SIGNING_KEY_CERT_PASSWORD_INH>
  <SIGNING USER CERT ID INH>0</SIGNING USER CERT ID INH>
  <MSG SIGNING ALG INH>0</MSG SIGNING ALG INH>
   <MSG_SYMMETRIC_ALG_STRENGTH_INH>0</msg_SYMMETRIC_ALG_STRENGTH_INH>
  <IDEMPOTENCY INH>0</IDEMPOTENCY INH>
  <EXTENDS OBJECT ID />
   <EXTENDS OBJECT VERSION>0</EXTENDS OBJECT VERSION>
  <PGP PK ENCRYPT />
  <PGP_PK_VERIFY />
  <PGP PK ENCRYPT INH>0</PGP PK ENCRYPT INH>
  <PGP PK VERIFY INH>0</PGP PK VERIFY INH>
</sci_doc_exchange>
<SCI DOC EXCHANGE>
  <OBJECT ID>$$userguid$$aac32:1436daff9a0:-7cb5/OBJECT ID>
  <EXTERNAL_OBJECT_ID />
  <OBJECT VERSION>1</OBJECT VERSION>
  <OBJECT_NAME>$$username$$_PRODUCER</OBJECT_NAME>
  <NO OF RETRIES>3</NO OF RETRIES>
   <RETRY INTERVAL>30</RETRY INTERVAL>
  <PERSIST DURATION>300/PERSIST DURATION>
  <ENVELOPE PROTOCOL>2</ENVELOPE PROTOCOL>
   <ENVELOPE ENCRYPTION ALGORITHM />
  <KEY MODEL />
  <SIGNING KEY CERTIFICATES />
   <SIGNING_KEY_CERT_PASSWORD />
  <SIGNING USER CERTIFICATES />
  <MSG SIGNING ALG />
  <MSG SYMMETRIC ALG STRENGTH />
  <IDEMPOTENCY />
   <LAST MODIFICATION>2014-01-07 12:17:58.98/LAST MODIFICATION>
```

```
<LAST MODIFIER>InstallProcess/LAST MODIFIER>
     <OBJECT STATE>true</OBJECT STATE>
     <no_of_retries_inh>0</no_of_retries_inh>
     <RETRY INTERVAL INH>0</RETRY INTERVAL INH>
     <PERSIST DURATION INH>0</PERSIST DURATION INH>
     <ENVELOPE PROTOCOL INH>0</ENVELOPE PROTOCOL INH>
     <ENVELOPE ENCRYPTION ALG INH>0</ENVELOPE ENCRYPTION ALG INH>
     <KEY MODEL INH>0</KEY MODEL INH>
     <SIGNING_KEY_CERT_ID_INH>0</SIGNING_KEY_CERT_ID_INH>
     <SIGNING_KEY_CERT_PASSWORD_INH>0</SIGNING_KEY_CERT_PASSWORD_INH>
     <SIGNING USER CERT ID INH>0</SIGNING USER CERT ID INH>
     <MSG SIGNING ALG INH>0</MSG SIGNING ALG INH>
     <MSG_SYMMETRIC_ALG_STRENGTH_INH>0</msg_SYMMETRIC_ALG_STRENGTH_INH>
     <IDEMPOTENCY INH>0</IDEMPOTENCY INH>
     <EXTENDS OBJECT ID />
     <EXTENDS OBJECT VERSION>0</EXTENDS OBJECT VERSION>
     <PGP PK ENCRYPT />
     <PGP_PK_VERIFY />
     <PGP PK ENCRYPT INH>0</PGP PK ENCRYPT INH>
     <PGP PK VERIFY INH>0</PGP PK VERIFY INH>
  </sci_doc_exchange>
</po>
<PROFILES>
  <SCI PROFILE>
     <OBJECT ID>$$userguid$$aac32:1436daff9a0:-7cab</OBJECT ID>
     <EXTERNAL_OBJECT_ID />
     <OBJECT VERSION>1</OBJECT VERSION>
     <OBJECT NAME>$$username$$ CONSUMER</OBJECT NAME>
     <DELIVERY_CHANNEL_ID>$$userguid$$aac32:1436daff9a0:-7cac/DELIVERY_CHANNEL_ID>
     <PACKAGING ID>$$userguid$$aac32:1436daff9a0:-7caf/PACKAGING ID>
     <SERVICE PROVIDER ID>none
     FROFILE_TYPE>EDI
     <ROLE NAME />
     <ROLE_HREF />
     <SERVICE />
     <SERVICE TYPE />
     <ACTION />
     <GLN />
     <LAST MODIFICATION>2014-01-07 12:17:59.062</LAST MODIFICATION>
```

```
<LAST MODIFIER>InstallProcess/LAST MODIFIER>
  <OBJECT_STATE>true</OBJECT_STATE>
  <ROLE_NAME_INH>0</ROLE_NAME_INH>
  <ROLE HREF INH>0</ROLE HREF INH>
  <SERVICE INH>0</SERVICE INH>
  <SERVICE_TYPE_INH>0</SERVICE_TYPE_INH>
  <ACTION INH>0</ACTION INH>
  <GLN INH>0</GLN INH>
  <PROFILE TYPE INH>0</PROFILE TYPE INH>
  <SERVICE_PROVIDER_ID_INH>0</SERVICE_PROVIDER_ID_INH>
  <PROFILE WORKFLOWS INH>0</PROFILE WORKFLOWS INH>
  <EXTENDS OBJECT ID />
  <EXTENDS_OBJECT_VERSION>0</EXTENDS_OBJECT_VERSION>
  <RN PROFILE ID />
  <PROFILE WORKFLOWS />
</SCI PROFILE>
<SCI PROFILE>
  <OBJECT_ID>$$userguid$$aac32:1436daff9a0:-7cb2</OBJECT_ID>
  <EXTERNAL OBJECT ID />
  <OBJECT VERSION>1</OBJECT VERSION>
  <OBJECT_NAME>$$username$$_PRODUCER</OBJECT_NAME>
  <DELIVERY CHANNEL ID>$$userguid$$aac32:1436daff9a0:-7cb3/DELIVERY CHANNEL ID>
  <PACKAGING ID>$$userguid$$aac32:1436daff9a0:-7cb6</PACKAGING ID>
  <SERVICE_PROVIDER_ID>none
  <ROLE NAME />
  <ROLE HREF />
  <SERVICE />
  <SERVICE TYPE />
  <ACTION />
  <GLN />
  <LAST_MODIFICATION>2014-01-07 12:17:58.998/LAST_MODIFICATION>
  <LAST MODIFIER>InstallProcess/LAST MODIFIER>
  <OBJECT_STATE>true</OBJECT_STATE>
  <ROLE NAME INH>0</ROLE NAME INH>
  <ROLE HREF INH>0</ROLE HREF INH>
  <SERVICE INH>0</SERVICE INH>
  <SERVICE TYPE INH>0</SERVICE TYPE INH>
  <ACTION INH>0</ACTION INH>
```

```
<GLN INH>0</GLN INH>
     TYPE_INH>0
     <SERVICE_PROVIDER_ID_INH>0</SERVICE_PROVIDER_ID_INH>
      <PROFILE WORKFLOWS INH>0</PROFILE WORKFLOWS INH>
     <EXTENDS_OBJECT_ID />
     <EXTENDS_OBJECT_VERSION>0</EXTENDS_OBJECT_VERSION>
     <RN PROFILE ID />
     <PROFILE_WORKFLOWS />
  </SCI PROFILE>
</PROFILES>
<TRANSPORTS>
  <SCI TRANSPORT>
     <OBJECT_ID>$$userguid$$aac32:1436daff9a0:-7cad</OBJECT_ID>
     <EXTERNAL_OBJECT_ID />
     <OBJECT VERSION>1</OBJECT VERSION>
     <OBJECT NAME>$$username$$ CONSUMER</OBJECT NAME>
     <SENDING PROTOCOL />
     <RECEIVING_PROTOCOL>MAILBOX</recEIVING_PROTOCOL>
     <END POINT />
     <END POINT TYPE>allPurpose</END POINT TYPE>
     <END_POINT_IP_ADDRESS />
     <END POINT LISTEN PORT />
     <DIRECTORY />
     <SSL_OPTION>SSL_NONE</SSL_OPTION>
     <CIPHER STRENGTH>ALL</CIPHER STRENGTH>
     <KEY_CERTIFICATES />
     <USER CERTIFICATES />
      <SECURITY PROTOCOL />
     <TRANSFER MODE />
     <RESPONSE TIMEOUT />
     <LOCAL DATA PORT RANGE />
     <LOCAL_CONTROL_PORT_RANGE />
     <FIREWALL PROXY />
     <FIREWALL_CONNECT_TIME />
     <SERVER_SOCKET_TIMEOUT />
     <MAIL BOX>/$$username$$</MAIL BOX>
     <MAIL FROM />
     <MAIL_ID />
     <CC />
```

```
<BCC />
<KEY_CERT_PASSWORD />
<PROTOCOL_MODE />
<DOCUMENT />
<TRANSPORT_ACCOUNT_USER_ID />
```

<TRANSPORT_ACCOUNT_PASSWORD>r00ABXQABkRFU2VkZXVyAAJbQqzzF/gGCFTgAgAAeHAAAAAI03WIYGGEc0JzcgARam
F2YS5sYW5nLkludGVnZXIS4qCk94GHOAIAAUkABXZhbHVleHIAEGphdmEubGFuZy50dWliZXKGrJUdC5TgiwIAAHhwAAAA
ZXVxAH4AAQAAAAAX90DotnOBIQ==
CTRANSPORT ACCOUNT PASSWORD>

```
<LAST MODIFICATION>2014-01-07 12:17:59.057</LAST MODIFICATION>
<LAST MODIFIER>InstallProcess/LAST MODIFIER>
<OBJECT STATE>true</OBJECT STATE>
<SENDING PROTOCOL INH>0</SENDING PROTOCOL INH>
<RECEIVING PROTOCOL INH>0</RECEIVING PROTOCOL INH>
<END POINT INH>0</END POINT INH>
<END POINT TYPE INH>0</END POINT TYPE INH>
<END POINT IP ADDRESS INH>0</END POINT IP ADDRESS INH>
<END POINT LISTEN PORT INH>0</END POINT LISTEN PORT INH>
<DIRECTORY INH>0</DIRECTORY INH>
<SSL OPTION INH>0</SSL OPTION INH>
<CIPHER STRENGTH INH>0</CIPHER STRENGTH INH>
<KEY CERT ID INH>0</KEY CERT ID INH>
<USER CERT ID INH>0</USER CERT ID INH>
<SECURITY PROTOCOL INH>0</SECURITY PROTOCOL INH>
<TRANSFER MODE INH>0</TRANSFER MODE INH>
<RESPONSE TIMEOUT INH>0</RESPONSE TIMEOUT INH>
<LOCAL DATA PORT RANGE INH>0</LOCAL DATA PORT RANGE INH>
<LOCAL CONTROL PORT RANGE INH>0</LOCAL CONTROL PORT RANGE INH>
<FIREWALL PROXY INH>0</FIREWALL PROXY INH>
<FIREWALL CONNECT TIME INH>0</FIREWALL CONNECT TIME INH>
<SERVER_SOCKET_TIMEOUT_INH>0</SERVER_SOCKET_TIMEOUT_INH>
<MAIL BOX INH>0</MAIL BOX INH>
<MAIL FROM INH>0</MAIL FROM INH>
<MAIL_ID_INH>0</MAIL_ID_INH>
<CC INH>0</CC INH>
<BCC INH>0</BCC INH>
<KEY CERT PASSWORD INH>0</KEY CERT PASSWORD INH>
<PROTOCOL MODE INH>0
PROTOCOL MODE INH>
<DOCUMENT INH>0</DOCUMENT INH>
<EXTENDS OBJECT ID />
```

```
<EXTENDS OBJECT VERSION>0</EXTENDS OBJECT VERSION>
   <TRANSPORT_ACCOUNT_USER_ID_INH>0</TRANSPORT_ACCOUNT_USER_ID_INH>
   <TRANSPORT_ACCOUNT_PASSWORD_INH>0</TRANSPORT_ACCOUNT_PASSWORD_INH>
   <TRANSPORT CA CERTS INH>0</TRANSPORT CA CERTS INH>
   <CA CERTIFICATES />
  <SSL_KEY_CERTIFICATES />
  <SSLKEY CERT ID INH>0</SSLKEY CERT ID INH>
   <USE CCC>false</USE CCC>
   <USE_CCC_INH>0</USE_CCC_INH>
</SCI_TRANSPORT>
<SCI TRANSPORT>
  <OBJECT ID>$$userguid$$aac32:1436daff9a0:-7cb4</OBJECT ID>
   <EXTERNAL_OBJECT_ID />
  <OBJECT_VERSION>1</OBJECT_VERSION>
   <OBJECT NAME>$$username$$ PRODUCER</OBJECT NAME>
   <SENDING PROTOCOL />
   <RECEIVING PROTOCOL>MAILBOX</RECEIVING PROTOCOL>
   <END_POINT />
   <END POINT TYPE>allPurpose</END POINT TYPE>
   <END POINT IP ADDRESS />
   <END_POINT_LISTEN_PORT />
   <DIRECTORY />
   <SSL OPTION>SSL NONE</SSL OPTION>
   <CIPHER_STRENGTH>ALL</CIPHER_STRENGTH>
   <KEY CERTIFICATES />
   <USER_CERTIFICATES />
   <SECURITY_PROTOCOL />
   <TRANSFER MODE />
  <RESPONSE_TIMEOUT />
   <LOCAL DATA PORT RANGE />
   <LOCAL CONTROL PORT RANGE />
  <FIREWALL_PROXY />
  <FIREWALL CONNECT TIME />
   <SERVER_SOCKET_TIMEOUT />
  <MAIL BOX />
  <MAIL FROM />
   <MAIL ID />
   <CC />
```

<BCC />

```
<key_cert_password />
cprotocol_mode />
<document />
<transport account user id />
```

<TRANSPORT_ACCOUNT_PASSWORD>r00ABXQABkRFU2VkZXVyAAJbQqzzF/gGCFTgAgAAeHAAAAAIDIcivbp+xWJzcgARam
F2YS5sYW5nLkludGVnZXIS4qCk94GHOAIAAUkABXZhbHVleHIAEGphdmEubGFuZy5OdWliZXKGrJUdC5TgiwIAAHhwAAAA
ZXVxAH4AAQAAAAhndyUtmWhHiw==
CTRANSPORT ACCOUNT PASSWORD>

```
<LAST MODIFICATION>2014-01-07 12:17:58.993</LAST MODIFICATION>
<LAST_MODIFIER>InstallProcess/LAST_MODIFIER>
<OBJECT STATE>true</OBJECT STATE>
<SENDING PROTOCOL INH>0</SENDING PROTOCOL INH>
<RECEIVING PROTOCOL INH>0</RECEIVING PROTOCOL INH>
<END POINT INH>0</END POINT INH>
<END POINT TYPE INH>0</END POINT TYPE INH>
<END POINT IP ADDRESS INH>0</END POINT IP ADDRESS INH>
<END POINT LISTEN PORT INH>0</END POINT LISTEN PORT INH>
<DIRECTORY INH>0</DIRECTORY INH>
<SSL OPTION INH>0</SSL OPTION INH>
<CIPHER STRENGTH INH>0</CIPHER STRENGTH INH>
<KEY CERT ID INH>0</KEY CERT ID INH>
<USER CERT ID INH>0</USER CERT ID INH>
<SECURITY PROTOCOL INH>0</SECURITY PROTOCOL INH>
<TRANSFER MODE INH>0</TRANSFER MODE INH>
<RESPONSE TIMEOUT INH>0</RESPONSE TIMEOUT INH>
<LOCAL DATA PORT RANGE INH>0</LOCAL DATA PORT RANGE INH>
<LOCAL CONTROL PORT RANGE INH>0</LOCAL CONTROL PORT RANGE INH>
<FIREWALL PROXY INH>0</FIREWALL PROXY INH>
<firewall_connect_time_inh>0</firewall_connect_time_inh>
<SERVER SOCKET TIMEOUT INH>0</SERVER SOCKET TIMEOUT INH>
<mail_box_inh>0</mail_box_inh>
<MAIL FROM INH>0</MAIL FROM INH>
<MAIL ID INH>0</MAIL ID INH>
<CC INH>0</CC INH>
<BCC INH>0</BCC INH>
<KEY CERT PASSWORD INH>0</KEY CERT PASSWORD INH>
<PROTOCOL MODE INH>0
PROTOCOL MODE INH>
<DOCUMENT INH>0</DOCUMENT INH>
<EXTENDS OBJECT ID />
<EXTENDS OBJECT VERSION>0</EXTENDS OBJECT VERSION>
```

```
<TRANSPORT ACCOUNT USER ID INH>0</TRANSPORT ACCOUNT USER ID INH>
      <TRANSPORT ACCOUNT PASSWORD INH>0</TRANSPORT ACCOUNT PASSWORD INH>
     <TRANSPORT_CA_CERTS_INH>0</TRANSPORT_CA_CERTS_INH>
      <CA CERTIFICATES />
     <SSL KEY CERTIFICATES />
     <SSLKEY_CERT_ID_INH>0</SSLKEY_CERT_ID INH>
     <USE_CCC>false</USE CCC>
     <USE CCC INH>0</USE CCC INH>
   </SCI TRANSPORT>
</TRANSPORTS>
<ENTITY EXTENSIONS>
  <SCI ENTITY EXTENSION>
     <OBJECT_ID>$$userguid$$aac32:1436daff9a0:-7cc7</OBJECT_ID>
     <OBJECT VERSION>1</OBJECT VERSION>
     <ENTITY ID>$$userguid$$aac32:1436daff9a0:-7cc8</ENTITY ID>
     <EXTENSION KEY>DMIROUTE WILLPRODUCE</EXTENSION KEY>
     <EXTENSION VALUE>TRUE</EXTENSION VALUE>
     <LAST MODIFICATION>2014-01-07 12:17:58.738/LAST MODIFICATION>
     <LAST MODIFIER />
     <OBJECT_STATE>true</OBJECT_STATE>
   </SCI_ENTITY_EXTENSION>
   <SCI ENTITY EXTENSION>
     <OBJECT ID>$$userguid$$aac32:1436daff9a0:-7cc5</OBJECT ID>
     <OBJECT_VERSION>1</OBJECT_VERSION>
     <ENTITY ID>$$userguid$$aac32:1436daff9a0:-7cc8</ENTITY ID>
     <EXTENSION KEY>DMIROUTECONSUMERIDPOLICY</EXTENSION KEY>
     <EXTENSION VALUE>FILEGATEWAY</EXTENSION VALUE>
     <LAST MODIFICATION>2014-01-07 12:17:58.745/LAST MODIFICATION>
     <LAST MODIFIER />
     <OBJECT STATE>true</OBJECT STATE>
   </SCI ENTITY EXTENSION>
  <SCI ENTITY EXTENSION>
     <OBJECT ID>$$userguid$$aac32:1436daff9a0:-7cc6</OBJECT ID>
     <OBJECT_VERSION>1</OBJECT_VERSION>
     <ENTITY ID>$$userguid$$aac32:1436daff9a0:-7cc8</ENTITY ID>
     <EXTENSION KEY>CONSUMERCONNECTION/EXTENSION KEY>
     <EXTENSION VALUE>INITIATECONNECTION</EXTENSION VALUE>
     <LAST MODIFICATION>2014-01-07 12:17:58.743/LAST MODIFICATION>
      <LAST MODIFIER />
```

```
<OBJECT STATE>true</OBJECT STATE>
</sci_entity_extension>
<SCI_ENTITY_EXTENSION>
   <OBJECT ID>$$userguid$$aac32:1436daff9a0:-7cc4</OBJECT ID>
  <OBJECT VERSION>1</OBJECT VERSION>
  <ENTITY_ID>$$userguid$$aac32:1436daff9a0:-7cc8</ENTITY_ID>
  <EXTENSION KEY>PGP C SIGN</EXTENSION KEY>
  <EXTENSION VALUE>no</EXTENSION VALUE>
  <LAST MODIFICATION>2014-01-07 12:17:58.747</LAST MODIFICATION>
  <LAST_MODIFIER />
  <OBJECT STATE>true</OBJECT STATE>
</SCI ENTITY EXTENSION>
<SCI_ENTITY_EXTENSION>
  <OBJECT ID>$$userguid$$aac32:1436daff9a0:-7cc3</OBJECT ID>
  <OBJECT VERSION>1</OBJECT VERSION>
  <ENTITY ID>$$userguid$$aac32:1436daff9a0:-7cc8</ENTITY ID>
  <EXTENSION KEY>AUTHORIZEDUSERKEYENABLED</EXTENSION KEY>
  <EXTENSION VALUE>FALSE
  <LAST MODIFICATION>2014-01-07 12:17:58.749</LAST MODIFICATION>
  <LAST MODIFIER />
   <OBJECT_STATE>true</OBJECT_STATE>
</SCI ENTITY EXTENSION>
<SCI ENTITY EXTENSION>
  <OBJECT_ID>$$userguid$$aac32:1436daff9a0:-7cc2</OBJECT_ID>
  <OBJECT VERSION>1</OBJECT VERSION>
  <ENTITY ID>$$userguid$$aac32:1436daff9a0:-7cc8</ENTITY ID>
  <EXTENSION KEY>DMIROUTE WILLCONSUME</EXTENSION KEY>
  <EXTENSION VALUE>TRUE</EXTENSION VALUE>
  <LAST MODIFICATION>2014-01-07 12:17:58.75/LAST MODIFICATION>
  <LAST MODIFIER />
  <OBJECT STATE>true</OBJECT STATE>
</sci_entity_extension>
<SCI ENTITY EXTENSION>
   <OBJECT_ID>$$userguid$$aac32:1436daff9a0:-7cc1</OBJECT_ID>
  <OBJECT VERSION>1</OBJECT VERSION>
  <ENTITY ID>$$userguid$$aac32:1436daff9a0:-7cc8</ENTITY ID>
  <EXTENSION KEY>ENCRYPTIONMETHOD</EXTENSION KEY>
  <EXTENSION VALUE>PGPPK</EXTENSION VALUE>
   <LAST MODIFICATION>2014-01-07 12:17:58.752/LAST MODIFICATION>
```

```
<LAST MODIFIER />
  <OBJECT STATE>true</OBJECT STATE>
</SCI_ENTITY_EXTENSION>
<SCI ENTITY EXTENSION>
  <OBJECT ID>$$userguid$$aac32:1436daff9a0:-7cbe</OBJECT ID>
  <OBJECT VERSION>1</OBJECT VERSION>
  <ENTITY ID>$$userguid$$aac32:1436daff9a0:-7cc8</ENTITY ID>
  <EXTENSION KEY>SFTPSCPENABLED</EXTENSION KEY>
  <EXTENSION VALUE>FALSE
  <LAST_MODIFICATION>2014-01-07 12:17:58.762/LAST_MODIFICATION>
  <LAST MODIFIER />
  <OBJECT STATE>true</OBJECT STATE>
</sci_entity_extension>
<SCI ENTITY EXTENSION>
  <OBJECT ID>$$userguid$$aac32:1436daff9a0:-7cbf</OBJECT ID>
  <OBJECT VERSION>1</OBJECT VERSION>
  <ENTITY ID>$$userguid$$aac32:1436daff9a0:-7cc8</ENTITY ID>
  <EXTENSION_KEY>PGP_C_COMP</EXTENSION_KEY>
  <EXTENSION VALUE>no</EXTENSION VALUE>
  <LAST MODIFICATION>2014-01-07 12:17:58.76/LAST MODIFICATION>
  <LAST_MODIFIER />
  <OBJECT STATE>true</OBJECT STATE>
</SCI ENTITY EXTENSION>
<SCI_ENTITY_EXTENSION>
  <OBJECT ID>$$userguid$$aac32:1436daff9a0:-7cc0</OBJECT ID>
  <OBJECT_VERSION>1</OBJECT_VERSION>
  <ENTITY ID>$$userguid$$aac32:1436daff9a0:-7cc8</ENTITY ID>
  <EXTENSION KEY>DMIROUTECONSUMERPROTOCOLPOLICY</EXTENSION KEY>
  <EXTENSION VALUE>MAILBOX</EXTENSION VALUE>
  <LAST MODIFICATION>2014-01-07 12:17:58.755/LAST MODIFICATION>
  <LAST MODIFIER />
  <OBJECT STATE>true</OBJECT STATE>
</SCI ENTITY EXTENSION>
<SCI_ENTITY_EXTENSION>
  <OBJECT ID>$$userguid$$aac32:1436daff9a0:-7cbd</OBJECT ID>
  <OBJECT VERSION>1</OBJECT VERSION>
  <ENTITY_ID>$$userguid$$aac32:1436daff9a0:-7cc8</ENTITY_ID>
  <EXTENSION KEY>PGP C ENCRYPT</EXTENSION KEY>
  <EXTENSION VALUE>no</EXTENSION VALUE>
```

```
<LAST_MODIFICATION>2014-01-07 12:17:58.763</LAST_MODIFICATION>
           <LAST_MODIFIER />
           <OBJECT_STATE>true</OBJECT_STATE>
        </SCI ENTITY EXTENSION>
     </ENTITY_EXTENSIONS>
  </SCI_ENTITY>
</SCI ENTITIES>
<MBXMETA>
  <MBXMETA>
     <MAILBOX>
        <BASEPATH>/$$username$$</BASEPATH>
        <METADATA>
           <PARENT_PATH />
           <PATH>/</PATH>
           <DESCRIPTION>Root Mailbox
           <MBXMETADEPENDENTS>
              <PERMISSION>
                 <PERMISSION_ID>/.mbx</PERMISSION_ID>
              </permission>
            </mbxmetadependents>
         </METADATA>
         <METADATA>
           <PARENT PATH>/</PARENT PATH>
           <PATH>/$$username$$</PATH>
           <DESCRIPTION>partner mailbox</DESCRIPTION>
            <MBXMETADEPENDENTS>
              <PERMISSION>
                 <PERMISSION ID>/$$username$$.mbx</PERMISSION ID>
              </permission>
              <USERS>
                 <USER>
                    <USER_ID>$$username$$</USER_ID>
                 </USER>
               </USERS>
            </mbxmetadependents>
        </METADATA>
     </MAILBOX>
  </MBXMETA>
```

<MBXMETA>

```
<MAILBOX>
   <BASEPATH>/$$username$$$$usermailbox$$</BASEPATH>
   <METADATA>
     <PARENT PATH />
     <PATH>/</PATH>
      <DESCRIPTION>Root Mailbox/DESCRIPTION>
      <MBXMETADEPENDENTS>
         <PERMISSION>
            <PERMISSION_ID>/.mbx</PERMISSION_ID>
         </permission>
      </mbxmetadependents>
   </METADATA>
   <METADATA>
      <parent_path>/</parent_path>
     <PATH>/$$username$$</PATH>
      <DESCRIPTION>partner mailbox</DESCRIPTION>
      <MBXMETADEPENDENTS>
         <PERMISSION>
            <PERMISSION ID>/$$username$$.mbx</PERMISSION ID>
         </permission>
         <USERS>
            <USER>
               <USER ID>$$username$$</USER ID>
            </USER>
         </USERS>
      </mbxmetadependents>
   </METADATA>
   <METADATA>
     <PARENT_PATH>/$$username$$</PARENT_PATH>
      <PATH>/$$username$$$$usermailbox$$</PATH>
      <DESCRIPTION>Partner Inbound Mailbox</DESCRIPTION>
      <MBXMETADEPENDENTS>
         <PERMISSION>
            <PERMISSION_ID>/$$username$$$$usermailbox$$.mbx</PERMISSION_ID>
         </PERMISSION>
         <USERS>
            <USER>
               <USER_ID>$$username$$</USER_ID>
            </USER>
```

```
</USERS>
        </mbxmetadependents>
     </METADATA>
  </MAILBOX>
</MBXMETA>
<MBXMETA>
  <MAILBOX>
     <BASEPATH>/$$username$$/archive</BASEPATH>
     <METADATA>
        <PARENT_PATH />
        <PATH>/</PATH>
        <DESCRIPTION>Root Mailbox
        <MBXMETADEPENDENTS>
           <PERMISSION>
              <PERMISSION ID>/.mbx</PERMISSION ID>
           </permission>
         </mbxmetadependents>
     </METADATA>
      <METADATA>
        <PARENT_PATH>/</PARENT_PATH>
        <PATH>/$$username$$</PATH>
         <DESCRIPTION>partner mailbox</DESCRIPTION>
        <MBXMETADEPENDENTS>
           <PERMISSION>
              <PERMISSION ID>/$$username$$.mbx</PERMISSION ID>
           </permission>
           <USERS>
              <USER>
                 <USER_ID>$$username$$</USER_ID>
              </USER>
           </USERS>
         </mbxmetadependents>
      </METADATA>
      <METADATA>
        <PARENT PATH>/$$username$$</PARENT PATH>
        <PATH>/$$username$$/archive</PATH>
        <DESCRIPTION>partner archive mailbox</DESCRIPTION>
        <MBXMETADEPENDENTS>
```

<PERMISSION>

```
<PERMISSION ID>/$$username$$/archive.mbx</PERMISSION ID>
               </PERMISSION>
            </mbxmetadependents>
        </METADATA>
     </MAILBOX>
  </MBXMETA>
</MBXMETA>
<SCI PACKAGES>
  <SCI PACKAGING>
     <OBJECT_ID>$$userguid$$aac32:1436daff9a0:-7caf</OBJECT_ID>
     <EXTERNAL OBJECT ID />
     <OBJECT VERSION>1</OBJECT VERSION>
     <OBJECT_NAME>$$username$$_CONSUMER</OBJECT_NAME>
     <MESSAGE PARSABLE>no/MESSAGE PARSABLE>
     <PKG TYPE />
     <PKG TYPE ID />
     <PKG TYPE VERSION />
     <PKG_TYPE_CLASS />
     <PKG TYPE TABLE>default</PKG TYPE TABLE>
     <PKG DESC>default</PKG DESC>
     <MESSAGE_FORMAT>0</MESSAGE_FORMAT>
     <PAYLOAD TYPE>0</PAYLOAD TYPE>
     <DEFAULT MIME TYPE>Text/DEFAULT MIME TYPE>
     <DEFAULT_MIME_SUBTYPE>EDI-X12/DEFAULT_MIME_SUBTYPE>
     <LAST MODIFICATION>2014-01-07 12:17:59.047/LAST MODIFICATION>
     <LAST_MODIFIER>InstallProcess/LAST_MODIFIER>
     <OBJECT_STATE>true</OBJECT_STATE>
     <COMPRESS DATA>default
     <ENTITY_ID>$$userguid$$aac32:1436daff9a0:-7cc8</ENTITY_ID>
  </SCI PACKAGING>
  <SCI PACKAGING>
     <OBJECT_ID>$$userguid$$aac32:1436daff9a0:-7cb6</OBJECT_ID>
     <EXTERNAL OBJECT ID />
     <OBJECT_VERSION>1</OBJECT_VERSION>
     <OBJECT_NAME>$$username$$_PRODUCER</OBJECT_NAME>
     <MESSAGE PARSABLE>no/MESSAGE PARSABLE>
     <PKG TYPE />
     <PKG_TYPE_ID />
     <PKG TYPE VERSION />
```

```
<PKG TYPE CLASS />
     <PKG TYPE TABLE>default</PKG TYPE TABLE>
     <PKG_DESC>default</PKG_DESC>
     <MESSAGE FORMAT>0</MESSAGE FORMAT>
     <PAYLOAD TYPE>0</PAYLOAD TYPE>
     <DEFAULT MIME TYPE>Text/DEFAULT MIME TYPE>
     <DEFAULT MIME SUBTYPE>EDI-X12/DEFAULT MIME SUBTYPE>
     <LAST MODIFICATION>2014-01-07 12:17:58.976/LAST MODIFICATION>
     <LAST MODIFIER>InstallProcess/LAST MODIFIER>
     <OBJECT_STATE>true</OBJECT_STATE>
     <COMPRESS DATA>default</COMPRESS DATA>
     <ENTITY ID>$$userguid$$aac32:1436daff9a0:-7cc8</ENTITY ID>
  </SCI_PACKAGING>
</SCI PACKAGES>
<GROUPS>
  <GROUP>
     <METADATA>
        <GROUP_ID>fg_partnerusers</GROUP_ID>
        <GROUP NAME>File Gateway Partner Users
        <ENTITY ID />
        <STATUS>1</STATUS>
        <GROUP OWNER ID />
        <RESTRICTED GROUP>false
     </METADATA>
     <GROUPDEPENDENTS>
        <GROUPXPERMS>
           <GROUPXPERM>
              <METADATA>
                 <GROUP_ID>fg_partnerusers</GROUP_ID>
                 <PERMISSION ID>MYFG VIEW EVENT SUBSCRIPTION MODULE/PERMISSION ID>
                 <RIGHTS>2047</RIGHTS>
                 <post_UI_RLZTN>true</post_UI_RLZTN>
              </METADATA>
           </GROUPXPERM>
           <GROUPXPERM>
              <METADATA>
                 <GROUP ID>fg partnerusers</GROUP ID>
                 <PERMISSION_ID>MYFG_VIEW_CHANGE_PASSWORD_MODULE
                 <RIGHTS>2047</RIGHTS>
```

```
<POST UI RLZTN>true</post UI RLZTN>
  </METADATA>
</GROUPXPERM>
<GROUPXPERM>
  <METADATA>
     <GROUP_ID>fg_partnerusers</GROUP_ID>
     <PERMISSION ID>MYFG VIEW HELP MENU ITEM/PERMISSION ID>
     <RIGHTS>2047</RIGHTS>
     <post_UI_RLZTN>true</post_UI_RLZTN>
  </METADATA>
</GROUPXPERM>
<GROUPXPERM>
  <METADATA>
     <GROUP_ID>fg_partnerusers</GROUP_ID>
     <PERMISSION ID>FG AUTOGRANT MBX PERMS/PERMISSION ID>
     <RIGHTS>2047</RIGHTS>
     <POST UI RLZTN>true</post UI RLZTN>
  </METADATA>
</GROUPXPERM>
<GROUPXPERM>
  <METADATA>
     <GROUP_ID>fg_partnerusers</GROUP_ID>
     <PERMISSION ID>MYFG VIEW LOGOUT BUTTON ITEM/PERMISSION ID>
     <RIGHTS>2047</RIGHTS>
     <POST UI RLZTN>true</post UI RLZTN>
  </METADATA>
</GROUPXPERM>
<GROUPXPERM>
  <METADATA>
     <GROUP ID>fg partnerusers</GROUP ID>
     <PERMISSION ID>MYFG VIEW USERNAME ITEM/PERMISSION ID>
     <RIGHTS>2047</RIGHTS>
     <POST UI RLZTN>true</post UI RLZTN>
  </METADATA>
</GROUPXPERM>
<GROUPXPERM>
  <METADATA>
     <GROUP_ID>fg_partnerusers</GROUP_ID>
     <PERMISSION_ID>MYFG_VIEW_REPORTS_MODULE
```

```
<RIGHTS>2047</RIGHTS>
              <post_ui_rlztn>true</post_ui_rlztn>
            </METADATA>
         </GROUPXPERM>
         <GROUPXPERM>
           <METADATA>
              <GROUP ID>fg partnerusers</GROUP ID>
              <permission_id>myfg_login</permission_id>
              <RIGHTS>2047</RIGHTS>
              <post_UI_RLZTN>true</post_UI_RLZTN>
            </METADATA>
         </GROUPXPERM>
         <GROUPXPERM>
            <METADATA>
              <GROUP_ID>fg_partnerusers</GROUP_ID>
              <PERMISSION ID>MYFG VIEW FILE UPLOAD MODULE/PERMISSION ID>
              <RIGHTS>2047</RIGHTS>
              <post_ui_rlztn>true</post_ui_rlztn>
           </METADATA>
         </GROUPXPERM>
         <GROUPXPERM>
            <METADATA>
              <GROUP ID>fg partnerusers</GROUP ID>
              <PERMISSION_ID>MYFG_VIEW_FILE_DOWNLOAD_MODULE/permission_ID>
              <RIGHTS>2047</RIGHTS>
              <post_ui_rlztn>true</post_ui_rlztn>
            </METADATA>
         </GROUPXPERM>
         <GROUPXPERM>
           <METADATA>
              <GROUP ID>fg partnerusers</GROUP ID>
              <PERMISSION_ID>MYFG_VIEW_FILE_ACTIVITY_MODULE
              <RIGHTS>2047</RIGHTS>
              <post_UI_RLZTN>true</post_UI_RLZTN>
            </METADATA>
         </GROUPXPERM>
      </GROUPXPERMS>
  </GROUPDEPENDENTS>
</GROUP>
```

```
<GROUP>
  <METADATA>
     <GROUP_ID>mbiusers</GROUP_ID>
     <GROUP NAME>Mailbox Browser Interface Users
     <ENTITY ID />
     <STATUS>1</STATUS>
     <GROUP OWNER ID />
     <RESTRICTED_GROUP>false/RESTRICTED_GROUP>
  </METADATA>
  <GROUPDEPENDENTS>
     <GROUPXPERMS>
        <GROUPXPERM>
           <METADATA>
              <GROUP_ID>mbiusers</GROUP_ID>
              <PERMISSION ID>MBIAdd/permission ID>
              <RIGHTS>2047</RIGHTS>
              <POST UI RLZTN>true</post UI RLZTN>
           </METADATA>
        </GROUPXPERM>
        <GROUPXPERM>
           <METADATA>
              <GROUP ID>mbiusers</GROUP ID>
              <PERMISSION ID>MBIDocViewID>
              <RIGHTS>2047</RIGHTS>
              <POST UI RLZTN>true</post UI RLZTN>
           </METADATA>
        </GROUPXPERM>
        <GROUPXPERM>
           <METADATA>
              <GROUP_ID>mbiusers</GROUP_ID>
              <PERMISSION ID>MBIExtract</PERMISSION ID>
              <RIGHTS>2047</RIGHTS>
              <post_ui_rlztn>true</post_ui_rlztn>
           </METADATA>
        </GROUPXPERM>
        <GROUPXPERM>
           <METADATA>
              <GROUP_ID>mbiusers</GROUP_ID>
              <PERMISSION_ID>MBIPathList/PERMISSION_ID>
```

```
<RIGHTS>2047</RIGHTS>
               <post_ui_rlztn>true</post_ui_rlztn>
            </METADATA>
         </GROUPXPERM>
         <GROUPXPERM>
            <METADATA>
               <GROUP ID>mbiusers</GROUP ID>
               <PERMISSION_ID>MBIQuery/PERMISSION_ID>
               <RIGHTS>2047</RIGHTS>
               <post_UI_RLZTN>true</post_UI_RLZTN>
            </METADATA>
         </GROUPXPERM>
         <GROUPXPERM>
            <METADATA>
               <GROUP_ID>mbiusers</GROUP_ID>
               <PERMISSION ID>MBISearch</PERMISSION ID>
               <RIGHTS>2047</RIGHTS>
               <post_ui_rlztn>true</post_ui_rlztn>
            </METADATA>
         </GROUPXPERM>
         <GROUPXPERM>
            <METADATA>
               <GROUP ID>mbiusers</GROUP ID>
               <PERMISSION_ID>MBISearch.jsp/PERMISSION_ID>
               <RIGHTS>2047</RIGHTS>
               <post_ui_rlztn>true</post_ui_rlztn>
            </METADATA>
         </GROUPXPERM>
         <GROUPXPERM>
            <METADATA>
               <GROUP ID>mbiusers</GROUP ID>
               <PERMISSION_ID>MBISelfRegistration/PERMISSION_ID>
               <RIGHTS>2047</RIGHTS>
               <post_UI_RLZTN>true</post_UI_RLZTN>
            </METADATA>
         </GROUPXPERM>
      </GROUPXPERMS>
   </GROUPDEPENDENTS>
</GROUP>
```

```
</GROUPS>
<PERMISSIONS>
   <PERMISSION>
      <METADATA>
         <PERMISSION_ID>/.mbx</PERMISSION_ID>
         <PERMISSION>/ Mailbox</PERMISSION>
         <STATUS>1</STATUS>
         <TYPE>1</TYPE>
      </METADATA>
   </permission>
   <PERMISSION>
      <METADATA>
         <PERMISSION_ID>/$$username$$.mbx</PERMISSION_ID>
         <PERMISSION>/$$username$$ Mailbox</PERMISSION>
         <STATUS>1</STATUS>
         <\!\!\mathrm{TYPE}\!\!>\!\!1<\!/\mathrm{TYPE}\!\!>
      </METADATA>
   </PERMISSION>
   <PERMISSION>
      <METADATA>
         <PERMISSION_ID>/$$username$$$$usermailbox$$.mbx</PERMISSION_ID>
         <PERMISSION>/$$username$$$$usermailbox$$ Mailbox</PERMISSION>
         <STATUS>1</STATUS>
         <TYPE>1</TYPE>
      </METADATA>
   </PERMISSION>
   <PERMISSION>
      <METADATA>
         <PERMISSION_ID>/$$username$$/archive.mbx</PERMISSION_ID>
         <PERMISSION>/$$username$$/archive Mailbox</PERMISSION>
         <STATUS>1</STATUS>
         <TYPE>1</TYPE>
      </METADATA>
   </permission>
   <PERMISSION>
      <METADATA>
         <PERMISSION_ID>MYFG_VIEW_EVENT_SUBSCRIPTION_MODULE/PERMISSION_ID>
         <PERMISSION>myFileGateway Event Subscription
         <STATUS>1</STATUS>
```

```
<TYPE>2000</TYPE>
   </METADATA>
</permission>
<PERMISSION>
   <METADATA>
     <PERMISSION_ID>MYFG_VIEW_CHANGE_PASSWORD_MODULE/PERMISSION_ID>
     <PERMISSION>myFileGateway Change Password</PERMISSION>
     <STATUS>1</STATUS>
     <TYPE>2000</TYPE>
   </METADATA>
</permission>
<PERMISSION>
   <METADATA>
     <PERMISSION ID>MYFG VIEW HELP MENU ITEM</PERMISSION ID>
      <PERMISSION>myFileGateway Help</PERMISSION>
     <STATUS>1</STATUS>
      <TYPE>2000</TYPE>
   </METADATA>
</permission>
<PERMISSION>
   <METADATA>
      <PERMISSION ID>FG AUTOGRANT MBX PERMS/PERMISSION ID>
     <PERMISSION>File Gateway Auto-grant Mailbox Permissions</PERMISSION>
     <STATUS>1</STATUS>
     <TYPE>2000</TYPE>
   </METADATA>
</permission>
<PERMISSION>
   <METADATA>
      <PERMISSION ID>MYFG VIEW LOGOUT BUTTON ITEM</PERMISSION ID>
     <PERMISSION>myFileGateway Logout</PERMISSION>
     <STATUS>1</STATUS>
     <TYPE>2000</TYPE>
   </METADATA>
</permission>
<PERMISSION>
   <METADATA>
     <PERMISSION_ID>MYFG_VIEW_USERNAME_ITEM/PERMISSION_ID>
      <PERMISSION>myFileGateway UserName</PERMISSION>
```

```
<STATUS>1</STATUS>
     <TYPE>2000</TYPE>
   </METADATA>
</permission>
<PERMISSION>
  <METADATA>
     <PERMISSION ID>MYFG VIEW REPORTS MODULE</PERMISSION ID>
     <PERMISSION>myFileGateway Reports</PERMISSION>
     <STATUS>1</STATUS>
     <TYPE>2000</TYPE>
   </METADATA>
</permission>
<PERMISSION>
   <METADATA>
     <permission_id>myfg_login</permission_id>
     <PERMISSION>myFileGateway Login</PERMISSION>
     <STATUS>1</STATUS>
     <TYPE>2000</TYPE>
  </METADATA>
</permission>
<PERMISSION>
   <METADATA>
     <PERMISSION ID>MYFG VIEW FILE UPLOAD MODULE
     <PERMISSION>myFileGateway File Upload/PERMISSION>
     <STATUS>1</STATUS>
     <TYPE>2000</TYPE>
   </METADATA>
</permission>
<PERMISSION>
  <METADATA>
     <PERMISSION ID>MYFG VIEW FILE DOWNLOAD MODULE/PERMISSION ID>
     <PERMISSION>myFileGateway File Download</PERMISSION>
     <STATUS>1</STATUS>
     <TYPE>2000</TYPE>
   </METADATA>
</permission>
<PERMISSION>
   <METADATA>
      <PERMISSION_ID>MYFG_VIEW_FILE_ACTIVITY_MODULE/PERMISSION_ID>
```

```
<PERMISSION>myFileGateway File Activity</PERMISSION>
     <STATUS>1</STATUS>
     <TYPE>2000</TYPE>
   </METADATA>
</permission>
<PERMISSION>
  <METADATA>
     <PERMISSION_ID>MBIAdd/permission_ID>
     <PERMISSION>Mailbox Add Business Process</PERMISSION>
      <STATUS>1</STATUS>
     <TYPE>3</TYPE>
   </METADATA>
</permission>
<PERMISSION>
  <METADATA>
      <PERMISSION ID>MBIDocView/PERMISSION ID>
      <PERMISSION>Mailbox View Business Process</PERMISSION>
     <STATUS>1</STATUS>
     <TYPE>3</TYPE>
   </METADATA>
</permission>
<PERMISSION>
   <METADATA>
     <PERMISSION_ID>MBIExtract/PERMISSION_ID>
     <PERMISSION>Mailbox Extract Business Process</PERMISSION>
     <STATUS>1</STATUS>
     <TYPE>3</TYPE>
   </METADATA>
</permission>
<PERMISSION>
  <METADATA>
      <PERMISSION_ID>MBIPathList/perMISSION_ID>
     <PERMISSION>Mailbox Path List Process</PERMISSION>
     <STATUS>1</STATUS>
     <TYPE>3</TYPE>
   </METADATA>
</permission>
<PERMISSION>
   <METADATA>
```

```
<PERMISSION ID>MBIQuery</PERMISSION ID>
            <PERMISSION>Mailbox Query Business Process</PERMISSION>
            <STATUS>1</STATUS>
            <TYPE>3</TYPE>
         </METADATA>
      </permission>
      <PERMISSION>
         <METADATA>
            <PERMISSION_ID>MBISearch/PERMISSION_ID>
            <PERMISSION>Mailbox Search Business Process/PERMISSION>
            <STATUS>1</STATUS>
            <TYPE>3</TYPE>
         </METADATA>
      </permission>
      <PERMISSION>
         <METADATA>
            <PERMISSION_ID>MBISearch.jsp/PERMISSION_ID>
            <PERMISSION>MBISearch JSP</PERMISSION>
            <STATUS>1</STATUS>
            <TYPE>99</TYPE>
         </METADATA>
      </permission>
      <PERMISSION>
         <METADATA>
            <PERMISSION ID>MBISelfRegistration/PERMISSION ID>
            <PERMISSION>Mailbox Self Registration Business Process/PERMISSION>
            <STATUS>1</STATUS>
            <TYPE>3</TYPE>
         </METADATA>
      </permission>
   </PERMISSIONS>
</si_resources>
```