

1. Prima conexiune -> oracle

create user sistemclienti identified by oracle;

grant connect, resource, dba, unlimited tablespace to sistemclienti;

create user oditemp_serbanmadalina identified by oracle;

grant connect, resource, dba, unlimited tablespace to oditemp_serbanmadalina;


//grant: acorda permisiuni

//revoke: retrage permisiunile

create user serbanmadalina identified by oracle;

grant connect, resource, dba, unlimited tablespace to serbanmadalina;

2. A doua conexiune -> sistem clienti

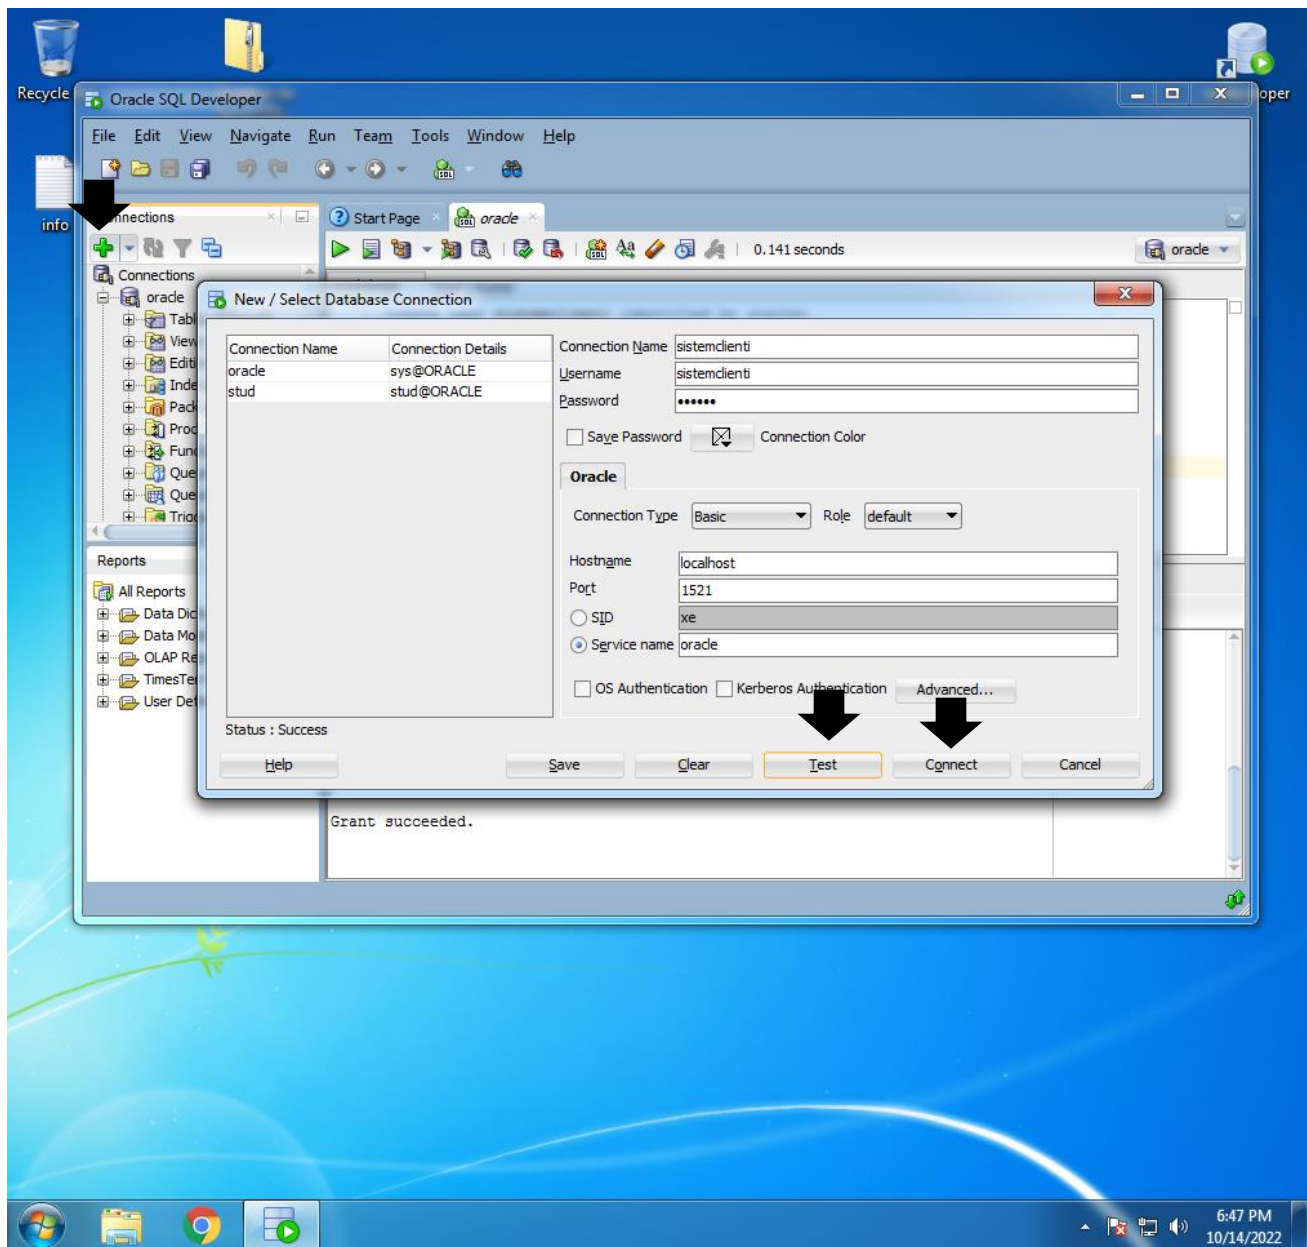

1. New connections
2. password: oracle
3. test
4. connect

CREATE TABLE "CLIENTI_MASTER" ("CLIENTID" NUMBER PRIMARY KEY, "PREFIX" VARCHAR2(10), "NUME" VARCHAR2(30), "PRENUME" VARCHAR2(30), "ADRESA" VARCHAR2(80), "ORAS" VARCHAR2(20),

```
"IDTARA" NUMBER, "TELEFON" VARCHAR2(20), "DATA_NASTERE" DATE, "ID_PARTENER" NUMBER,
"ID_VANZATOR" NUMBER);
```

```
desc clienti_master; //afisare atribute tabela
```

```
Insert into CLIENTI_MASTER
```

```
(CLIENTID,PREFIX,NUME,PRENUME,ADRESA,ORAS,IDTARA,TELEFON,DATA_NASTERE,ID_PARTENER,ID_V
ANZATOR) values (1,'Mr','Roberts','John','4 Diagonal Alley','London',1,'0754689752',to_date('21-MAR-
44','DD-MON-RR'),1,1);
```

```
Insert into CLIENTI_MASTER
```

```
(CLIENTID,PREFIX,NUME,PRENUME,ADRESA,ORAS,IDTARA,TELEFON,DATA_NASTERE,ID_PARTENER,ID_V
ANZATOR) values (2,'Mr','Smith','Paul','7 Borley','Manchester',1,'0754689752',to_date('15-MAY-90','DD-
MON-RR'),1,3);
```

```
Insert into CLIENTI_MASTER
```

```
(CLIENTID,PREFIX,NUME,PRENUME,ADRESA,ORAS,IDTARA,TELEFON,DATA_NASTERE,ID_PARTENER,ID_V
ANZATOR) values (3,'Miss','Fey','Tina','No 5 dorchas','London',1,'0754689752',to_date('07-MAR-84','DD-
MON-RR'),2,4);
```

```
Insert into CLIENTI_MASTER
```

```
(CLIENTID,PREFIX,NUME,PRENUME,ADRESA,ORAS,IDTARA,TELEFON,DATA_NASTERE,ID_PARTENER,ID_V
ANZATOR) values (5,'Mrs','Watson','Emma','4 Picadilly','New York',2,'0754689752',to_date('15-JUL-
89','DD-MON-RR'),2,1);
```

```
Insert into CLIENTI_MASTER
```

```
(CLIENTID,PREFIX,NUME,PRENUME,ADRESA,ORAS,IDTARA,TELEFON,DATA_NASTERE,ID_PARTENER,ID_V
ANZATOR) values (6,'Dr','Cumberbatch','Benedict','4 Upper East Side','New
York',2,'0754689752',to_date('21-MAR-90','DD-MON-RR'),1,5);
```


```
Insert into CLIENTI_MASTER
```

```
(CLIENTID,PREFIX,NUME,PRENUME,ADRESA,ORAS,IDTARA,TELEFON,DATA_NASTERE,ID_PARTENER,ID_V
ANZATOR) values (7,'Dr','Holmes','Robert','Trafalgar','Miami',2,'0754689752',to_date('01-SEP-68','DD-
MON-RR'),2,1);
```

```
commit;
```

```
select * from clienti_master;
```

3. A treia conexiune -> serbanmadalina

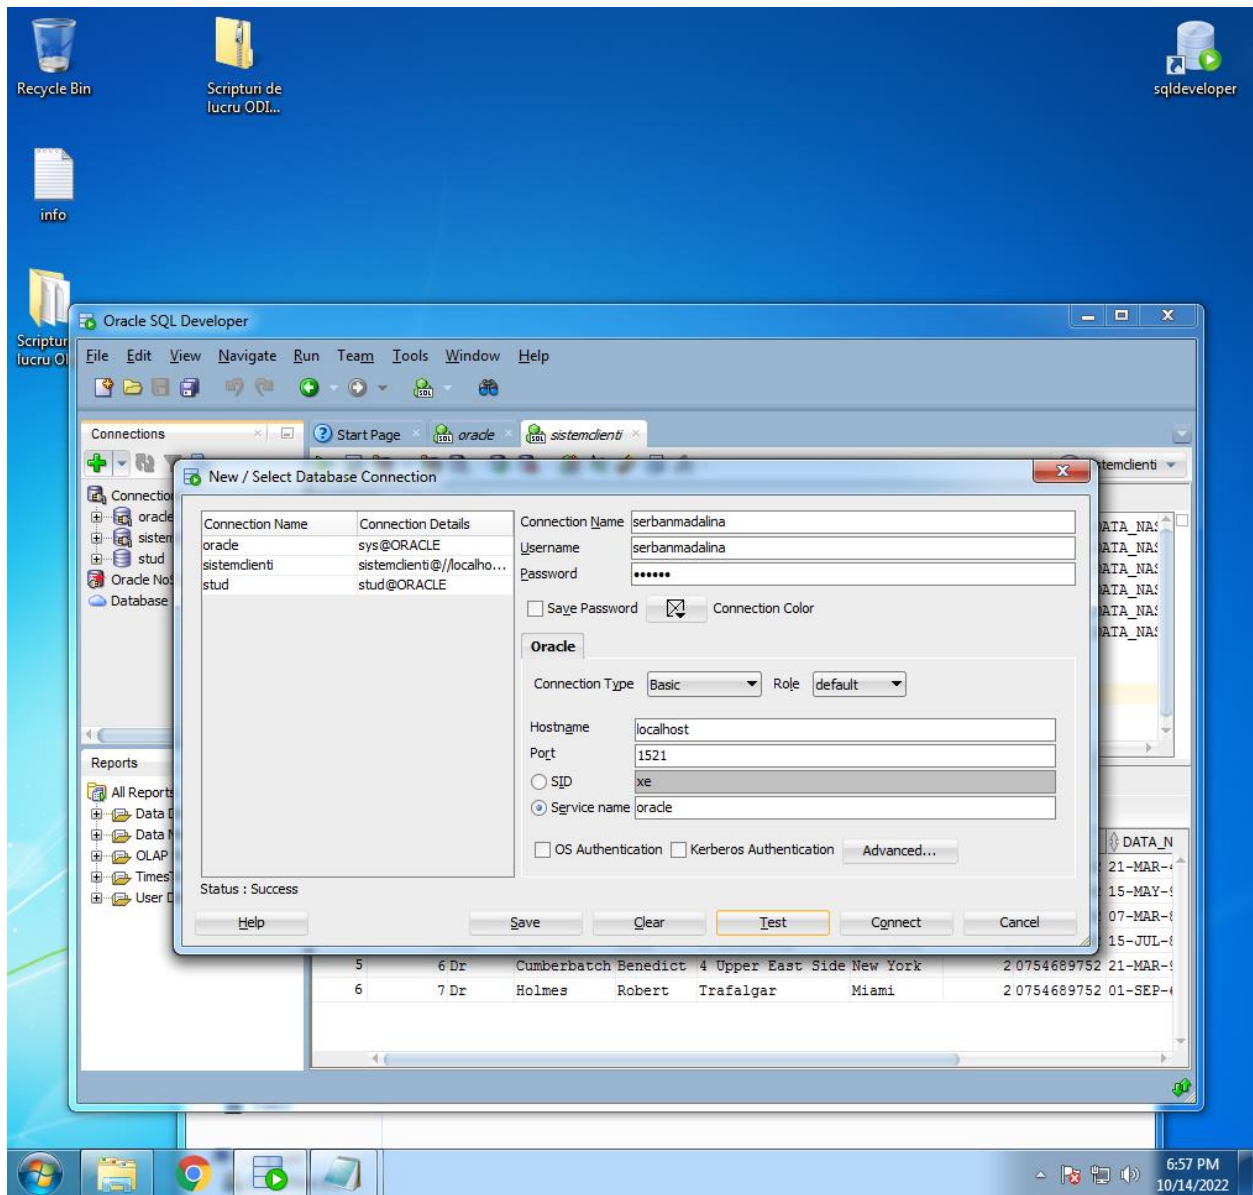

Pass: oracle

CREATE TABLE "CLIENTI"

("ID_CLIENT" NUMBER PRIMARY KEY,
"PREFIX" NUMBER,
"NUME" VARCHAR2(30),

```
"PRENUME" VARCHAR2(30),  
"ADRESA" VARCHAR2(80),  
"ORAS" VARCHAR2(30),  
"ID_TARA" NUMBER,  
"TELEFON" VARCHAR2(30),  
"VARSTA" NUMBER,  
"ID_PARTENER" NUMBER,  
"ID_VANZATOR" NUMBER,  
"DATA_CREARE" DATE NOT NULL,  
"ULTIMA_ACTUALIZARE" DATE NOT NULL  
);
```

CREATE TABLE "PRODUS"


```
( "IDPRODUS" NUMBER(15,0) PRIMARY KEY,  
  "NUME_PRODUS" VARCHAR2(50),  
  "TIP_PRODUS" VARCHAR2(30),  
  "TIP_PRODUS_PARINTE" VARCHAR2(30),  
  "PRET_COST" NUMBER(8,2),  
  "PRET_LISTA" NUMBER(8,2),  
  "ULTIMA_ACTUALIZARE" DATE NOT NULL  
);
```

CREATE TABLE "INVENTAR"


```
( "IDPRODUS" NUMBER(15,0) PRIMARY KEY,  
  "NUME_PRODUS" VARCHAR2(50),  
  "CANT_STOC" NUMBER(8,0),  
  "ULTIMA_ACTUALIZARE" DATE NOT NULL
```

);

5. Deschidere ODI STUDIO

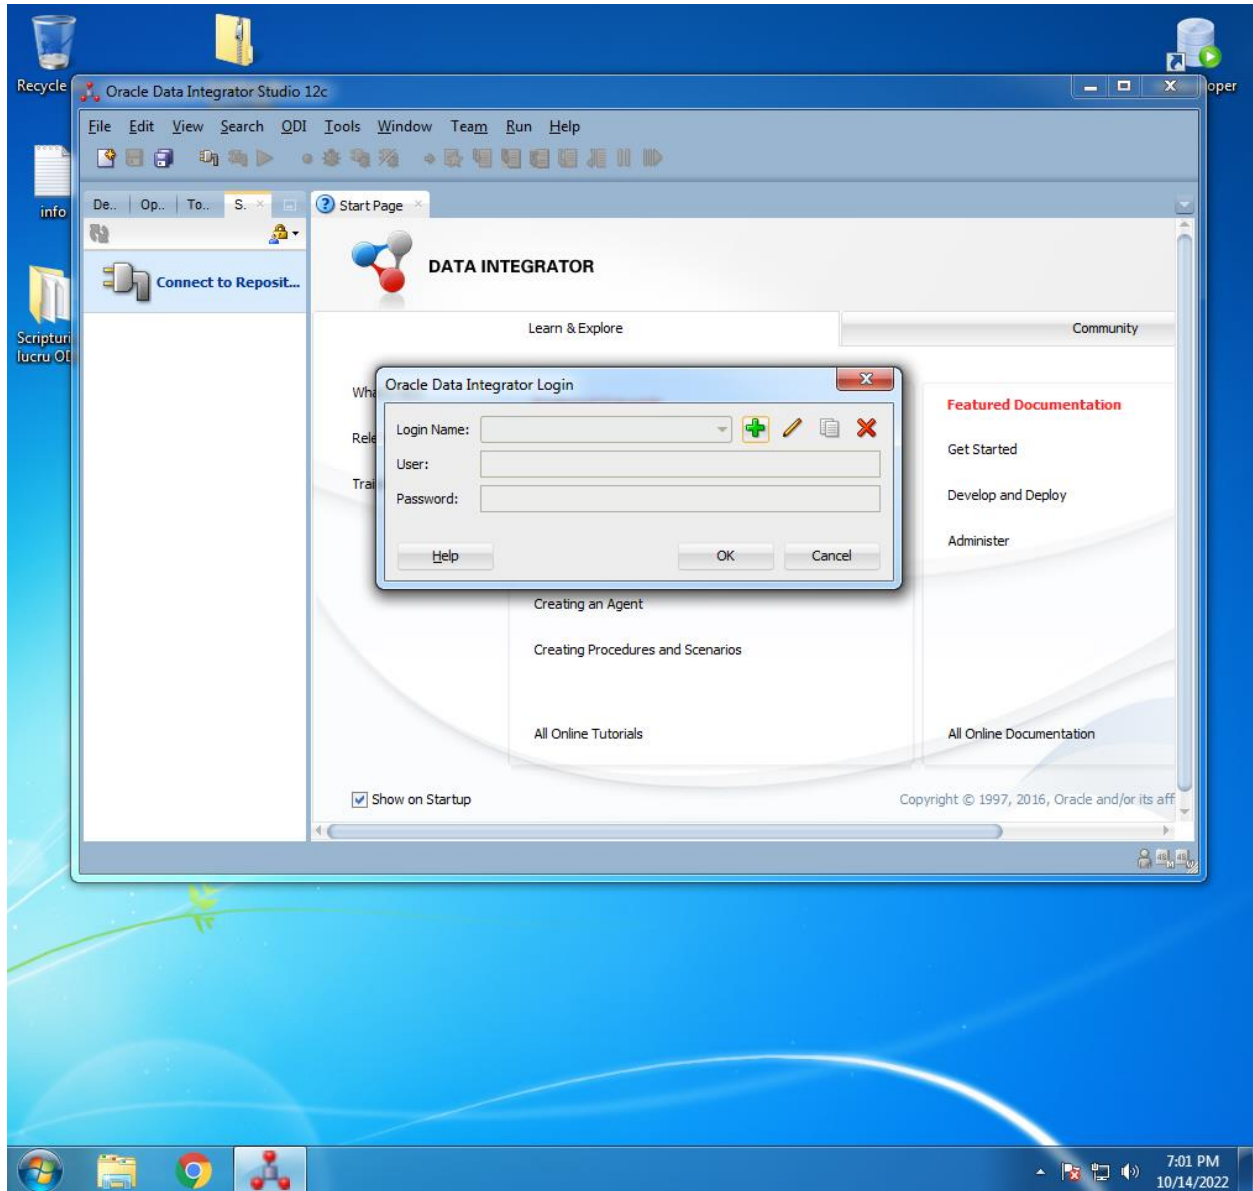

new connection -> pagina 4 Seminar 2

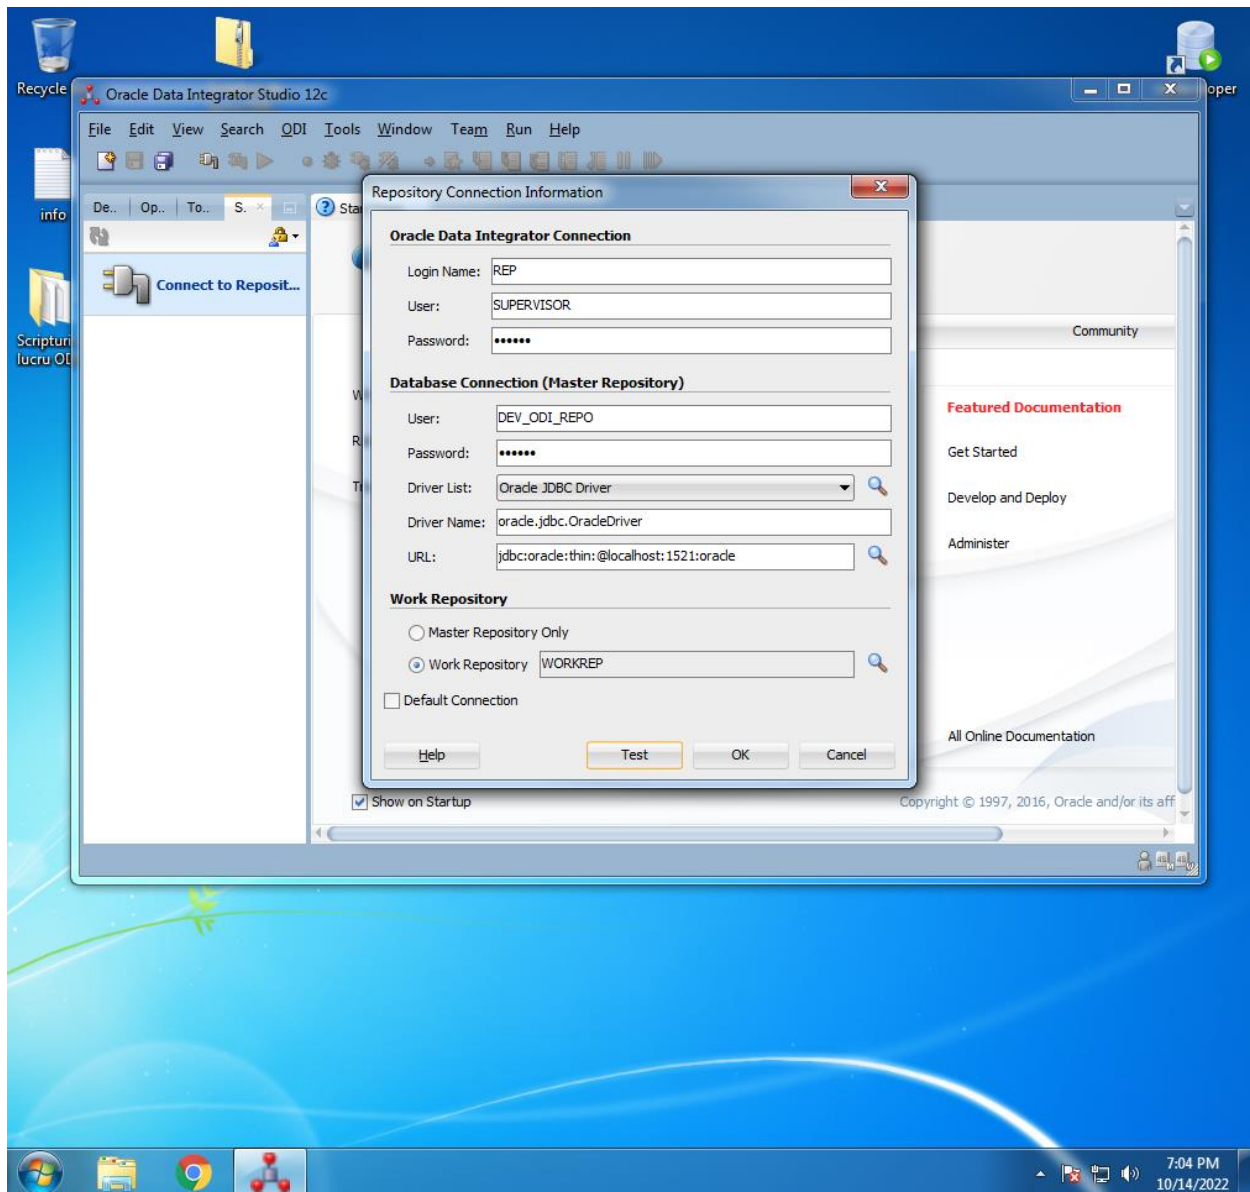

Pass: oracle

