

The **pgfSweave** Package

Cameron Bracken and Charlie Sharpsteen

March 22, 2009

The **pgfSweave** package provides capabilities for “caching” graphics generated with **Sweave**. This document highlights the features and usage of **pgfSweave**. **pgfSweave** provides a new driver for **Sweave**, **pgfSweaveDriver** and new chunk options **pgf** and **external** on top of the **cache** option provided by **cacheSweave**. This package is built directly upon **cacheSweave** and therefore also **Sweave**. This document assumes familiarity with **Sweave**.

1 Motivation and Background

Sweave is a tool for generating “reproducible” documents by embedding R or S “code chunks” directly into a \LaTeX document. The problem of performing lengthy computations in Sweave documents is not a new one. Previous attempts to tackle this problem include **cacheSweave**¹ and the **weaver**². Specifically these packages address the problem that code chunks with lengthy computations are executed every time a document is compiled. Both packages provide a **cache** option which saves R objects for quick access during successive compilations. The **cacheSweave** package stores results in a **filehash**³ databases while the **weaver** package stores RData files. The benefit of the **cacheSweave** method is lazy loading of objects. Both methods provides significant speedup of most computations, namely only those which create objects in the global environment.

Additional drawbacks of the existing methods are:

1. Plots are not cached (since plots does not create objects in the global environment). If a plot takes a long time to generate, the same problem exists as when lengthy computations are present.
2. Consistency in style (font, point size) in automatically generated graphics is difficult to achieve. The default font and point size in R does not match \LaTeX very well and getting this to match precisely is tricky business.

So called “caching” of plots is achieved with the help of two tools: the \TeX package **PGF**⁴ and the command line utility **eps2pgf**⁵. When we refer to the “caching” of an graphic we mean that if the code chunk which generated the graphic is unchanged, an image included from a file rather than regenerated from the code. The \TeX package **pgf**⁶ provides the ability to “externalize graphics.” The externalization chapter in the **PGF/TikZ** manual is extremely well written, so please look there for more information.

¹<http://cran.r-project.org/package=cacheSweave>

²<http://www.bioconductor.org/packages/2.3/bioc/html/weaver.html>

³<http://cran.r-project.org/package=filehash>

⁴<http://sourceforge.net/projects/pgf/>

⁵<http://sourceforge.net/projects/eps2pgf/>

⁶Latest CVS available at http://sourceforge.net/cvs/?group_id=142562

2 System Requirements

In general **pgfSweave** depends on:

1. A working \TeX distribution (such as TeXLive for linux and mac and MiKTeX for Windows)
2. The java command line interpreter (i.e. the `java` command). This is standard on most systems and is free to download otherwise.
3. At least version 2.00 of the **PGF/TikZ** package for \LaTeX .

That should be it for any *nix or Mac OS X system.

2.1 Windows specific requirements

The **pgfSweave** package can work on windows with some special care. First of all it is strongly recommended that you install R in a location that does not have spaces in its path name such as `C:\R`. This will save you much grief when using **Sweave**. Other wise do the following in the order listed.

1. Install Java.
2. Install MiKTeX.
3. Upgrade to or install PGF 2.0 if not already done.
4. Install Rtools ⁷. Make sure to allow the Rtools installer to modify your PATH.

If everything is set up correctly, the commands `java` and `pdflatex` or `latex` should be available at the command prompt.

3 Usage

We assume a familiarity with the usage of **Sweave**, for more information see the **Sweave** manual⁸. This section will explain the usage of the **pgf** and **external** options and then provide a complete example.

3.1 The pgf option

The first new code chunk option **pgf**, acts the same as the **pdf** or **eps** options but instead of resulting in an `\includegraphics{}` statement the result is an `\input{}` statement. For example the text and Consider the following code:

⁷<http://www.murdoch-sutherland.com/Rtools/>

⁸<http://www.stat.uni-muenchen.de/~leisch/Sweave/Sweave-manual.pdf>

Input:

```
\begin{figure}[ht]
<<pgf-option,fig=T,pgf=T,echo=F>>=
  x <- rnorm(100)
  plot(x)
@
\caption{caption}
\label{fig:pgf-option}
\end{figure}
```

Output:

```
\begin{figure}[ht]
\input{pgf-option.pgf}
\caption{caption}
\label{fig:pgf-option}
\end{figure}
```

The .pgf file is generated with the **eps2pgf** utility. The postscript graphics device is used first to generate a .eps file. Then the command

```
$ java -jar /path/to/eps2pgf.jar -m directcopy graphic.eps
```

is run on every code chunk that has `fig=TRUE` and `pgf=TRUE`. When using **pgfSweave** the `pgf` option is set to **TRUE** by default.

3.2 The external option

Input:

```
\begin{figure}[ht]
<<external,fig=T,pgf=T,external=T,echo=F>>=
  x <- rnorm(100)
  plot(x)
@
\caption{caption}
\label{fig:pgf-option}
\end{figure}
```

Output:

```
\begin{figure}[ht]
\beginpgfgraphicnamed{external}
\input{external.pgf}
\endpgfgraphicnamed
\caption{caption}
\label{fig:external}
\end{figure}
```

3.3 A complete example

At this point we will provide a complete example. The example from the **Sweave** manual is used to highlight the differences. The two frame below show the input Sweave file `example.Rnw` and the resulting tex file `example.tex`.

```
----- pgfSweave-example-Rnw.in -----
\documentclass{article}

\usepackage{pgf}
\usepackage{geometry}
\pgfrealjobname{pgfSweave-example}
\title{pgfSweave Example}
\author{Cameron Bracken}

\begin{document}
<<setup,echo=F>>=
setCacheDir("cache")
@
\maketitle
In this example we embed parts of the examples from the \texttt{kruskal.test}
```

help page into a `\LaTeX{}` document:

```
<<data,cache=T,pgf=T,external=T>>=
data(airquality)
library
kruskal.test(Ozone ~ Month, data = airquality)
@
which shows that the location parameter of the Ozone distribution varies
significantly from month to month. Finally we include a boxplot of the data:

\begin{figure}[!ht]
\centering
<<plot,fig=TRUE,echo=FALSE,pgf=T,external=T,width=4,height=4>>=
boxplot(Ozone ~ Month, data = airquality)
@
\end{figure}

\end{document}
```

pgfSweave-example-Rnw.in

On the input file run:

```
R> library(pgfSweave)
R> pgfSweave('example.Rnw',pdf=T)
```

And we get:

pgfSweave-example-tex.in

```
\documentclass{article}

\usepackage{pgf}
\usepackage{geometry}
\pgfrealjobname{pgfSweave-example}
\title{pgfSweave Example}
\author{Cameron Bracken}

\usepackage{/Library/Frameworks/R.framework/Resources/share/texmf/Sweave}
\begin{document}
\maketitle
In this example we embed parts of the examples from the \texttt{kruskal.test}
help page into a \LaTeX{} document:

\begin{Schunk}
\begin{Sinput}
> data(airquality)
> library
> kruskal.test(Ozone ~ Month, data = airquality)
\end{Sinput}
\end{Schunk}
which shows that the location parameter of the Ozone distribution varies
significantly from month to month. Finally we include a boxplot of the data:

\begin{figure}[!ht]
\centering
\beginpgfgraphicnamed{pgfSweave-example-plot}
```

```

\input{pgfSweave-example-plot.pgff}
\endpgfgraphicnamed
\end{figure}

\end{document}

```

pgfSweave-example-tex.in

4 Consistency in style between graphics and text

In figure ?? Notice the inconsistency in font and size between the default R output and the default L^AT_EX output. Fonts and font sizes can be changed from R but it is hard to be precise. What if you decide to change the font and and point size of your entire document? In figure ?? the text is consistent with the rest of the document.

```
> hist(a)
```

```
> hist(a)
```

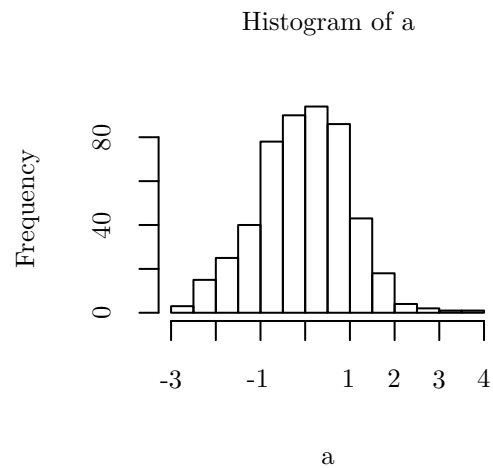
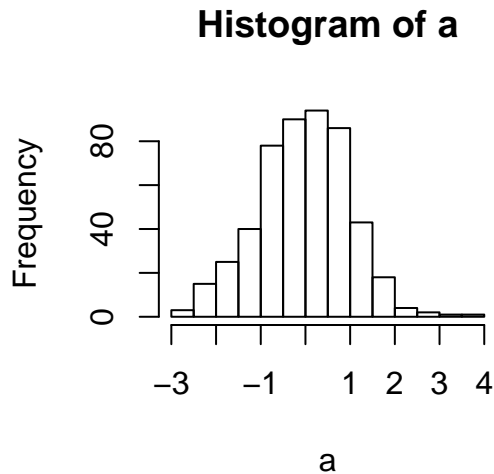


Figure 1: This is normal **Sweave**.

Figure 2: This is from **pgfSweave**.

The example below illustrates some of the power of **pgfSweave**. \LaTeX code can be directly input into captions. This sort of thing is already available in R but again consistency in font and text size is difficult to achieve.

```
> plot(a, b, xlab = "", ylab = "")
> title(xlab = "$\\alpha\\beta\\gamma\\delta\\epsilon\\Re \\rightarrow \\ell\\hbar$")
> title(ylab = "{\\color{green!40!blue}\\scshape \\Large Teal Label in Small Caps}")
> title(main = "{\\large This is a plot of $\\displaystyle\\int_a^b \\frac{x}{y}dx$}")
> abline(fit)
```

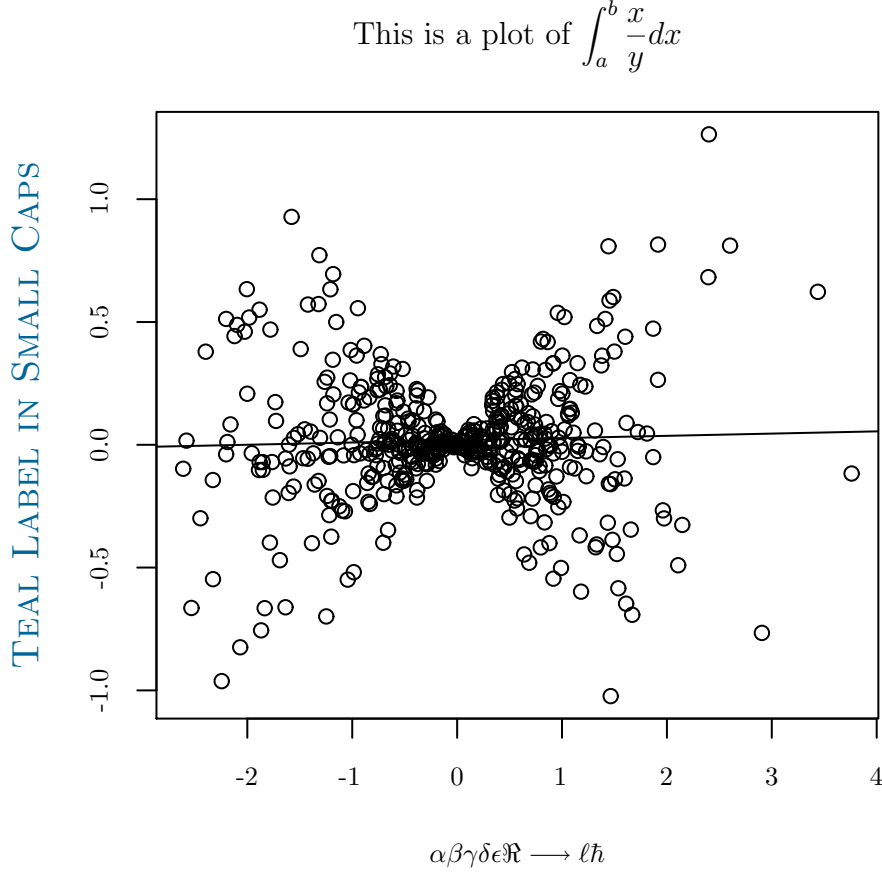


Figure 3: Large size plot but still consistent. Also \LaTeX can be put directly into the titles of the plot which matches the style of your paper. All \backslash 's must be escaped using this method.

Every other part of **Sweave** and **cacheSweave** work the same.

5 Frequently Asked Questions

Can pgfSweave be run from the command line?

Sure! Use the shell script provided in the **pgfSweave** package source in the **exec/** directory. Save the script somewhere in your **PATH** and run

```
$ pgfsweave <yourfile>.Rnw
```

How do I set subdirectories for figures and caches?

This is straight out of the **Sweave** and **cacheSweave** manuals (nothing new here). For a figures subdirectory ⁹ use the **prefix.string** option:

```
\SweaveOpts{prefix.string=figs/fig}
```

For a caching subdirectory use a code chunk at the beginning of your document like:

```
<<setup,echo=F>>=
setCacheDir("cache")
@
```

Why are the width and height options being ignored?

This is another one from **Sweave**. You must use the **nogin** option in **Sweave.sty** for the width and height parameters to actually affect the size of the image in the document:

```
\usepackage[nogin]{Sweave}
```

latex/pdflatex is not found in R.app (Mac OS X) and [Possibly] R.exe (Windows)

Your latex program is not in the default search path. Put a line such as:

```
Sys.setenv("PATH" = paste(Sys.getenv("PATH"), "/usr/texbin", sep=":"))
```

in your **.Rprofile** file.

I get a bunch of “Incompatible list can’t be unboxed” errors when compiling.

This is a problem with PGF. The workaround is to load the **atbegshi** package before PGF or TikZ:

```
\usepackage{atbegshi}
\usepackage{pgf}
```

or

```
\usepackage{atbegshi}
\usepackage{tikz}
```

⁹make sure to create the directory first!

The vignette in /inst/doc/ does not contain any code chunks!

That is because the vignette in /inst/doc/ is a “fake” vignette generated from the “real” vignette in /inst/misc/vignette-src/. The reason for this extra step is because compiling this vignette requires some from of the **pgfSweave** be installed. The other problem is that package vignettes must be able to be compiled with R CMD Sweave <vignette>.Rnw, which is just what we don’t want to use! Sort of a chicken or the egg problem.

To compile this vignette yourself use the following:

```
$ svn checkout svn://svn.rforge.net/pgfSweave/trunk pgfSweave
$ R CMD INSTALL pgfSweave
$ cd pgfSweave/inst/misc/vignette-src/
$ make
```