


Evidência de configuração de DNS local

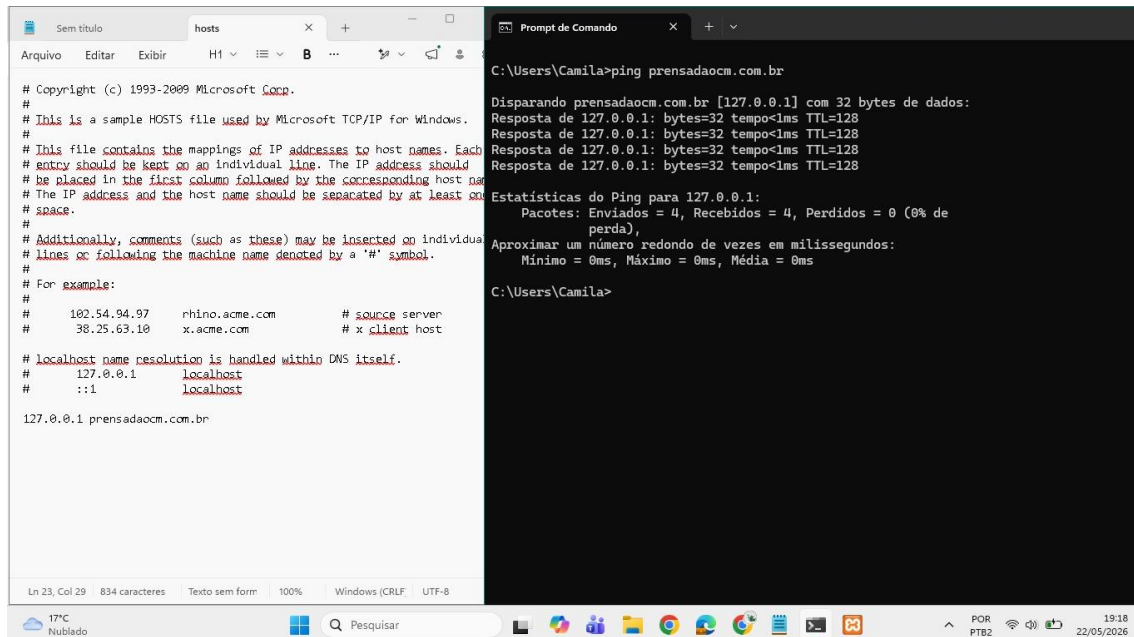

The screenshot shows a Windows desktop with two windows open. The left window is a text editor titled 'Sem título' showing the contents of the 'hosts' file. The right window is a 'Prompt de Comando' (Command Prompt) showing the execution of a ping command to 'prensadaocm.com.br'.

```
# Copyright (c) 1993-2009 Microsoft Corp.
#
# This is a sample HOSTS file used by Microsoft TCP/IP for Windows.
#
# This file contains the mappings of IP addresses to host names. Each
# entry should be kept on an individual line. The IP address should
# be placed in the first column followed by the corresponding host name
# The IP address and the host name should be separated by at least one
# space.
#
# Additionally, comments (such as these) may be inserted on individual
# lines or following the machine name denoted by a '#' symbol.
#
# For example:
#
#       102.54.94.97       rhino.acme.com       # source server
#       38.25.63.10       x.acme.com          # x client host
#
# localhost name resolution is handled within DNS itself.
#       127.0.0.1         localhost
#       ::1               localhost
#
127.0.0.1 prensadaocm.com.br
```

```
C:\Users\Camila>ping prensadaocm.com.br

Disparando prensadaocm.com.br [127.0.0.1] com 32 bytes de dados:
Resposta de 127.0.0.1: bytes=32 tempo<1ms TTL=128
Resposta de 127.0.0.1: bytes=32 tempo<1ms TTL=128
Resposta de 127.0.0.1: bytes=32 tempo<1ms TTL=128
Resposta de 127.0.0.1: bytes=32 tempo<1ms TTL=128

Estatísticas do Ping para 127.0.0.1:
    Pacotes: Enviados = 4, Recebidos = 4, Perdidos = 0 (0% de
    perda),
    Aproximar um número redondo de vezes em milissegundos:
        Mínimo = 0ms, Máximo = 0ms, Média = 0ms

C:\Users\Camila>
```

