


Proibir listagem de diretórios

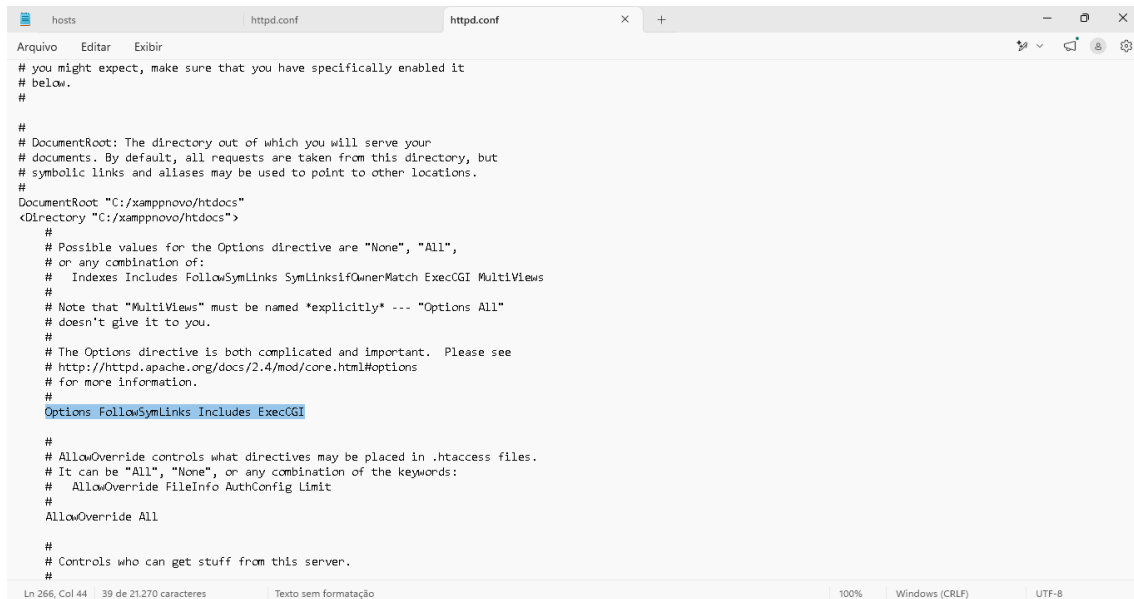

```
hosts    httpd.conf    httpd.conf
Arquivo  Editar  Exibir

# you might expect, make sure that you have specifically enabled it
# below.
#


#
# DocumentRoot: The directory out of which you will serve your
# documents. By default, all requests are taken from this directory, but
# symbolic links and aliases may be used to point to other locations.
#
DocumentRoot "C:/xamppnovo/htdocs"
<Directory "C:/xamppnovo/htdocs">
    #
    # Possible values for the Options directive are "None", "All",
    # or any combination of:
    #   Indexes Includes FollowSymLinks SymLinksifOwnerMatch ExecCGI MultiViews
    #
    # Note that "MultiViews" must be named *explicitly* --- "Options All"
    # doesn't give it to you.
    #
    # The Options directive is both complicated and important. Please see
    # http://httpd.apache.org/docs/2.4/mod/core.html#options
    # for more information.
    #
    Options FollowSymLinks Includes ExecCGI

    #
    # AllowOverride controls what directives may be placed in .htaccess files.
    # It can be "All", "None", or any combination of the keywords:
    #   AllowOverride FileInfo AuthConfig Limit
    #
    AllowOverride All

    #
    # Controls who can get stuff from this server.
    #

```

Aplicação funcionando na porta 8080

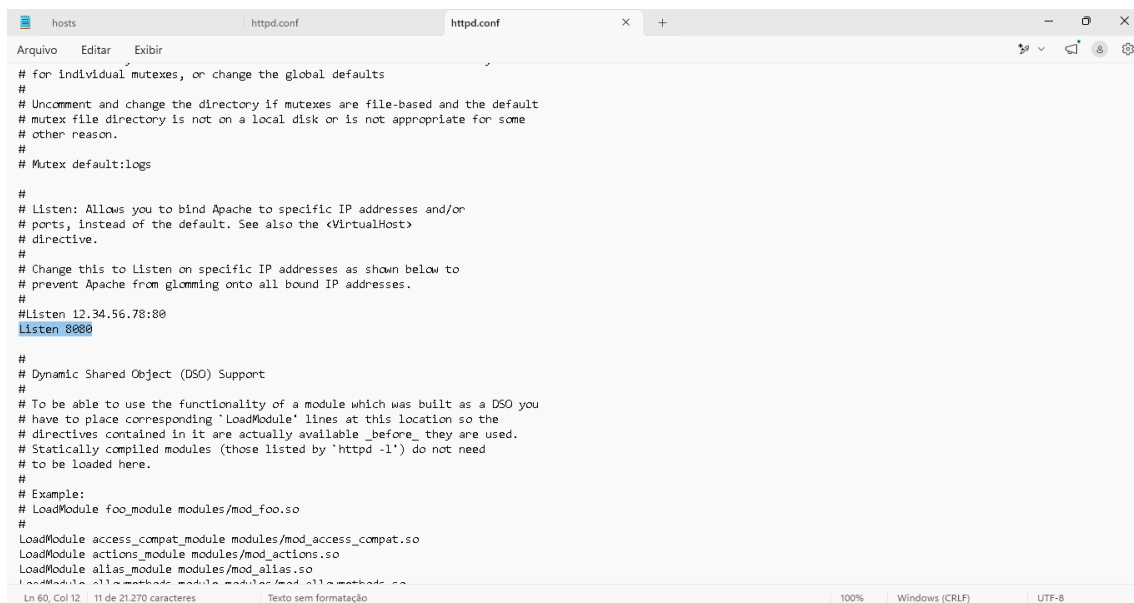

```
hosts    httpd.conf    httpd.conf
Arquivo  Editar  Exibir

# for individual mutexes, or change the global defaults
#
# Uncomment and change the directory if mutexes are file-based and the default
# mutex file directory is not on a local disk or is not appropriate for some
# other reason.
#
# Mutex default:logs

#
# Listen: Allows you to bind Apache to specific IP addresses and/or
# ports, instead of the default. See also the <VirtualHost>
# directive.
#
# Change this to Listen on specific IP addresses as shown below to
# prevent Apache from glomming onto all bound IP addresses.
#
#Listen 12.34.56.78:80
Listen 8080

#
# Dynamic Shared Object (DSO) Support
#
# To be able to use the functionality of a module which was built as a DSO you
# have to place corresponding 'LoadModule' lines at this location so the
# directives contained in it are actually available _before_ they are used.
# Statically compiled modules (those listed by 'httpd -l') do not need
# to be loaded here.
#
# Example:
# LoadModule foo_module modules/mod_foo.so
#
LoadModule access_compat_module modules/mod_access_compat.so
LoadModule actions_module modules/mod_actions.so
LoadModule alias_module modules/mod_alias.so
LoadModule allowmethods_module modules/mod_allowmethods.so
```

Configurar DNS local para a aplicação

hosts

httpd.conf

httpd.conf

Arquivo

Editar

Exibir

H1

B

I

S

↺

↻

⌵

⌶

↻

↺

↻

⚙

Copyright (c) 1993-2009 Microsoft Corp.

#

This is a sample HOSTS file used by Microsoft TCP/IP for Windows.

#

This file contains the mappings of IP addresses to host names. Each

entry should be kept on an individual line. The IP address should

be placed in the first column followed by the corresponding host name.

The IP address and the host name should be separated by at least one

space.

#

Additionally, comments (such as these) may be inserted on individual

lines or following the machine name denoted by a '#' symbol.

#

For example:

#

102.54.94.97 rhino.acme.com # source server

38.25.63.10 x.acme.com # x client host

#

localhost name resolution is handled within DNS itself.

127.0.0.1 localhost

::1 localhost

127.0.0.1 prensadaocm.com.br

Ln 23, Col 29

28 de 833 caracteres


Texto sem formatação

100%


Windows (CRLF)

UTF-8

O banco de dados possui IP Fixo.

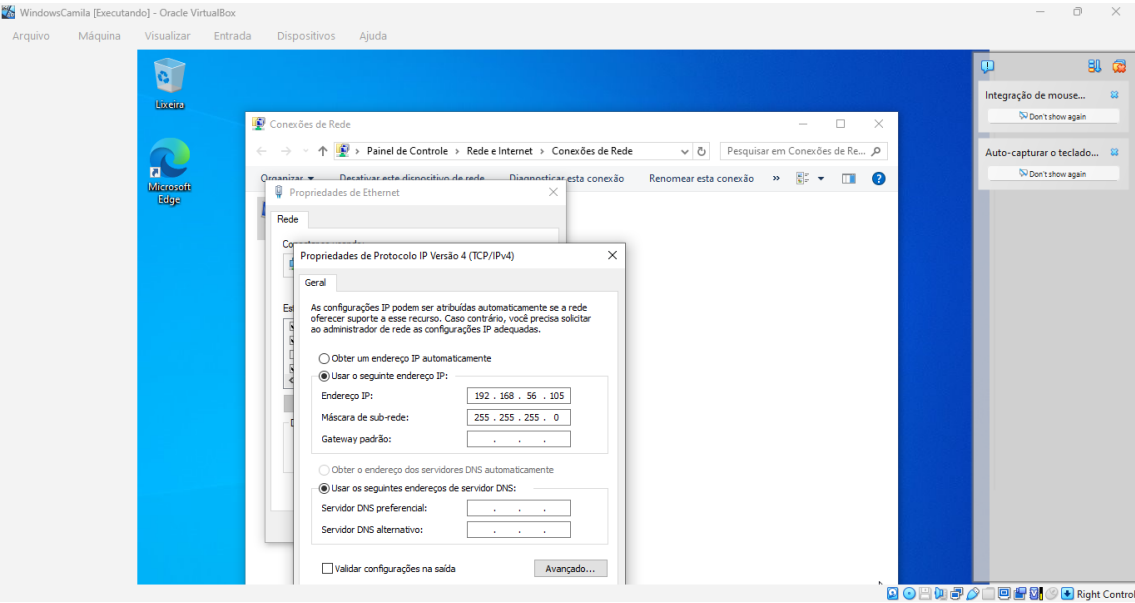

A aplicação e o banco de dados estão em máquinas separadas

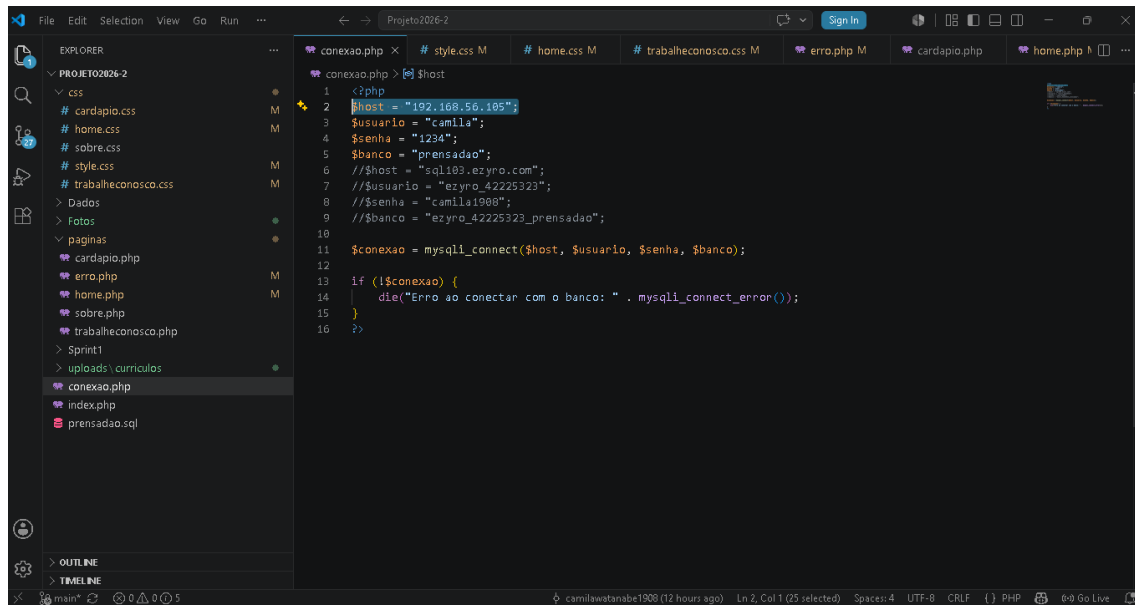

```
1 <?php
2 $host = "192.168.56.185";
3 $usuario = "camila";
4 $senha = "1234";
5 $banco = "prensadao";
6 // $host = "sql103.ezryno.com";
7 // $usuario = "ezryno_42225323";
8 // $senha = "camila1908";
9 // $banco = "ezryno_42225323_prensadao";
10
11 $conexao = mysqli_connect($host, $usuario, $senha, $banco);
12
13 if (!$conexao) {
14     die("Erro ao conectar com o banco: " . mysqli_connect_error());
15 }
16 ?>
```