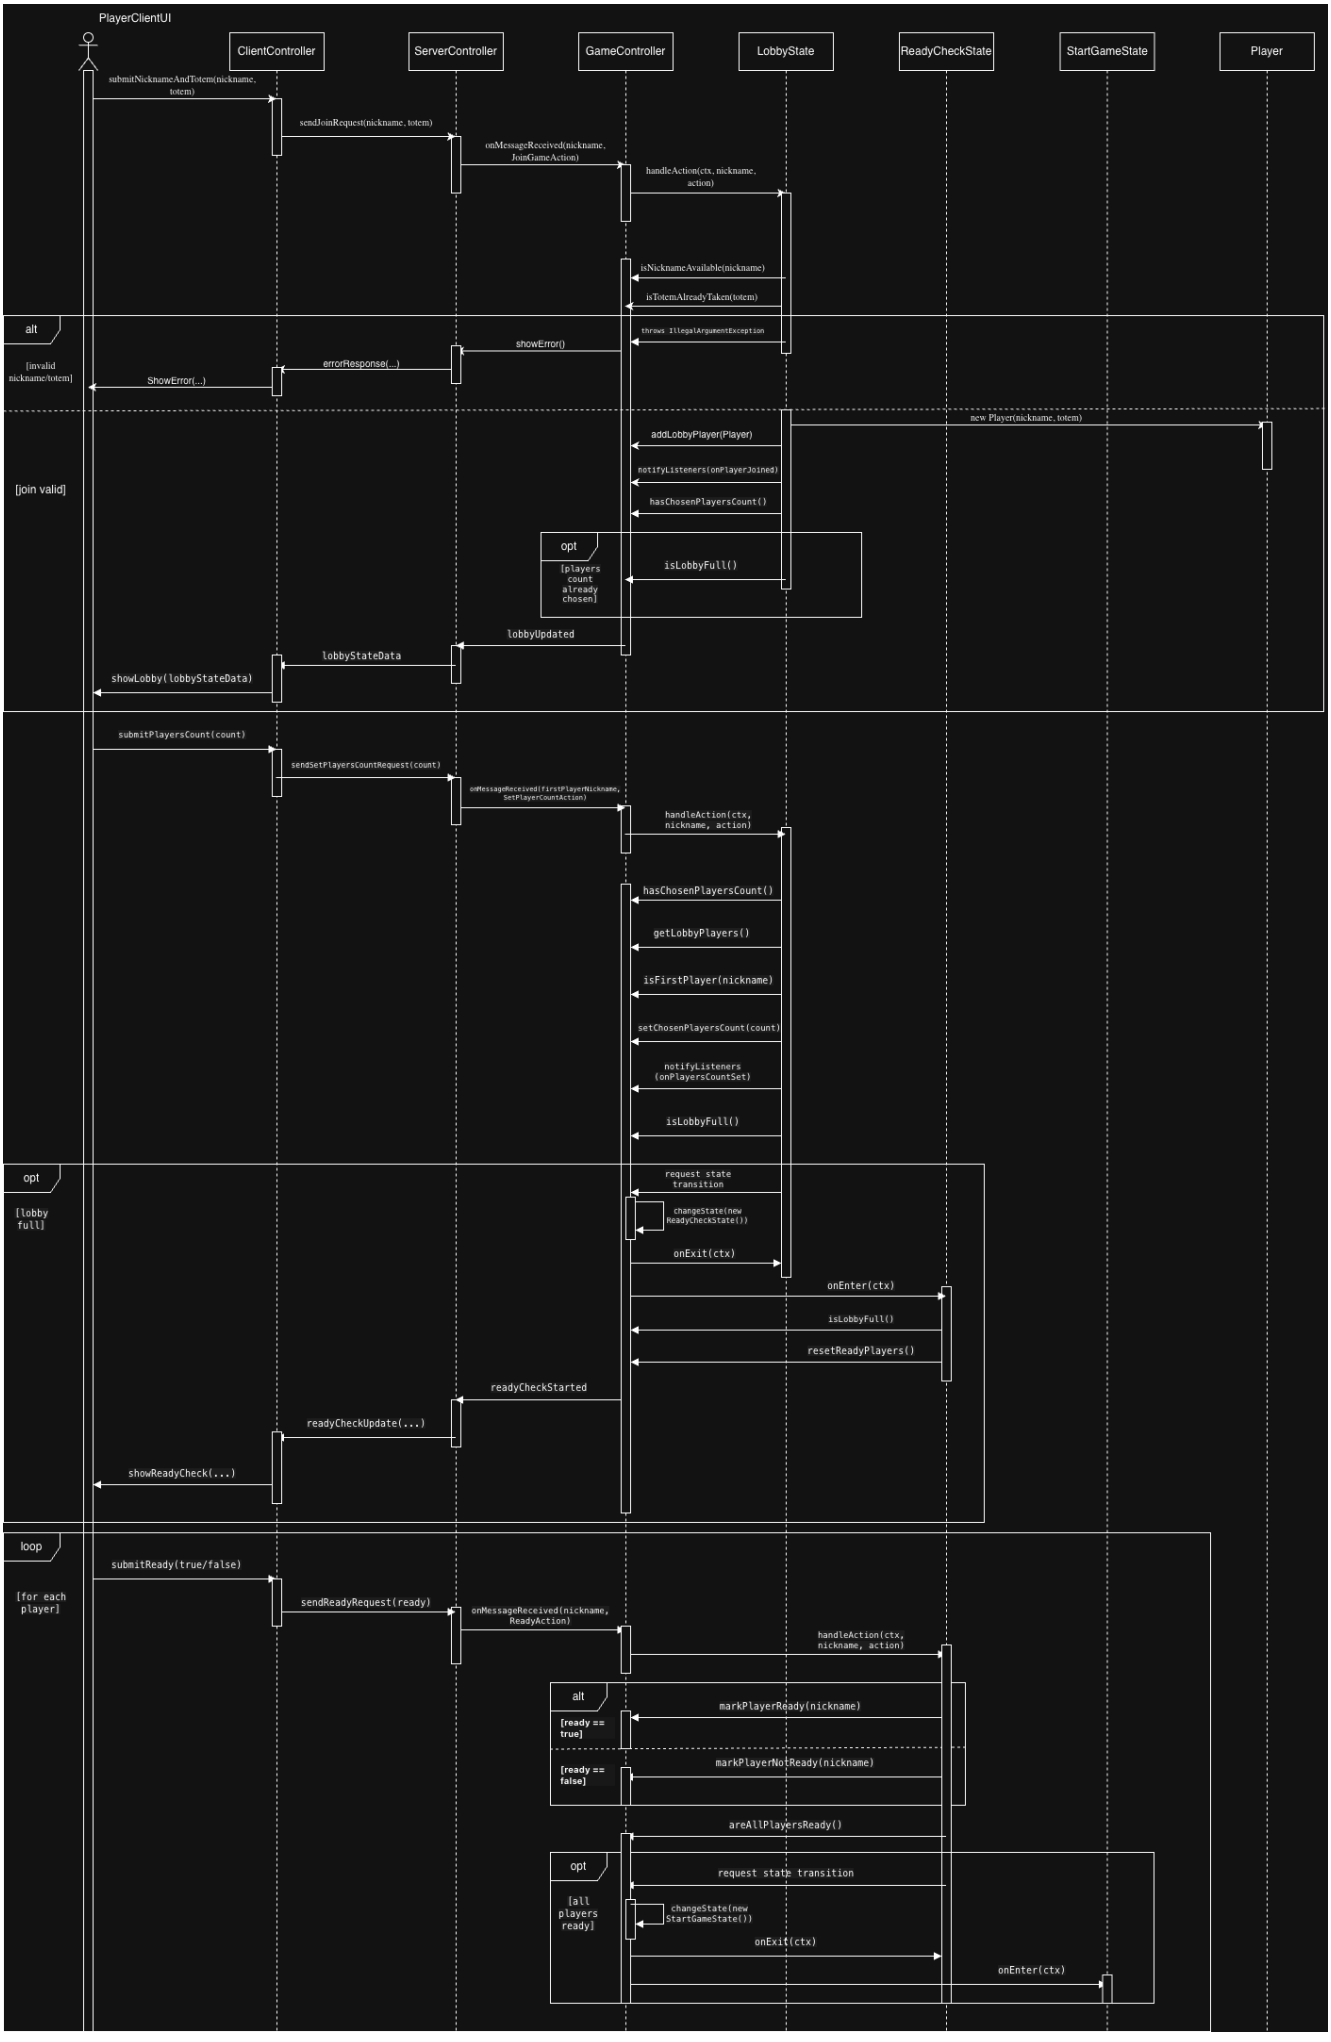

PlayerClientUI
ClientController
ServerController
GameController
LobbyState
ReadyCheckState
StartGameState
Player
submitNicknameAndTotem(nickname, totem)
sendJoinRequest(nickname, totem)
onMessageReceived(nickname, JoinGameAction)
handleAction(ctx, nickname, action)
isNicknameAvailable(nickname)
isTotemAlreadyTaken(totem)
alt
[invalid nickname/totem]
throws IllegalArgumentException
showError()
errorResponse(...)
ShowError(...)
new Player(nickname, totem)
addLobbyPlayer(Player)
notifyListeners(onPlayerJoined)
hasChosenPlayersCount()
[join valid]
opt
[players count already chosen]
isLobbyFull()
lobbyUpdated
lobbyStateData
showLobby(lobbyStateData)
submitPlayersCount(count)
sendSetPlayersCountRequest(count)
onMessageReceived(FirstPlayerNickname, SetPlayerCountAction)
handleAction(ctx, nickname, action)
hasChosenPlayersCount()
getLobbyPlayers()
isFirstPlayer(nickname)
setChosenPlayersCount(count)
notifyListeners (onPlayersCountSet)
isLobbyFull()
opt
[lobby full]
request state transition
changeState(new ReadyCheckState())
onExit(ctx)
onEnter(ctx)
isLobbyFull()
resetReadyPlayers()
readyCheckStarted
readyCheckUpdate(...)
showReadyCheck(...)
loop
[for each player]
submitReady(true/false)
sendReadyRequest(ready)
onMessageReceived(nickname, ReadyAction)
handleAction(ctx, nickname, action)
alt
[ready == true]
markPlayerReady(nickname)
[ready == false]
markPlayerNotReady(nickname)
areAllPlayersReady()
opt
[all players ready]
request state transition
changeState(new StartGameState())
onExit(ctx)
onEnter(ctx)