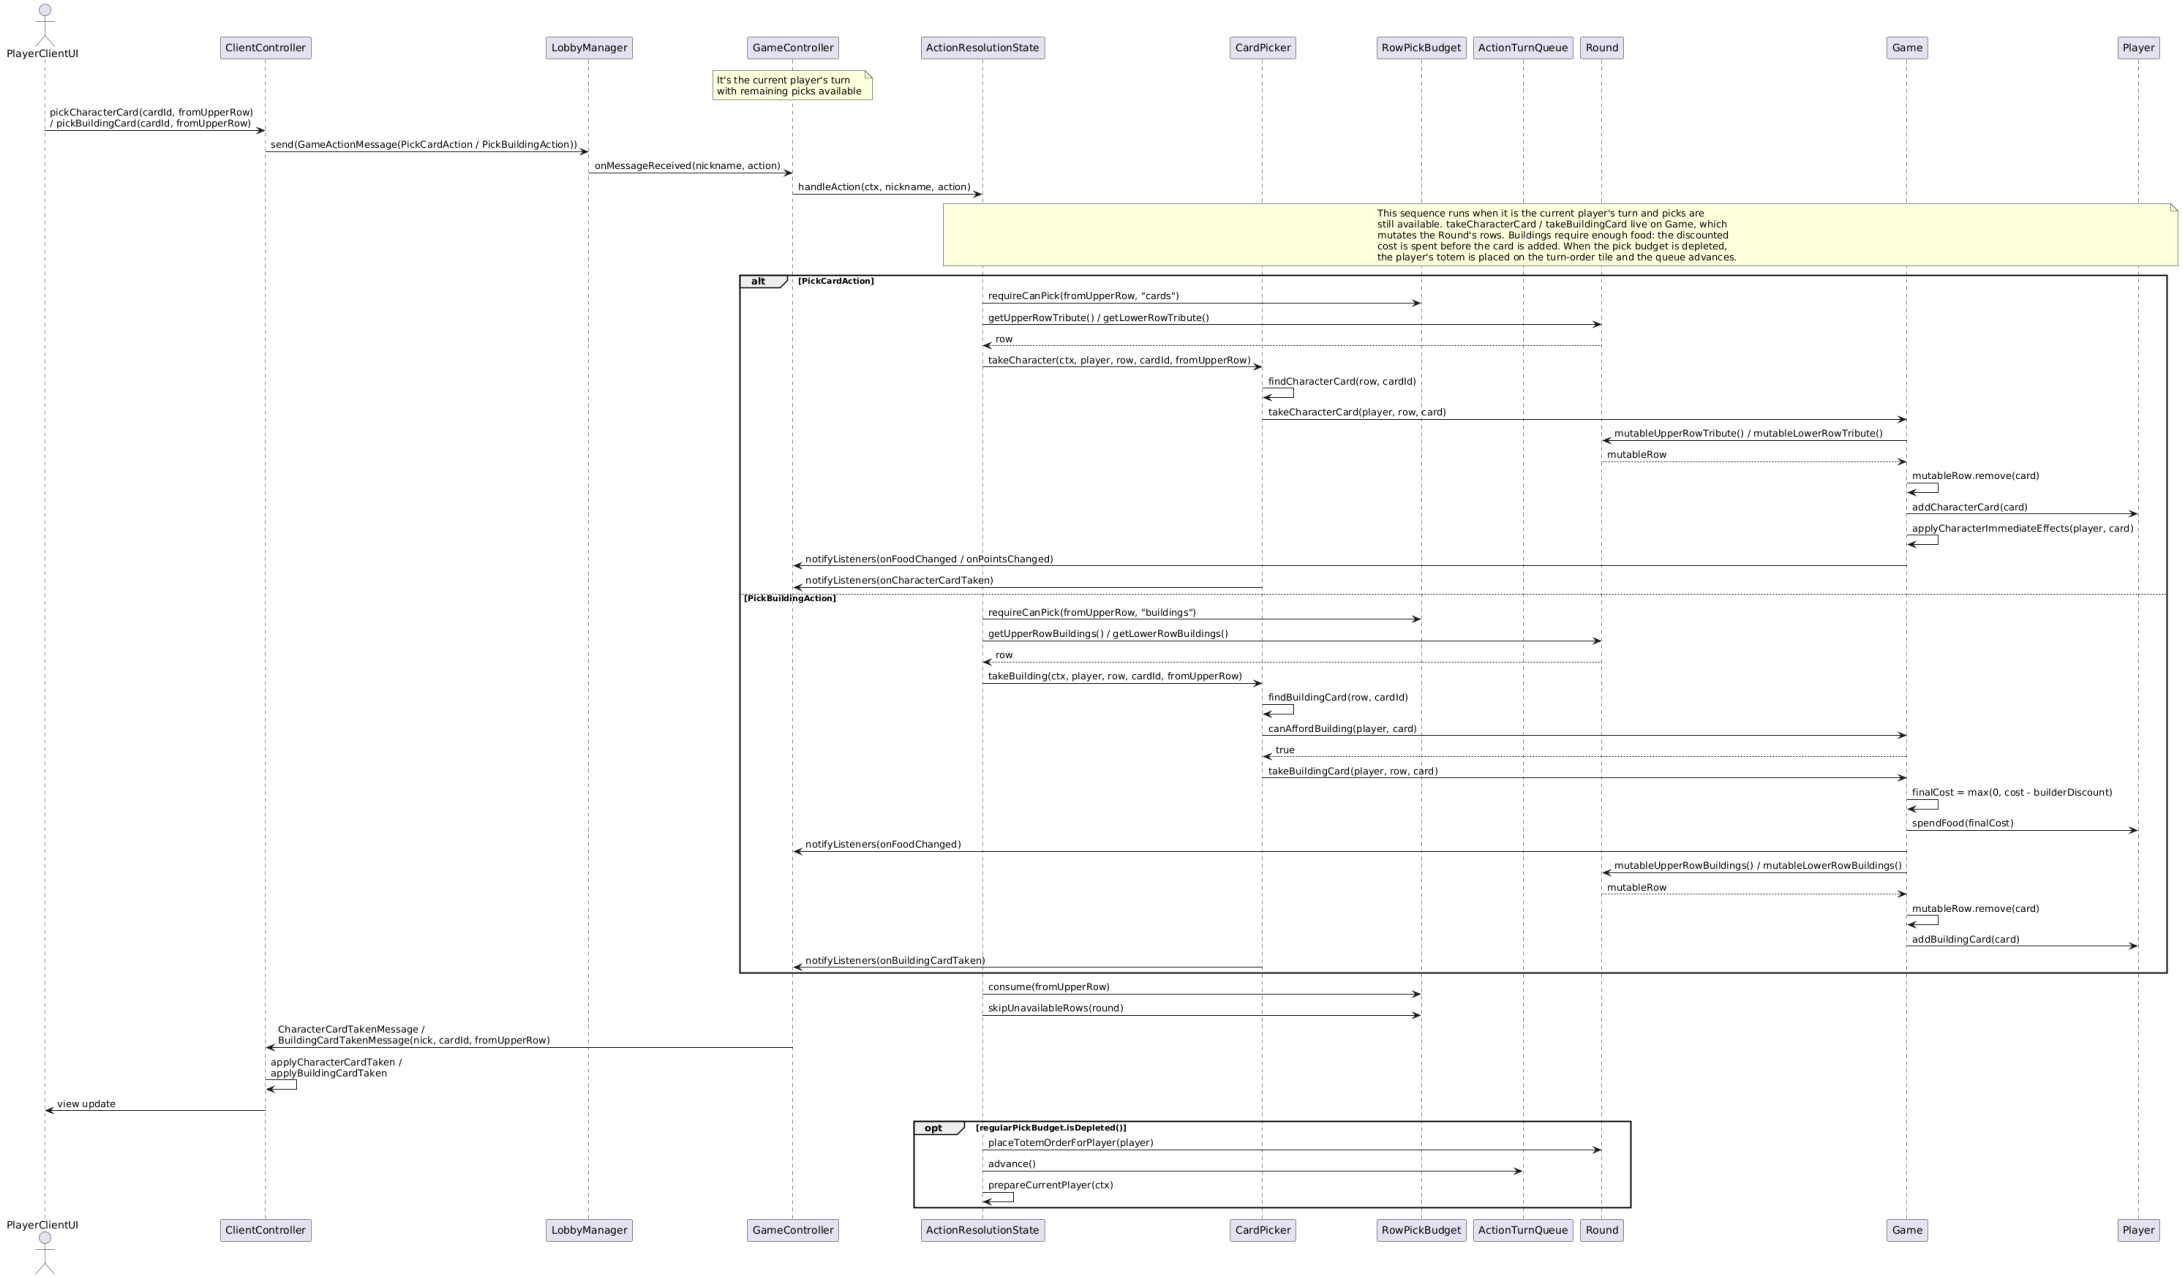

Card Selection Sequence
PlayerClientUI
ClientController
LobbyManager
GameController
ActionResolutionState
CardPicker
RowPickBudget
ActionTurnQueue
Round
Game
Player
It's the current player's turn
with remaining picks available
pickCharacterCard(cardId, fromUpperRow)
/ pickBuildingCard(cardId, fromUpperRow)
send(GameActionMessage(PickCardAction / PickBuildingAction))
onMessageReceived(nickname, action)
handleAction(ctx, nickname, action)
This sequence runs when it is the current player's turn and picks are
still available. takeCharacterCard / takeBuildingCard live on Game, which
mutates the Round's rows. Buildings require enough food: the discounted
cost is spent before the card is added. When the pick budget is depleted,
the player's totem is placed on the turn-order tile and the queue advances.
alt
[PickCardAction]
requireCanPick(fromUpperRow, "cards")
getUpperRowTribute() / getLowerRowTribute()
row
takeCharacter(ctx, player, row, cardId, fromUpperRow)
findCharacterCard(row, cardId)
takeCharacterCard(player, row, card)
mutableUpperRowTribute() / mutableLowerRowTribute()
mutableRow
mutableRow.remove(card)
addCharacterCard(card)
applyCharacterImmediateEffects(player, card)
notifyListeners(onFoodChanged / onPointsChanged)
notifyListeners(onCharacterCardTaken)
[PickBuildingAction]
requireCanPick(fromUpperRow, "buildings")
getUpperRowBuildings() / getLowerRowBuildings()
row
takeBuilding(ctx, player, row, cardId, fromUpperRow)
findBuildingCard(row, cardId)
canAffordBuilding(player, card)
true
takeBuildingCard(player, row, card)
finalCost = max(0, cost - builderDiscount)
spendFood(finalCost)
notifyListeners(onFoodChanged)
mutableUpperRowBuildings() / mutableLowerRowBuildings()
mutableRow
mutableRow.remove(card)
addBuildingCard(card)
notifyListeners(onBuildingCardTaken)
consume(fromUpperRow)
skipUnavailableRows(round)
CharacterCardTakenMessage /
BuildingCardTakenMessage(nick, cardId, fromUpperRow)
applyCharacterCardTaken /
applyBuildingCardTaken
view update
opt
[regularPickBudget.isDepleted()]
placeTotemOrderForPlayer(player)
advance()
prepareCurrentPlayer(ctx)