



Six architectures that can generate segment-wise predictive dependence.
 Only (a) contains episode-specific return to the source population; panel (f) transmits only a coarse summary along each link, so both predictive gains are positive while episode identity is destroyed in transit.

(a)

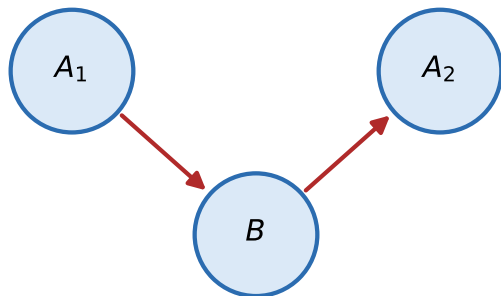


return to source A

(b)

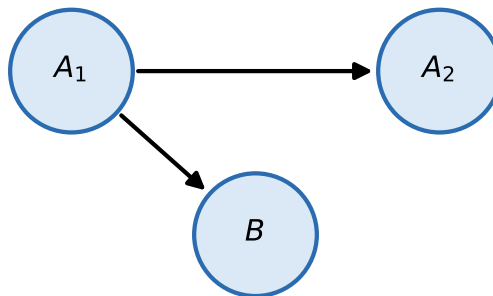


no return through B

(c)

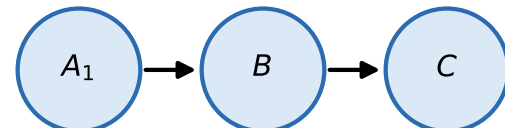


terminates elsewhere

(d)

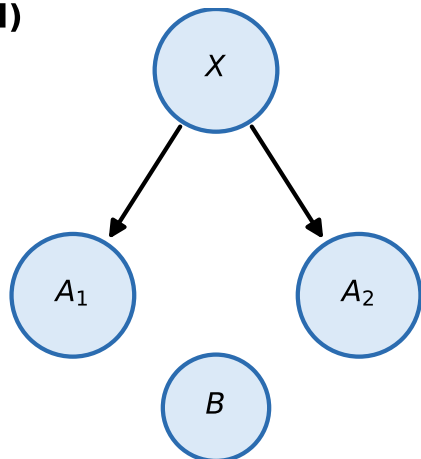


observed common cause

(e)

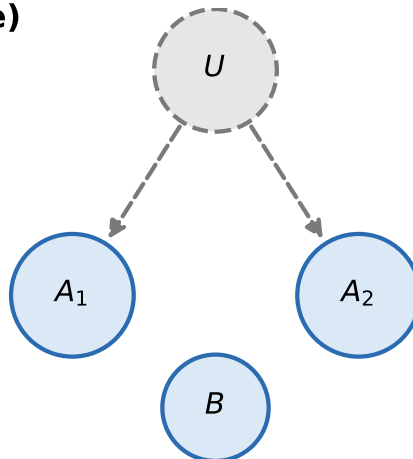

latent confounder

(f)

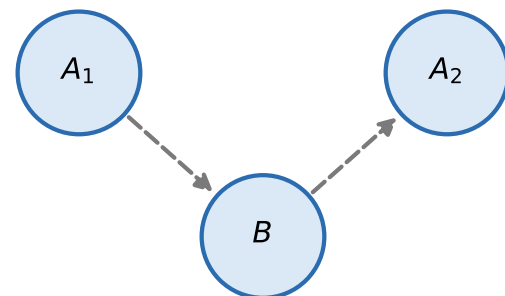

coarse links, identity lost