

Supplemental file

Last updated 2021-07-27

Contents

Cleaning	2
Workspace	2
Recode personality item responses to numeric	2
Drop bots	3
Reverse score personality items	10
Score memory task	11
Change labels of device variable	17
Save data	17
 Does item format affect response?	 18
Workspace	18
Data prep	18
Analysis: Block 1 data only	19
Analysis: Block 1 and Block 2	26
Analysis: Account for memory effects	31
 How does format affect timing of responses?	 38
Workspace	38
Analysis: Block 1 data only	39
Analysis: Block 1 and Block 2	53
Analysis: Account for memory effects	65
 How does device type affect means and timing of responses?	 76
 Workspace	 76
Data prep: item responses	76
Data prep: item timing	77
 Responses	 78
Response by device	78
Device by format	80

Timing	81
Timing by device	81
Device by format	83

Cleaning

Workspace

```
library(here) # for working with files
library(tidyverse) # for cleaning
library(janitor) # for variable names
library(lme4) # for multilevel modeling
library(sjPlot) # for figures
library(ggpubr) # for prettier plots
library(kableExtra) # for nicer tables
library(stringdist) # for scoring memory task
library(papaja) # for pretty numbers
```

```
data_path = here("data/Wording_July 13, 2021_20.00.text.csv")

data_labels = read_csv(data_path)

data = read_csv(data_path,
                 skip = 3,
                 col_names = names(data_labels))
rm(data_labels)
data = clean_names(data)
```

Remove the following columns.

```
data = data %>%
  select(-end_date,
         -ip_address,
         -progress,
         -finished,
         -recorded_date,
         -external_reference,
         -distribution_channel,
         -user_language,
         -starts_with("recipient"),
         -starts_with("location"),
         -starts_with("meta_info"))
```

Recode personality item responses to numeric

We recode the responses to personality items, which we downloaded as text strings.

```
p_items = str_extract(names(data), "^[[:alpha:]]*_[abcd](_2)?$")
p_items = p_items[!is.na(p_items)]

personality_items = select(data, proid, all_of(p_items))
```

Next we write a simple function to recode values.

```
recode_p = function(x){
  y = case_when(
    x == "Very inaccurate" ~ 1,
    x == "Moderately inaccurate" ~ 2,
    x == "Slightly inaccurate" ~ 3,
    x == "Slightly accurate" ~ 4,
    x == "Moderately accurate" ~ 5,
    x == "Very accurate" ~ 6,
    TRUE ~ NA_real_)
  return(y)
}
```

Finally, we apply this function to all personality items.

```
personality_items = personality_items %>%
  mutate(
    across(!c(proid), recode_p))
```

Now we merge this back into the data.

```
data = select(data, -all_of(p_items))
data = full_join(data, personality_items)
```

Drop bots

Based on ID

We removed 5 participants without valid Prolific IDs.

```
data = data %>%
  mutate(proid = str_remove(proid, "Value will be set from panel or URL"),
         proid = str_remove(proid, "Value will be set from panel or UR"),
         proid = str_remove(proid, "TEST")) %>%
  filter(proid != "")
```

We removed 0 participants that do not speak english well or very well.

Based on patterns

We remove any participant who provides the same response to over half of the items (17 or more items) from a given block in a row.

```

# first, identify unique adjectives, in order
adjectives = p_items %>%
  str_remove_all("_.") %>%
  unique()

# extract block 1 questions
block1 = data %>%
  select(proid, matches("^[:alpha:]]+_[abcd]$"))

#rename variables
n = 0
for(i in adjectives){
  n = n+1
  names(block1) = str_replace(names(block1), i, paste0("trait", str_pad(n, 2, pad = "0")))
}

block1 = block1 %>%
  gather(item, response, -proid) %>%
  filter(!is.na(response)) %>%
  separate(item, into = c("item", "format")) %>%
  select(-format) %>%
  spread(item, response)

block1_runs = numeric(length = nrow(block1))

# working on this!!!
for(i in 1:nrow(block1)){
  run = 0
  maxrun = 0
  for(j in 3:ncol(block1)){
    if(block1[i,j] == block1[i, j-1]){
      run = run+1
      if(run > maxrun) maxrun = run
    } else{ run = 0}
  }
  block1_runs[i] = maxrun
}

#add to data frame
block1$block1_runs = block1_runs

# extract block 2 questions
block2 = data %>%
  select(proid, matches("^[:alpha:]]+_[abcd]_2$"))

#rename variables
n = 0
for(i in adjectives){
  n = n+1
  names(block2) = str_replace(names(block2), i, paste0("trait", str_pad(n, 2, pad = "0")))
}

```

```

block2 = block2 %>%
  gather(item, response, -proid) %>%
  filter(!is.na(response)) %>%
  mutate(item = str_remove(item, "_2")) %>%
  separate(item, into = c("item", "format")) %>%
  select(-format) %>%
  spread(item, response)

block2_runs = numeric(length = nrow(block2))

# working on this!!!
for(i in 1:nrow(block2)){
  run = 0
  maxrun = 0
  for(j in 3:ncol(block2)){
    if(block2[i,j] == block2[i, j-1]){
      run = run+1
      if(run > maxrun) maxrun = run
    } else{ run = 0}
  }
  block2_runs[i] = maxrun
}

#add to data frame
block2$block2_runs = block2_runs

#combine results
runs_data = block1 %>%
  select(proid, block1_runs) %>%
  full_join(select(block2, proid, block2_runs)) %>%
  mutate(
    remove = case_when(
      block1_runs >= 17 ~ "Remove",
      block2_runs >= 17 ~ "Remove",
      TRUE ~ "Keep"
    )
  )

#visualize
runs_data %>%
  ggplot(aes(block1_runs, block2_runs)) +
  geom_point(aes(color = remove)) +
  scale_color_manual(values = c("black", "red")) +
  guides(color = "none") +
  labs(
    x = "block 1 runs",
    y = "block 2 runs"
  ) +
  theme_pubr()

```

There were 2 participants who provided the same answer 17 or more times in a row. These participants were removed from the analyses.

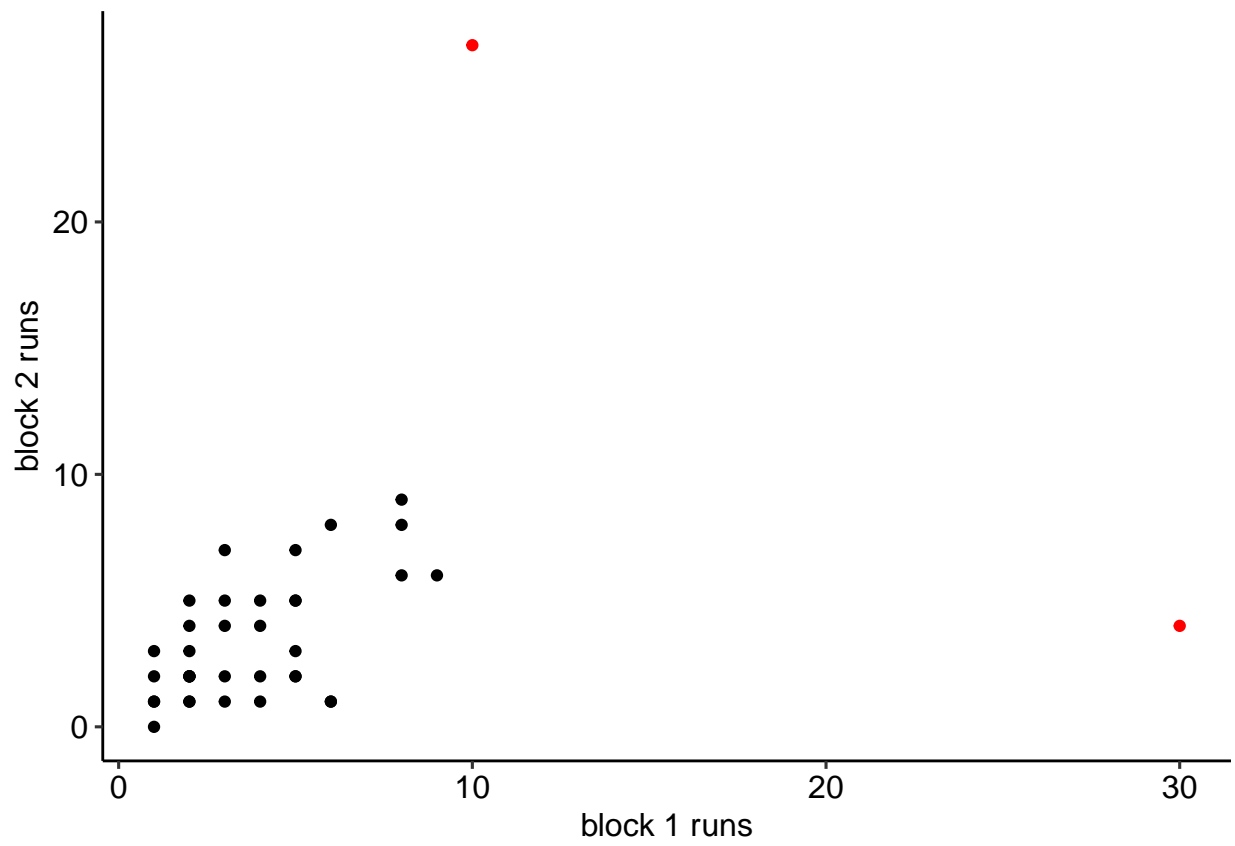


Figure 1: Maximum number of same consecutive responses in personality blocks.

```
data = data %>%
  full_join(select(runs_data, proid, remove)) %>%
  filter(remove != "Remove") %>%
  select(-remove)

rm(runs_data)
```

Based on inattentive responding

We expect to exclude any participant who has an average response of 4 (“slightly agree”) or greater to the attention check items. Two items from the Inattentive and Deviant Responding Inventory for Adjectives (IDRIA) scale (Kay & Saucier, in prep) have been included here, in part to help evaluate the extent of inattentive responding but also to consider the effect of item wording on these items. The two items used here (i.e., “Asleep”, “Human”) were chosen to be as inconspicuous as possible, so as to not to inflate item response durations. The frequency item (i.e., “human”) will be reverse-scored, so that higher scores on both the infrequency and frequency items reflect greater inattentive responding.

```
in_average = data %>%
  # reverse score human
  mutate(across(matches("^human"), ~(.x*-1)+7)) %>%
  # select id and attention check items
  select(proid, matches("^human"), matches("^asleep")) %>%
  gather(item, response, -proid) %>%
  filter(!is.na(response)) %>%
  group_by(proid) %>%
  summarise(avg = mean(response)) %>%
  mutate(
    remove = case_when(
      avg >= 4 ~ "Remove",
      TRUE ~ "Keep"))
```

```
in_average %>%
  ggplot(aes(x = avg, fill = remove)) +
  geom_histogram(bins = 20, color = "white") +
  geom_vline(aes(xintercept = 4)) +
  guides(fill = "none") +
  labs(x = "Average response to inattention check items") +
  theme_pubr()
```

We remove 1 participants whose responses suggest inattention.

```
data = data %>%
  full_join(select(in_average, proid, remove)) %>%
  filter(remove != "Remove") %>%
  select(-remove)
```

Based on average time to respond to personality items

First, select just the timing of the personality items. We do this by searching for specific strings: "t_[someword]/a or b or c or d/(maybe 2_)_page_submit."

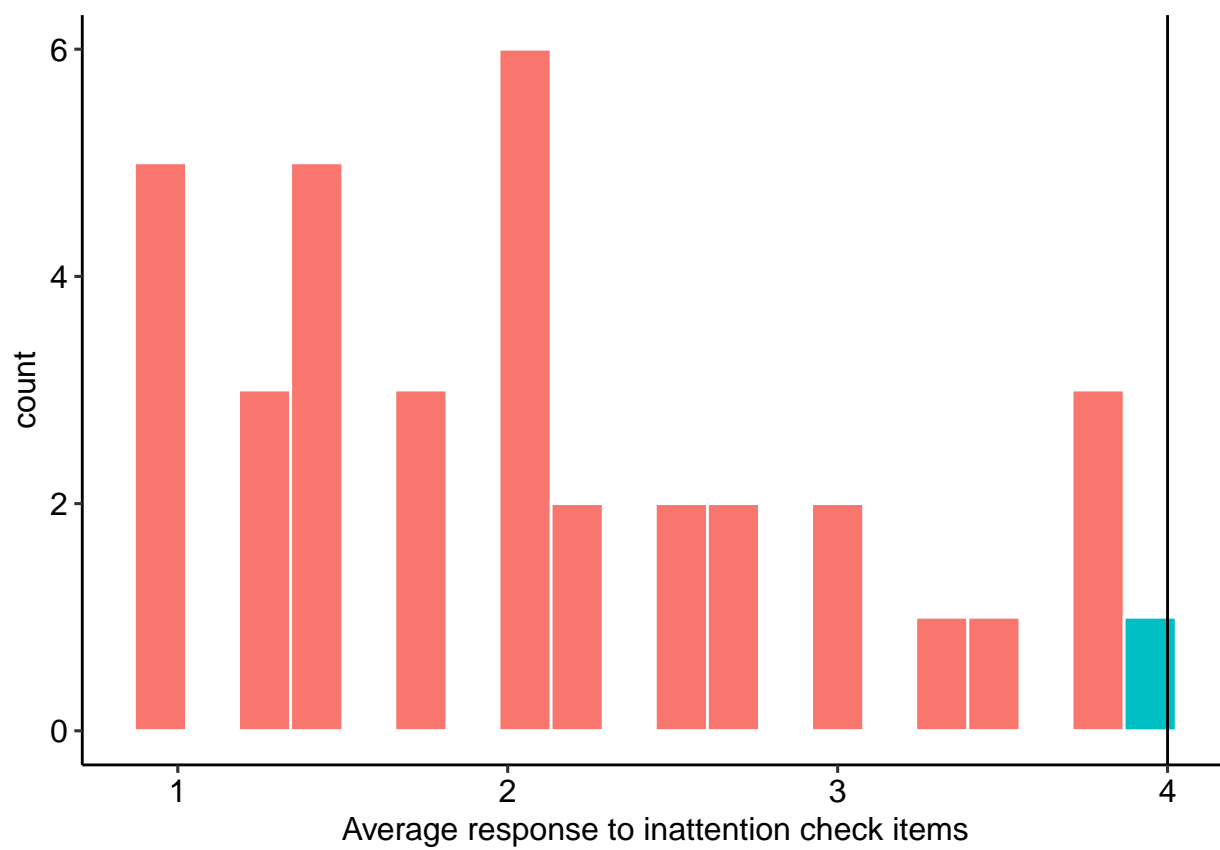


Figure 2: Average response to inattention check items


```
timing_data = data %>%
  select(proid, matches("t_[[:alpha:]]*_[abcd](_2)?_page_submit"))
```

Next we gather into long form and remove missing timing values

```
timing_data = timing_data %>%
  gather(variable, timing, -proid) %>%
  filter(!is.na(timing))
```

```
timing_data
```

```
## # A tibble: 2,170 x 3
##   proid          variable      timing
##   <chr>         <chr>         <dbl>
## 1 5f0227ae81bf2f3a4618c8c7 t_outgoing_a_page_submit 4.47
## 2 60eb3434de863fc43f563b0e t_outgoing_a_page_submit 4.52
## 3 60eb31222e8b2fb8dc904432 t_outgoing_a_page_submit 4.86
## 4 60e49d66c9c4f08ce7a3b789 t_outgoing_a_page_submit 4.16
## 5 60ea7b0e32a76a57b4a34664 t_outgoing_a_page_submit 4.20
## 6 60e950d879a14636c5fc286d t_outgoing_a_page_submit 4.49
## 7 60e781742748ec6401b79f86 t_outgoing_a_page_submit 4.5
## 8 60e9521961c670e718bcc4df t_outgoing_a_page_submit 85.7
## 9 60e777356e13630d745eeb49 t_outgoing_a_page_submit 2.47
## 10 60e99999b101ef725cb0b8a2 t_outgoing_a_page_submit 4.45
## # ... with 2,160 more rows
```

To check, each participant should have the same number of responses: 62.

```
timing_data %>%
  group_by(proid) %>%
  count() %>%
  ungroup() %>%
  summarise(min(n), max(n))
```

```
## # A tibble: 1 x 2
##   'min(n)' 'max(n)'
##   <int>    <int>
## 1      62      62
```

Excellent! Now we calculate the average response time per item for each participant. We mark a participant for removal if their average time is less than 1 second or greater than 30. See Figure @ref(fig:timing_dist) for a distribution of average response time.

```
timing_data = timing_data %>%
  group_by(proid) %>%
  summarise(m_time = mean(timing)) %>%
  mutate(remove = case_when(
    m_time < 1 ~ "Remove",
    m_time > 30 ~ "Remove",
    TRUE ~ "Keep"
  ))
```

```
timing_data %>%
  ggplot(aes(x = m_time, fill = remove)) +
  geom_histogram(color = "white") +
  labs(x = "Average response time (seconds)", y = "Number of participants") +
  theme_pubr()
```

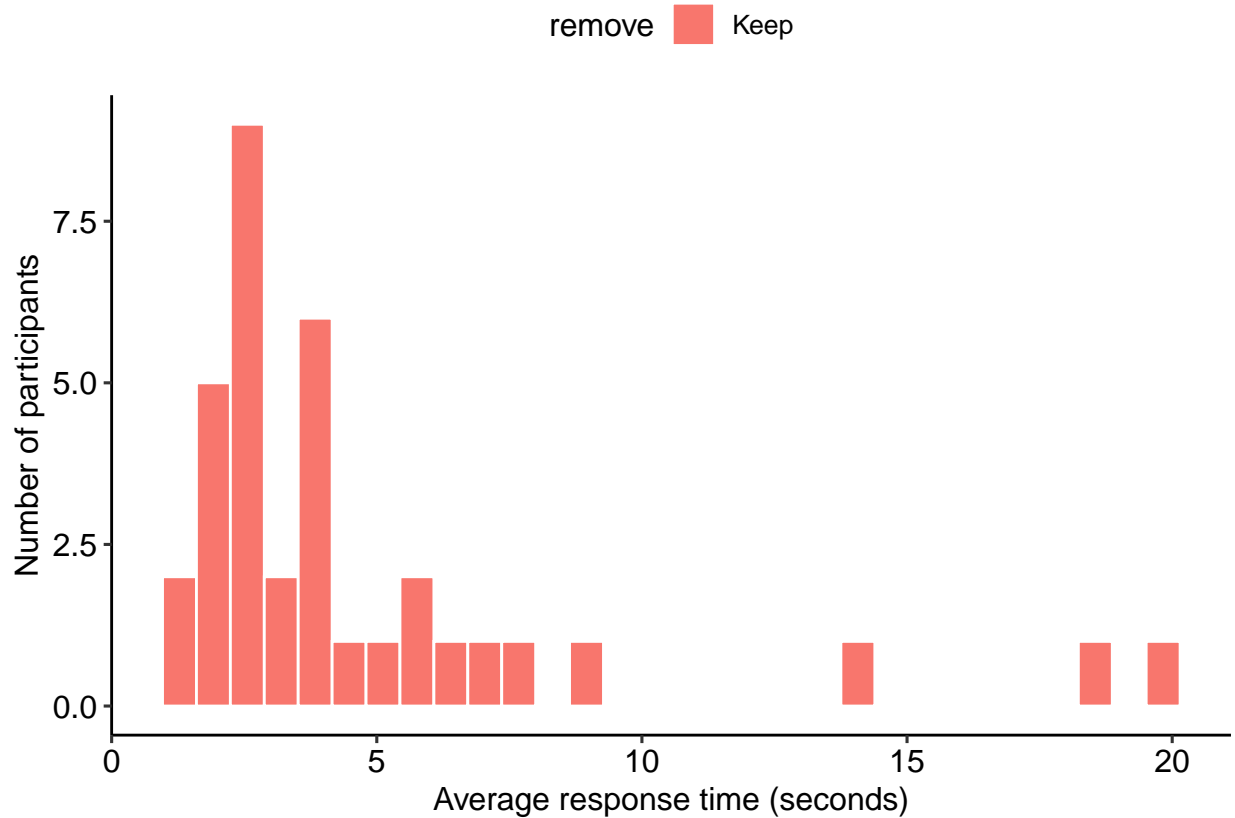


Figure 3: Distribution of average time to respond to personality items.

```
data = inner_join(data, filter(timing_data, remove == "Keep")) %>%
  select(-remove)
```

Based on timing, we removed 0 participants.

Reverse score personality items

The following items are (typically) negatively correlated with the others: reckless, moody, worrying, nervous, careless, impulsive. We reverse-score them to ease interpretation of associations and means in the later sections. In short, all traits will be scored such that larger numbers are indicative of the more socially desirable end of the spectrum.

```
data = data %>%
  mutate(
    across(matches("^reckless"), ~(.x*-1)+7),
    across(matches("^moody"), ~(.x*-1)+7),
```

```

across(matches("^worrying"), ~(.x*-1)+7),
across(matches("^nervous"), ~(.x*-1)+7),
across(matches("^careless"), ~(.x*-1)+7),
across(matches("^impulsive"), ~(.x*-1)+7))

```

Score memory task

Now we score the memory task. We start by creating vectors of the correct responses.

```

correct1 = c("book", "child", "gold", "hotel", "king",
             "market", "paper", "river", "skin", "tree")

correct2 = c("butter", "college", "dollar", "earth", "flag",
             "home", "machine", "ocean", "sky", "wife")

correct3 = c("blood", "corner", "engine", "girl", "house",
             "letter", "rock", "shoes", "valley", "woman")

correct4 = c("baby", "church", "doctor", "fire", "garden",
             "palace", "sea", "table", "village", "water")

```

Next we convert all responses to lowercase. Then we break the string of responses into a vector containing many strings.

```

data = data %>%
  mutate(
    across(matches("recall"), tolower), # convert to lower
    #replace carriage return with space
    across(matches("recall"), str_replace_all, pattern = "\\n", replacement = ","),
    # remove spaces
    across(matches("recall"), str_replace_all, pattern = " ", replacement = ","),
    # remove doubles
    across(matches("recall"), str_replace_all, pattern = ",", replacement = ","),
    #remove last comma
    across(matches("recall"), str_remove, pattern = ",$"),
    # split the strings based on the spaces
    across(matches("recall"), str_split, pattern = ","))

```

Immediate recall

Now we use the `amatch` function in the `stringdist` package to look for exact (or close) matches to the target words. This function returns for each word either the position of the key in which you can find the target word or NA to indicate the word or a close match does not exist in the string.

```

distance = 1 #maximum distance between target word and correct response
data = data %>%
  mutate(
    memory1 = map(recall1, ~sapply(., amatch, correct1, maxDist = distance)),
    memory2 = map(recall2, ~sapply(., amatch, correct2, maxDist = distance)),
    memory3 = map(recall3, ~sapply(., amatch, correct3, maxDist = distance)),
    memory4 = map(recall4, ~sapply(., amatch, correct4, maxDist = distance))
  )

```

We count the number of correct answers. This gets complicated...

```
data = data %>%
  mutate(
    across(starts_with("memory"),
      #replace position with 1
      ~map(., sapply, FUN = function(x) ifelse(x > 0, 1, 0))),
    across(starts_with("recall"),
      # are there non-missing values in the original response?
      ~map_dbl(.,
        .f = function(x) sum(!is.na(x)),
        .names = "{.col}_miss"),
    across(starts_with("memory"),
      #replace position with 1
      # count the number of correct answers
      ~map_dbl(., sum, na.rm=T))) %>%
  mutate(
    memory1 = case_when(
      # if there were no responses, make the answer NA
      recall1_miss == 0 ~ NA_real_,
      # otherwise, the number of correct guesses
      TRUE ~ memory1),
    memory2 = case_when(
      recall2_miss == 0 ~ NA_real_,
      TRUE ~ memory2),
    memory3 = case_when(
      recall3_miss == 0 ~ NA_real_,
      TRUE ~ memory3),
    memory4 = case_when(
      recall4_miss == 0 ~ NA_real_,
      TRUE ~ memory4)) %>%
  # no longer need the missing count variables
  select(-ends_with("miss"))
```

Finally, we want to go from 4 columns (one for each recall test), to two: one that has the number of correct responses, and one that indicates which version they saw.

```
data = data %>%
  select(proid, starts_with("memory")) %>%
  gather(mem_condition, memory, -proid) %>%
  filter(!is.na(memory)) %>%
  mutate(mem_condition = str_remove(mem_condition, "memory")) %>%
  full_join(data)
```

Participants remember on average 5.80 words correctly ($SD = 2.73$),

```
data %>%
  ggplot(aes(x = memory)) +
  geom_histogram(bins = 11, color = "white") +
  labs(x = "Number of correct responses") +
  scale_x_continuous(breaks = 0:10) +
  theme_pubr()
```

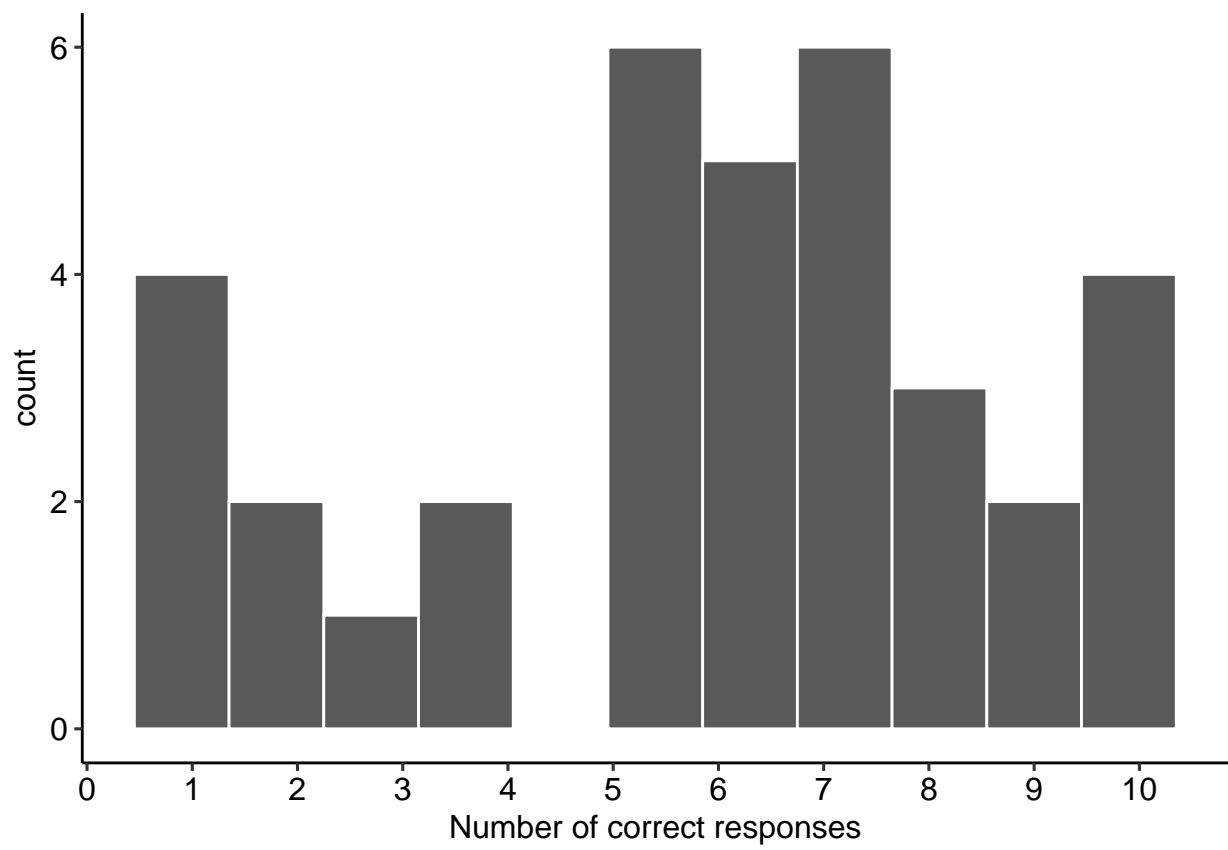


Figure 4: Correct responses on the memory task

Table 1: Memory responses by condition

Condition	Mean	SD	Min	Max	N
1	5.50	2.56	1	10	8
2	4.62	3.20	1	10	8
3	6.40	2.72	1	10	10
4	6.44	2.51	2	10	9

```
data %>%
  group_by(mem_condition) %>%
  summarise(
    m = mean(memory),
    s = sd(memory),
    min = min(memory),
    max = max(memory),
    n = n()
  ) %>%
  kable(booktabs = T,
        col.names = c("Condition", "Mean", "SD", "Min", "Max", "N"),
        digits = c(0, 2, 2, 1, 1, 1),
        caption = "Memory responses by condition") %>%
  kable_styling()
```

Delayed recall

A challenge with the delayed recall task is identifying the memory condition that participants were assigned to, but this is made easier by the work done above.

```
mem2 = data %>%
  select(proid, mem_condition, delayed_recall) %>%
  mutate(newid = 1:nrow())

mem2 = mem2 %>%
  mutate(
    delayed_recall1 = map(delayed_recall, ~sapply(., amatch, correct1, maxDist = distance)),
    delayed_recall2 = map(delayed_recall, ~sapply(., amatch, correct2, maxDist = distance)),
    delayed_recall3 = map(delayed_recall, ~sapply(., amatch, correct3, maxDist = distance)),
    delayed_recall4 = map(delayed_recall, ~sapply(., amatch, correct4, maxDist = distance))
  ) %>%
  gather(variable, delayed_memory, delayed_recall1:delayed_recall4)

mem2 = mem2 %>%
  mutate(
    delayed_memory = map(delayed_memory, sapply,
      FUN = function(x) ifelse(x > 0, 1, 0)),
    # count the number of correct answers
    delayed_memory = map_dbl(delayed_memory, sum, na.rm=T))

mem2 = mem2 %>%
  group_by(proid) %>%
```

```

filter(delayed_memory == max(delayed_memory)) %>%
filter(row_number() == 1 ) %>%
select(-delayed_recall, -variable)

data = inner_join(data, mem2)

```

```

data %>%
  ggplot(aes(x = delayed_memory)) +
  geom_histogram(color = "white", bins = 11) +
  scale_x_continuous("Number correct", breaks = c(0:10)) +
  labs(y = "Number of participants") +
  theme_pubr()

```

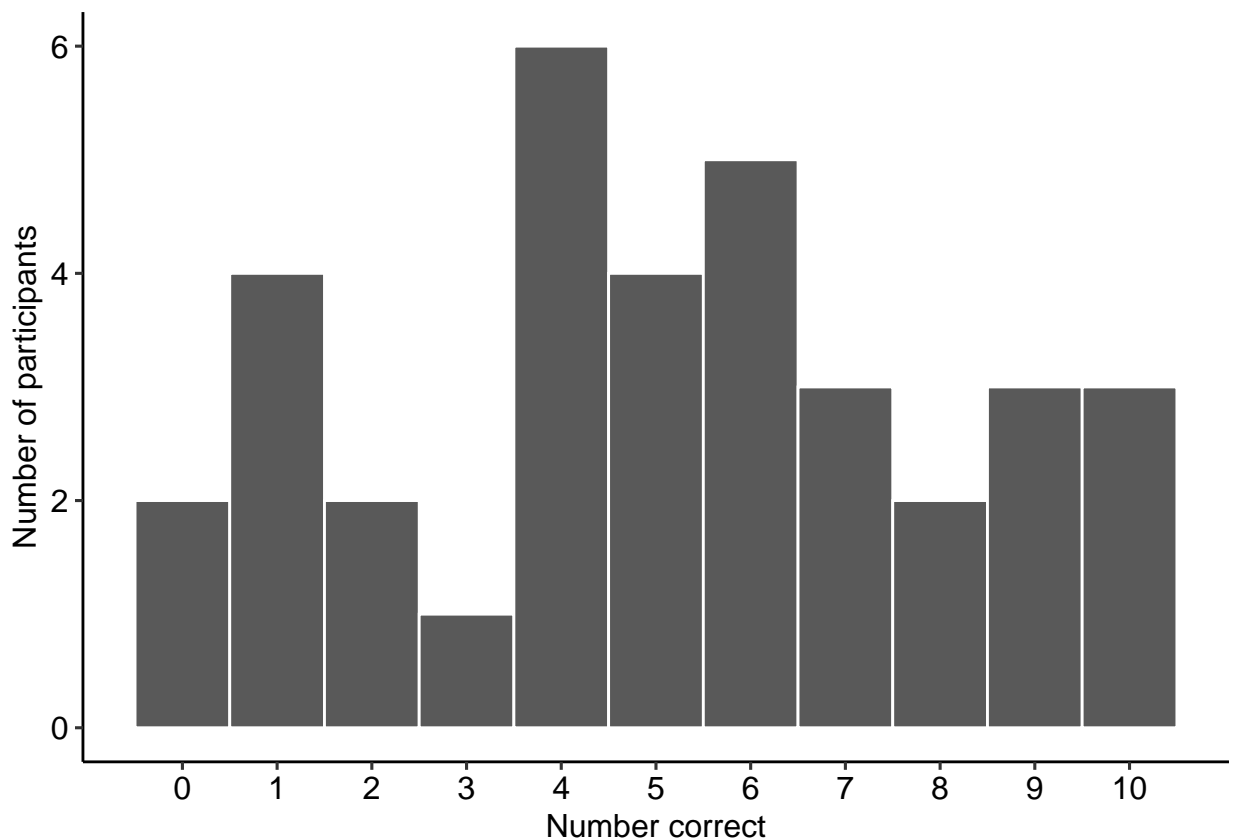


Figure 5: Distribution of delayed memory scores

```

data %>%
  ggplot(aes(x = memory, y = delayed_memory)) +
  geom_point() +
  geom_smooth(method = "lm") +
  scale_x_continuous("Immediate number correct", breaks = c(0:10)) +
  scale_y_continuous("Delayed number correct", breaks = c(0:10)) +
  labs(title = paste0("r = ", printnum(cor(data$memory, data$delayed_memory, use = "pairwise")))) +
  theme_pubr()

```

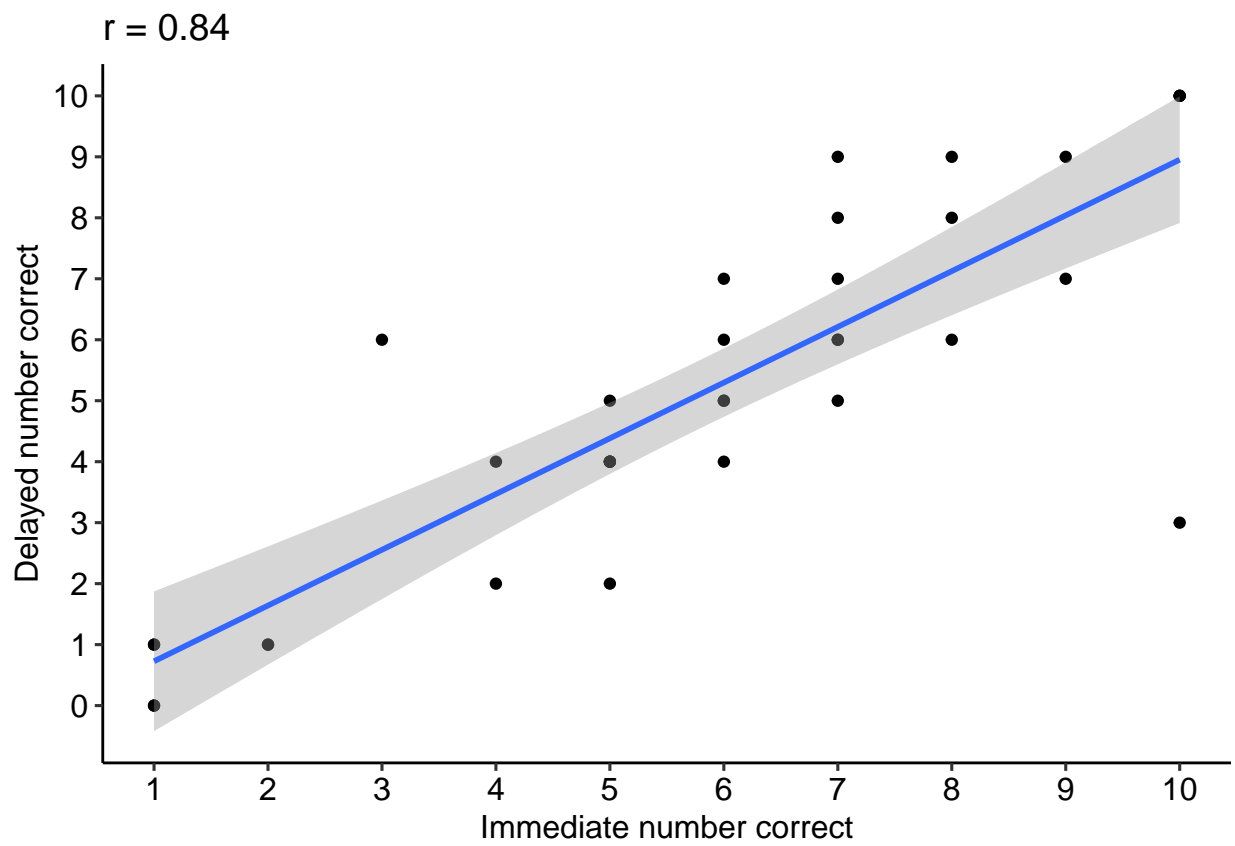


Figure 6: Relationship between immediate and delayed recall

Change labels of device variable

These labels are too long!

```
data = data %>%
  mutate(devicetype = factor(
    devicetype,
    levels = c("Desktop or laptop computer", "Mobile",
               "Tablet (for example, iPad, Galaxy Tablet, Amazon Fire, etc.)"), #what is this?!
    labels = c("Computer", "Mobile", "Tablet")
  ))
```

Save data

Does item format affect response?

The primary aims of this study are to evaluate the effects of item wording in online, self-report personality assessment. Specifically, we intend to consider the extent to which incremental wording changes may influence differences in the distributions of responses, response times, and psychometric properties of the items. These wording changes will include a progression from using (1) trait-descriptive adjectives by themselves, (2) with the linking verb “to be” (Am...), (3) with the additional verb “to tend” (Tend to be...), and (4) with the pronoun “someone” (Am someone who tends to be...).

Using a protocol that administers each adjective twice to the same participant (in different combinations of item format administered randomly across participants), we will use between-person analyses to compare responses using group-level data for the different formats.

These analyses will attempt to account for delayed_memory effects by collecting data on immediate and delayed recall (5 minutes and approximately two weeks) using a delayed_memory paradigm that was developed based on a similar recall task used in the HRS (Runge et al., 2015).

Workspace

```
library(here) # for working with files
library(tidyverse) # for cleaning
library(janitor) # for variable names
library(lme4) # for multilevel modeling
library(lmerTest) # for p-values
library(emmeans) # for comparisons
library(sjPlot) # for figures
library(ggpubr) # for prettier plots
library(kableExtra) # for nicer tables
```

Data prep

First we select the responses to the items of different formats. For this set of analyses, we use data collected in both Block 1 and Block 2 – that is, each participant saw the same format for every item during Block 1, but a random format for each item in Block 2.

These variable names have one of two formats: `[trait]_[abcd]` (for example, `talkative_a`) or `[trait]_[abcd]_2` (for example, `talkative_a_2`). We search for these items using regular expressions.

```
items_seen_b1b2 = str_subset(
  names(data),
  "^[[:alpha:]]+_[abcd](_2)?$"
)

item_responses = data %>%
  select(proid, all_of(items_seen_b1b2), delayed_memory)
```

Next we reshape these data into long form.

```
item_responses = item_responses %>%
  gather(item, response, -proid, -delayed_memory) %>%
  mutate(
```

```

block = case_when(
  str_detect(item, "_2") ~ "2",
  TRUE ~ "1"),
item = str_remove(item, "_2")) %>% # remove block id from item string
separate(item, into = c("item", "format")) %>%
filter(!is.na(response))

```

We give labels to the formats, to clarify interpretations and aid table and figure construction.

```

item_responses$format = as.factor(item_responses$format)
item_responses$format = relevel(item_responses$format, ref = "a")
item_responses$format = factor(item_responses$format,
  levels = c("a", "b", "c", "d"),
  labels = c("Adjective\nOnly", "Am\nAdjective", "Tend to be\nAdjective",

```

Analysis: Block 1 data only

We used a multilevel model, nesting response within participant to account for dependence. Our primary predictor was format. Here, we use only Block 1 data.

```

item_block1 = filter(item_responses, block == "1")

mod.format_b1 = lmer(response~format + (1|proid),
  data = item_block1)
anova(mod.format_b1)

```

```

## Type III Analysis of Variance Table with Satterthwaite's method
##          Sum Sq Mean Sq NumDF DenDF F value Pr(>F)
## format   2.139  0.71299      3    31  0.4306 0.7325

```

```

plot_b1 = plot_model(mod.format_b1, type = "pred")

plot_b1$format +
  labs(x = NULL,
    y = "Average response",
    title = "Average responses by item formatting (Block 1 Data)") +
  theme_pubclean()

```

```

means_by_group = item_block1 %>%
  group_by(format) %>%
  summarise(m = mean(response),
    s = sd(response))

item_block1 %>%
  ggplot(aes(x = response, fill = format)) +
  geom_histogram(bins = 6, color = "white") +
  geom_vline(aes(xintercept = m), data = means_by_group) +
  geom_text(aes(x = 1,
    y = 125,
    label = paste("M =", round(m,2),

```

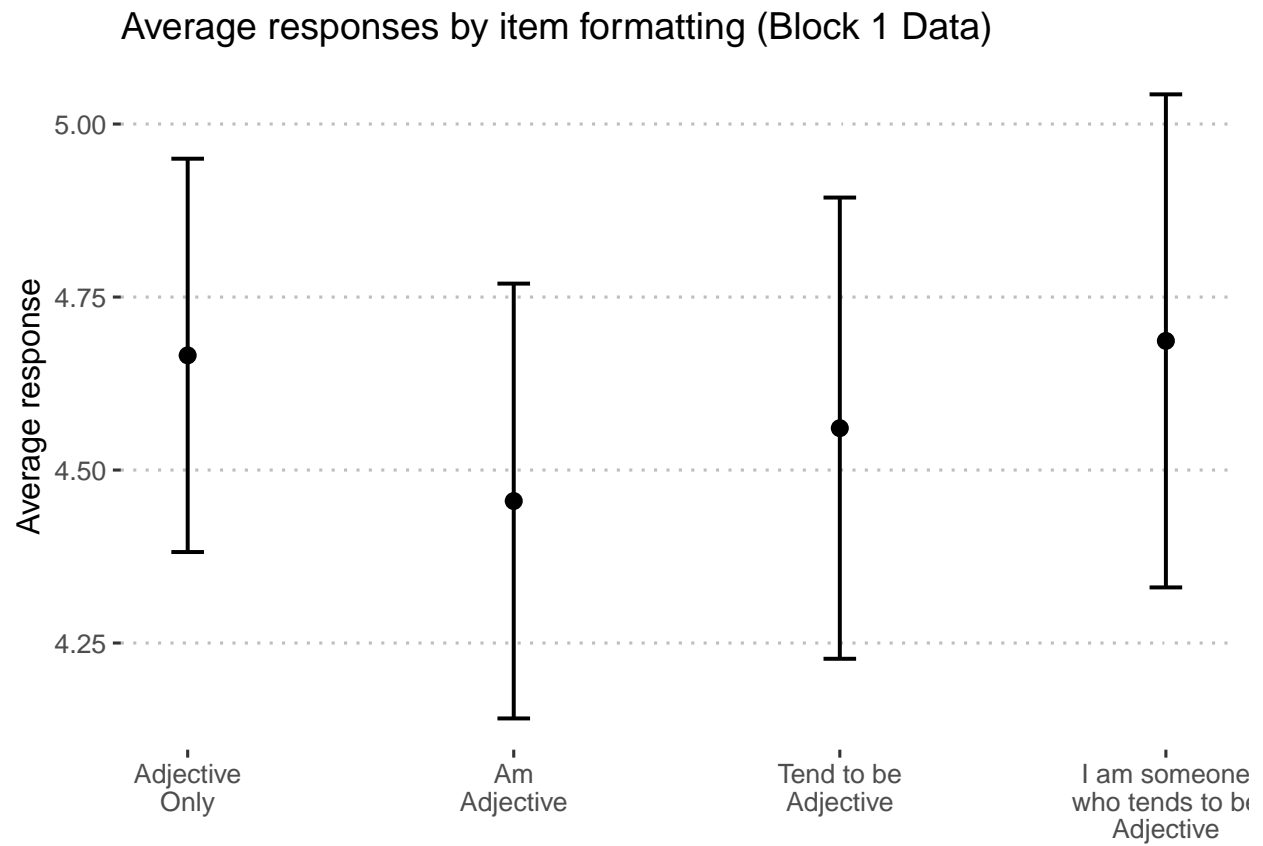


Figure 7: Predicted response on personality items by condition, using only Block 1 data.

```

      "\nSD =", round(s,2)),
    data = means_by_group,
    hjust = 0,
    vjust = 1) +
  facet_wrap(~format) +
  guides(fill = "none") +
  scale_x_continuous(breaks = 1:6) +
  labs(y = "Number of participants",
       title = "Distribution of responses by format (Block 1 data)" +
  theme_pubr()

```

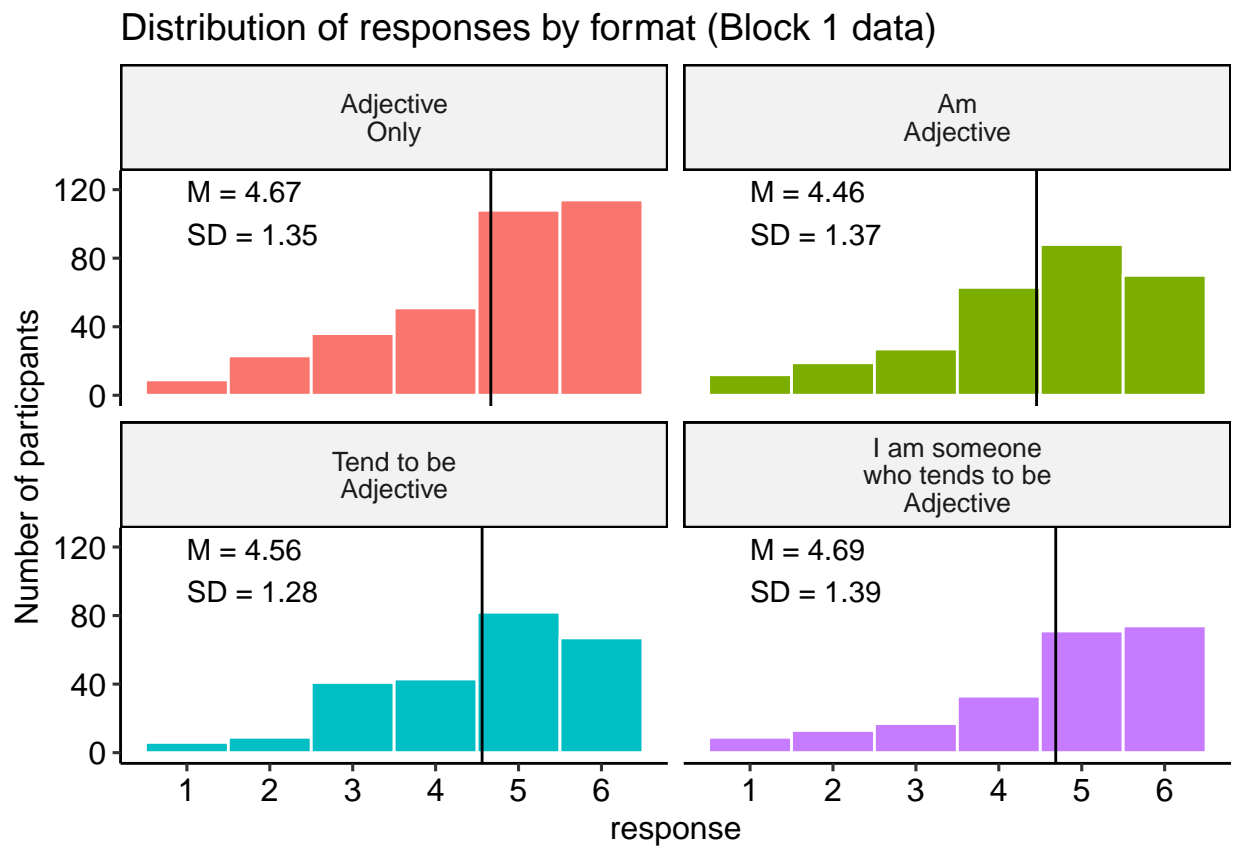


Figure 8: Distribution of responses by category, block 1 data only

One model for each adjective

We can also repeat this analysis separately for each trait.

```

mod_by_item_b1 = item_block1 %>%
  group_by(item) %>%
  nest() %>%
  mutate(mod = map(data, ~lm(response~format, data = .))) %>%
  mutate(aov = map(mod, anova))

summary_by_item_b1 = mod_by_item_b1 %>%

```

```

mutate(tidy = map(aov, broom::tidy)) %>%
select(item, tidy) %>%
unnest(cols = c(tidy)) %>%
filter(term == "format") %>%
select(-term, -df) %>%
mutate(p.adj = p.adjust(p.value, method = "holm"))

summary_by_item_b1 %>%
mutate(across(
  starts_with("p"),
  papaja::printnum
)) %>%
kable(digits = 2, booktabs = T, caption = "Format effects on response by item (block 1 data only)") %>%
kable_styling()

```

Pairwise t-tests for significant ANOVAs

Here we identify the specific items with significant differences.

```

sig_item_b1 = summary_by_item_b1 %>%
  filter(p.value < .05)

sig_item_b1 = sig_item_b1$item
sig_item_b1

```

```
## [1] "human"      "talkative"
```

Then we create models for each adjective. We use the `emmeans` package to perform pairwise comparisons, again with a Holm correction on the p -values. We also plot the means and 95% confidence intervals of each mean.

This code will have to be changed after final data collection. It is not self-adapting!

Human

```

human_model_b1 = item_responses %>%
  filter(item == "human") %>%
  lm(response~format, data = .)

human_em_b1 = emmeans(human_model_b1, "format")
pairs(human_em_b1, adjust = "holm") %>%
  kable(booktabs = T,
        digits = c(0,2,2,2,2,3),
        caption = "Differences in response to Human by format (Block 1 data only)",
        col.names = c("Contrast", "Difference in means", "SE", "df", "t", "p")) %>%
  kable_styling()

```

Table 2: Format effects on response by item (block 1 data only)

item	sumsq	meansq	statistic	p.value	p.adj
outgoing	1.58	0.53	0.40	0.76	0.76
helpful	0.20	0.07	0.08	0.97	0.97
reckless	5.14	1.71	0.65	0.59	0.59
moody	6.21	2.07	1.14	0.35	0.35
organized	2.20	0.73	0.66	0.58	0.58
friendly	0.52	0.17	0.34	0.80	0.80
warm	0.71	0.24	0.20	0.90	0.90
worrying	8.95	2.98	1.25	0.31	0.31
responsible	0.87	0.29	0.65	0.59	0.59
lively	1.15	0.38	0.36	0.78	0.78
asleep	0.89	0.30	0.13	0.94	0.94
caring	2.47	0.82	1.17	0.34	0.34
nervous	1.54	0.51	0.20	0.89	0.89
creative	2.35	0.78	0.79	0.51	0.51
hardworking	0.03	0.01	0.02	1.00	1.00
imaginative	1.40	0.47	0.58	0.63	0.63
softhearted	1.25	0.42	0.30	0.83	0.83
calm	3.77	1.26	1.29	0.30	0.30
intelligent	1.86	0.62	0.44	0.73	0.73
curious	0.52	0.17	0.15	0.93	0.93
active	2.80	0.93	0.61	0.61	0.61
human	4.25	1.42	3.03	0.04	0.04
careless	18.23	6.08	2.77	0.06	0.06
impulsive	2.65	0.88	0.45	0.72	0.72
sympathetic	3.42	1.14	1.10	0.36	0.36
cautious	1.55	0.52	0.32	0.81	0.81
talkative	18.53	6.18	3.19	0.04	0.04
sophisticated	1.08	0.36	0.21	0.89	0.89
adventurous	1.34	0.45	0.50	0.68	0.68
thorough	0.33	0.11	0.08	0.97	0.97
thrifty	8.09	2.70	2.06	0.13	0.13

Table 3: Differences in response to Human by format (Block 1 data only)

Contrast	Difference in means	SE	df	t	p
Adjective Only - Am Adjective	0.23	0.24	66	0.94	1.000
Adjective Only - Tend to be Adjective	0.40	0.25	66	1.57	0.722
Adjective Only - I am someone who tends to be Adjective	0.18	0.26	66	0.71	1.000
Am Adjective - Tend to be Adjective	0.17	0.26	66	0.67	1.000
Am Adjective - I am someone who tends to be Adjective	-0.05	0.26	66	-0.17	1.000
Tend to be Adjective - I am someone who tends to be Adjective	-0.22	0.27	66	-0.80	1.000

```
plot_model(human_model_b1, type = "pred", terms = c("format"))
```

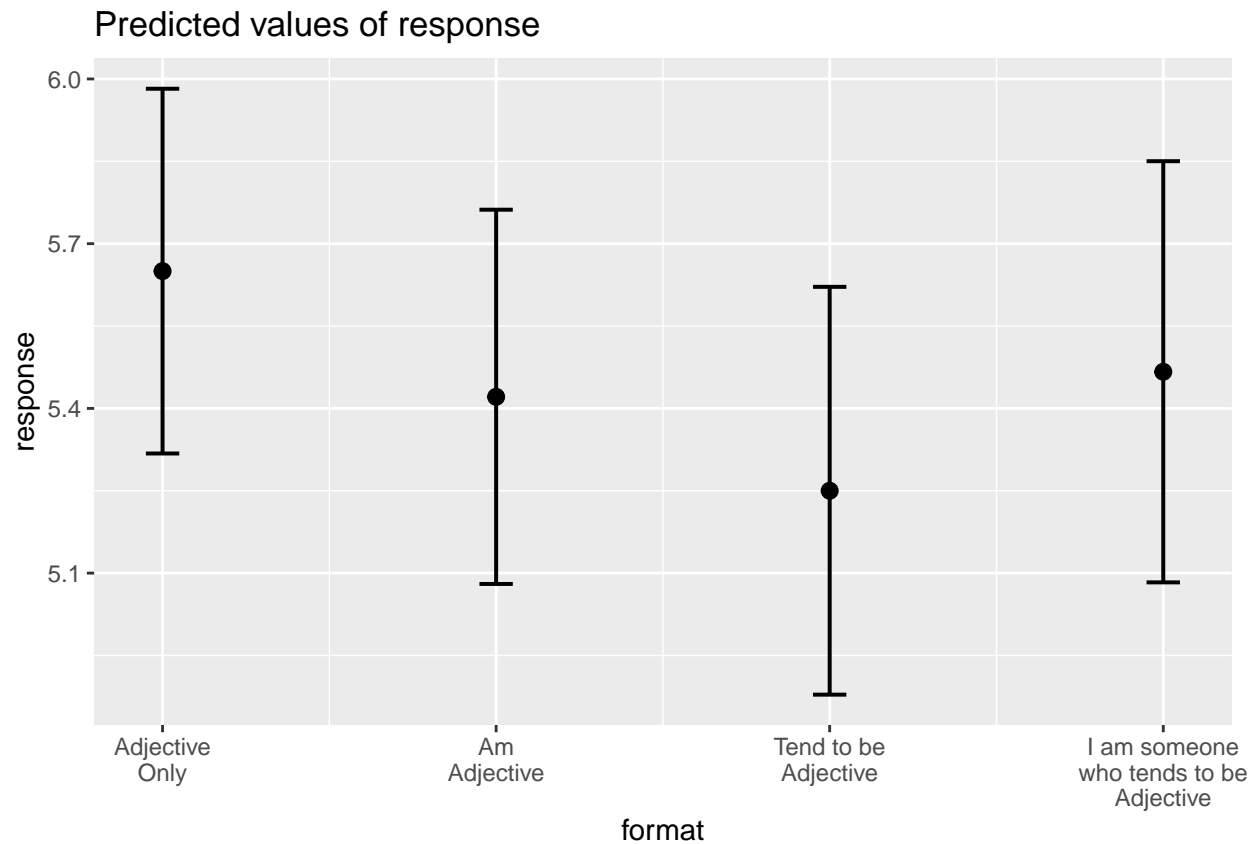


Figure 9: Average response to “human” by format (block 1 data only)

Talkative

```
talkative_model_b1 = item_block1 %>%
  filter(item == "talkative") %>%
  lm(response~format, data = .)

talkative_em_b1 = emmeans(talkative_model_b1, "format")
pairs(talkative_em_b1, adjust = "holm") %>%
  kable(booktabs = T,
        digits = c(0,2,2,2,2,3),
        caption = "Differences in response to Talkative by format (Block 1 data only)",
        col.names = c("Contrast", "Difference in means", "SE", "df", "t", "p")) %>%
  kable_styling()
```

```
plot_model(talkative_model_b1, type = "pred", terms = c("format"))
```


Table 4: Differences in response to Talkative by format (Block 1 data only)

Contrast	Difference in means	SE	df	t	p
Adjective Only - Am Adjective	-1.49	0.63	31	-2.39	0.139
Adjective Only - Tend to be Adjective	-1.40	0.65	31	-2.16	0.192
Adjective Only - I am someone who tends to be Adjective	0.01	0.67	31	0.02	1.000
Am Adjective - Tend to be Adjective	0.10	0.68	31	0.14	1.000
Am Adjective - I am someone who tends to be Adjective	1.51	0.70	31	2.15	0.192
Tend to be Adjective - I am someone who tends to be Adjective	1.41	0.72	31	1.96	0.192

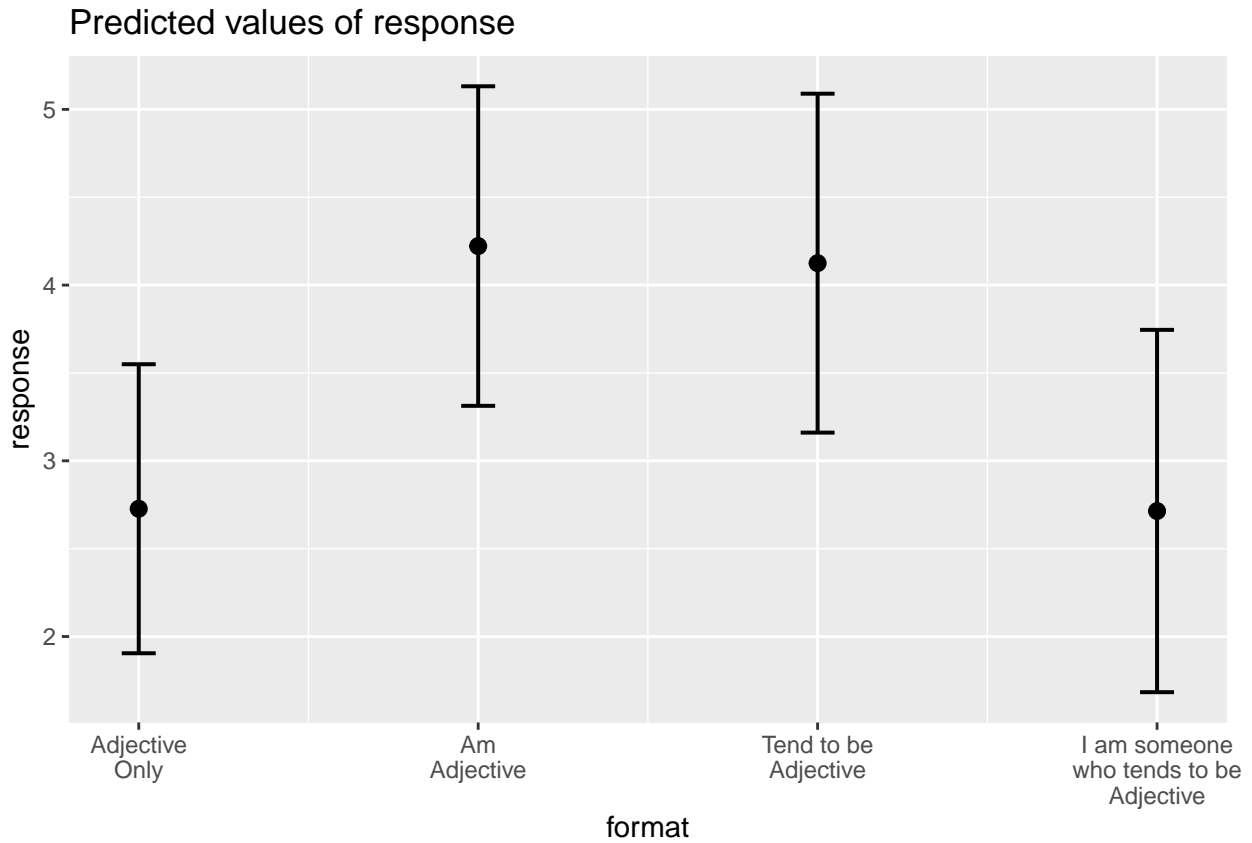


Figure 10: Average response to “talkative” by format (block 1 data only)

Analysis: Block 1 and Block 2

We used a multilevel model, nesting response within participant to account for dependence. Our primary predictor was format. Here, we use only Block 1 data.

```
mod.format_b2 = lmer(response~format + (1|proid),  
                      data = item_responses)  
anova(mod.format_b2)
```

```
## Type III Analysis of Variance Table with Satterthwaite's method  
##           Sum Sq Mean Sq NumDF  DenDF F value Pr(>F)  
## format  4.0209  1.3403      3 2031.2  0.7886 0.5002
```

```
plot_b2 = plot_model(mod.format_b2, type = "pred")  
  
plot_b2$format +  
  labs(x = NULL,  
        y = "Average response",  
        title = "Average responses by item formatting (Block 1 and Block 2)") +  
  theme_pubclean()
```

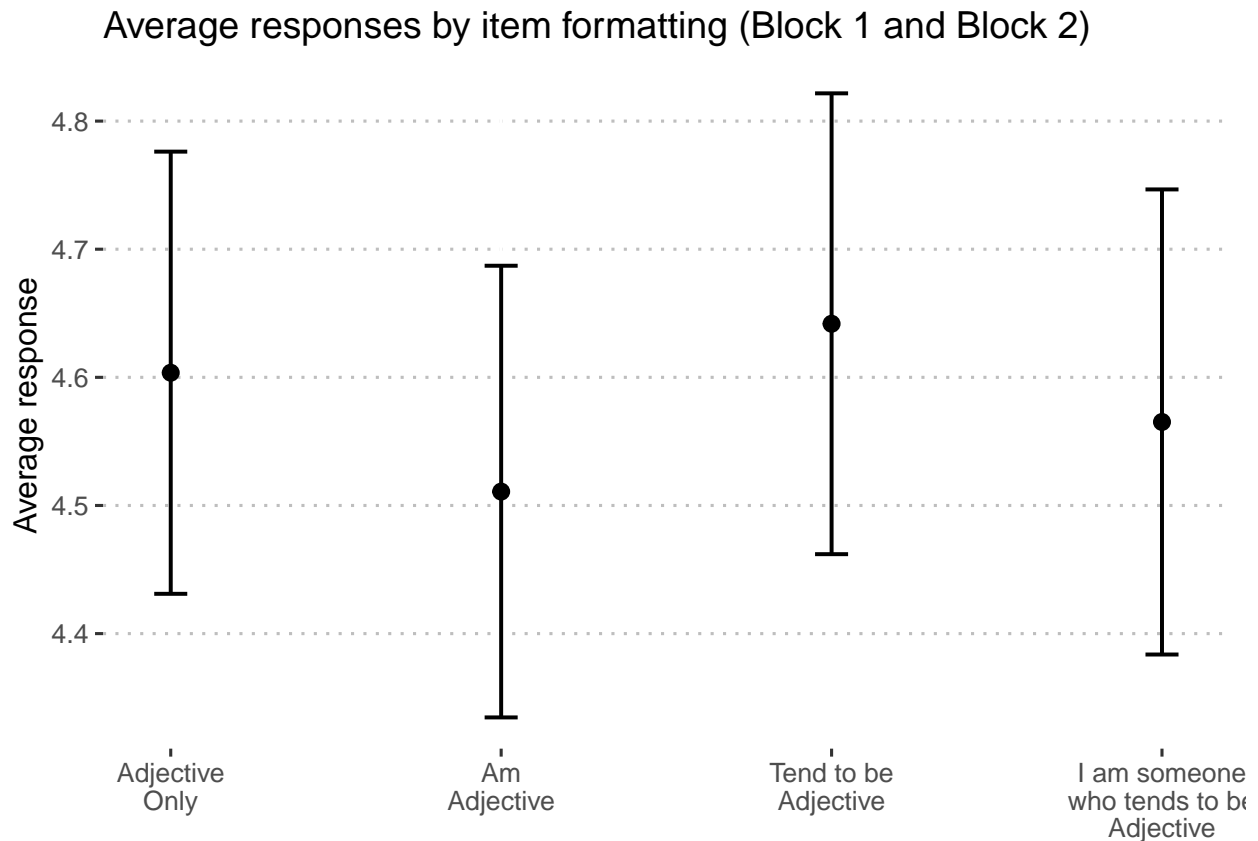


Figure 11: Predicted response on personality items by condition, using only Block 1 data.

```

means_by_group = item_responses %>%
  group_by(format) %>%
  summarise(m = mean(response),
            s = sd(response))

item_responses %>%
  ggplot(aes(x = response, fill = format)) +
  geom_histogram(bins = 6, color = "white") +
  geom_vline(aes(xintercept = m), data = means_by_group) +
  geom_text(aes(x = 1,
                y = 200,
                label = paste("M =", round(m,2),
                              "\nSD =", round(s,2))),
            data = means_by_group,
            hjust = 0,
            vjust = 1) +
  facet_wrap(~format) +
  guides(fill = "none") +
  scale_x_continuous(breaks = 1:6) +
  labs(y = "Number of participants",
       title = "Distribution of responses by format (Block 1 and Block 2)") +
  theme_pubr()

```

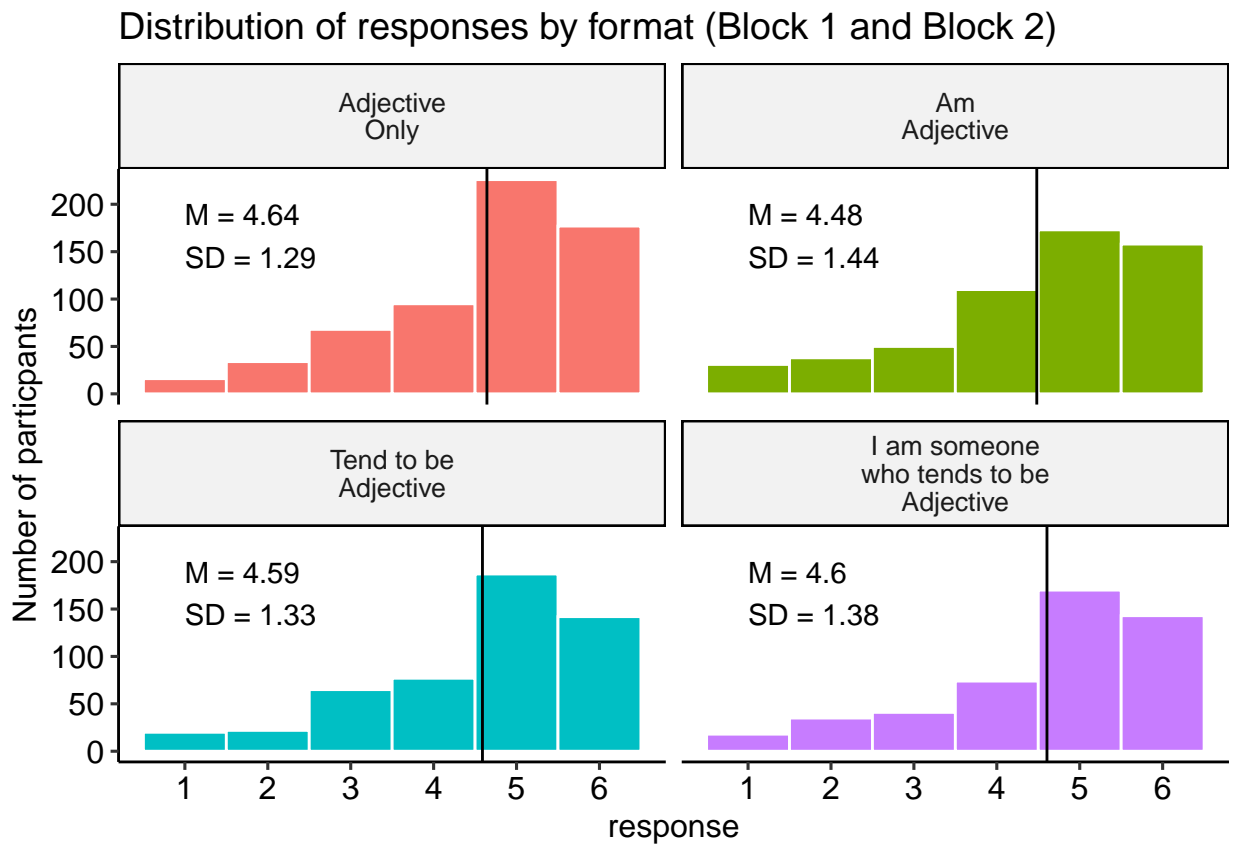


Figure 12: Distribution of responses by category, block 1 and block 2

One model for each adjective

We can also repeat this analysis separately for each trait.

```
mod_by_item_b2 = item_responses %>%
  group_by(item) %>%
  nest() %>%
  mutate(mod = map(data, ~lmer(response~format + (1|proid), data = .))) %>%
  mutate(aov = map(mod, anova))

summary_by_item_b2 = mod_by_item_b2 %>%
  mutate(tidy = map(aov, broom::tidy)) %>%
  select(item, tidy) %>%
  unnest(cols = c(tidy)) %>%
  filter(term == "format") %>%
  select(-term) %>%
  mutate(p.adj = p.adjust(p.value, method = "holm"))

summary_by_item_b2 %>%
  mutate(across(
    starts_with("p"),
    papaja::printnum
  )) %>%
  kable(digits = 2, booktabs = T, caption = "Format effects on response by item (block 1 data only)") %>%
  kable_styling()
```

Pairwise t-tests for significant ANOVAs

Here we identify the specific items with significant differences.

```
sig_item_b2 = summary_by_item_b2 %>%
  filter(p.value < .05)

sig_item_b2 = sig_item_b2$item
sig_item_b2
```

```
## [1] "careless" "thrifty"
```

Then we create models for each adjective. We use the `emmeans` package to perform pairwise comparisons, again with a Holm correction on the p -values. We also plot the means and 95% confidence intervals of each mean.

This code will have to be changed after final data collection. It is not self-adapting!

Careless

```
careless_model_b2 = item_responses %>%
  filter(item == "careless") %>%
  lmer(response~format + (1|proid),
        data = .)
```

Table 5: Format effects on response by item (block 1 data only)

item	sumsq	meansq	NumDF	DenDF	statistic	p.value	p.adj
outgoing	0.71	0.24	3	39.34	0.83	0.48	0.48
helpful	0.90	0.30	3	60.54	0.82	0.49	0.49
reckless	1.14	0.38	3	48.60	0.36	0.78	0.78
moody	1.21	0.40	3	42.77	0.69	0.57	0.57
organized	0.22	0.07	3	37.39	0.41	0.75	0.75
friendly	0.94	0.31	3	46.85	1.45	0.24	0.24
warm	0.10	0.03	3	52.22	0.08	0.97	0.97
worrying	1.72	0.57	3	41.67	0.63	0.60	0.60
responsible	1.51	0.50	3	56.50	0.82	0.49	0.49
lively	1.08	0.36	3	42.77	0.89	0.46	0.46
asleep	0.53	0.18	3	42.91	0.28	0.84	0.84
caring	1.16	0.39	3	52.66	1.28	0.29	0.29
nervous	1.35	0.45	3	46.22	0.45	0.72	0.72
creative	0.14	0.05	3	49.22	0.13	0.94	0.94
hardworking	2.10	0.70	3	52.03	2.06	0.12	0.12
imaginative	1.03	0.34	3	55.07	0.86	0.47	0.47
softhearted	1.95	0.65	3	57.46	0.74	0.53	0.53
calm	0.13	0.04	3	45.02	0.13	0.94	0.94
intelligent	1.72	0.57	3	51.16	1.15	0.34	0.34
curious	2.35	0.78	3	52.00	1.05	0.38	0.38
active	0.76	0.25	3	40.00	1.01	0.40	0.40
human	0.28	0.09	3	41.14	0.82	0.49	0.49
careless	8.29	2.76	3	53.32	2.84	0.05	0.05
impulsive	1.38	0.46	3	41.41	0.85	0.47	0.47
sympathetic	0.49	0.16	3	51.48	0.51	0.68	0.68
cautious	2.30	0.77	3	54.97	0.98	0.41	0.41
talkative	6.36	2.12	3	43.86	1.95	0.13	0.13
sophisticated	0.05	0.02	3	44.04	0.04	0.99	0.99
adventurous	1.51	0.50	3	48.65	1.09	0.36	0.36
thorough	2.23	0.74	3	40.16	2.72	0.06	0.06
thrifty	6.39	2.13	3	51.69	3.30	0.03	0.03

Table 6: Differences in response to Careless by format (Block 1 and Block 2)

Contrast	Difference in means	SE	df	t	p
Adjective Only - Am Adjective	0.82	0.45	58.04	1.83	0.359
Adjective Only - Tend to be Adjective	0.14	0.44	54.32	0.32	0.749
Adjective Only - I am someone who tends to be Adjective	-0.44	0.44	54.32	-1.01	0.633
Am Adjective - Tend to be Adjective	-0.68	0.45	51.43	-1.52	0.542
Am Adjective - I am someone who tends to be Adjective	-1.26	0.45	51.43	-2.82	0.041
Tend to be Adjective - I am someone who tends to be Adjective	-0.58	0.45	49.48	-1.31	0.591

```
careless_em_b2 = emmeans(careless_model_b2, "format")
pairs(careless_em_b2, adjust = "holm") %>%
  kable(booktabs = T,
        digits = c(0,2,2,2,2,3),
        caption = "Differences in response to Careless by format (Block 1 and Block 2)",
        col.names = c("Contrast", "Difference in means", "SE", "df", "t", "p")) %>%
  kable_styling()
```

```
plot_model(careless_model_b2, type = "pred", terms = c("format"))
```

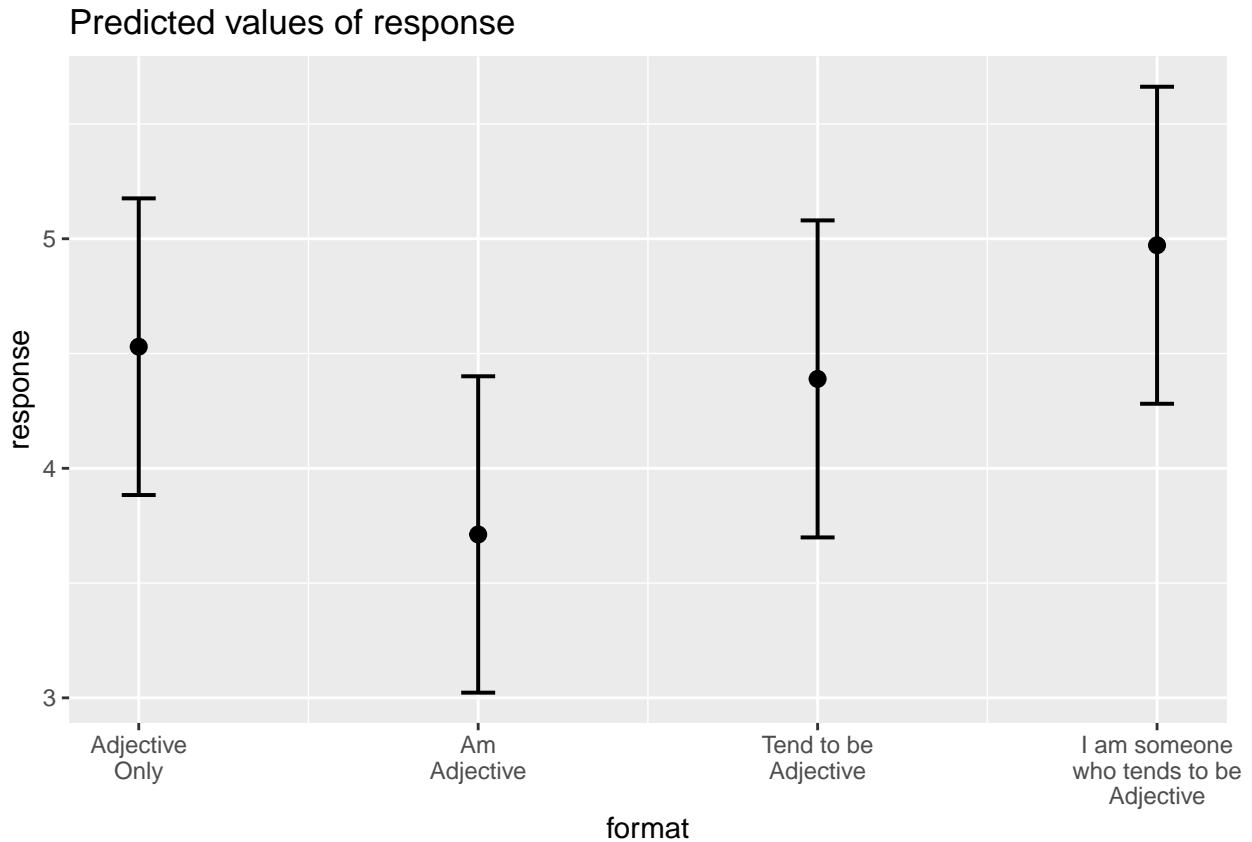


Figure 13: Average response to “careless” by format (Block 1 and Block 2)

Table 7: Differences in response to Thrifty by format (Block 1 and Block 2)

Contrast	Difference in means	SE	df	t	p
Adjective Only - Am Adjective	-0.02	0.36	56.66	-0.04	1.000
Adjective Only - Tend to be Adjective	-0.92	0.36	55.47	-2.54	0.083
Adjective Only - I am someone who tends to be Adjective	-0.09	0.35	52.28	-0.26	1.000
Am Adjective - Tend to be Adjective	-0.90	0.37	56.24	-2.45	0.084
Am Adjective - I am someone who tends to be Adjective	-0.08	0.37	54.54	-0.21	1.000
Tend to be Adjective - I am someone who tends to be Adjective	0.83	0.33	43.22	2.49	0.084

Thrifty

```
thrifty_model_b2 = item_responses %>%
  filter(item == "thrifty") %>%
  lmer(response~format + (1|proid),
        data = .)

thrifty_em_b2 = emmeans(thrifty_model_b2, "format")
pairs(thrifty_em_b2, adjust = "holm") %>%
  kable(booktabs = T,
        digits = c(0,2,2,2,2,3),
        caption = "Differences in response to Thrifty by format (Block 1 and Block 2)",
        col.names = c("Contrast", "Difference in means", "SE", "df", "t", "p")) %>%
  kable_styling()
```

```
plot_model(thrifty_model_b2, type = "pred", terms = c("format"))
```

Analysis: Account for memory effects

```
mod.format_mem = lmer(response~format*delayed_memory + (1|proid),
                      data = item_responses)
anova(mod.format_mem)
```

```
## Type III Analysis of Variance Table with Satterthwaite's method
##               Sum Sq Mean Sq NumDF   DenDF F value Pr(>F)
## format          5.2610  1.7537     3 2055.72  1.0315 0.3775
## delayed_memory   3.0527  3.0527     1   33.18  1.7956 0.1893
## format:delayed_memory 3.3315  1.1105     3 2056.89  0.6532 0.5809
```

```
summary(mod.format_mem)
```

```
## Linear mixed model fit by REML. t-tests use Satterthwaite's method [
## lmerModLmerTest]
## Formula: response ~ format * delayed_memory + (1 | proid)
##      Data: item_responses
```

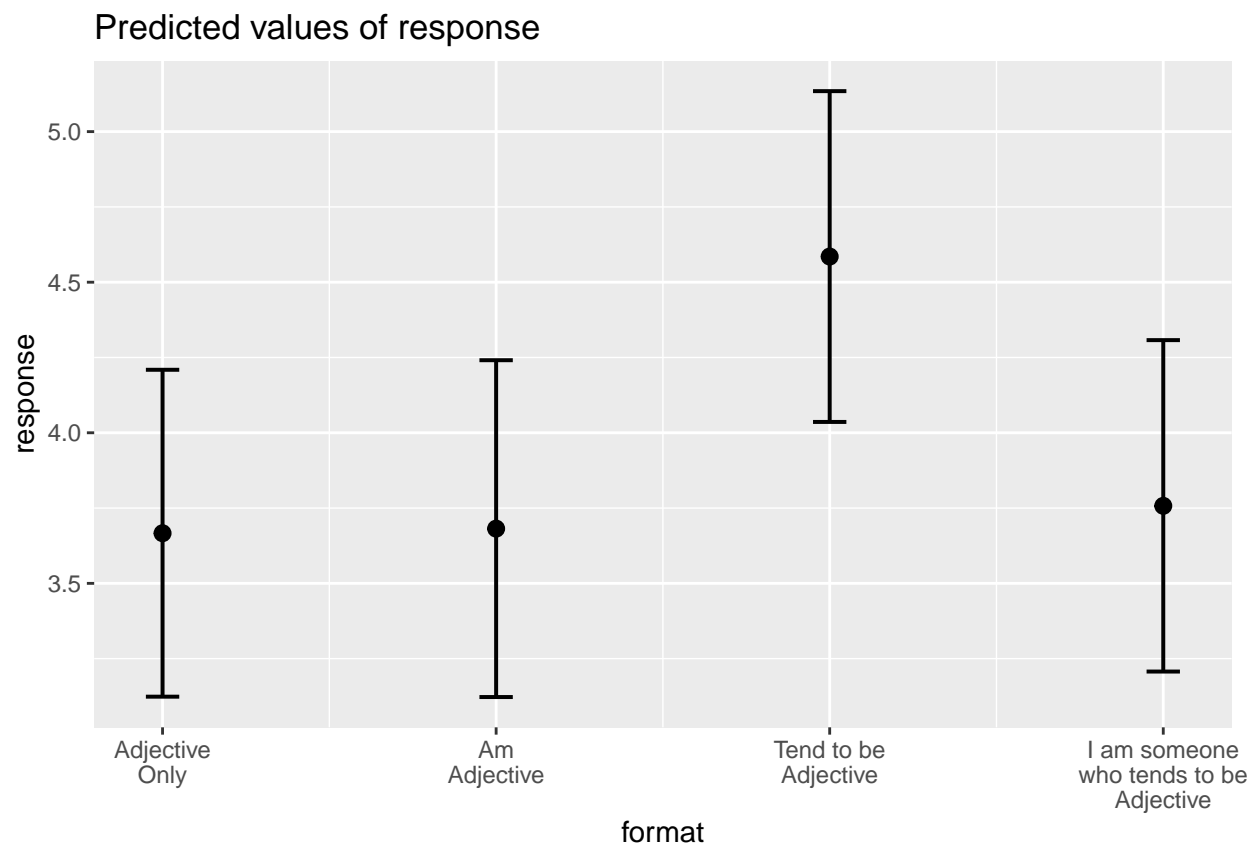


Figure 14: Average response to “thrifty” by format (Block 1 and Block 2)


```

##
## REML criterion at convergence: 7402.6
##
## Scaled residuals:
##      Min       1Q   Median       3Q      Max
## -3.3260 -0.4142  0.2827  0.7190  1.6316
##
## Random effects:
##   Groups   Name                Variance Std.Dev.
##   proid    (Intercept)  0.1533   0.3916
##   Residual                  1.7001   1.3039
## Number of obs: 2170, groups:  proid, 35
##
## Fixed effects:
##
##                                     Estimate
## (Intercept)                        4.558e+00
## formatAm\nAdjective                -2.791e-01
## formatTend to be\nAdjective        -1.051e-01
## formatI am someone\nwho tends to be\nAdjective -2.045e-01
## delayed_memory                     8.457e-03
## formatAm\nAdjective:delayed_memory  3.633e-02
## formatTend to be\nAdjective:delayed_memory 2.902e-02
## formatI am someone\nwho tends to be\nAdjective:delayed_memory 3.301e-02
##                                     Std. Error
## (Intercept)                        1.773e-01
## formatAm\nAdjective                1.674e-01
## formatTend to be\nAdjective        1.786e-01
## formatI am someone\nwho tends to be\nAdjective 1.816e-01
## delayed_memory                     3.034e-02
## formatAm\nAdjective:delayed_memory 2.804e-02
## formatTend to be\nAdjective:delayed_memory 3.145e-02
## formatI am someone\nwho tends to be\nAdjective:delayed_memory 3.112e-02
##                                     df
## (Intercept)                        7.028e+01
## formatAm\nAdjective                2.080e+03
## formatTend to be\nAdjective        1.988e+03
## formatI am someone\nwho tends to be\nAdjective 2.105e+03
## delayed_memory                     7.228e+01
## formatAm\nAdjective:delayed_memory 2.046e+03
## formatTend to be\nAdjective:delayed_memory 1.952e+03
## formatI am someone\nwho tends to be\nAdjective:delayed_memory 2.124e+03
##                                     t value Pr(>|t|)
## (Intercept)                        25.711   <2e-16
## formatAm\nAdjective                -1.667   0.0957
## formatTend to be\nAdjective        -0.589   0.5562
## formatI am someone\nwho tends to be\nAdjective -1.126   0.2603
## delayed_memory                     0.279   0.7813
## formatAm\nAdjective:delayed_memory  1.296   0.1952
## formatTend to be\nAdjective:delayed_memory 0.923   0.3562
## formatI am someone\nwho tends to be\nAdjective:delayed_memory 1.061   0.2890
##
## (Intercept)                        ***
## formatAm\nAdjective                  .
## formatTend to be\nAdjective

```

```
## formatI am someone\nwho tends to be\nAdjective
## delayed_memory
## formatAm\nAdjective:delayed_memory
## formatTend to be\nAdjective:delayed_memory
## formatI am someone\nwho tends to be\nAdjective:delayed_memory
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Correlation of Fixed Effects:
##              (Intr) frmtAA frTtbA frIaswtbA dlyd_m frAA:_ fTtbA:
## frmtAmAdjct -0.476
## frmtTndtbAd -0.468  0.474
## frmlaswtbA -0.443  0.457  0.473
## delayd_mmry -0.869  0.420  0.412  0.386
## frmtAAdjc:_  0.430 -0.858 -0.428 -0.413      -0.504
## frmtTtbAd:_  0.400 -0.406 -0.867 -0.401      -0.466  0.490
## flaswtbA:_   0.385 -0.402 -0.412 -0.872      -0.446  0.486  0.462
```

```
plot_model(mod.format_mem,
           type = "pred",
           term = c("format", "delayed_memory[meansd]")) +
  geom_line() +
  labs(x = NULL,
       y = "Average response") +
  scale_color_discrete("Memory", labels = c("-1SD", "Mean", "+1SD"))+
  theme_pubclean()
```

One model for each adjective

```
mod_by_item_mem = item_responses %>%
  group_by(item) %>%
  nest() %>%
  mutate(mod = map(data, ~lm(response~format*delayed_memory, data = .))) %>%
  mutate(aov = map(mod, anova))

summary_by_item_mem = mod_by_item_mem %>%
  mutate(tidy = map(aov, broom::tidy)) %>%
  select(item, tidy) %>%
  unnest(cols = c(tidy)) %>%
  filter(term == "format:delayed_memory") %>%
  select(-term, -df) %>%
  mutate(p.adj = p.adjust(p.value, method = "holm"))

summary_by_item_mem %>%
  mutate(across(
    starts_with("p"),
    papaja::printnum
  )) %>%
  kable(digits = 2, booktabs = T) %>%
  kable_styling()
```

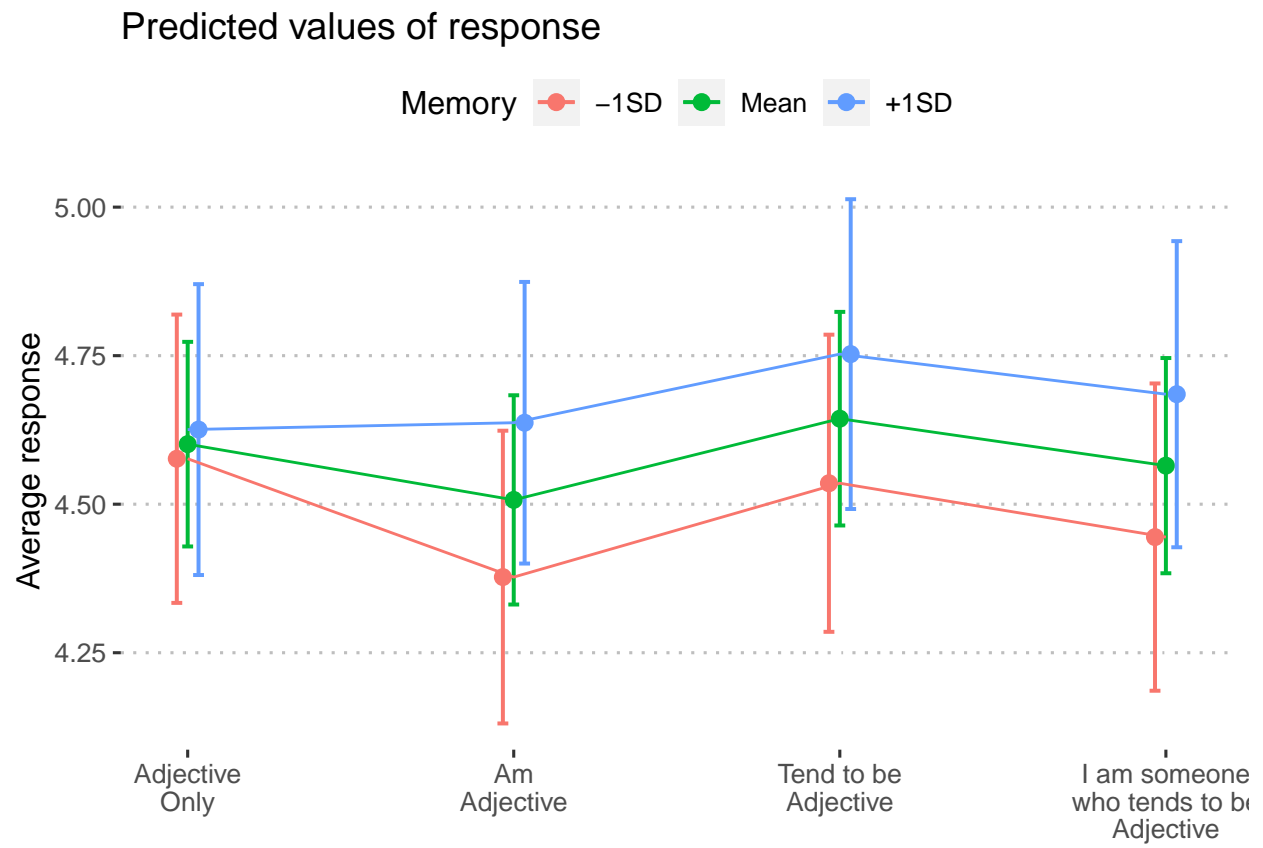


Figure 15: Predicted response on personality items by condition after controlling for delayed_memory.

item	sumsq	meansq	statistic	p.value	p.adj
outgoing	1.72	0.57	0.40	0.75	0.75
helpful	1.31	0.44	0.73	0.54	0.54
reckless	7.65	2.55	1.01	0.39	0.39
moody	10.15	3.38	1.76	0.16	0.16
organized	5.06	1.69	1.53	0.22	0.22
friendly	1.83	0.61	1.01	0.39	0.39
warm	1.65	0.55	0.69	0.56	0.56
worrying	1.77	0.59	0.22	0.88	0.88
responsible	2.53	0.84	1.11	0.35	0.35
lively	1.21	0.40	0.28	0.84	0.84
asleep	3.29	1.10	0.46	0.71	0.71
caring	0.16	0.05	0.08	0.97	0.97
nervous	4.40	1.47	0.57	0.64	0.64
creative	1.12	0.37	0.44	0.73	0.73
hardworking	0.74	0.25	0.37	0.77	0.77
imaginative	0.65	0.22	0.35	0.79	0.79
softhearted	0.46	0.15	0.13	0.94	0.94
calm	0.15	0.05	0.06	0.98	0.98
intelligent	2.94	0.98	0.95	0.42	0.42
curious	1.28	0.43	0.27	0.84	0.84
active	0.29	0.10	0.06	0.98	0.98
human	1.48	0.49	0.84	0.48	0.48
careless	3.74	1.25	0.55	0.65	0.65
impulsive	7.37	2.46	1.13	0.34	0.34
sympathetic	1.11	0.37	0.40	0.75	0.75
cautious	0.42	0.14	0.12	0.95	0.95
talkative	8.53	2.84	1.23	0.31	0.31
sophisticated	4.21	1.40	0.89	0.45	0.45
adventurous	1.17	0.39	0.39	0.76	0.76
thorough	3.87	1.29	1.13	0.34	0.34
thrifty	0.61	0.20	0.13	0.94	0.94

Pairwise t-tests for significant ANOVAs

Here we identify the specific items with significant differences.

```
sig_item_mem = summary_by_item_mem %>%  
  filter(p.value < .05)  
  
sig_item_mem = sig_item_mem$item  
sig_item_mem
```

```
## character(0)
```

How does format affect timing of responses?

Workspace

```
library(here) # for working with files
library(tidyverse) # for cleaning
library(janitor) # for variable names
library(lme4) # for multilevel modeling
library(lmerTest) # for p-values
library(emmeans) # for comparisons
library(sjPlot) # for figures
library(ggpubr) # for prettier plots
library(kableExtra) # for nicer tables
```

First, we select the timing to the items of different formats. For this set of analyses, we only use data collected in Blocks 1 and 2 – that is, each participant saw the same format for every item during Block 1, but a random format for each item in Block 2.

These variable names have one of two formats: `t_[trait]_[abcd]_page_submit` (for example, `t_talkative_a_page_submit`) or `t_[trait]_[abcd]_2_page_submit` (for example, `t_talkative_a_2_page_submit`). We search for these items using regular expressions.

```
item_timing = str_subset(
  names(data),
  "^t_([[:alpha:]]+)_([abcd])_(2)?page_submit$"
)

item_timing = data %>%
  select(proid, all_of(item_timing), delayed_memory)
```

Next we reshape these data into long form.

```
item_timing = item_timing %>%
  gather(item, seconds, -proid, -delayed_memory) %>%
  mutate(block = case_when(
    str_detect(item, "_2") ~ "2",
    TRUE ~ "1"
  )) %>%
  mutate(item = str_remove(item, "^t_"),
         item = str_remove(item, "_2"),
         item = str_remove(item, "_page_submit$")) %>%
  separate(item, into = c("item", "format")) %>%
  filter(!is.na(seconds))
```


Seconds appears to be strongly skewed, so we log-transform this variable.

```
item_timing = item_timing %>%
  mutate(seconds_log = log(seconds))

item_timing %>%
  select(contains("seconds")) %>%
```

```
gather(variable, value) %>%
mutate(variable = factor(variable,
                          levels = c("seconds", "seconds_log"),
                          labels = c("Seconds (raw)", "Log Seconds"))) %>%

ggplot(aes(x = value)) +
  geom_histogram(bins = 100) +
  facet_wrap(~variable, scales = "free") +
  labs(x = NULL, y = "Count") +
  theme_pubr()
```

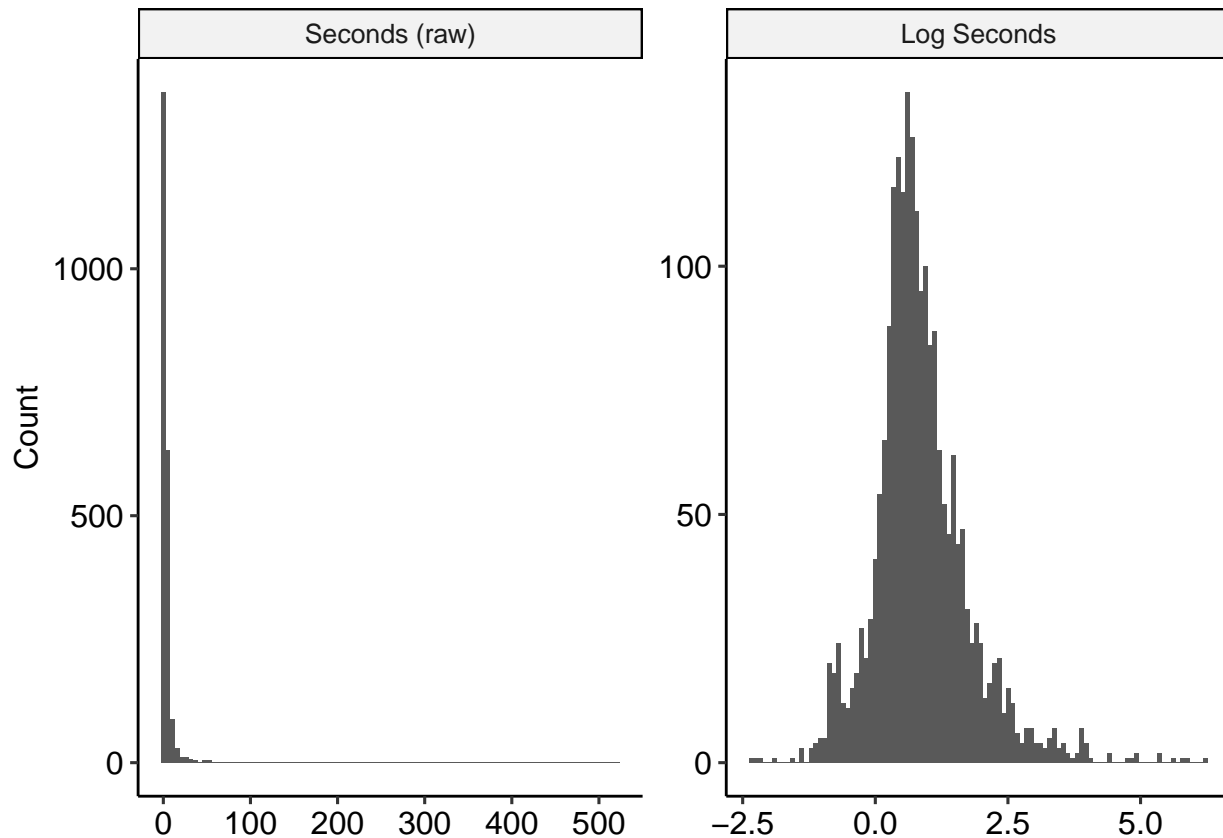

We give labels to the formats, to clarify interpretations and aid table and figure construction.

```
item_timing$format = as.factor(item_timing$format)
item_timing$format = relevel(item_timing$format, ref = "a")
item_timing$format = factor(item_timing$format,
                            levels = c("a", "b", "c", "d"),
                            labels = c("Adjective\nOnly", "Am\nAdjective", "Tend to be\nAdjective", "Tend to be\nNot Adjective"))
```

Analysis: Block 1 data only

We used a multilevel model, nesting log-seconds within participant to account for dependence. Our primary predictor was format. Here, we use only Block 1 data.

```
item_block1 = filter(item_timing, block == "1")
```

```

mod.format_b1 = lmer(seconds_log~format + (1|proid),
                      data = item_block1)
anova(mod.format_b1)

## Type III Analysis of Variance Table with Satterthwaite's method
##           Sum Sq Mean Sq NumDF DenDF F value    Pr(>F)
## format  7.6313  2.5438     3    31    4.17 0.01364 *
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

plot_b1 = plot_model(mod.format_b1, type = "pred")

plot_b1$format +
  labs(x = NULL,
       y = "Average time (log seconds)",
       title = "Average time by item formatting (Block 1 Data)") +
  theme_pubclean()

```

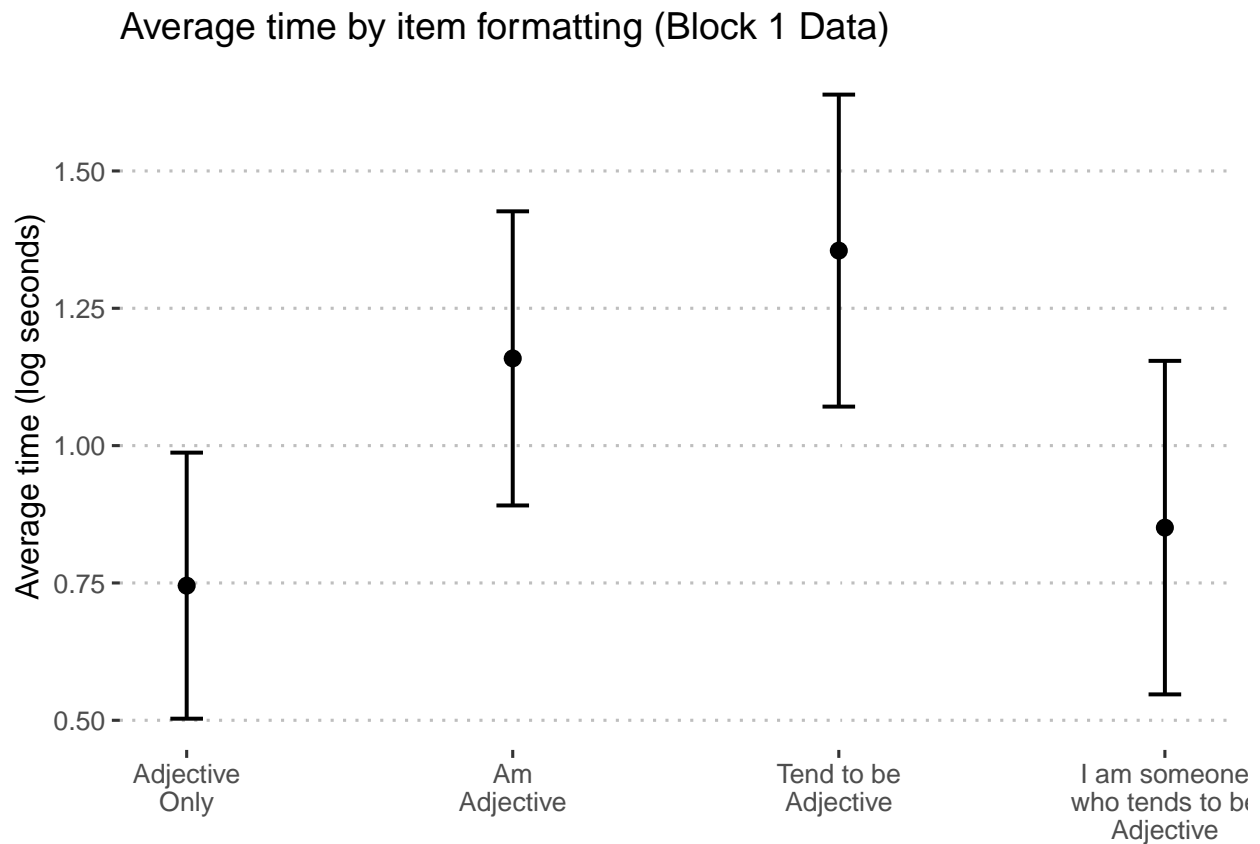


Figure 16: Predicted seconds (log) on personality items by condition, using only Block 1 data.

```

plot_b1$format$data %>%
  mutate(predicted = exp(predicted),
         conf.low = exp(conf.low),

```



```

    conf.high = exp(conf.high)) %>%
mutate(x = factor(x,
    labels = c("Adjective\nOnly",
    "Am\nAdjective",
    "Tend to be\nAdjective",
    "I am someone\nwho tends to be\nAdjective"))) %>%
ggplot(aes(x = x, y = predicted)) +
geom_point() +
geom_errorbar(aes(ymin = conf.low, ymax = conf.high)) +
labs(x = NULL, y = "seconds", title = "Average time by item formatting (Block 1 Data)") +
theme_pubclean()

```

Average time by item formatting (Block 1 Data)

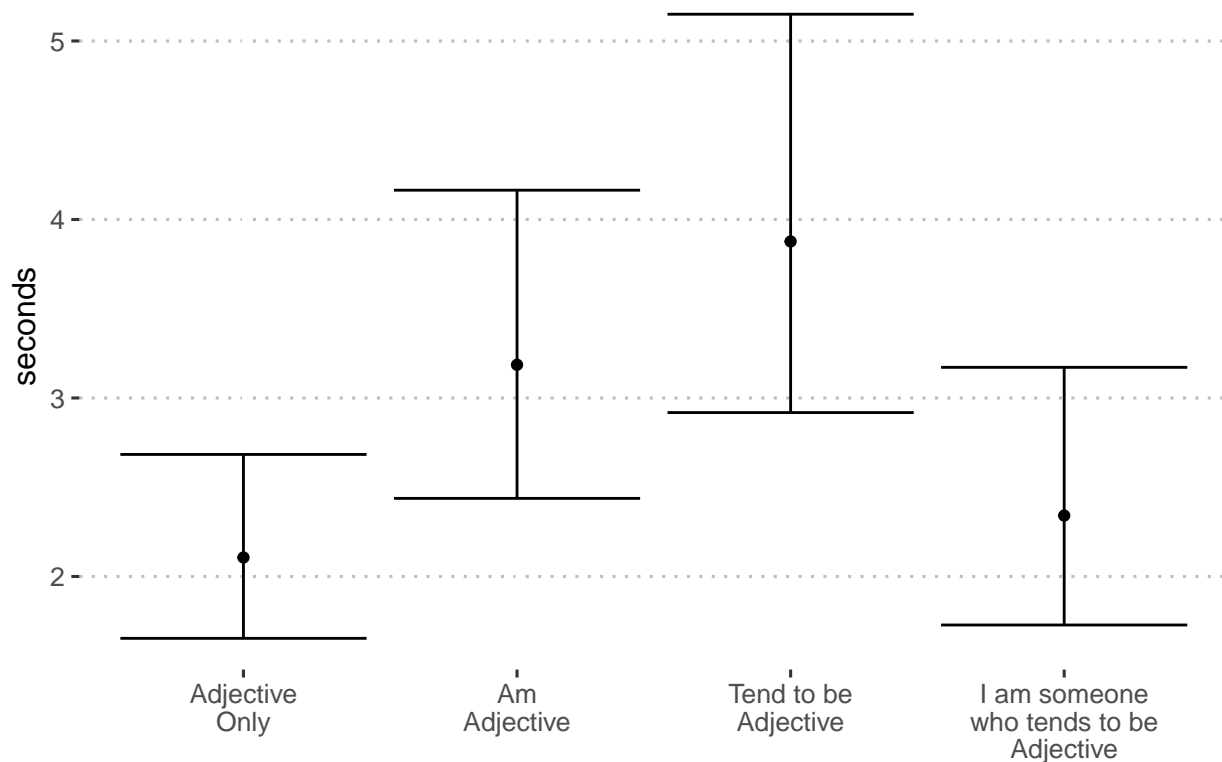


Figure 17: Predicted seconds on personality items by condition, using only Block 1 data.

```

means_by_group = item_block1 %>%
  group_by(format) %>%
  summarise(m = mean(seconds_log),
    s = sd(seconds_log))

item_block1 %>%
  ggplot(aes(x = seconds_log, fill = format)) +
  geom_histogram(bins = 50, color = "white") +
  geom_vline(aes(xintercept = m), data = means_by_group) +
  geom_text(aes(x = 1,
    y = 40,

```

```

    label = paste("M =", round(m,2),
                  "\nSD =", round(s,2)),
    data = means_by_group,
    hjust = 0,
    vjust = 1) +
  facet_wrap(~format) +
  guides(fill = "none") +
  labs(x = "Log-seconds",
       y = "Number of participants",
       title = "Distribution of log-seconds by format (Block 1 data)") +
  theme_pubr()

```

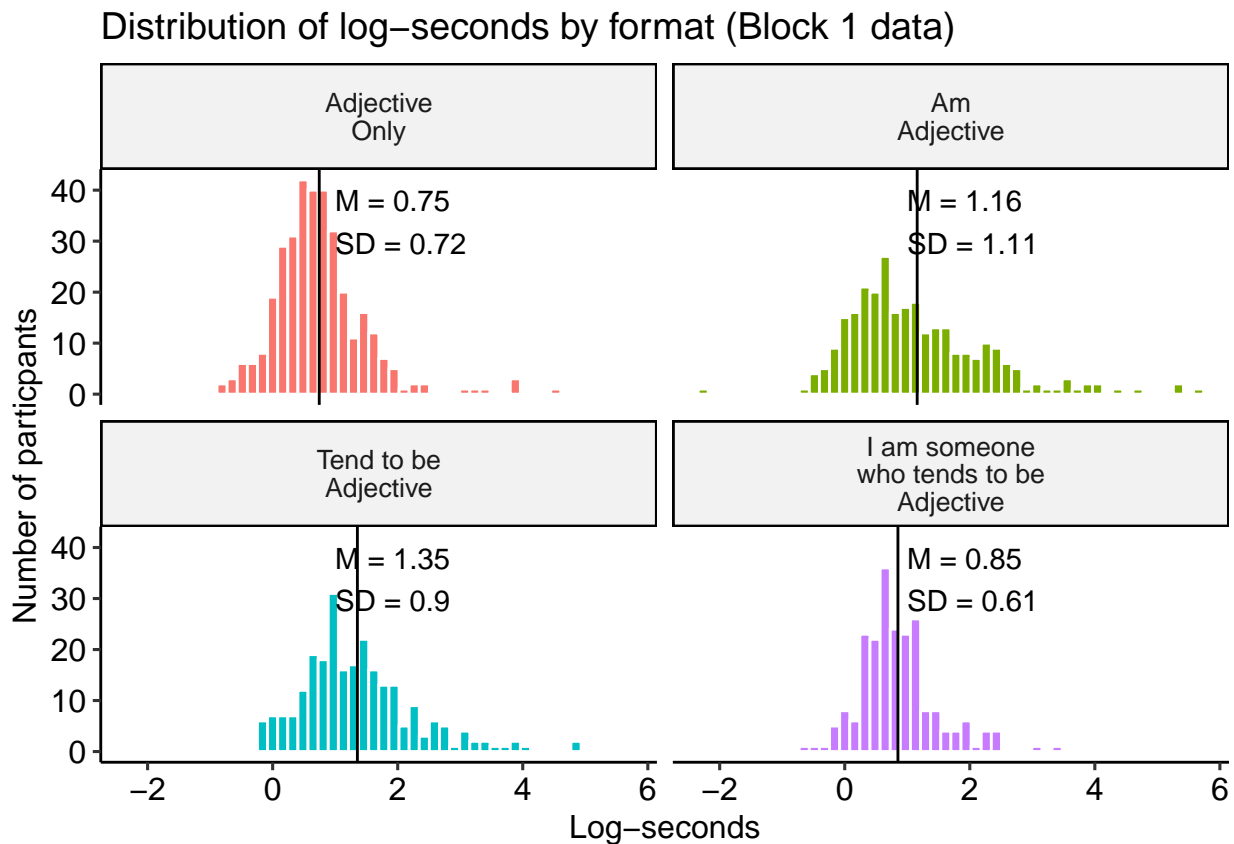


Figure 18: Distribution of time by category, block 1 data only

One model for each adjective

We can also repeat this analysis separately for each trait.

```

mod_by_item_b1 = item_block1 %>%
  group_by(item) %>%
  nest() %>%
  mutate(mod = map(data, ~lm(seconds_log~format, data = .))) %>%
  mutate(aov = map(mod, anova))

```

```
summary_by_item_b1 = mod_by_item_b1 %>%
  mutate(tidy = map(aov, broom::tidy)) %>%
  select(item, tidy) %>%
  unnest(cols = c(tidy)) %>%
  filter(term == "format") %>%
  select(-term, -df) %>%
  mutate(p.adj = p.adjust(p.value, method = "holm"))

summary_by_item_b1 %>%
  mutate(across(
    starts_with("p"),
    papaja::printnum
  )) %>%
  kable(digits = 2, booktabs = T, caption = "Format effects on log-seconds by item (block 1 data only)",
  kable_styling()
```

Pairwise t-tests for significant ANOVAs

Here we identify the specific items with significant differences.

```
sig_item_b1 = summary_by_item_b1 %>%
  filter(p.value < .05)

sig_item_b1 = sig_item_b1$item
sig_item_b1
```

```
## [1] "helpful"      "asleep"      "caring"      "softhearted" "calm"
## [6] "sympathetic" "adventurous"
```

Then we create models for each adjective. We use the `emmeans` package to perform pairwise comparisons, again with a Holm correction on the p -values. We also plot the means and 95% confidence intervals of each mean.

This code will have to be changed after final data collection. It is not self-adapting!

Helpful

```
helpful_model_b1 = item_timing %>%
  filter(item == "helpful") %>%
  lm(seconds_log~format, data = .)

helpful_em_b1 = emmeans(helpful_model_b1, "format")
pairs(helpful_em_b1, adjust = "holm") %>%
  kable(booktabs = T,
    digits = c(0,2,2,2,2,3),
    caption = "Differences in log-seconds to Helpful by format (Block 1 data only)",
    col.names = c("Contrast", "Difference in means", "SE", "df", "t", "p")) %>%
  kable_styling()
```

Table 8: Format effects on log-seconds by item (block 1 data only)

item	sumsq	meansq	statistic	p.value	p.adj
outgoing	1.97	0.66	1.02	0.40	0.40
helpful	2.17	0.72	3.44	0.03	0.03
reckless	2.88	0.96	2.09	0.12	0.12
moody	0.27	0.09	0.25	0.86	0.86
organized	3.42	1.14	1.72	0.18	0.18
friendly	1.17	0.39	0.66	0.58	0.58
warm	3.70	1.23	2.63	0.07	0.07
worrying	0.85	0.28	0.67	0.58	0.58
responsible	4.78	1.59	2.79	0.06	0.06
lively	3.64	1.21	1.42	0.25	0.25
asleep	12.54	4.18	8.18	0.00	0.00
caring	5.72	1.91	4.45	0.01	0.01
nervous	6.11	2.04	2.54	0.07	0.07
creative	8.30	2.77	2.80	0.06	0.06
hardworking	6.54	2.18	2.55	0.07	0.07
imaginative	2.50	0.83	1.31	0.29	0.29
softhearted	8.16	2.72	5.51	0.00	0.00
calm	8.79	2.93	3.39	0.03	0.03
intelligent	4.15	1.38	1.15	0.34	0.34
curious	2.70	0.90	2.02	0.13	0.13
active	2.02	0.67	0.71	0.56	0.56
human	1.01	0.34	0.29	0.83	0.83
careless	0.57	0.19	0.29	0.83	0.83
impulsive	4.16	1.39	1.05	0.39	0.39
sympathetic	12.92	4.31	6.31	0.00	0.00
cautious	0.12	0.04	0.07	0.97	0.97
talkative	0.20	0.07	0.21	0.89	0.89
sophisticated	2.34	0.78	0.71	0.56	0.56
adventurous	3.39	1.13	3.21	0.04	0.04
thorough	6.75	2.25	2.18	0.11	0.11
thrifty	3.15	1.05	0.97	0.42	0.42

Table 9: Differences in log-seconds to Helpful by format (Block 1 data only)

Contrast	Difference in means	SE	df	t	p
Adjective Only - Am Adjective	-0.30	0.16	66	-1.83	0.324
Adjective Only - Tend to be Adjective	-0.33	0.18	66	-1.88	0.324
Adjective Only - I am someone who tends to be Adjective	-0.52	0.17	66	-3.00	0.023
Am Adjective - Tend to be Adjective	-0.03	0.18	66	-0.16	0.873
Am Adjective - I am someone who tends to be Adjective	-0.22	0.17	66	-1.24	0.664
Tend to be Adjective - I am someone who tends to be Adjective	-0.19	0.18	66	-1.01	0.664

```
plot_model(helpful_model_b1, type = "pred", terms = c("format"))
```

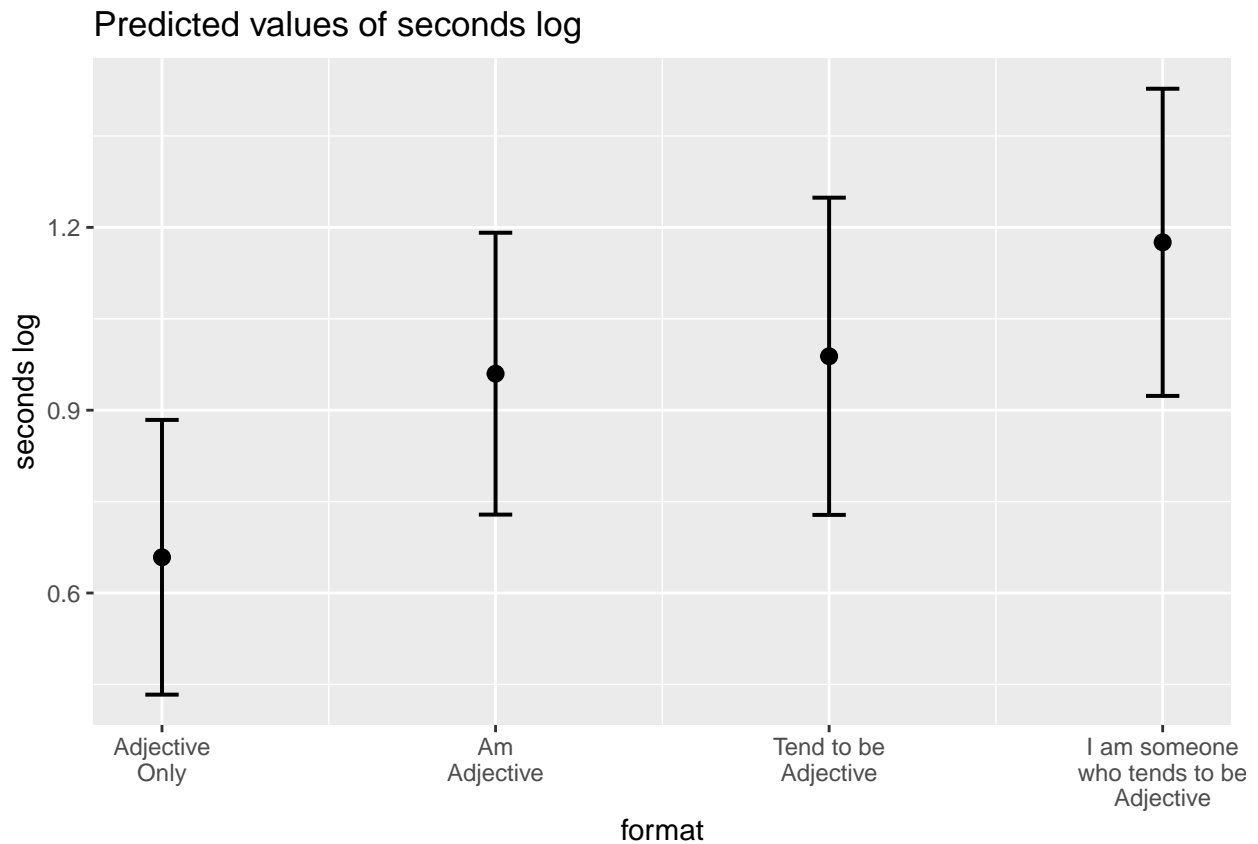


Figure 19: Average log-seconds to “helpful” by format (block 1 data only)

Asleep

```
asleep_model_b1 = item_timing %>%
  filter(item == "asleep") %>%
  lm(seconds_log~format, data = .)

asleep_em_b1 = emmeans(asleep_model_b1, "format")
pairs(asleep_em_b1, adjust = "holm") %>%
  kable(booktabs = T,
        digits = c(0,2,2,2,2,3),
        caption = "Differences in log-seconds to Asleep by format (Block 1 data only)",
        col.names = c("Contrast", "Difference in means", "SE", "df", "t", "p")) %>%
  kable_styling()
```

```
plot_model(asleep_model_b1, type = "pred", terms = c("format"))
```

Table 10: Differences in log-seconds to Asleep by format (Block 1 data only)

Contrast	Difference in means	SE	df	t	p
Adjective Only - Am Adjective	-0.65	0.26	66	-2.45	0.084
Adjective Only - Tend to be Adjective	-0.81	0.28	66	-2.84	0.036
Adjective Only - I am someone who tends to be Adjective	-0.42	0.28	66	-1.49	0.565
Am Adjective - Tend to be Adjective	-0.16	0.28	66	-0.57	0.809
Am Adjective - I am someone who tends to be Adjective	0.23	0.28	66	0.84	0.809
Tend to be Adjective - I am someone who tends to be Adjective	0.39	0.30	66	1.33	0.569

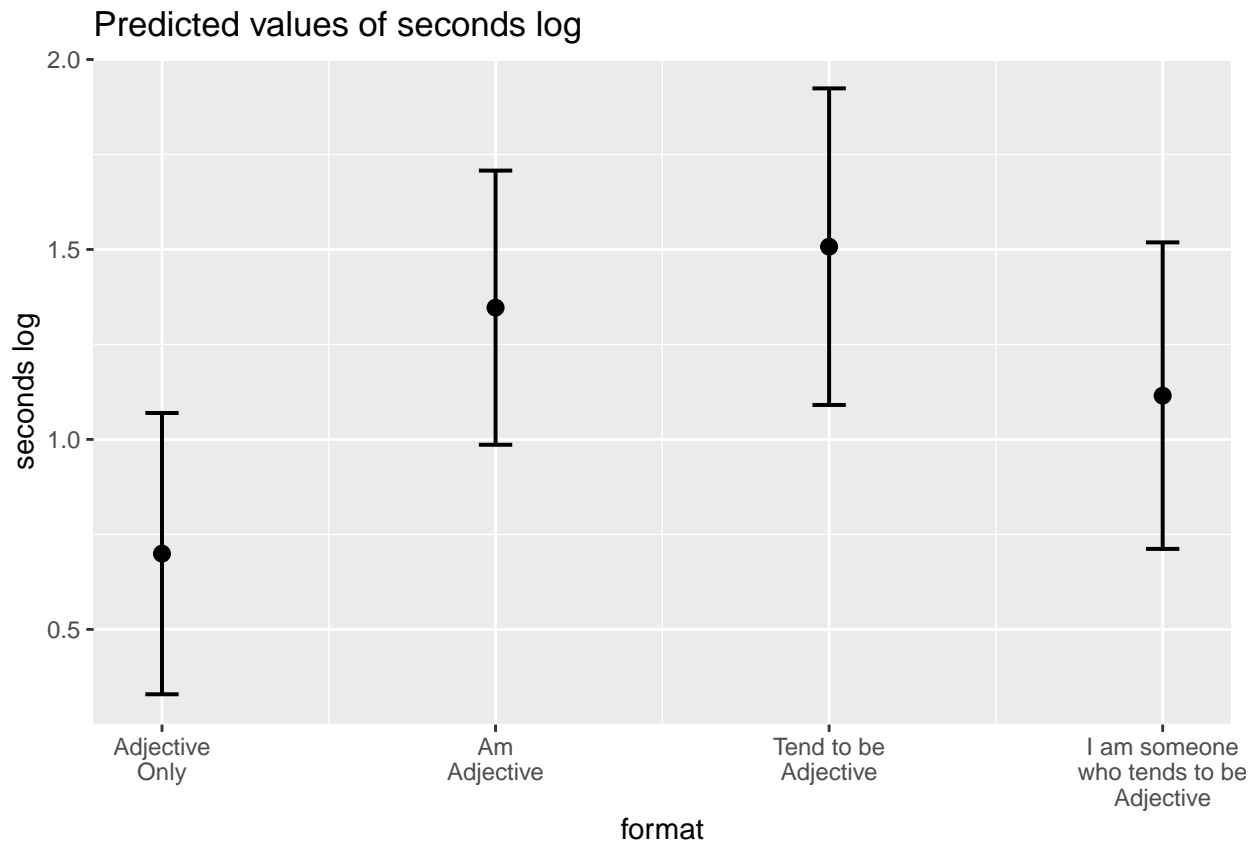


Figure 20: Average log-seconds to “asleep” by format (block 1 data only)

Table 11: Differences in log-seconds to Caring by format (Block 1 data only)

Contrast	Difference in means	SE	df	t	p
Adjective Only - Am Adjective	-0.65	0.25	66	-2.64	0.062
Adjective Only - Tend to be Adjective	-0.60	0.25	66	-2.41	0.094
Adjective Only - I am someone who tends to be Adjective	-0.29	0.25	66	-1.19	0.714
Am Adjective - Tend to be Adjective	0.05	0.26	66	0.18	0.856
Am Adjective - I am someone who tends to be Adjective	0.36	0.26	66	1.39	0.672
Tend to be Adjective - I am someone who tends to be Adjective	0.31	0.26	66	1.19	0.714

Caring

```

caring_model_b1 = item_timing %>%
  filter(item == "caring") %>%
  lm(seconds_log~format, data = .)

caring_em_b1 = emmeans(caring_model_b1, "format")
pairs(caring_em_b1, adjust = "holm") %>%
  kable(booktabs = T,
        digits = c(0,2,2,2,2,3),
        caption = "Differences in log-seconds to Caring by format (Block 1 data only)",
        col.names = c("Contrast", "Difference in means", "SE", "df", "t", "p")) %>%
  kable_styling()

```

```

plot_model(caring_model_b1, type = "pred", terms = c("format"))

```

Soft-hearted

```

softhearted_model_b1 = item_timing %>%
  filter(item == "softhearted") %>%
  lm(seconds_log~format, data = .)

softhearted_em_b1 = emmeans(softhearted_model_b1, "format")
pairs(softhearted_em_b1, adjust = "holm") %>%
  kable(booktabs = T,
        digits = c(0,2,2,2,2,3),
        caption = "Differences in log-seconds to Soft-hearted by format (Block 1 data only)",
        col.names = c("Contrast", "Difference in means", "SE", "df", "t", "p")) %>%
  kable_styling()

```

```

plot_model(softhearted_model_b1, type = "pred", terms = c("format"))

```

Calm

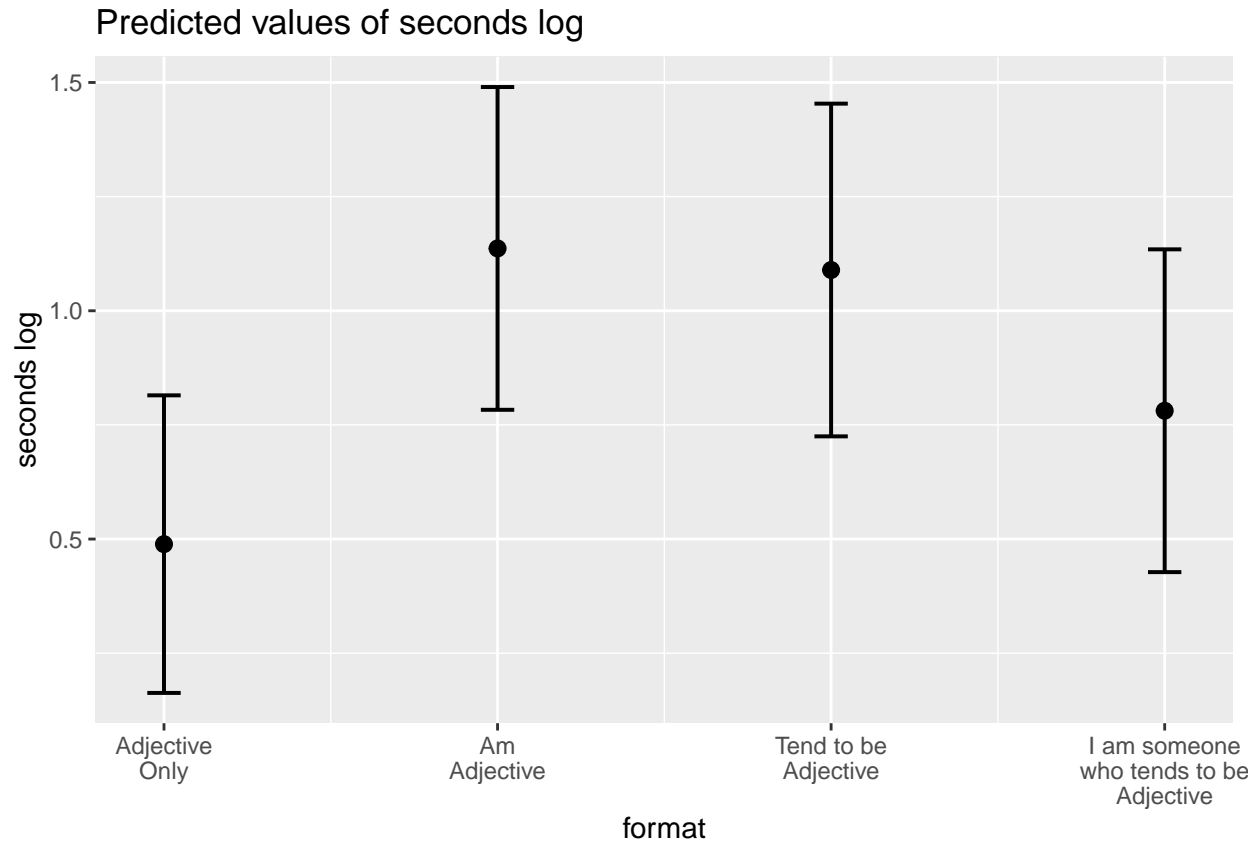


Figure 21: Average log-seconds to “caring” by format (block 1 data only)

Table 12: Differences in log-seconds to Soft-hearted by format (Block 1 data only)

Contrast	Difference in means	SE	df	t	p
Adjective Only - Am Adjective	-0.23	0.27	66	-0.86	1.000
Adjective Only - Tend to be Adjective	-0.50	0.28	66	-1.78	0.479
Adjective Only - I am someone who tends to be Adjective	-0.16	0.29	66	-0.54	1.000
Am Adjective - Tend to be Adjective	-0.27	0.29	66	-0.92	1.000
Am Adjective - I am someone who tends to be Adjective	0.08	0.30	66	0.26	1.000
Tend to be Adjective - I am someone who tends to be Adjective	0.35	0.31	66	1.13	1.000

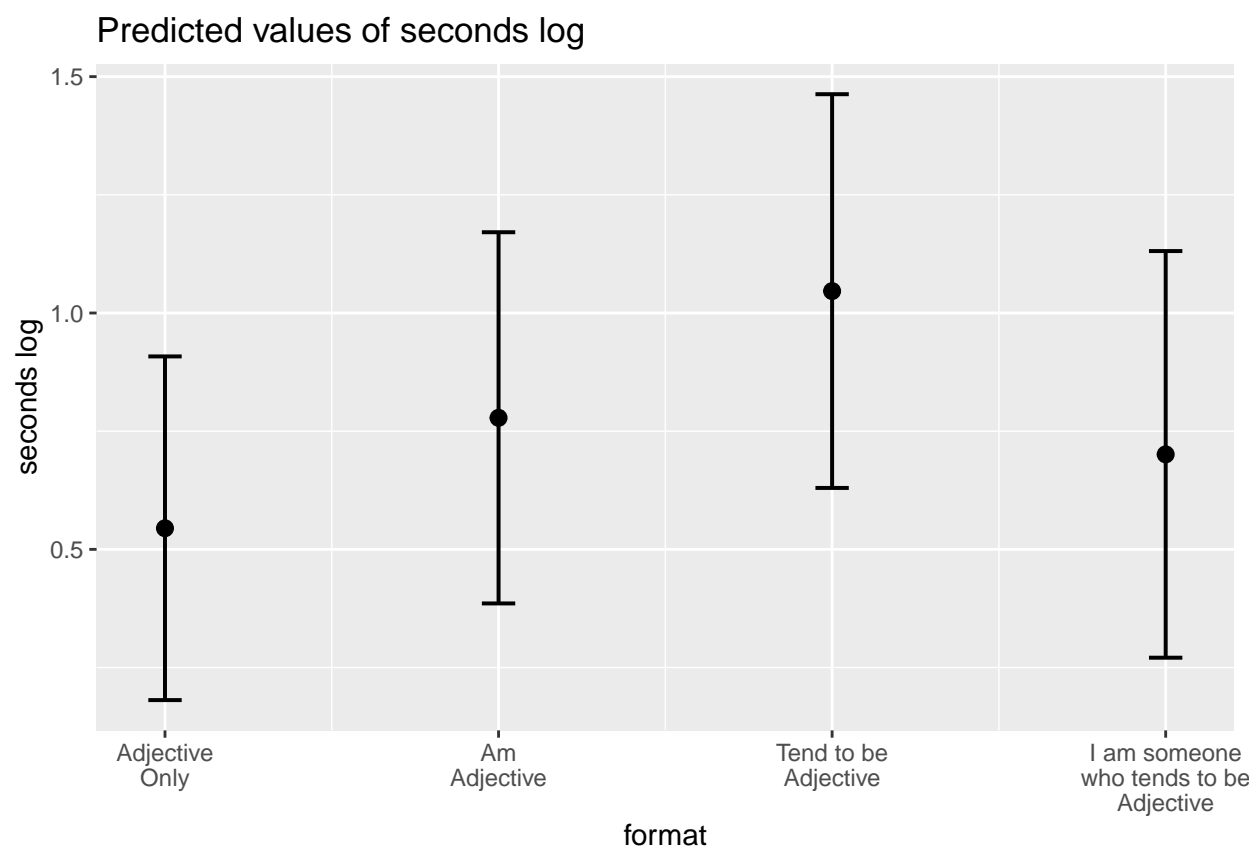


Figure 22: Average log-seconds to “softhearted” by format (block 1 data only)

Table 13: Differences in log-seconds to Calm by format (Block 1 data only)

Contrast	Difference in means	SE	df	t	p
Adjective Only - Am Adjective	-0.73	0.30	66	-2.44	0.104
Adjective Only - Tend to be Adjective	-0.34	0.30	66	-1.12	0.902
Adjective Only - I am someone who tends to be Adjective	-0.41	0.30	66	-1.35	0.900
Am Adjective - Tend to be Adjective	0.39	0.32	66	1.22	0.902
Am Adjective - I am someone who tends to be Adjective	0.32	0.32	66	1.00	0.902
Tend to be Adjective - I am someone who tends to be Adjective	-0.07	0.32	66	-0.22	0.902

```

calm_model_b1 = item_timing %>%
  filter(item == "calm") %>%
  lm(seconds_log~format, data = .)

calm_em_b1 = emmeans(calm_model_b1, "format")
pairs(calm_em_b1, adjust = "holm") %>%
  kable(booktabs = T,
        digits = c(0,2,2,2,2,3),
        caption = "Differences in log-seconds to Calm by format (Block 1 data only)",
        col.names = c("Contrast", "Difference in means", "SE", "df", "t", "p")) %>%
  kable_styling()

```

```

plot_model(calm_model_b1, type = "pred", terms = c("format"))

```

Sympathetic

```

sympathetic_model_b1 = item_timing %>%
  filter(item == "sympathetic") %>%
  lm(seconds_log~format, data = .)

sympathetic_em_b1 = emmeans(sympathetic_model_b1, "format")
pairs(sympathetic_em_b1, adjust = "holm") %>%
  kable(booktabs = T,
        digits = c(0,2,2,2,2,3),
        caption = "Differences in log-seconds to Sympathetic by format (Block 1 data only)",
        col.names = c("Contrast", "Difference in means", "SE", "df", "t", "p")) %>%
  kable_styling()

```

```

plot_model(sympathetic_model_b1, type = "pred", terms = c("format"))

```

Adventurous

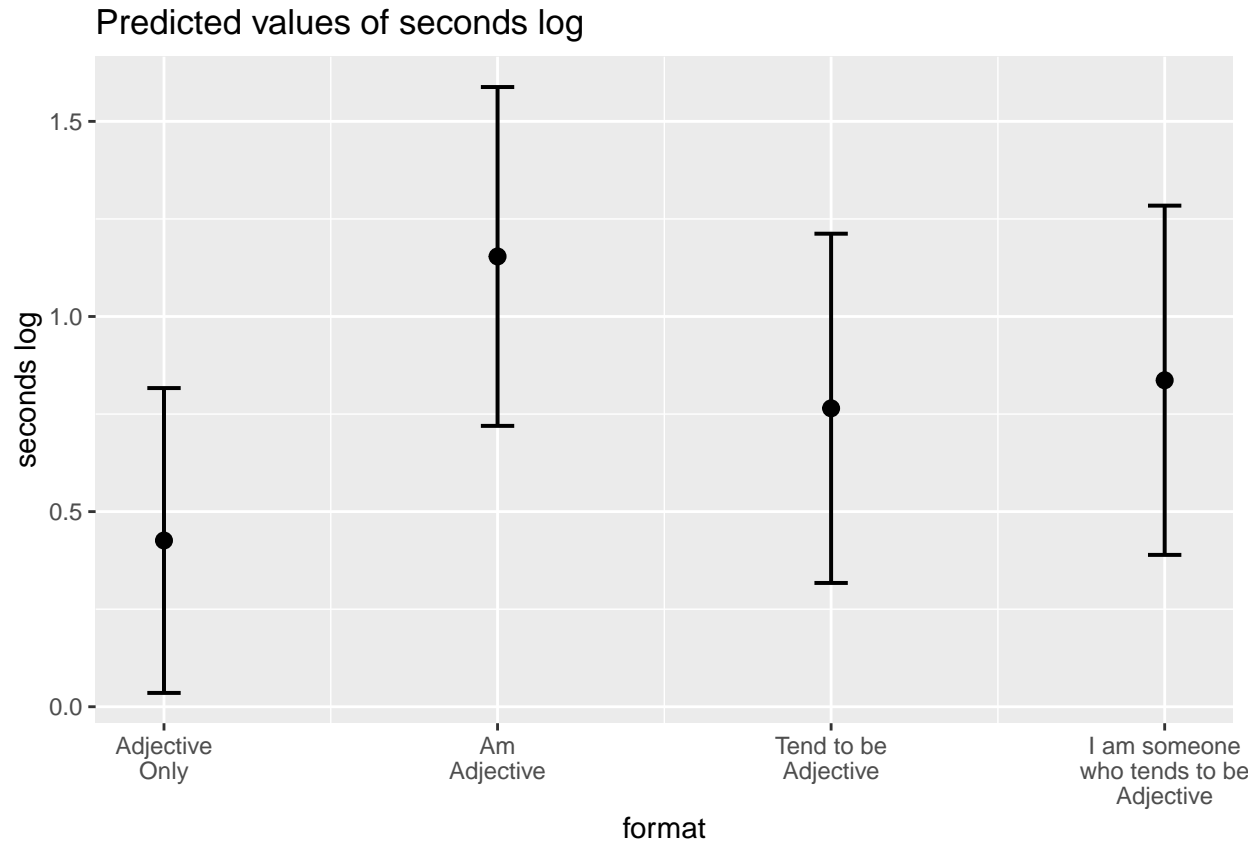


Figure 23: Average log-seconds to “calm” by format (block 1 data only)

Table 14: Differences in log-seconds to Sympathetic by format (Block 1 data only)

Contrast	Difference in means	SE	df	t	p
Adjective Only - Am Adjective	-0.28	0.29	66	-0.96	1.000
Adjective Only - Tend to be Adjective	-0.67	0.29	66	-2.28	0.155
Adjective Only - I am someone who tends to be Adjective	-0.34	0.31	66	-1.12	1.000
Am Adjective - Tend to be Adjective	-0.40	0.30	66	-1.31	0.979
Am Adjective - I am someone who tends to be Adjective	-0.06	0.31	66	-0.20	1.000
Tend to be Adjective - I am someone who tends to be Adjective	0.33	0.32	66	1.05	1.000

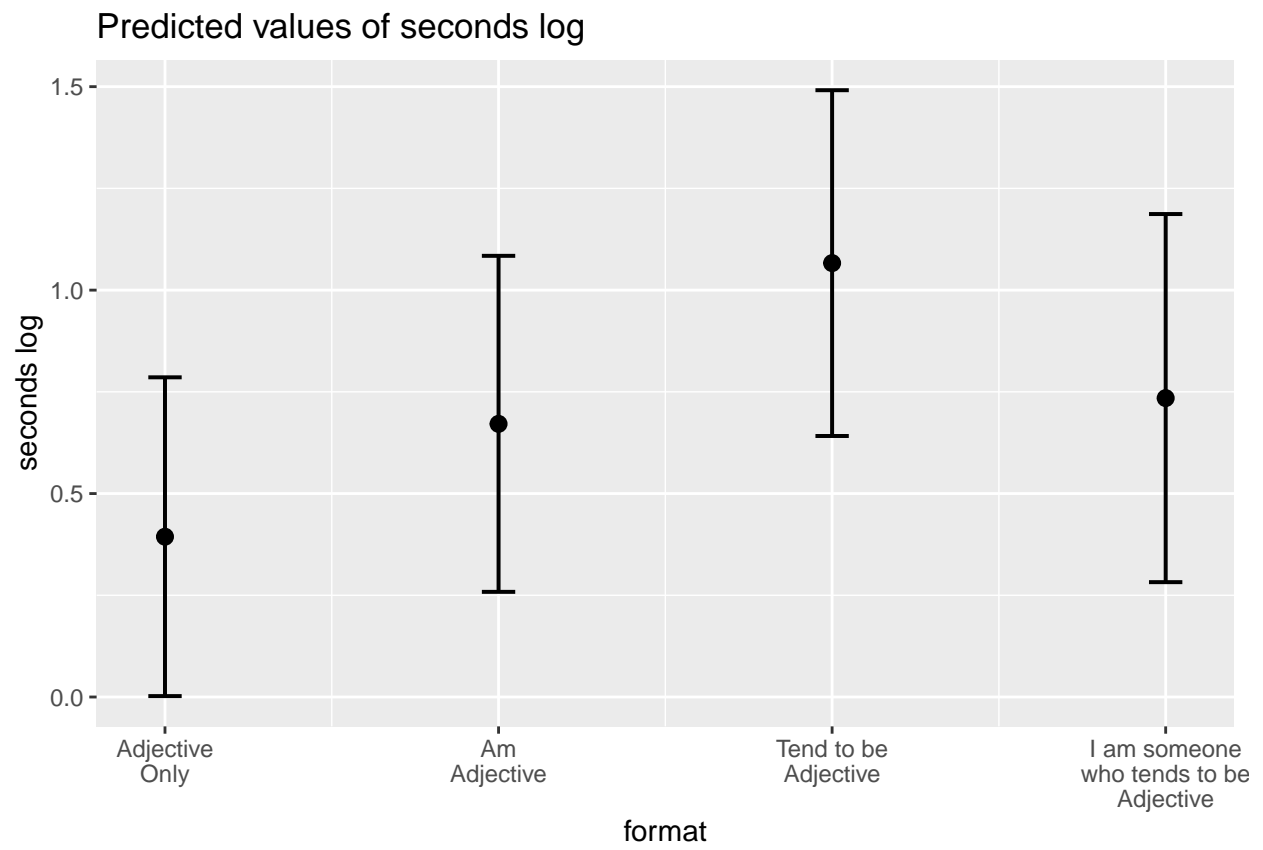


Figure 24: Average log-seconds to “sympathetic” by format (block 1 data only)

Table 15: Differences in log-seconds to Adventurous by format (Block 1 data only)

Contrast	Difference in means	SE	df	t	p
Adjective Only - Am Adjective	-0.18	0.26	66	-0.69	0.990
Adjective Only - Tend to be Adjective	-0.63	0.26	66	-2.42	0.109
Adjective Only - I am someone who tends to be Adjective	-0.48	0.26	66	-1.81	0.371
Am Adjective - Tend to be Adjective	-0.45	0.28	66	-1.62	0.444
Am Adjective - I am someone who tends to be Adjective	-0.30	0.28	66	-1.06	0.880
Tend to be Adjective - I am someone who tends to be Adjective	0.15	0.28	66	0.54	0.990

```

adventurous_model_b1 = item_timing %>%
  filter(item == "adventurous") %>%
  lm(seconds_log~format, data = .)

adventurous_em_b1 = emmeans(adventurous_model_b1, "format")
pairs(adventurous_em_b1, adjust = "holm") %>%
  kable(booktabs = T,
        digits = c(0,2,2,2,2,3),
        caption = "Differences in log-seconds to Adventurous by format (Block 1 data only)",
        col.names = c("Contrast", "Difference in means", "SE", "df", "t", "p")) %>%
  kable_styling()

```

```

plot_model(adventurous_model_b1, type = "pred", terms = c("format"))

```

Analysis: Block 1 and Block 2

We used a multilevel model, nesting log-seconds within participant to account for dependence. Our primary predictor was format. Here, we use only Block 1 data.

```

mod.format_b2 = lmer(seconds_log~format + (1|proid),
                    data = item_timing)
anova(mod.format_b2)

## Type III Analysis of Variance Table with Satterthwaite's method
##      Sum Sq Mean Sq NumDF  DenDF F value    Pr(>F)
## format 27.794   9.2648     3 2154.4   13.61 8.518e-09 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

```

```

plot_b2 = plot_model(mod.format_b2, type = "pred")

plot_b2$format +
  labs(x = NULL,
       y = "Average log-seconds",
       title = "Average responses by item formatting (Block 1 and Block 2)") +
  theme_pubclean()

```

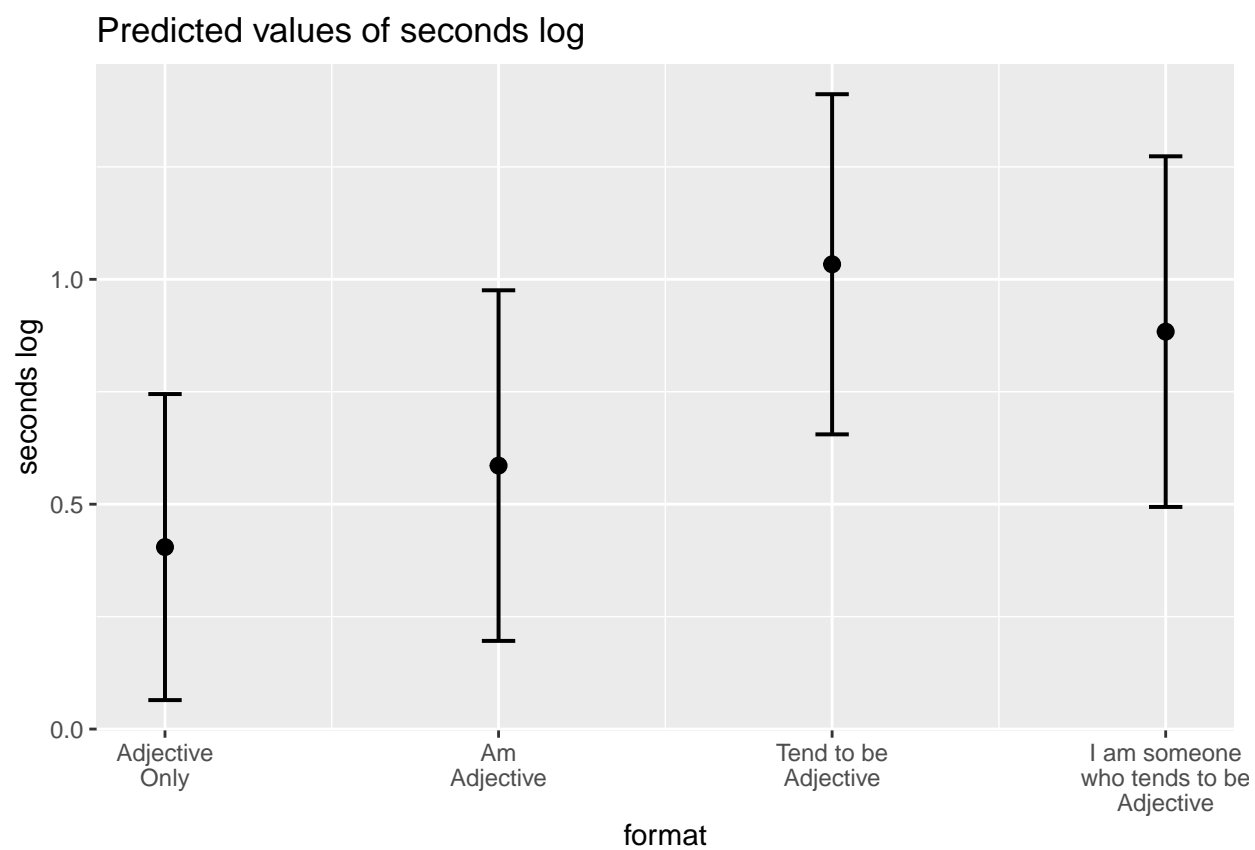


Figure 25: Average log-seconds to “adventurous” by format (block 1 data only)

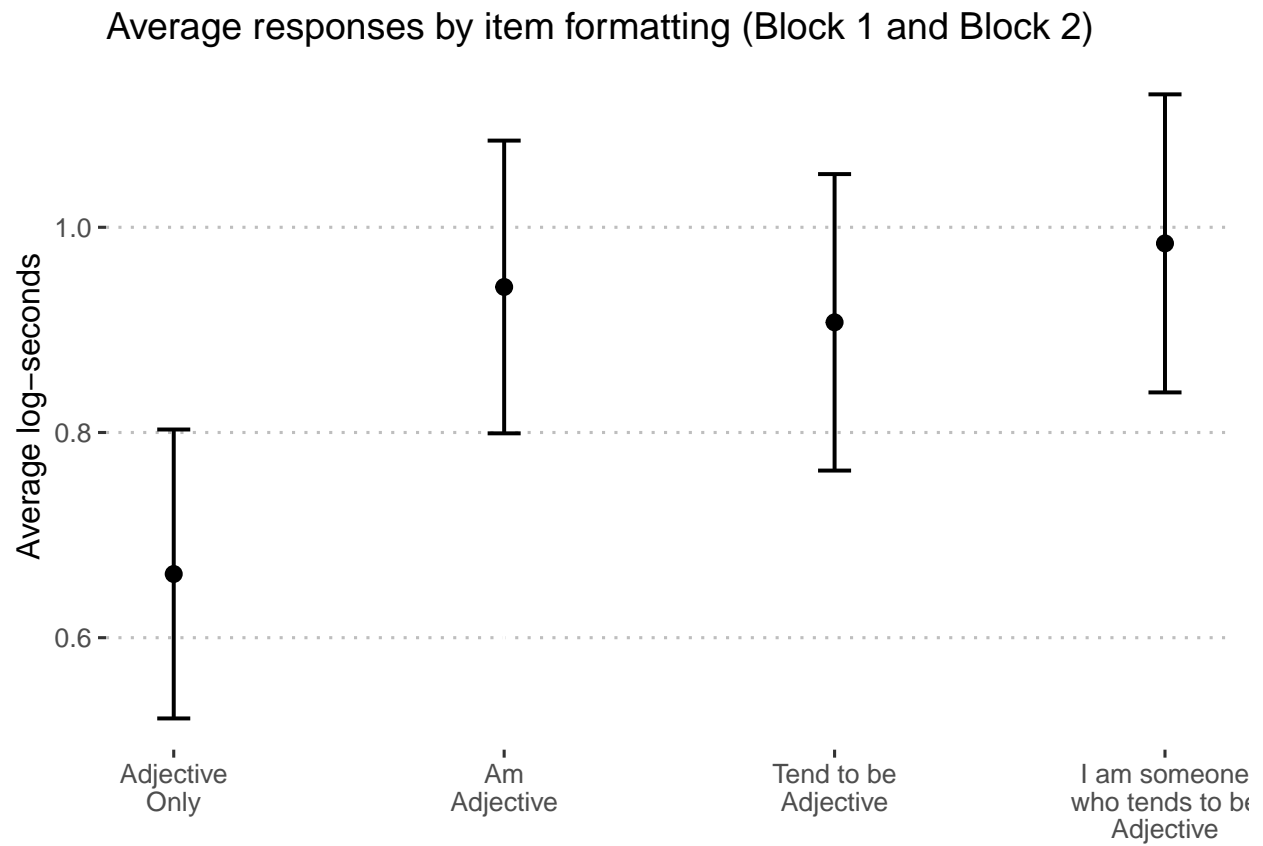


Figure 26: Predicted log-seconds on personality items by condition, using only Block 1 data.

```

plot_b2$format$data %>%
  mutate(predicted = exp(predicted),
         conf.low = exp(conf.low),
         conf.high = exp(conf.high)) %>%
  mutate(x = factor(x,
                    labels = c("Adjective\nOnly",
                              "Am\nAdjective",
                              "Tend to be\nAdjective",
                              "I am someone\nwho tends to be\nAdjective"))) %>%
  ggplot(aes(x = x, y = predicted)) +
  geom_point() +
  geom_errorbar(aes(ymin = conf.low, ymax = conf.high)) +
  labs(x = NULL, y = "seconds", title = "Average time by item formatting (Block 1 and Block 2)") +
  theme_pubclean()

```

Average time by item formatting (Block 1 and Block 2)

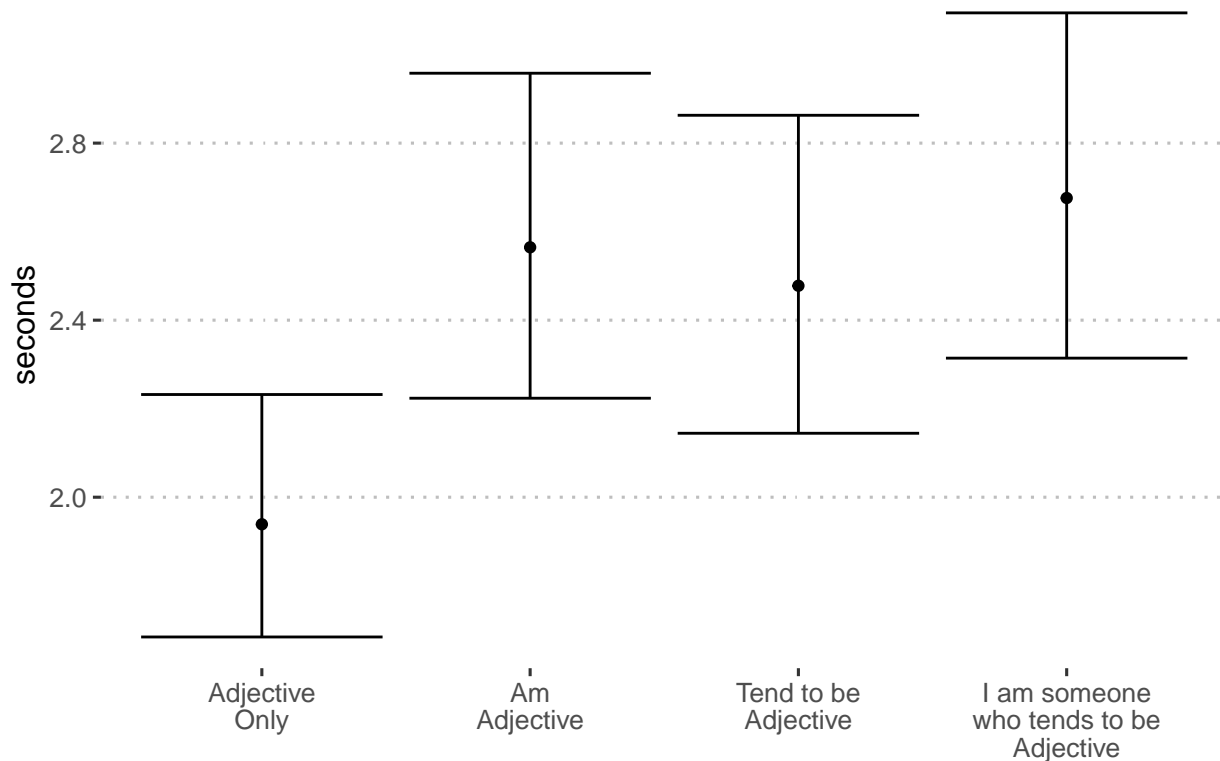


Figure 27: Predicted seconds on personality items by condition, using only Block 1 data.

```

means_by_group = item_timing %>%
  group_by(format) %>%
  summarise(m = mean(seconds_log),
            s = sd(seconds_log))

item_timing %>%
  ggplot(aes(x = seconds_log, fill = format)) +
  geom_histogram(bins = 100, color = "white") +

```



```
geom_vline(aes(xintercept = m), data = means_by_group) +
geom_text(aes(x = 1,
              y = 50,
              label = paste("M =", round(m,2),
                           "\nSD =", round(s,2))),
          data = means_by_group,
          hjust = 0,
          vjust = 1) +
facet_wrap(~format) +
guides(fill = "none") +
labs(y = "Number of participants",
      title = "Distribution of responses by format (Block 1 and Block 2)") +
theme_pubr()
```

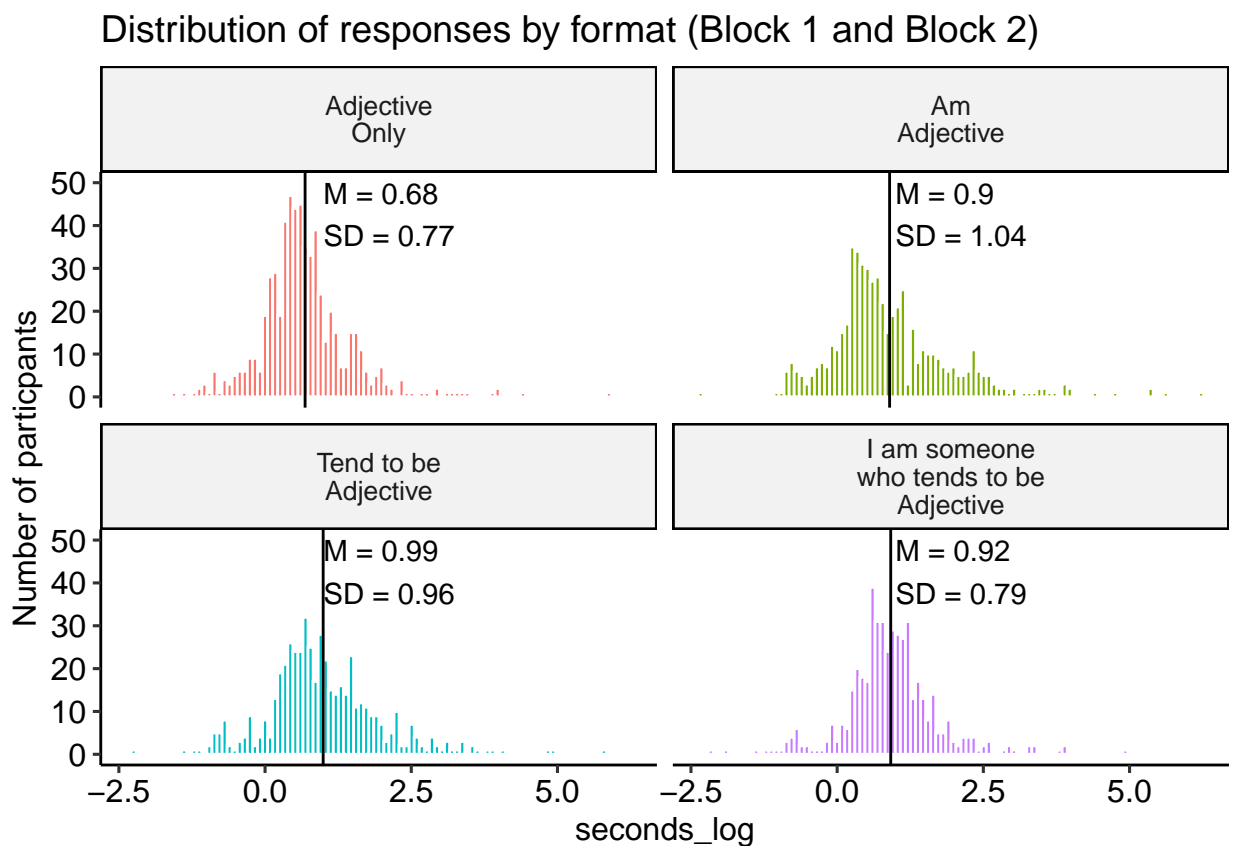


Figure 28: Distribution of log-seconds by category, block 1 and block 2

One model for each adjective

We can also repeat this analysis separately for each trait.

```
mod_by_item_b2 = item_timing %>%
  group_by(item) %>%
  nest() %>%
  mutate(mod = map(data, ~lmer(seconds_log~format + (1|proid), data = .))) %>%
```

```

mutate(aov = map(mod, anova))

summary_by_item_b2 = mod_by_item_b2 %>%
  mutate(tidy = map(aov, broom::tidy)) %>%
  select(item, tidy) %>%
  unnest(cols = c(tidy)) %>%
  filter(term == "format") %>%
  select(-term) %>%
  mutate(p.adj = p.adjust(p.value, method = "holm"))

summary_by_item_b2 %>%
  mutate(across(
    starts_with("p"),
    papaja::printnum
  )) %>%
  kable(digits = 2, booktabs = T, caption = "Format effects on log-seconds by item (block 1 data only)",
  kable_styling()

```

Pairwise t-tests for significant ANOVAs

Here we identify the specific items with significant differences.

```

sig_item_b2 = summary_by_item_b2 %>%
  filter(p.value < .05)

sig_item_b2 = sig_item_b2$item
sig_item_b2

```

```
## [1] "helpful"      "asleep"      "caring"      "adventurous"
```

Then we create models for each adjective. We use the `emmeans` package to perform pairwise comparisons, again with a Holm correction on the p -values. We also plot the means and 95% confidence intervals of each mean.

This code will have to be changed after final data collection. It is not self-adapting!

Helpful

```

helpful_model_b2 = item_timing %>%
  filter(item == "helpful") %>%
  lmer(seconds_log~format + (1|proid),
        data = .)

helpful_em_b2 = emmeans(helpful_model_b2, "format")
pairs(helpful_em_b2, adjust = "holm") %>%
  kable(booktabs = T,
        digits = c(0,2,2,2,2,3),
        caption = "Differences in log-seconds to Helpful by format (Block 1 and Block 2)",
        col.names = c("Contrast", "Difference in means", "SE", "df", "t", "p")) %>%
  kable_styling()

```

Table 16: Format effects on log-seconds by item (block 1 data only)

item	sumsq	meansq	NumDF	DenDF	statistic	p.value	p.adj
outgoing	2.85	0.95	3	60.19	1.46	0.23	0.23
helpful	2.04	0.68	3	65.91	2.92	0.04	0.04
reckless	1.60	0.53	3	63.75	0.53	0.66	0.66
moody	1.40	0.47	3	65.34	0.96	0.42	0.42
organized	2.16	0.72	3	66.00	1.02	0.39	0.39
friendly	0.41	0.14	3	65.49	0.18	0.91	0.91
warm	0.81	0.27	3	66.00	0.42	0.74	0.74
worrying	0.76	0.25	3	66.00	0.45	0.72	0.72
responsible	2.67	0.89	3	66.00	1.57	0.20	0.20
lively	2.25	0.75	3	66.00	0.70	0.56	0.56
asleep	6.57	2.19	3	66.00	3.23	0.03	0.03
caring	5.00	1.67	3	66.00	3.01	0.04	0.04
nervous	6.47	2.16	3	66.00	2.42	0.07	0.07
creative	1.97	0.66	3	66.00	0.70	0.55	0.55
hardworking	5.53	1.84	3	66.00	2.74	0.05	0.05
imaginative	4.68	1.56	3	66.00	1.98	0.13	0.13
softhearted	2.34	0.78	3	66.00	1.08	0.36	0.36
calm	5.06	1.69	3	66.00	2.02	0.12	0.12
intelligent	3.20	1.07	3	66.00	1.02	0.39	0.39
curious	2.31	0.77	3	62.52	1.40	0.25	0.25
active	1.82	0.61	3	66.00	0.81	0.49	0.49
human	0.42	0.14	3	66.00	0.14	0.94	0.94
careless	2.03	0.68	3	66.00	1.10	0.36	0.36
impulsive	2.81	0.94	3	62.76	0.96	0.42	0.42
sympathetic	4.19	1.40	3	66.00	1.75	0.17	0.17
cautious	2.13	0.71	3	51.97	1.14	0.34	0.34
talkative	0.22	0.07	3	45.63	0.34	0.79	0.79
sophisticated	1.95	0.65	3	66.00	0.67	0.57	0.57
adventurous	4.20	1.40	3	59.34	2.99	0.04	0.04
thorough	1.54	0.51	3	60.65	0.66	0.58	0.58
thrifty	2.16	0.72	3	55.08	1.48	0.23	0.23

Table 17: Differences in log-seconds to Helpful by format (Block 1 and Block 2)

Contrast	Difference in means	SE	df	t	p
Adjective Only - Am Adjective	-0.28	0.17	65.88	-1.67	0.414
Adjective Only - Tend to be Adjective	-0.32	0.18	65.98	-1.76	0.414
Adjective Only - I am someone who tends to be Adjective	-0.50	0.18	65.98	-2.80	0.040
Am Adjective - Tend to be Adjective	-0.04	0.18	65.77	-0.19	0.848
Am Adjective - I am someone who tends to be Adjective	-0.21	0.18	65.08	-1.20	0.702
Tend to be Adjective - I am someone who tends to be Adjective	-0.18	0.19	65.85	-0.94	0.702

```
plot_model(helpful_model_b2, type = "pred", terms = c("format"))
```

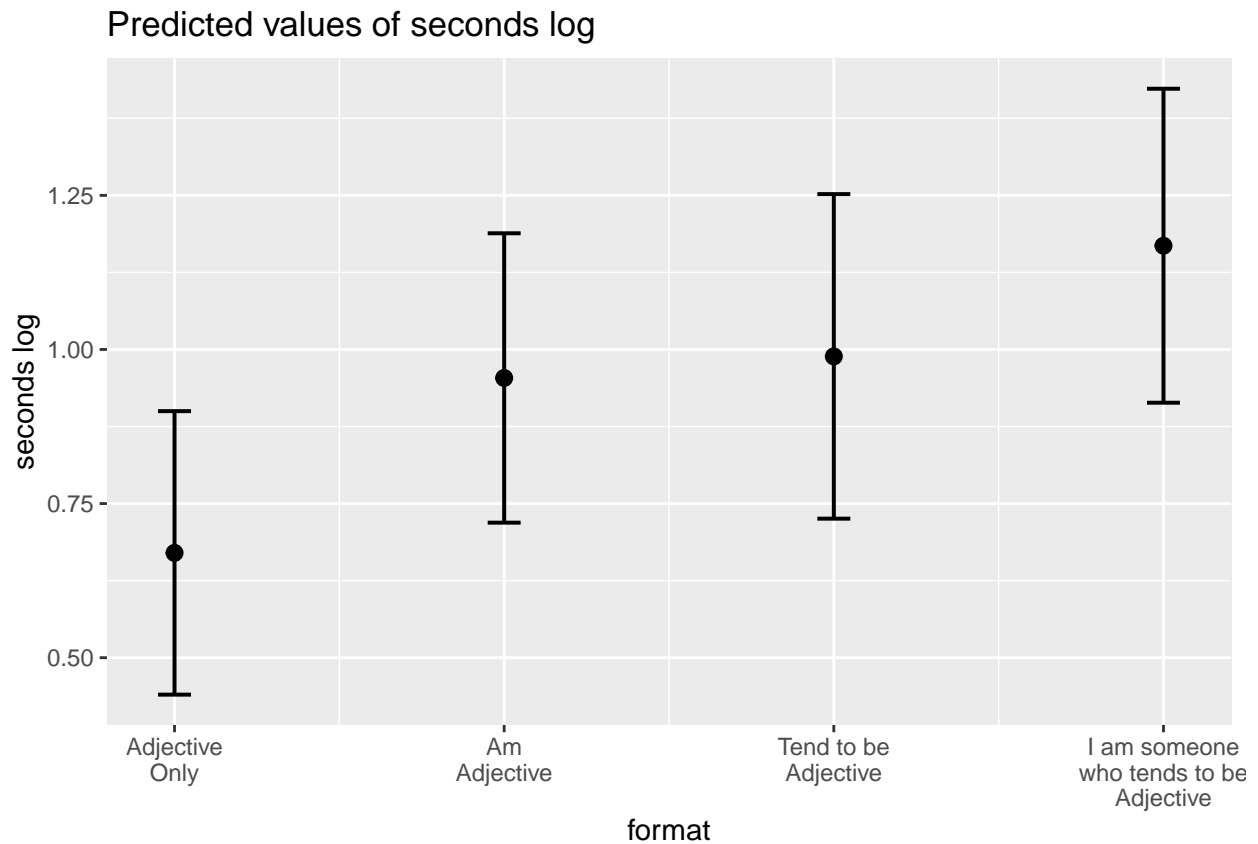


Figure 29: Average log-seconds to “helpful” by format (Block 1 and Block 2)

Asleep

```
asleep_model_b2 = item_timing %>%
  filter(item == "asleep") %>%
  lmer(seconds_log~format + (1|proid),
        data = .)

asleep_em_b2 = emmeans(asleep_model_b2, "format")
pairs(asleep_em_b2, adjust = "holm") %>%
  kable(booktabs = T,
        digits = c(0,2,2,2,2,3),
        caption = "Differences in log-seconds to Asleep by format (Block 1 and Block 2)",
        col.names = c("Contrast", "Difference in means", "SE", "df", "t", "p")) %>%
  kable_styling()
```

```
plot_model(asleep_model_b2, type = "pred", terms = c("format"))
```

Table 18: Differences in log-seconds to Asleep by format (Block 1 and Block 2)

Contrast	Difference in means	SE	df	t	p
Adjective Only - Am Adjective	-0.65	0.27	65.48	-2.38	0.101
Adjective Only - Tend to be Adjective	-0.81	0.29	65.81	-2.76	0.044
Adjective Only - I am someone who tends to be Adjective	-0.42	0.29	63.82	-1.45	0.610
Am Adjective - Tend to be Adjective	-0.16	0.29	65.84	-0.55	0.835
Am Adjective - I am someone who tends to be Adjective	0.23	0.28	65.01	0.82	0.835
Tend to be Adjective - I am someone who tends to be Adjective	0.39	0.30	62.06	1.29	0.610

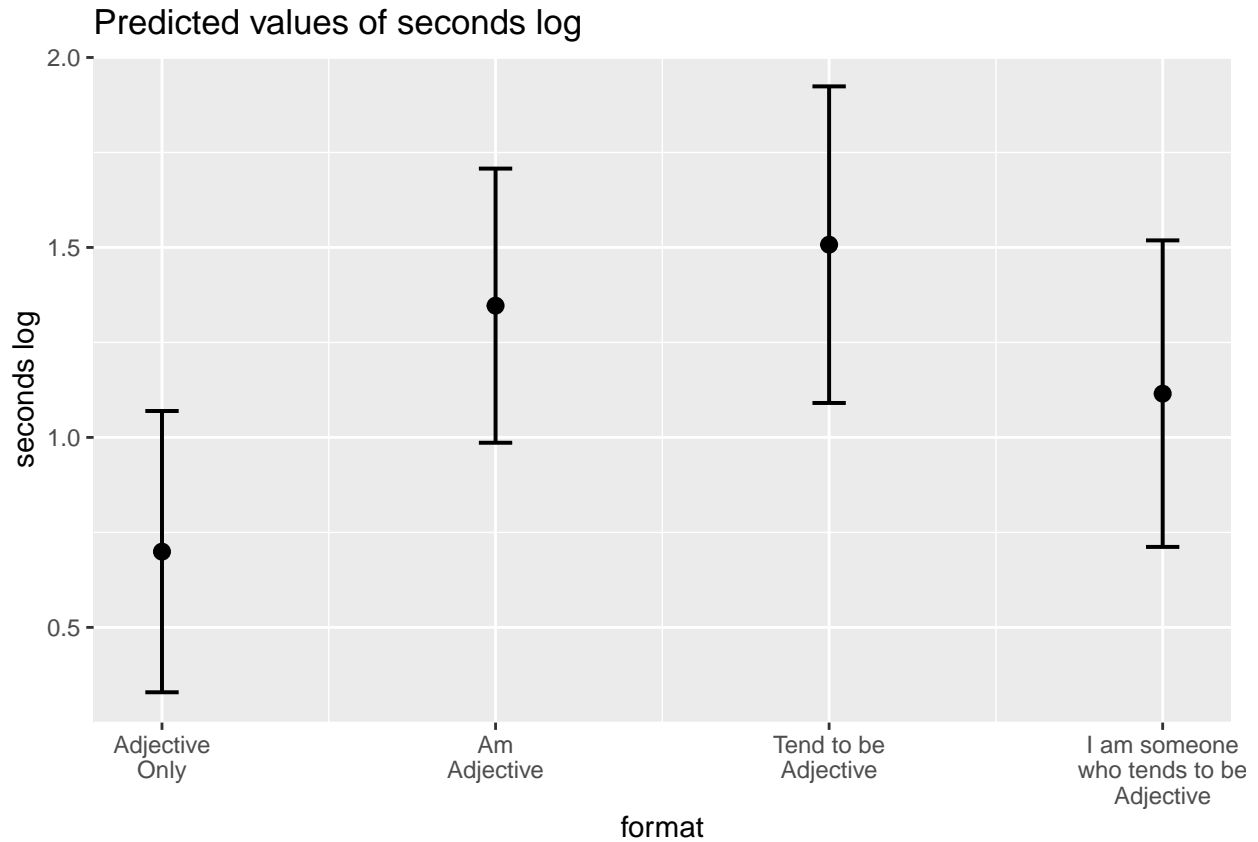


Figure 30: Average log-seconds to “asleep” by format (Block 1 and Block 2)

Table 19: Differences in log-seconds to Caring by format (Block 1 and Block 2)

Contrast	Difference in means	SE	df	t	p
Adjective Only - Am Adjective	-0.65	0.25	65.21	-2.56	0.076
Adjective Only - Tend to be Adjective	-0.60	0.26	63.58	-2.34	0.113
Adjective Only - I am someone who tends to be Adjective	-0.29	0.25	65.99	-1.15	0.757
Am Adjective - Tend to be Adjective	0.05	0.27	65.96	0.18	0.860
Am Adjective - I am someone who tends to be Adjective	0.36	0.26	65.29	1.35	0.723
Tend to be Adjective - I am someone who tends to be Adjective	0.31	0.27	64.65	1.16	0.757

Caring

```

caring_model_b2 = item_timing %>%
  filter(item == "caring") %>%
  lmer(seconds_log~format + (1|proid),
        data = .)

caring_em_b2 = emmeans(caring_model_b2, "format")
pairs(caring_em_b2, adjust = "holm") %>%
  kable(booktabs = T,
        digits = c(0,2,2,2,2,3),
        caption = "Differences in log-seconds to Caring by format (Block 1 and Block 2)",
        col.names = c("Contrast", "Difference in means", "SE", "df", "t", "p")) %>%
  kable_styling()

```

```

plot_model(caring_model_b2, type = "pred", terms = c("format"))

```

Adventurous

```

adventurous_model_b2 = item_timing %>%
  filter(item == "adventurous") %>%
  lmer(seconds_log~format + (1|proid),
        data = .)

adventurous_em_b2 = emmeans(adventurous_model_b2, "format")
pairs(adventurous_em_b2, adjust = "holm") %>%
  kable(booktabs = T,
        digits = c(0,2,2,2,2,3),
        caption = "Differences in log-seconds to Adventurous by format (Block 1 and Block 2)",
        col.names = c("Contrast", "Difference in means", "SE", "df", "t", "p")) %>%
  kable_styling()

```

```

plot_model(adventurous_model_b2, type = "pred", terms = c("format"))

```

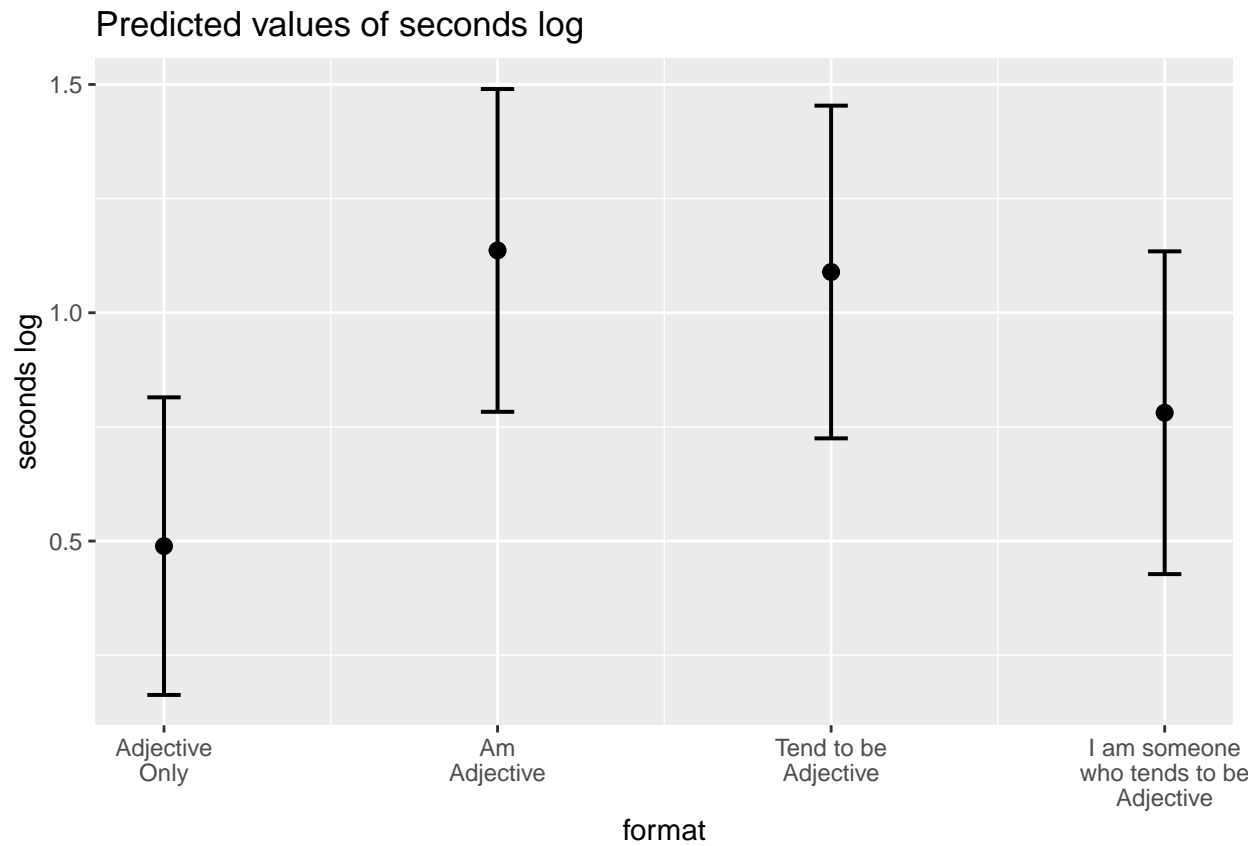


Figure 31: Average log-seconds to “caring” by format (Block 1 and Block 2)

Table 20: Differences in log-seconds to Adventurous by format (Block 1 and Block 2)

Contrast	Difference in means	SE	df	t	p
Adjective Only - Am Adjective	-0.31	0.26	59.39	-1.20	0.724
Adjective Only - Tend to be Adjective	-0.68	0.25	55.91	-2.69	0.057
Adjective Only - I am someone who tends to be Adjective	-0.57	0.27	65.51	-2.13	0.185
Am Adjective - Tend to be Adjective	-0.36	0.27	55.75	-1.35	0.724
Am Adjective - I am someone who tends to be Adjective	-0.26	0.28	62.04	-0.93	0.724
Tend to be Adjective - I am someone who tends to be Adjective	0.10	0.28	63.89	0.37	0.724

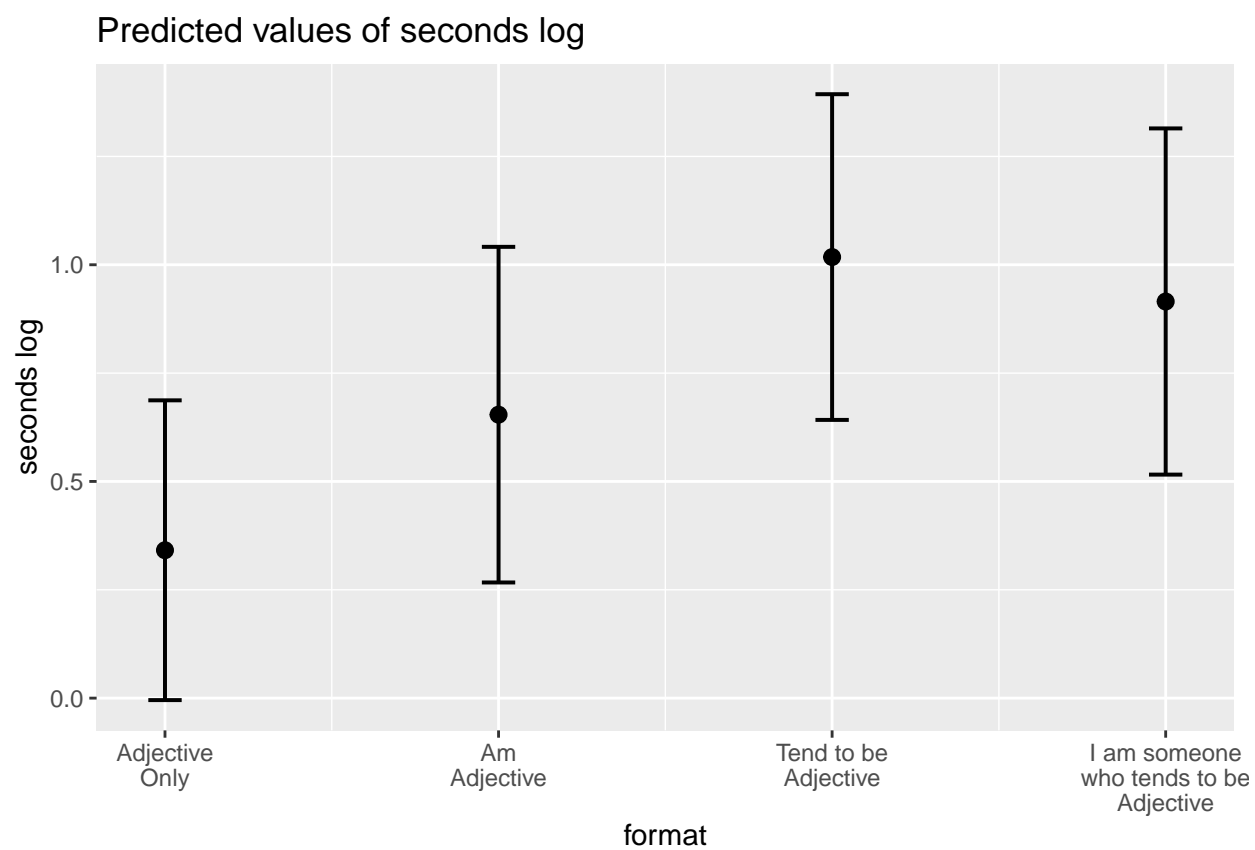


Figure 32: Average log-seconds to “adventurous” by format (Block 1 and Block 2)

Analysis: Account for memory effects

```
mod.format_mem = lmer(seconds_log~format*delayed_memory + (1|proid),
                      data = item_timing)
anova(mod.format_mem)
```

```
## Type III Analysis of Variance Table with Satterthwaite's method
##               Sum Sq Mean Sq NumDF   DenDF F value    Pr(>F)
## format          12.7662  4.2554     3 2154.76  6.3175 0.0002903 ***
## delayed_memory    0.0767  0.0767     1   33.04  0.1139 0.7378907
## format:delayed_memory 17.1098  5.7033     3 2155.81  8.4670 1.363e-05 ***
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```

```
summary(mod.format_mem)
```

```
## Linear mixed model fit by REML. t-tests use Satterthwaite's method [
## lmerModLmerTest]
## Formula: seconds_log ~ format * delayed_memory + (1 | proid)
##   Data: item_timing
##
## REML criterion at convergence: 5424.7
##
## Scaled residuals:
##      Min       1Q   Median       3Q      Max
## -3.9244 -0.5397 -0.1383  0.3616  6.7825
##
## Random effects:
##   Groups   Name                Variance Std.Dev.
##   proid    (Intercept)  0.1366     0.3695
##   Residual                  0.6736     0.8207
## Number of obs: 2170, groups:  proid, 35
##
## Fixed effects:
##                                     Estimate
## (Intercept)                        7.256e-01
## formatAm\nAdjective                 -1.031e-01
## formatTend to be\nAdjective         1.479e-01
## formatI am someone\nwho tends to be\nAdjective  3.801e-01
## delayed_memory                     -1.357e-02
## formatAm\nAdjective:delayed_memory    7.374e-02
## formatTend to be\nAdjective:delayed_memory  2.036e-02
## formatI am someone\nwho tends to be\nAdjective:delayed_memory -9.818e-03
##                                     Std. Error
## (Intercept)                        1.460e-01
## formatAm\nAdjective                 1.065e-01
## formatTend to be\nAdjective         1.139e-01
## formatI am someone\nwho tends to be\nAdjective  1.154e-01
## delayed_memory                     2.492e-02
## formatAm\nAdjective:delayed_memory    1.785e-02
## formatTend to be\nAdjective:delayed_memory  2.008e-02
## formatI am someone\nwho tends to be\nAdjective:delayed_memory  1.975e-02
```

```

##                                     df
## (Intercept)                        5.052e+01
## formatAm\nAdjective                2.159e+03
## formatTend to be\nAdjective        2.146e+03
## formatI am someone\nwho tends to be\nAdjective 2.161e+03
## delayed_memory                    5.152e+01
## formatAm\nAdjective:delayed_memory 2.155e+03
## formatTend to be\nAdjective:delayed_memory 2.140e+03
## formatI am someone\nwho tends to be\nAdjective:delayed_memory 2.162e+03
##                                     t value Pr(>|t|)
## (Intercept)                        4.968 8.13e-06
## formatAm\nAdjective                -0.968 0.333
## formatTend to be\nAdjective        1.298 0.194
## formatI am someone\nwho tends to be\nAdjective 3.295 0.001
## delayed_memory                    -0.545 0.588
## formatAm\nAdjective:delayed_memory 4.130 3.76e-05
## formatTend to be\nAdjective:delayed_memory 1.014 0.311
## formatI am someone\nwho tends to be\nAdjective:delayed_memory -0.497 0.619
##
## (Intercept)                        ***
## formatAm\nAdjective
## formatTend to be\nAdjective
## formatI am someone\nwho tends to be\nAdjective **
## delayed_memory
## formatAm\nAdjective:delayed_memory ***
## formatTend to be\nAdjective:delayed_memory
## formatI am someone\nwho tends to be\nAdjective:delayed_memory
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Correlation of Fixed Effects:
##      (Intr) frmtAA frTtbA frIaswtbA dlyd_m frAA:_ fTtbA:
## frmtAmAdjct -0.367
## frmtTndtbAd -0.362 0.472
## frmlaswtbA -0.343 0.456 0.477
## delayd_mmry -0.868 0.325 0.319 0.299
## frmtAAdjc:_ 0.332 -0.857 -0.426 -0.413 -0.391
## frmtTtbAd:_ 0.310 -0.405 -0.867 -0.403 -0.362 0.489
## fIaswtbA:_ 0.298 -0.402 -0.415 -0.871 -0.346 0.487 0.466

```

```

plot_mem = plot_model(mod.format_mem,
  type = "pred",
  term = c("format", "delayed_memory[meansd]")) +
  geom_line() +
  labs(x = NULL,
    y = "Average log-seconds") +
  scale_color_discrete("Memory", labels = c("-1SD", "Mean", "+1SD")) +
  theme_pubclean()

plot_mem

```

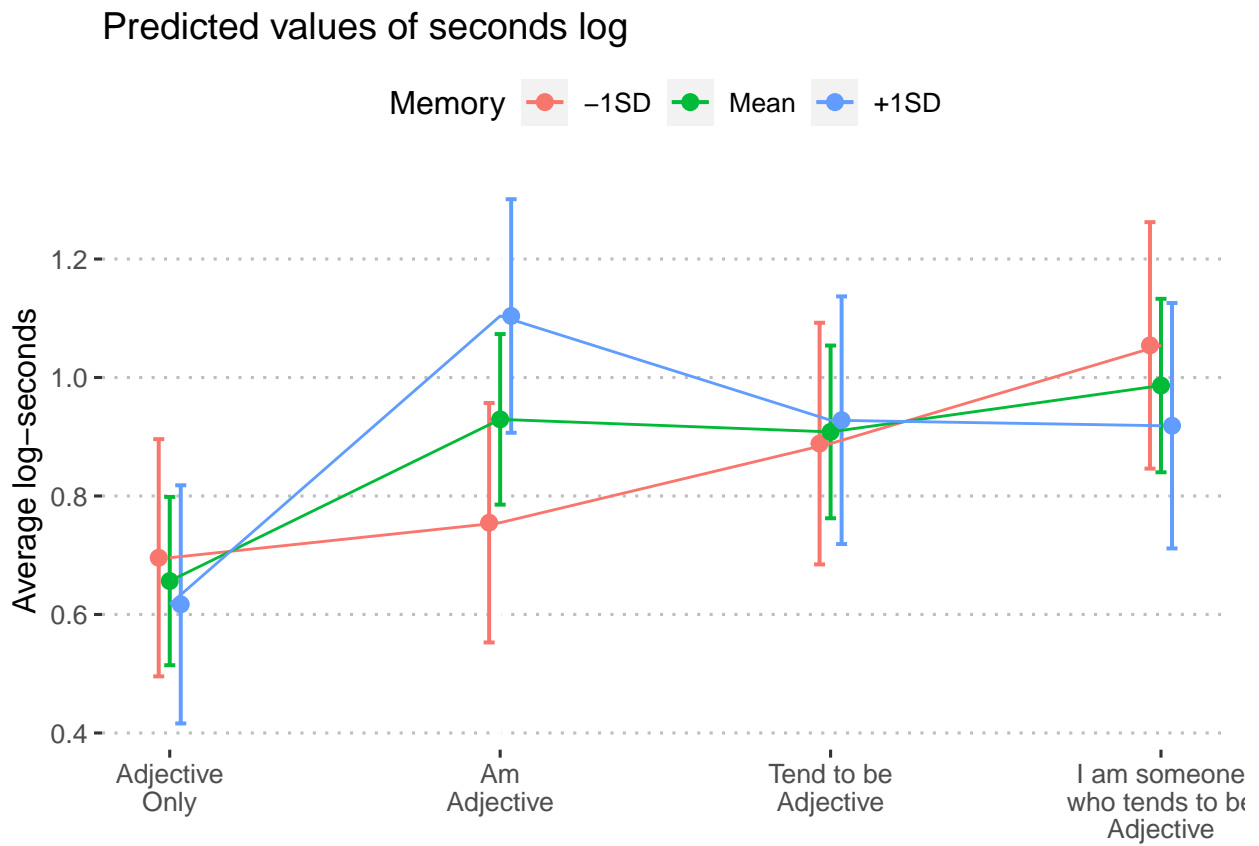


Figure 33: Predicted log-seconds on personality items by condition after controlling for delayed_memory.

```

plot_mem$data %>% as_tibble %>%
  mutate(predicted = exp(predicted),
         conf.low = exp(conf.low),
         conf.high = exp(conf.high),
         group_col = factor(group_col, labels = c("Memory\n-1SD", "Memory\nMean", "Memory\n+1SD"))) %>%
  mutate(x = factor(x,
                   labels = c("Adjective\nOnly",
                              "Am\nAdjective",
                              "Tend to be\nAdjective",
                              "I am someone\nwho tends to be\nAdjective"))) %>%
  ggplot(aes(x = x, y = predicted, color = group_col)) +
  geom_point() +
  geom_errorbar(aes(ymin = conf.low, ymax = conf.high)) +
  labs(x = NULL, y = "seconds", title = "Average time by item formatting (Block 1 and Block 2)") +
  facet_wrap(~group_col) +
  guides(color = "none") +
  theme_pubclean()

```

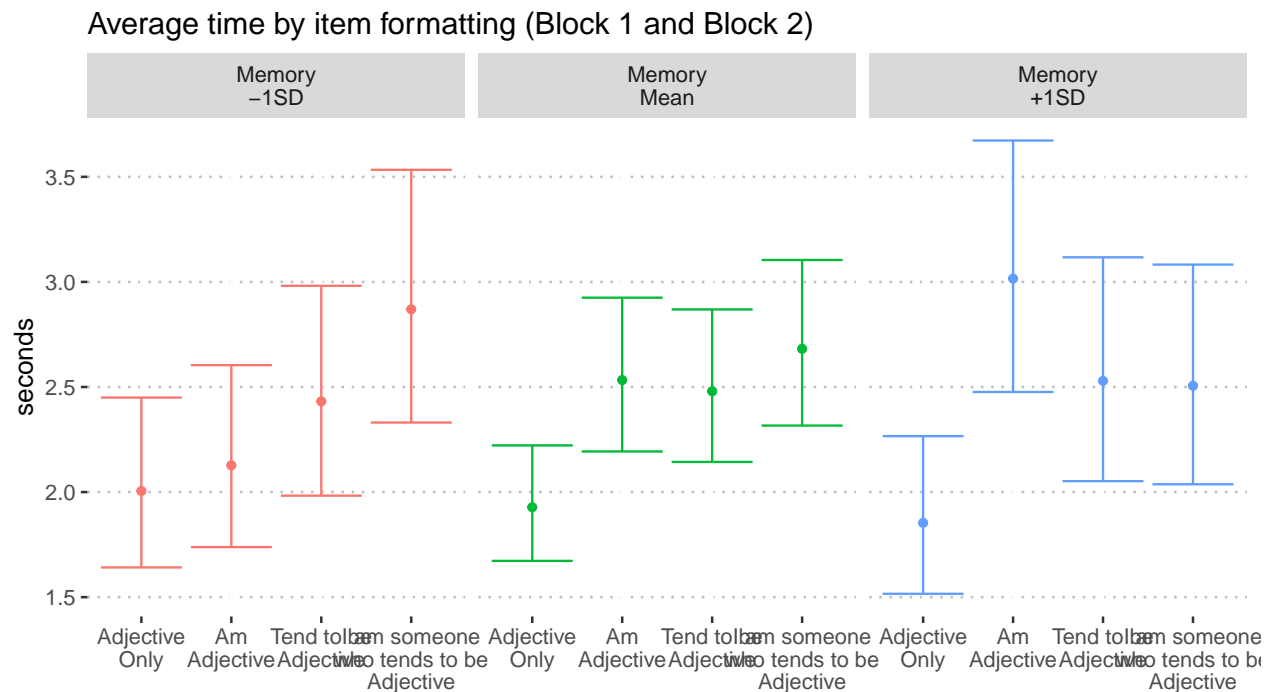


Figure 34: Predicted seconds on personality items by condition after controlling for delayed_memory.

One model for each adjective

```

mod_by_item_mem = item_timing %>%
  group_by(item) %>%
  nest() %>%
  mutate(mod = map(data, ~lmer(seconds_log~format*delayed_memory + (1|proid), data = .))) %>%
  mutate(aov = map(mod, anova))

```

item	sumsq	meansq	NumDF	DenDF	statistic	p.value	p.adj
outgoing	6.13	2.04	3	58.90	3.48	0.02	0.02
helpful	1.05	0.35	3	56.98	1.43	0.24	0.24
reckless	6.95	2.32	3	60.74	2.61	0.06	0.06
moody	0.43	0.14	3	54.42	0.29	0.83	0.83
organized	1.62	0.54	3	62.00	0.75	0.52	0.52
friendly	2.29	0.76	3	56.38	1.09	0.36	0.36
warm	5.23	1.74	3	56.82	3.30	0.03	0.03
worrying	1.49	0.50	3	62.00	0.87	0.46	0.46
responsible	7.33	2.44	3	62.00	5.05	0.00	0.00
lively	1.36	0.45	3	62.00	0.40	0.75	0.75
asleep	1.23	0.41	3	62.00	0.59	0.62	0.62
caring	1.25	0.42	3	62.00	0.73	0.54	0.54
nervous	2.86	0.95	3	62.00	1.06	0.37	0.37
creative	6.90	2.30	3	62.00	2.61	0.06	0.06
hardworking	1.54	0.51	3	62.00	0.74	0.53	0.53
imaginative	6.19	2.06	3	62.00	2.79	0.05	0.05
softhearted	3.03	1.01	3	62.00	1.43	0.24	0.24
calm	2.43	0.81	3	62.00	0.96	0.42	0.42
intelligent	3.11	1.04	3	62.00	0.97	0.41	0.41
curious	2.25	0.75	3	53.87	1.48	0.23	0.23
active	0.80	0.27	3	62.00	0.35	0.79	0.79
human	5.87	1.96	3	62.00	1.97	0.13	0.13
careless	2.81	0.94	3	61.60	1.68	0.18	0.18
impulsive	7.30	2.43	3	61.99	2.74	0.05	0.05
sympathetic	1.31	0.44	3	62.00	0.53	0.66	0.66
cautious	1.31	0.44	3	47.18	0.70	0.56	0.56
talkative	2.19	0.73	3	39.67	4.15	0.01	0.01
sophisticated	8.05	2.68	3	62.00	3.09	0.03	0.03
adventurous	1.47	0.49	3	54.52	1.06	0.38	0.38
thorough	3.48	1.16	3	55.00	1.48	0.23	0.23
thrifty	1.23	0.41	3	49.59	0.84	0.48	0.48

```
summary_by_item_mem = mod_by_item_mem %>%
  mutate(tidy = map(aov, broom::tidy)) %>%
  select(item, tidy) %>%
  unnest(cols = c(tidy)) %>%
  filter(term == "format:delayed_memory") %>%
  select(-term) %>%
  mutate(p.adj = p.adjust(p.value, method = "holm"))

summary_by_item_mem %>%
  mutate(across(
    starts_with("p"),
    papaja::printnum
  )) %>%
  kable(digits = 2, booktabs = T) %>%
  kable_styling()
```

Pairwise t-tests for significant ANOVAs

Here we identify the specific items with significant differences.

```
sig_item_mem = summary_by_item_mem %>%  
  filter(p.value < .05)
```

```
sig_item_mem = sig_item_mem$item  
sig_item_mem
```

```
## [1] "outgoing"      "warm"          "responsible"   "imaginative"  
## [5] "talkative"    "sophisticated"
```

Outgoing

```
outgoing_model_mem = item_timing %>%  
  filter(item == "outgoing") %>%  
  lmer(seconds_log~format*delayed_memory + (1|proid),  
        data = .)
```

```
plot_model(outgoing_model_mem, type = "pred", terms = c("format", "delayed_memory[meansd]"))
```

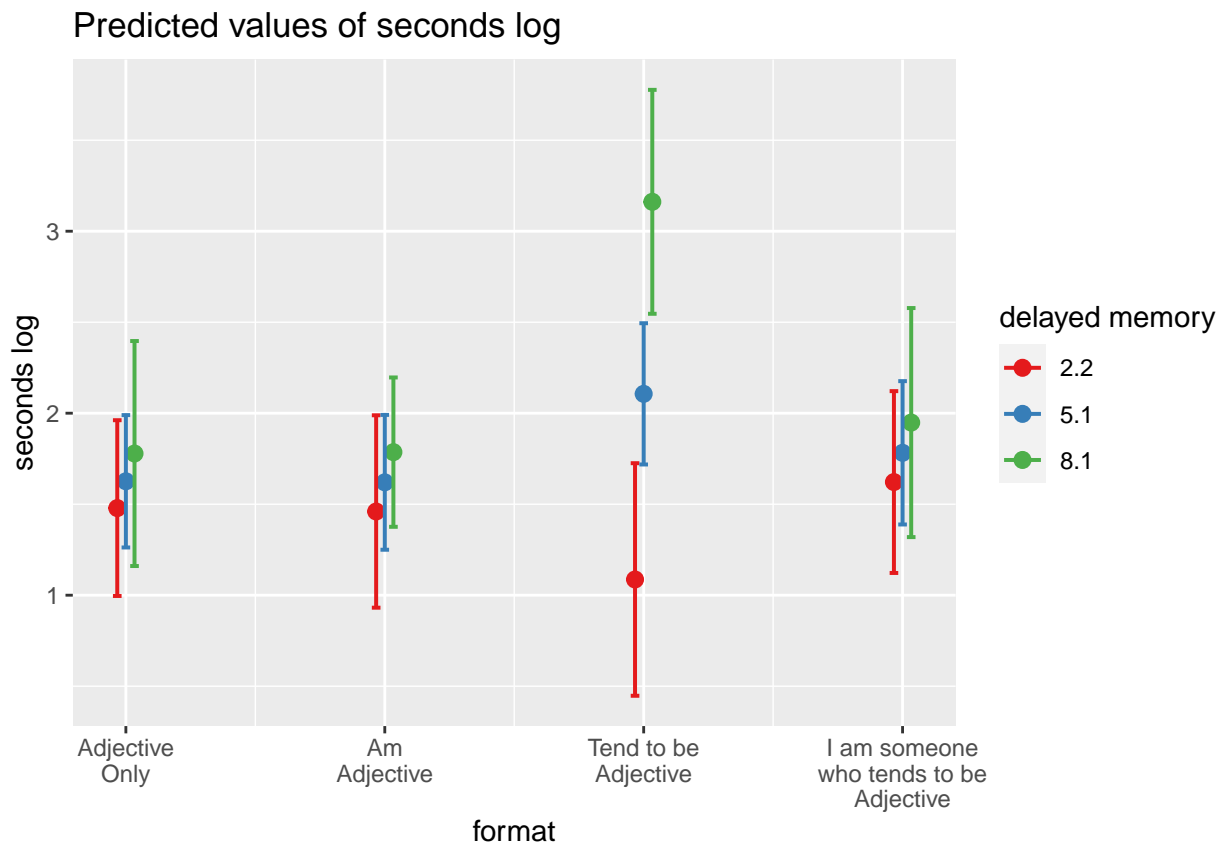


Figure 35: Average log-seconds to “outgoing” by format (Block 1 and Block 2)

Warm

```
warm_model_mem = item_timing %>%  
  filter(item == "warm") %>%  
  lmer(seconds_log~format*delayed_memory + (1|proid),  
        data = .)
```

```
plot_model(warm_model_mem, type = "pred", terms = c("format", "delayed_memory[meansd]"))
```

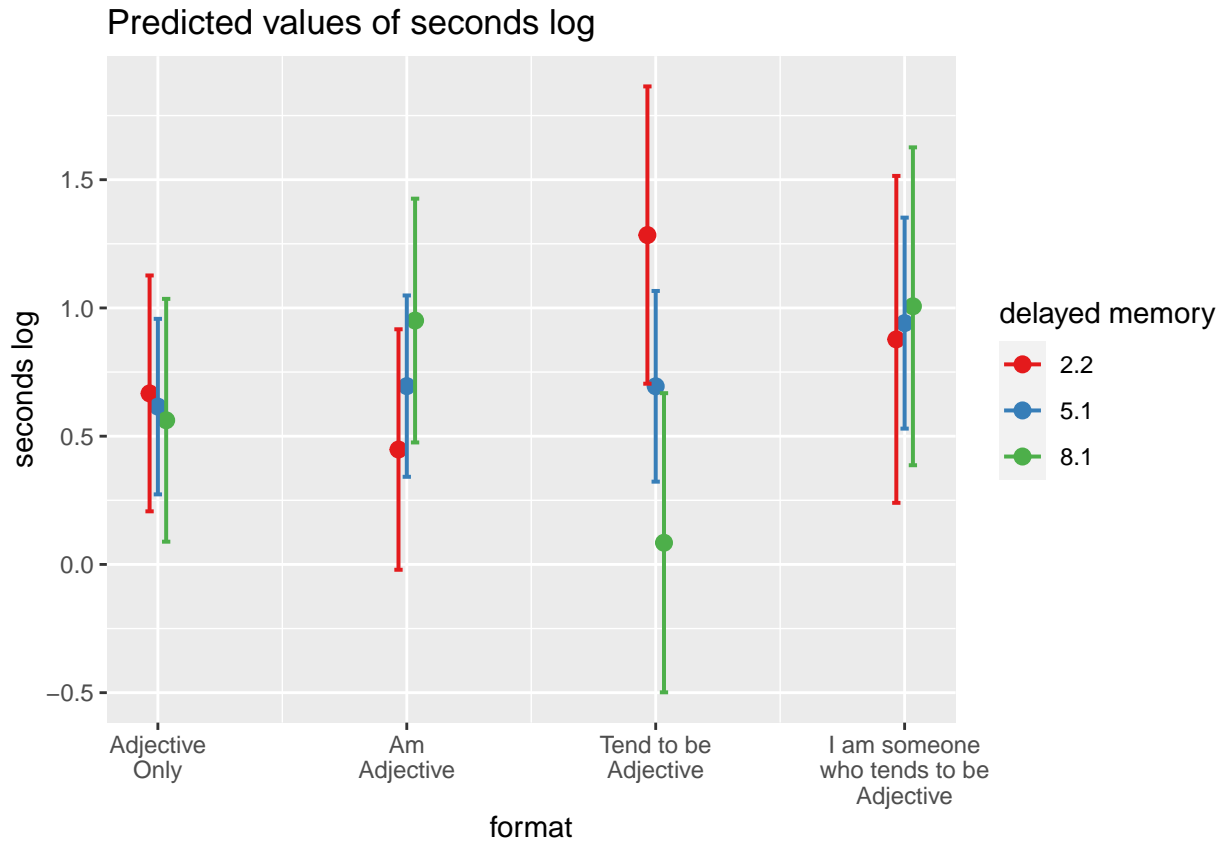


Figure 36: Average log-seconds to “warm” by format (Block 1 and Block 2)

Responsible

```
responsible_model_mem = item_timing %>%  
  filter(item == "responsible") %>%  
  lmer(seconds_log~format*delayed_memory + (1|proid),  
        data = .)
```

```
plot_model(responsible_model_mem, type = "pred", terms = c("format", "delayed_memory[meansd]"))
```

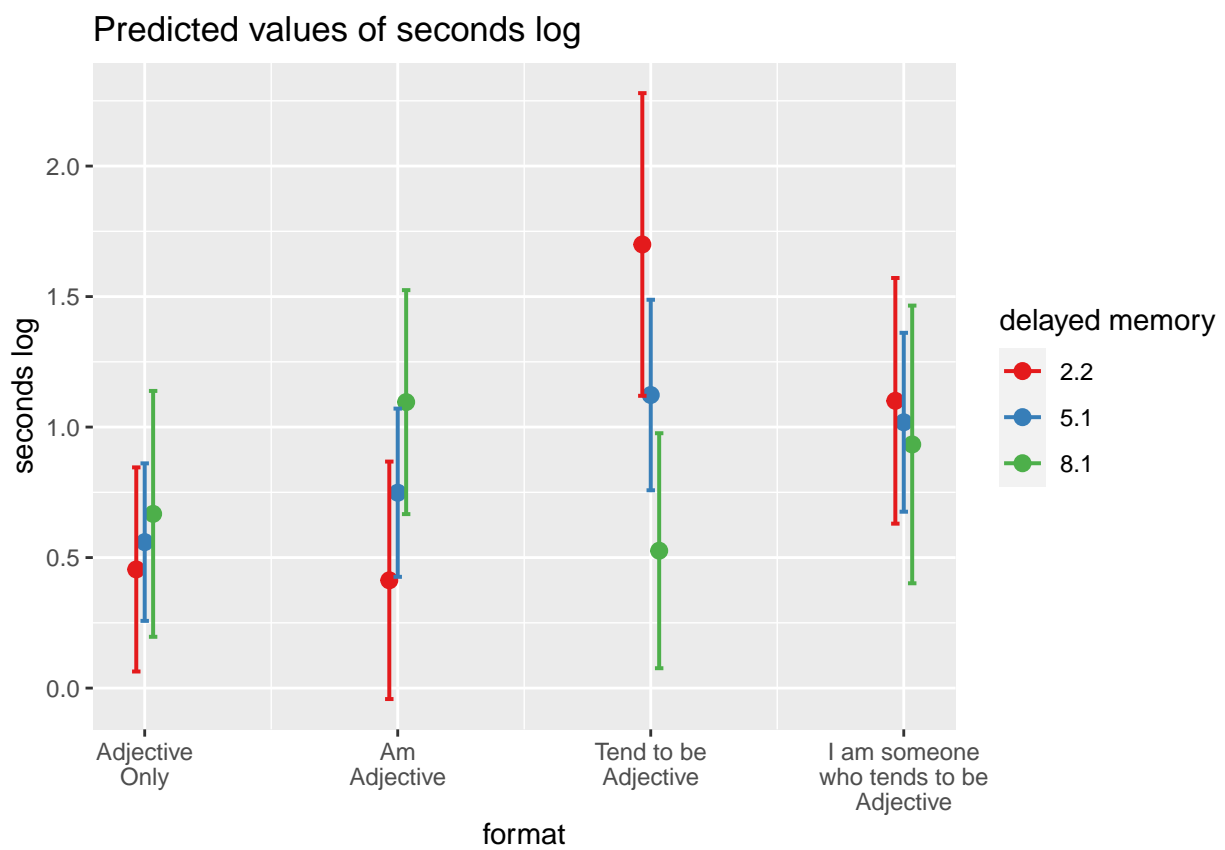


Figure 37: Average log-seconds to “responsible” by format (Block 1 and Block 2)

Imaginative

```
imaginative_model_mem = item_timing %>%  
  filter(item == "imaginative") %>%  
  lmer(seconds_log~format*delayed_memory + (1|proid),  
        data = .)
```

```
plot_model(imaginative_model_mem, type = "pred", terms = c("format", "delayed_memory[meansd]"))
```

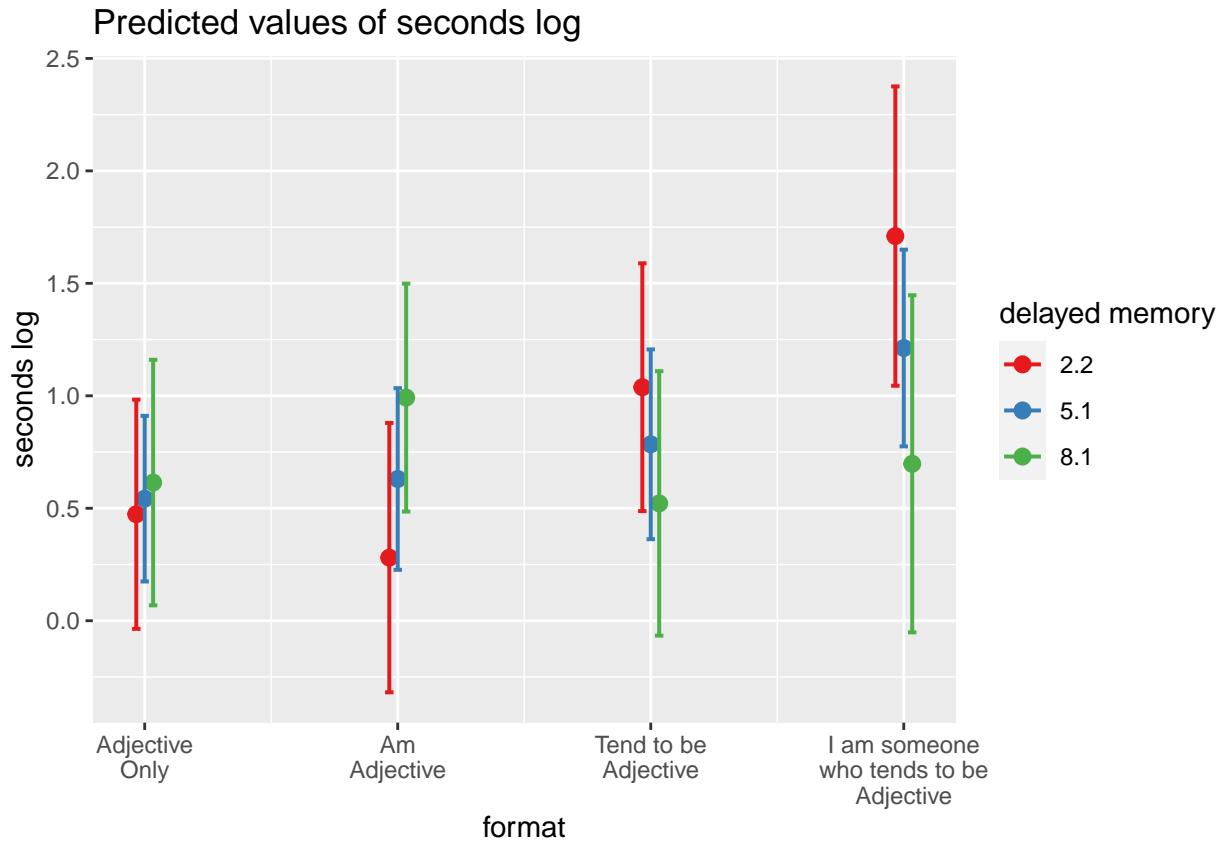


Figure 38: Average log-seconds to “imaginative” by format (Block 1 and Block 2)

Talkative

```
talkative_model_mem = item_timing %>%  
  filter(item == "talkative") %>%  
  lmer(seconds_log~format*delayed_memory + (1|proid),  
        data = .)
```

```
plot_model(talkative_model_mem, type = "pred", terms = c("format", "delayed_memory[meansd]"))
```

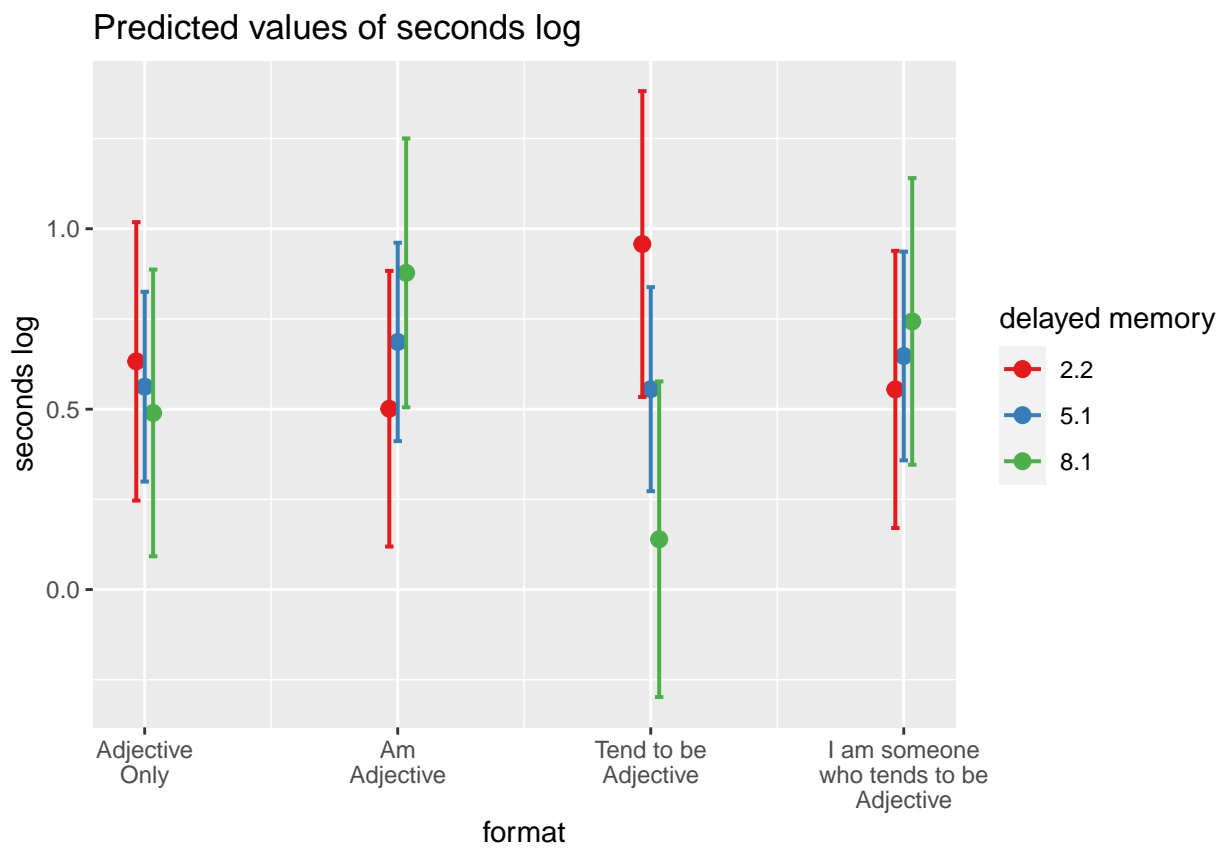


Figure 39: Average log-seconds to “talkative” by format (Block 1 and Block 2)

Sophisticated

```
sophisticated_model_mem = item_timing %>%  
  filter(item == "sophisticated") %>%  
  lmer(seconds_log~format*delayed_memory + (1|proid),  
        data = .)
```

```
plot_model(sophisticated_model_mem, type = "pred", terms = c("format", "delayed_memory[meansd]"))
```

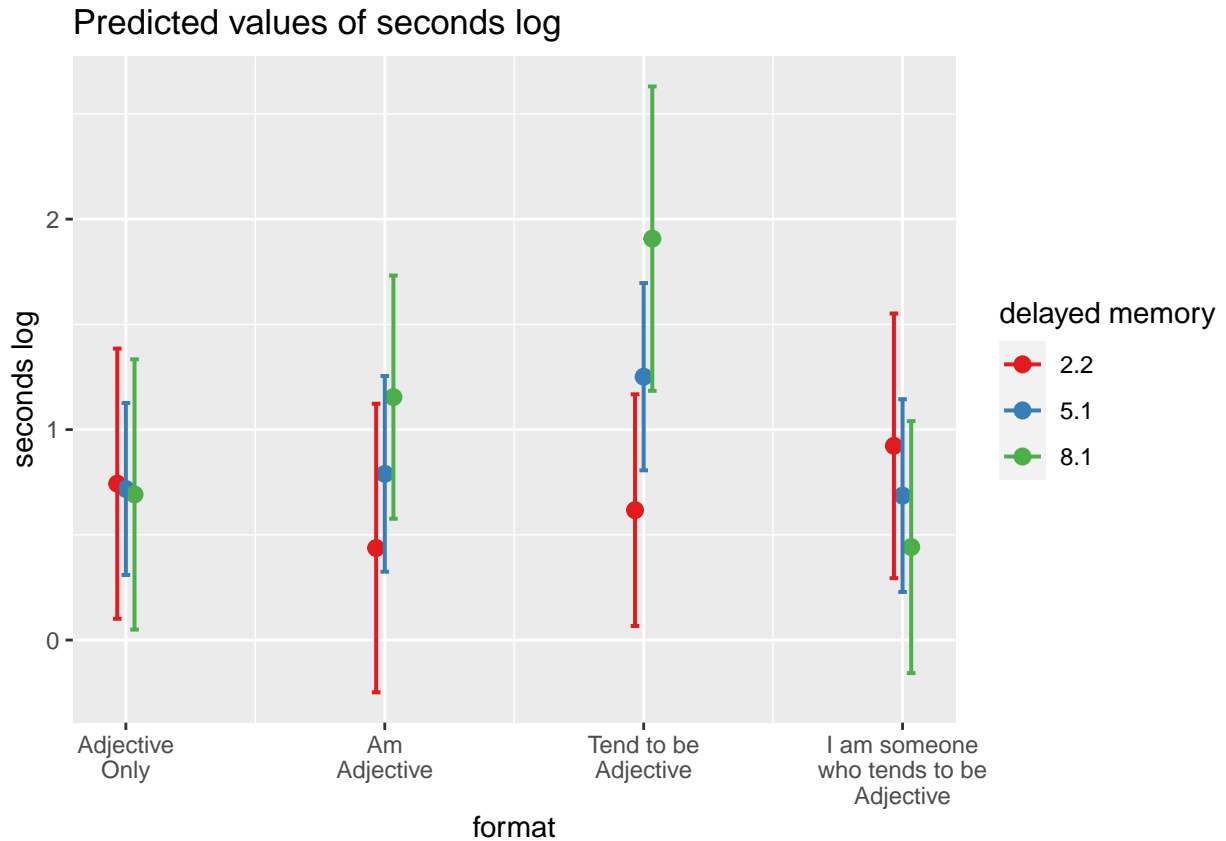


Figure 40: Average log-seconds to “sophisticated” by format (Block 1 and Block 2)

How does device type affect means and timing of responses?

Workspace

```
library(here) # for working with files
library(tidyverse) # for cleaning
library(janitor) # for variable names
library(lme4) # for multilevel modeling
library(lmerTest) # for df and p-values
library(emmeans) # for pairwise comparisons
library(sjPlot) # for figures
library(ggpubr) # for prettier plots
library(kableExtra) # for nicer tables
```

Data prep: item responses

First we select the responses to the items of different formats. For this set of analyses, we use data collected in both Block 1 and Block 2 – that is, each participant saw the same format for every item during Block 1, but a random format for each item in Block 2.

These variable names have one of two formats: `[trait]_[abcd]` (for example, `talkative_a`) or `[trait]_[abcd]_2` (for example, `talkative_a_2`). We search for these items using regular expressions.

```
items_seen_b1b2 = str_subset(
  names(data),
  "^[[:alpha:]]+_[abcd](_2)?$"
)

item_responses = data %>%
  select(proid, all_of(items_seen_b1b2), devicetype)
```

Next we reshape these data into long form.

```
item_responses = item_responses %>%
  gather(item, response, -proid, -devicetype) %>%
  mutate(
    block = case_when(
      str_detect(item, "_2") ~ "2",
      TRUE ~ "1"),
    item = str_remove(item, "_2")) %>% # remove block id from item string
  separate(item, into = c("item", "format")) %>%
  filter(!is.na(response))
```

We give labels to the formats, to clarify interpretations and aid table and figure construction.

```
item_responses$format = as.factor(item_responses$format)
item_responses$format = relevel(item_responses$format, ref = "a")
item_responses$format = factor(item_responses$format,
  levels = c("a", "b", "c", "d"),
  labels = c("Adjective\nOnly", "Am\nAdjective", "Tend to be\nAdjective",
```

Data prep: item timing

We also prepare a dataframe to examine the amount of time needed to respond to items. These variable names have one of two formats: `t_[trait]_[abcd]_page_submit` (for example, `t_talkative_a_page_submit`) or `t_[trait]_[abcd]_2_page_submit` (for example, `t_talkative_a_2_page_submit`). We search for these items using regular expressions.

```
item_timing = str_subset(
  names(data),
  "^t_([[:alpha:]]+)_([abcd])_(2_)?page_submit$"
)

item_timing = data %>%
  select(proid, all_of(item_timing), devicetype)
```

Next we reshape these data into long form.


```
item_timing = item_timing %>%
  gather(item, seconds, -proid, -devicetype) %>%
  mutate(item = str_remove(item, "^t_"),
         item = str_remove(item, "_2"),
         item = str_remove(item, "_page_submit$")) %>%
  separate(item, into = c("item", "format")) %>%
  filter(!is.na(seconds))
```

Seconds appears to be strongly skewed, so we log-transform this variable.

```
item_timing = item_timing %>%
  mutate(seconds_log = log(seconds))

item_timing %>%
  select(contains("seconds")) %>%
  gather(variable, value) %>%
  mutate(variable = factor(variable,
                          levels = c("seconds", "seconds_log"),
                          labels = c("Seconds (raw)", "Log Seconds")))) %>%

  ggplot(aes(x = value)) +
  geom_histogram(bins = 100) +
  facet_wrap(~variable, scales = "free") +
  labs(x = NULL, y = "Count") +
  theme_pubr()
```

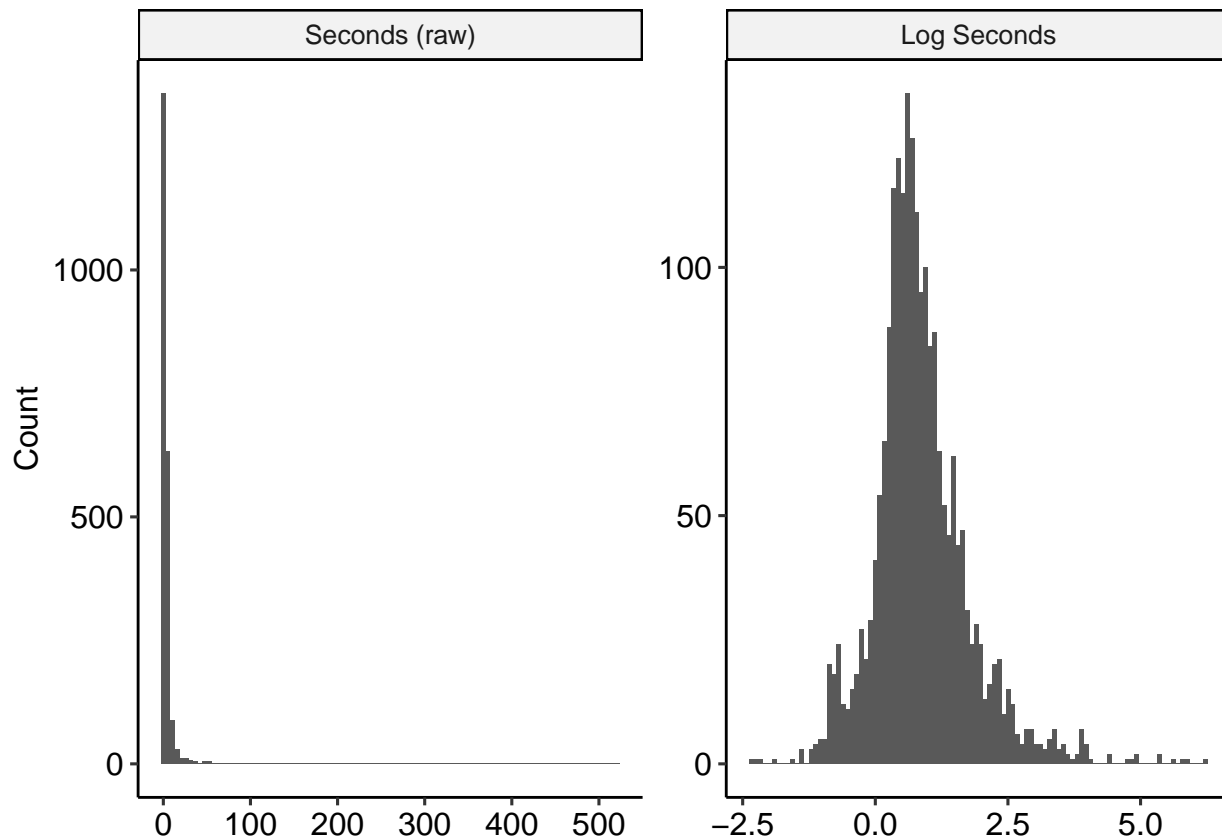

We give labels to the formats, to clarify interpretations and aid table and figure construction.

```
item_timing$format = as.factor(item_timing$format)
item_timing$format = relevel(item_timing$format, ref = "a")
item_timing$format = factor(item_timing$format,
                             levels = c("a","b","c","d"),
                             labels = c("Adjective\nOnly", "Am\nAdjective", "Tend to be\nAdjective",
```

Responses

Response by device

We used a multilevel model, nesting response within participant to account for dependence. Our primary predictor was device format

```
mod.response = lmer(response~devicetype + (1|proid),
                     data = item_responses)
anova(mod.response)
```

```
## Type III Analysis of Variance Table with Satterthwaite's method
##              Sum Sq Mean Sq NumDF DenDF F value Pr(>F)
## devicetype    4.008   2.004     2    32  1.1793 0.3205
```

```
plot1 = plot_model(mod.response, type = "pred")

plot1$devicetype +
  labs(x = NULL,
       y = "Average response",
       title = "Average responses by device") +
  theme_pubclean()
```

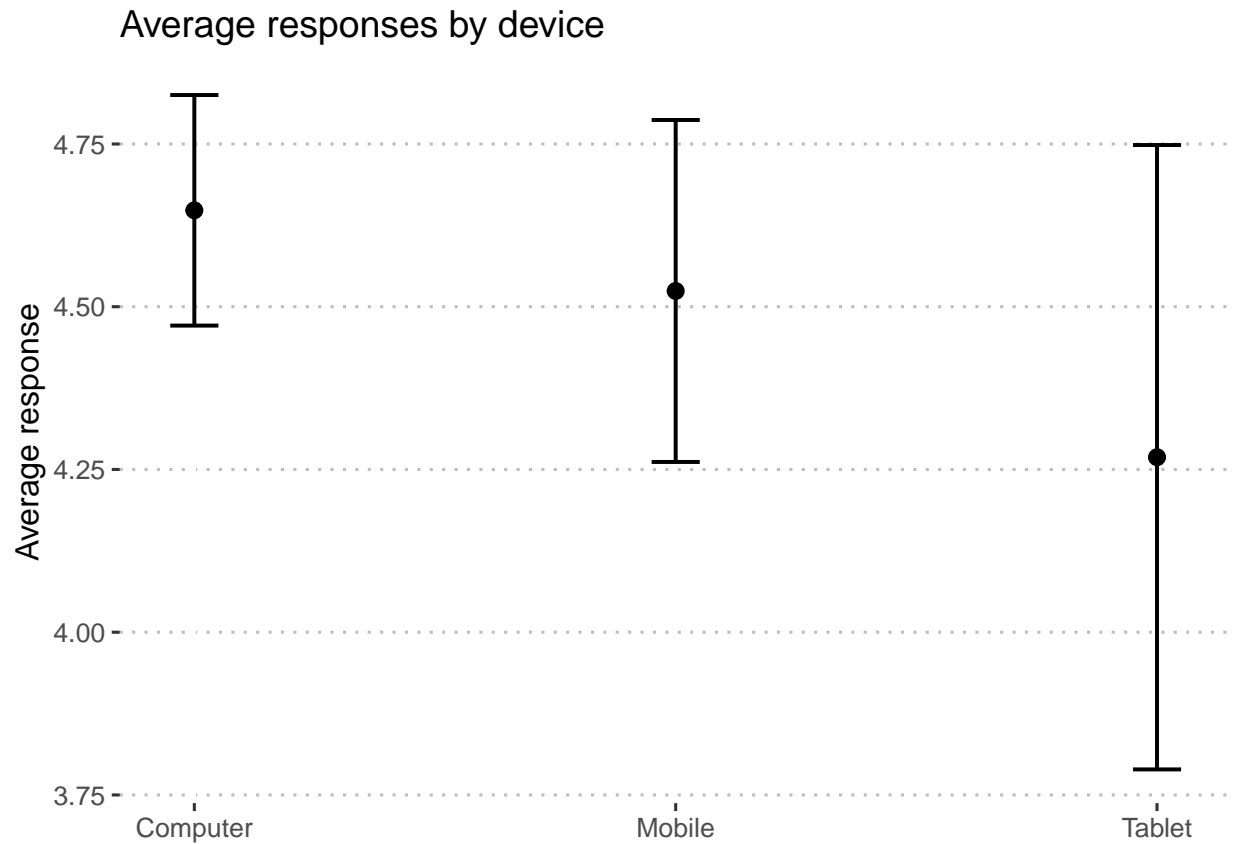


Figure 41: Predicted response on personality items by condition.

```
means_by_group = item_responses %>%
  group_by(devicetype) %>%
  summarise(m = mean(response),
            s = sd(response))

item_responses %>%
  ggplot(aes(x = response)) +
  geom_histogram(aes(fill = block),
                position = "dodge",
                bins = 6, color = "white") +
  geom_vline(aes(xintercept = m),
             data = means_by_group) +
  facet_wrap(~devicetype, scales = "free_y") +
  #guides(fill = "none") +
  scale_x_continuous(breaks = 1:6) +
```

```
labs(y = "Number of participants",
     title = "Distribution of responses by format") +
theme_pubr()
```

Distribution of responses by format

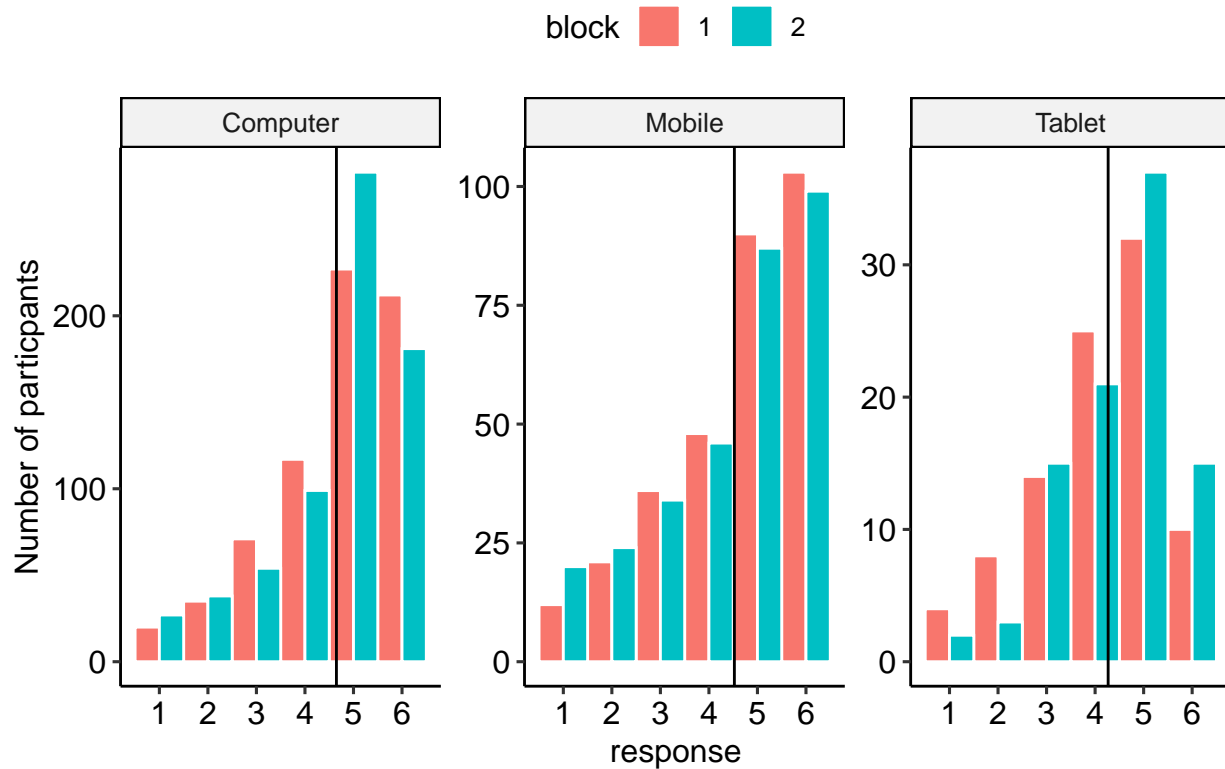


Figure 42: Distribution of responses by category

Device by format

```
mod.response2 = lmer(response~devicetype*format + (1|proid),
                      data = item_responses)
anova(mod.response2)
```

```
## Type III Analysis of Variance Table with Satterthwaite's method
##               Sum Sq Mean Sq NumDF   DenDF F value    Pr(>F)
## devicetype      2.4435  1.2217     2    33.06  0.7204 0.49405
## format          5.0203  1.6734     3   2030.62  0.9867 0.39803
## devicetype:format 18.9498  3.1583     6   2033.40  1.8622 0.08374 .
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```

```
plot2 = plot_model(mod.response2, type = "pred", terms = c("format", "devicetype"))
```



```
plot2 +
  labs(x = NULL,
       y = "Average response",
       title = "Average responses by device") +
  theme_pubclean()
```

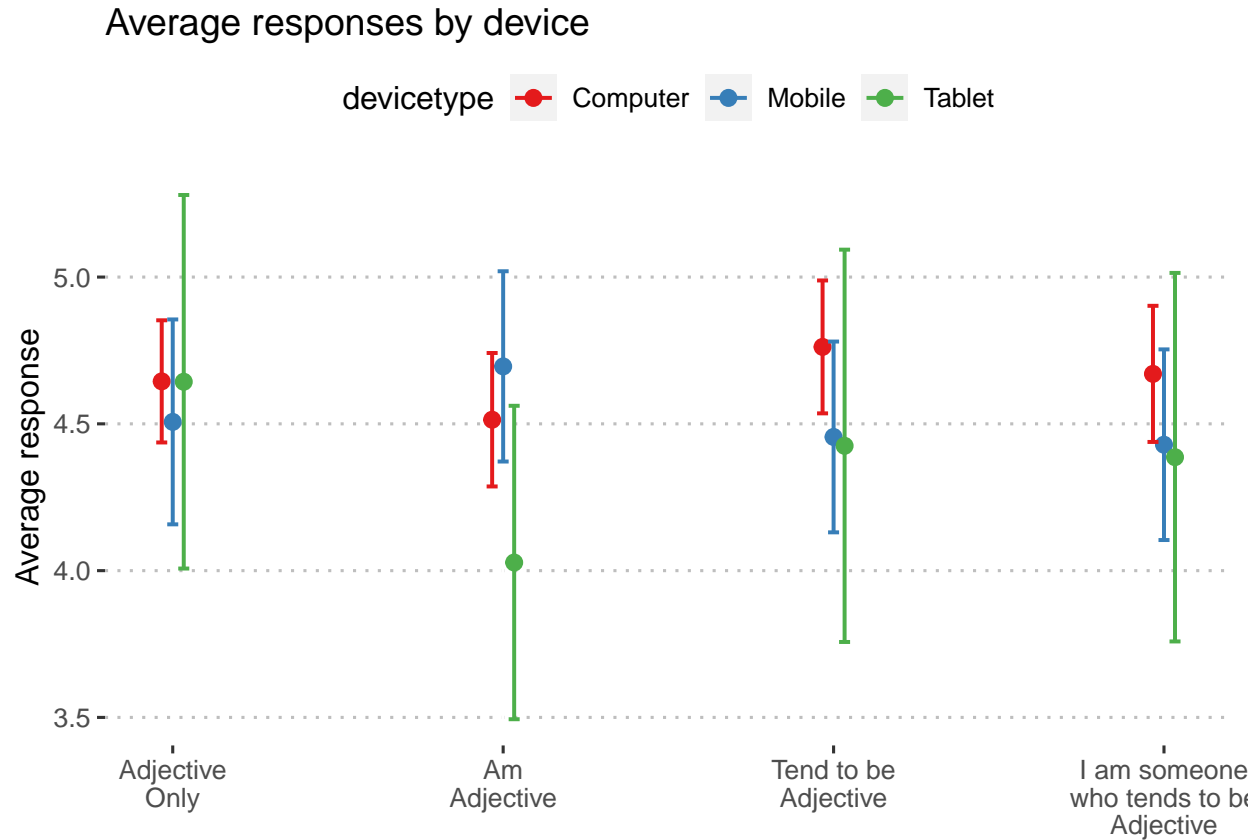


Figure 43: Predicted response on personality items by condition.

Timing

Timing by device

We used a multilevel model, nesting seconds within participant to account for dependence. Our primary predictor was format.

```
mod.timing = lmer(seconds_log~devicetype + (1|proid),
                  data = item_timing)
anova(mod.timing)
```

```
## Type III Analysis of Variance Table with Satterthwaite's method
##               Sum Sq Mean Sq NumDF DenDF F value Pr(>F)
## devicetype  2.8619  1.4309     2    32  2.0649 0.1434
```

```
plot1 = plot_model(mod.timing, type = "pred")

plot1$devicetype +
  labs(x = NULL,
       y = "Seconds (log)",
       title = "Average seconds time by device type") +
  theme_pubclean()
```

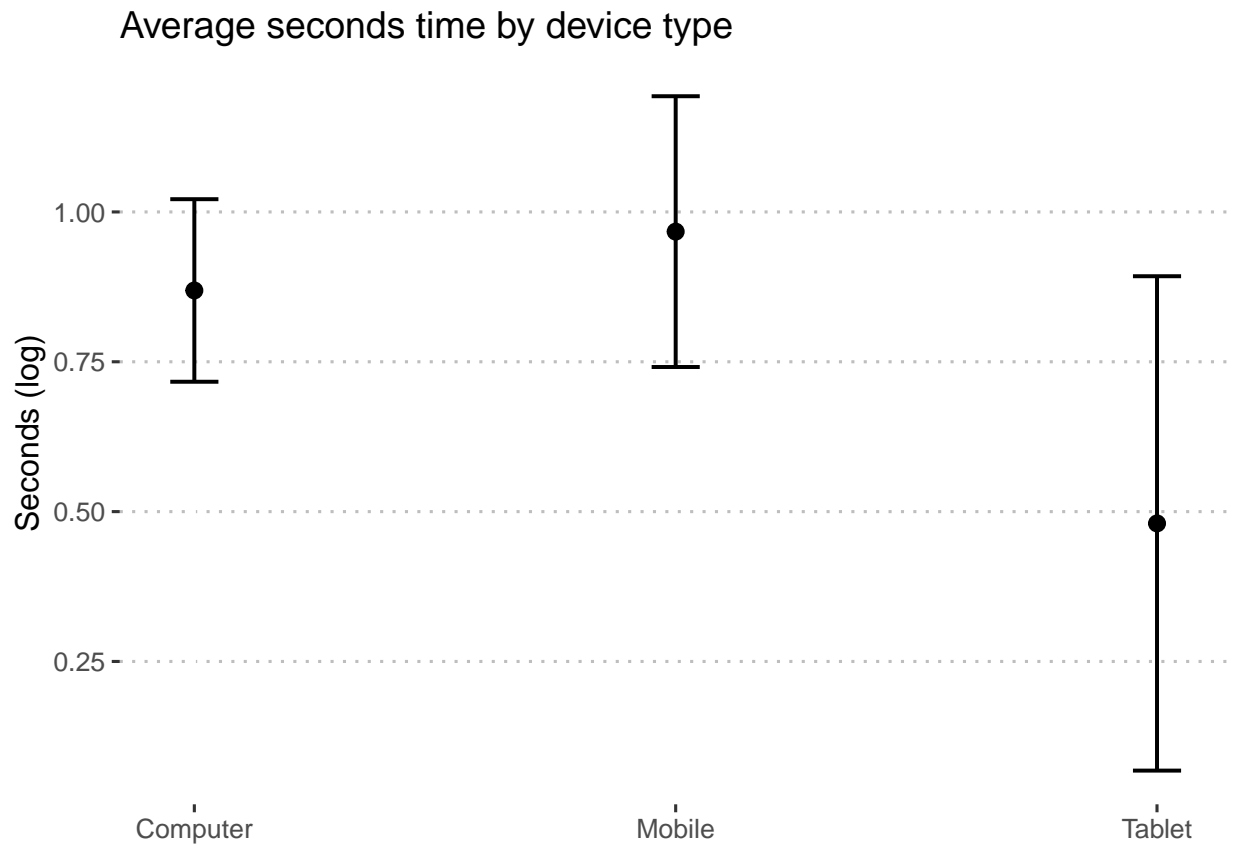


Figure 44: Predicted seconds on personality items by condition.

```
means_by_group = item_timing %>%
  group_by(devicetype) %>%
  summarise(m = mean(seconds),
            s = sd(seconds))

item_timing %>%
  ggplot(aes(x = seconds, fill = devicetype)) +
  geom_histogram(bins = 100) +
  geom_vline(aes(xintercept = m), data = means_by_group) +
  facet_wrap(~devicetype, scales = "free_y") +
  guides(fill = "none") +
  scale_x_log10() +
  labs(y = "Number of participants",
       title = "Distribution of seconds by format",
       x = "Seconds (logarithmic scale)") +
```

```
theme_pubr()
```

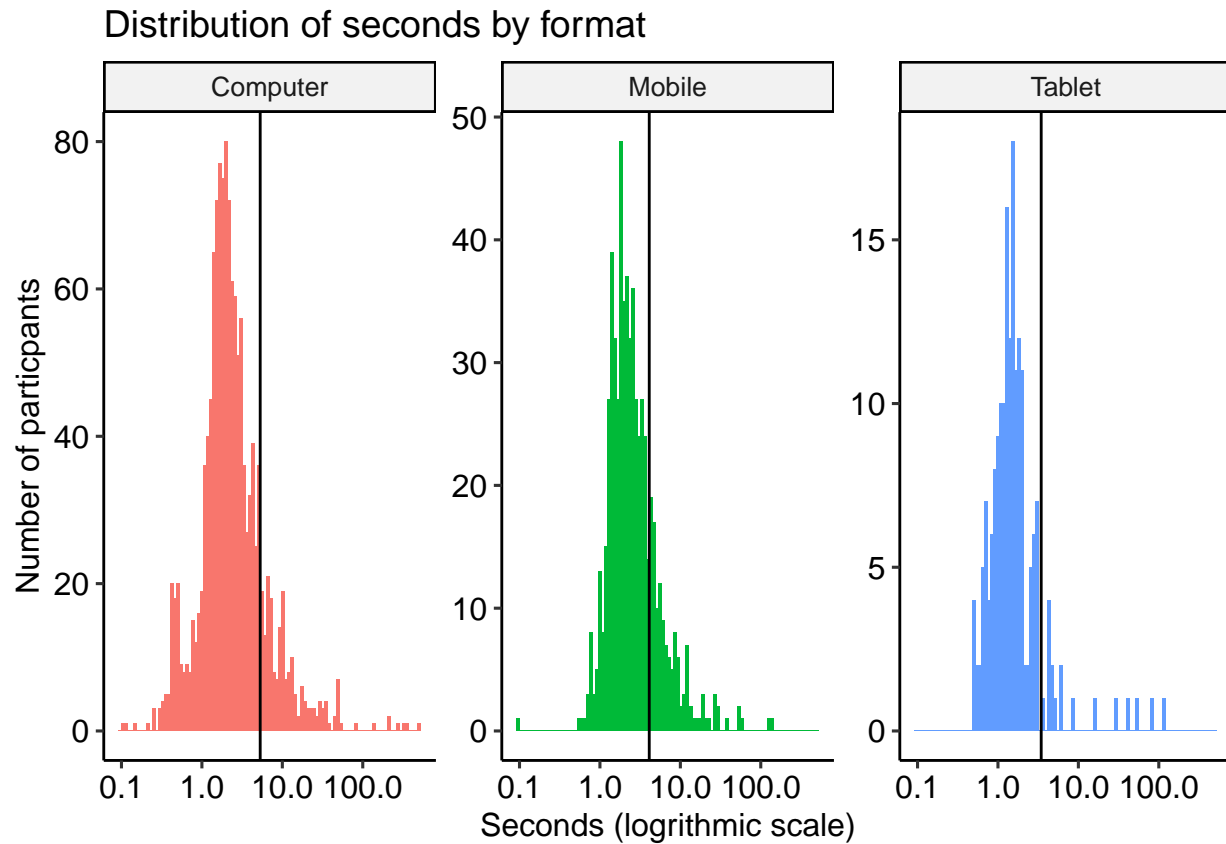


Figure 45: Distribution of secondss by category

Device by format

```
mod.timing2 = lmer(seconds_log~devicetype*format + (1|proid),
  data = item_timing)
anova(mod.timing2)
```

```
## Type III Analysis of Variance Table with Satterthwaite's method
##              Sum Sq Mean Sq NumDF   DenDF F value    Pr(>F)
## devicetype      3.4339  1.7170     2    32.31  2.5424 0.0943136 .
## format          12.5878  4.1959     3   2138.42  6.2132 0.0003366 ***
## devicetype:format 14.5245  2.4208     6   2142.58  3.5846 0.0015414 **
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```

```
plot1 = plot_model(mod.timing2, type = "pred", terms = c("format", "devicetype"))

plot1 +
  labs(x = NULL,
```

```

y = "Seconds (log)",
title = "Average seconds time by device type") +
theme_pubclean()

```

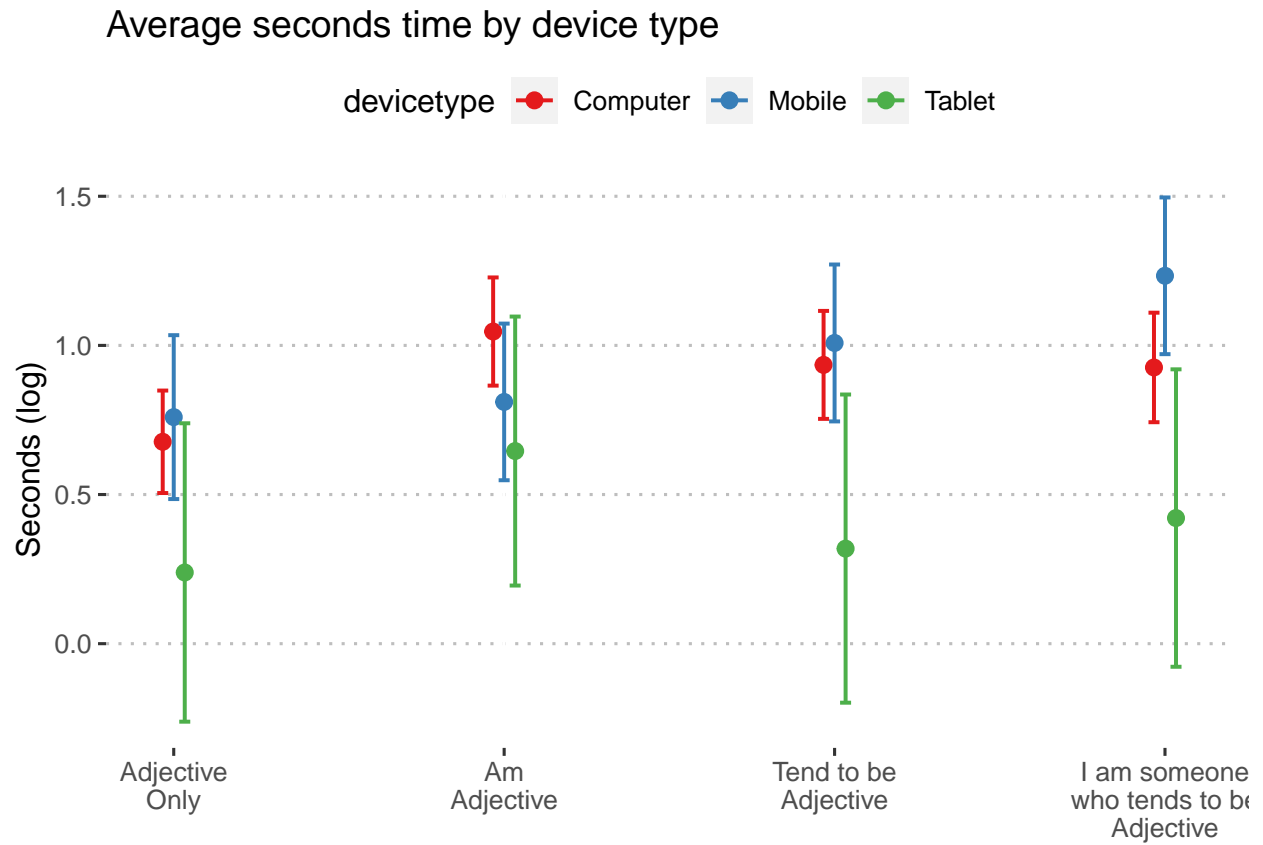


Figure 46: Predicted seconds on personality items by condition.