


cansas1d SASprocess

From canSAS

block diagrams

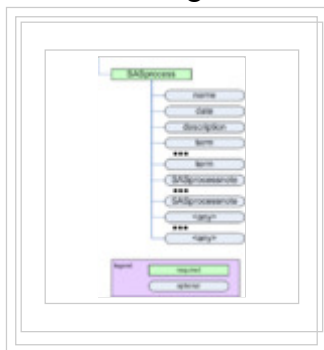

■ parent: SASentry

Name	Type	occurrence	Description	Attributes
<i>name</i>	string	[0..1]	Optional name for this data processing or analysis step.	
<i>date</i>	string	[0..1]	Optional date for this data processing or analysis step. Use a format which is easily machine-readable such as "yyyy-mm-dd hh:mm:ss" The format for the date string may be specified at a later date.	
<i>description</i>	string	[0..1]	Optional description for this data processing or analysis step.	
<i>term</i>	string	[0..unbounded]	This is used to specify the value of a single variable, parameter, or term (while defined here as a string, it could be a number) related to the SASprocess step.	unit ="{unit}"
<i>SASprocessnote</i>	container	[1..unbounded]	This element is used to describe anything about SASprocess that is not already described.	
<i>{any}</i>	container	[0..unbounded]	Any element(s) not defined in the cansas1d/1.0 standard can be placed at this point. See <i>{any}</i> for more details.	xmlns:{foreign-prefix} ="{foreign-namespace}"

SASprocessnote

Name	Type	occurrence	Description	Attributes
<i>{any}</i>	container	[0..unbounded]	Any element(s) not defined in the cansas1d/1.0 standard can be placed at this point. See <i>{any}</i> for more details.	<i>xmlns:{foreign-prefix}="{foreign-namespace}"</i>

Retrieved from "http://www.smallangles.net/wgwiki/index.php/cansas1d_SASprocess"

- This page was last modified 03:10, 9 December 2008.