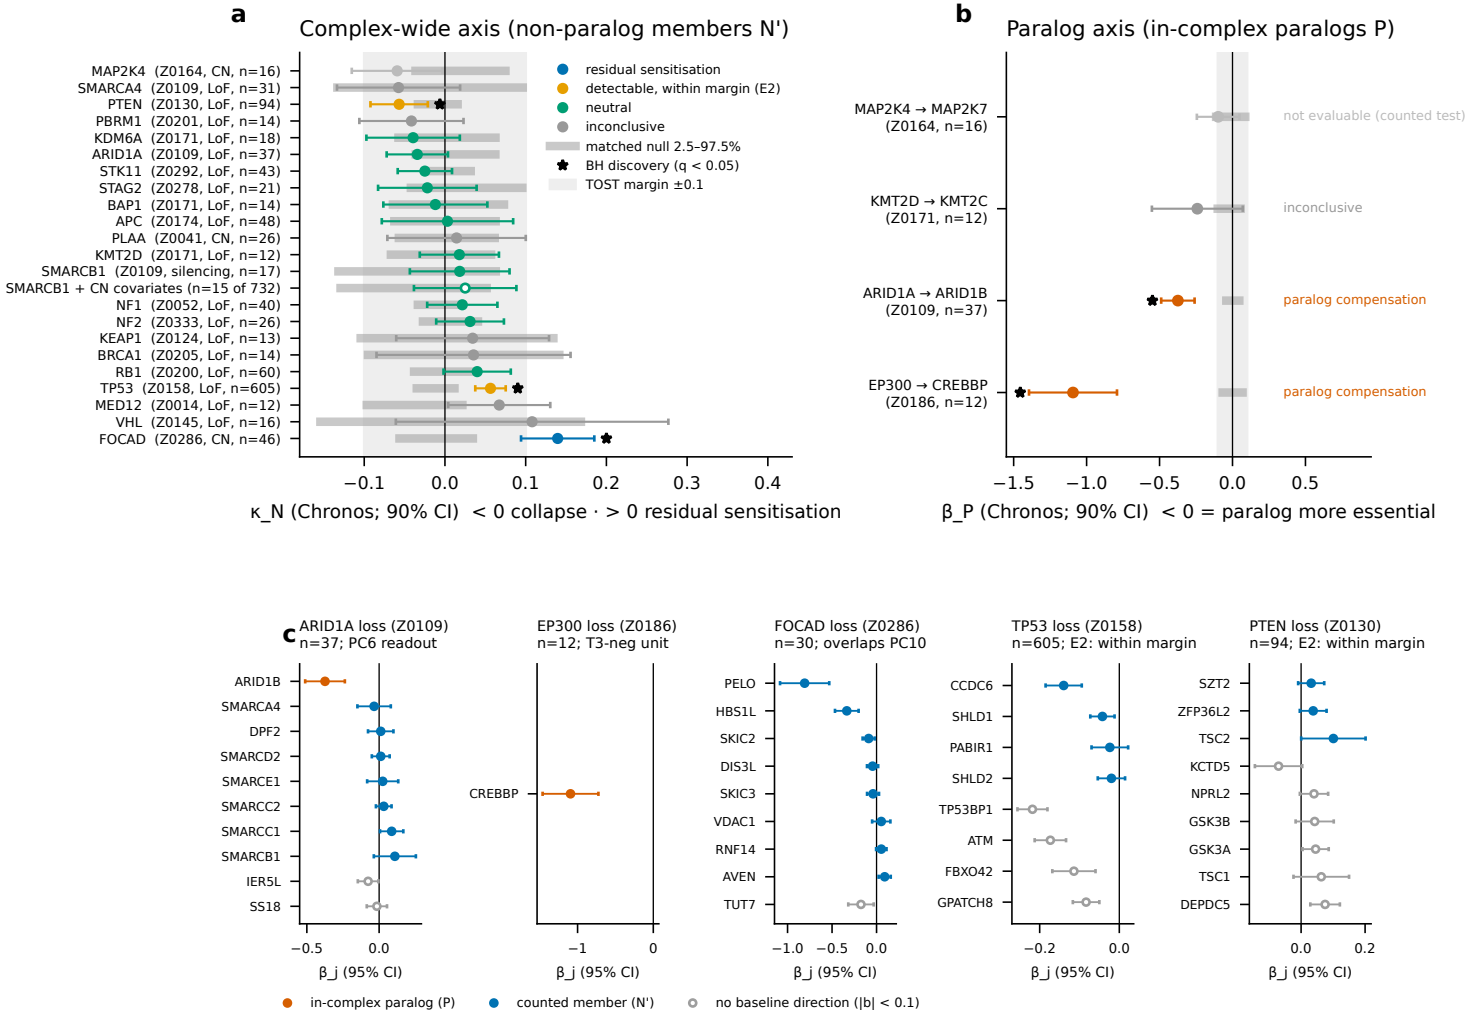
a
Complex-wide axis (non-paralog members N')
MAP2K4 (Z0164, CN, n=16)
SMARCA4 (Z0109, LoF, n=31)
PTEN (Z0130, LoF, n=94)
PBRM1 (Z0201, LoF, n=14)
KDM6A (Z0171, LoF, n=18)
ARID1A (Z0109, LoF, n=37)
STK11 (Z0292, LoF, n=43)
STAG2 (Z0278, LoF, n=21)
BAP1 (Z0171, LoF, n=14)
APC (Z0174, LoF, n=48)
PLAA (Z0041, CN, n=26)
KMT2D (Z0171, LoF, n=12)
SMARCB1 (Z0109, silencing, n=17)
SMARCB1 + CN covariates (n=15 of 732)
NF1 (Z0052, LoF, n=40)
NF2 (Z0333, LoF, n=26)
KEAP1 (Z0124, LoF, n=13)
BRCA1 (Z0205, LoF, n=14)
RB1 (Z0200, LoF, n=60)
TP53 (Z0158, LoF, n=605)
MED12 (Z0014, LoF, n=12)
VHL (Z0145, LoF, n=16)
FOCAD (Z0286, CN, n=46)
residual sensitisation
detectable, within margin (E2)
neutral
inconclusive
matched null 2.5–97.5%
BH discovery (q < 0.05)
TOST margin ±0.1
−0.1 0.0 0.1 0.2 0.3 0.4
κ_N (Chronos; 90% CI) < 0 collapse · > 0 residual sensitisation
b
Paralog axis (in-complex paralogs P)
MAP2K4 → MAP2K7 (Z0164, n=16)
KMT2D → KMT2C (Z0171, n=12)
ARID1A → ARID1B (Z0109, n=37)
EP300 → CREBBP (Z0186, n=12)
not evaluable (counted test)
inconclusive
paralog compensation
paralog compensation
−1.5 −1.0 −0.5 0.0 0.5
β_P (Chronos; 90% CI) < 0 = paralog more essential
c
ARID1A loss (Z0109) n=37; PC6 readout
EP300 loss (Z0186) n=12; T3-neg unit
FOCAD loss (Z0286) n=30; overlaps PC10
TP53 loss (Z0158) n=605; E2: within margin
PTEN loss (Z0130) n=94; E2: within margin
ARID1B
SMARCA4
DPF2
SMARCD2
SMARCE1
SMARCC2
SMARCC1
SMARCB1
IER5L
SS18
CREBBP
PELO
HBS1L
SKIC2
DIS3L
SKIC3
VDAC1
RNF14
AVEN
TUT7
CCDC6
SHLD1
PABIR1
SHLD2
TP53BP1
ATM
FBXO42
GPATCH8
SZT2
ZFP36L2
TSC2
KCTD5
NPRL2
GSK3B
GSK3A
TSC1
DEPDC5
β_j (95% CI)
in-complex paralog (P)
counted member (N')
no baseline direction (|b| < 0.1)
β_j: member coefficient of loss (A, Chronos; < 0 = member more essential in loss lines). Gene-level control readouts on A (own contexts, Table S1):
PC6 ARID1B in LoF:ARID1A: β -0.38 (one-sided p 8e-07); PC10 PELO in FOCAD_del_or_MSI_H: β -0.66 (one-sided p 1e-06); PC10 HBS1L in FOCAD_del_or_MSI_H: β -0.21 (one-sided p 0.0002)
d
H1, 24 events: complex-wide labels + 2 paralog calls
paralog compensation (paralog axis) 2
residual sensitisation 1
collapse 0
detectable, within margin (E2) 2
neutral 11
inconclusive 6
inconclusive (null unavailable) 1
not evaluable (counted test) 1
not evaluable (|N'| < 2) 2
Events
e
H1S (317 events, exploratory)
paralog compensation (paralog axis) 0
residual sensitisation 0
collapse 20
detectable, within margin (E2) 4
neutral 191
inconclusive 45
inconclusive (null unavailable) 13
not evaluable (counted test) 27
not evaluable (|N'| < 2) 17
Events