Section 5 : Nmap & Lua (NSE Scripts)

Task 5.1: Basic Nmap Scanning

1.Basic ping scan

Command: *nmap -sn scanme.nmap.org*

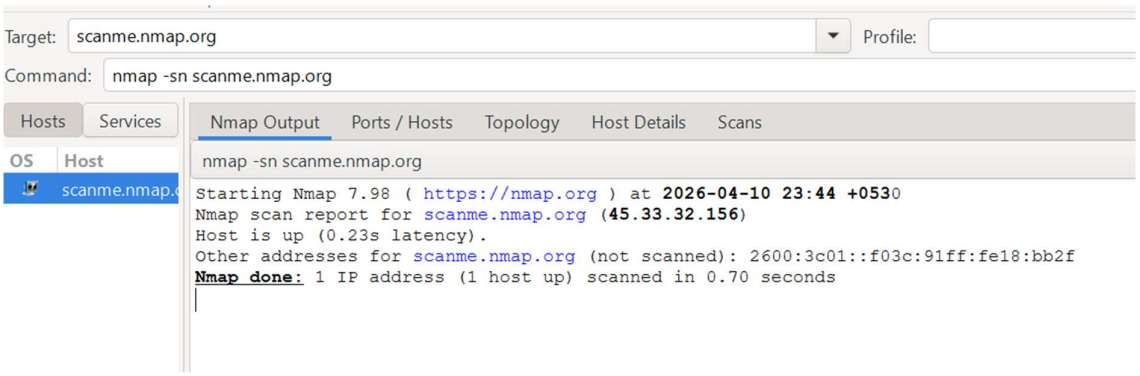

This scan checks if the target system is online without scanning any ports. The result shows that scanme.nmap.org is up and reachable.

2.TCP SYN scan on top 100 ports

Command: *nmap -sS scanme.nmap.org*

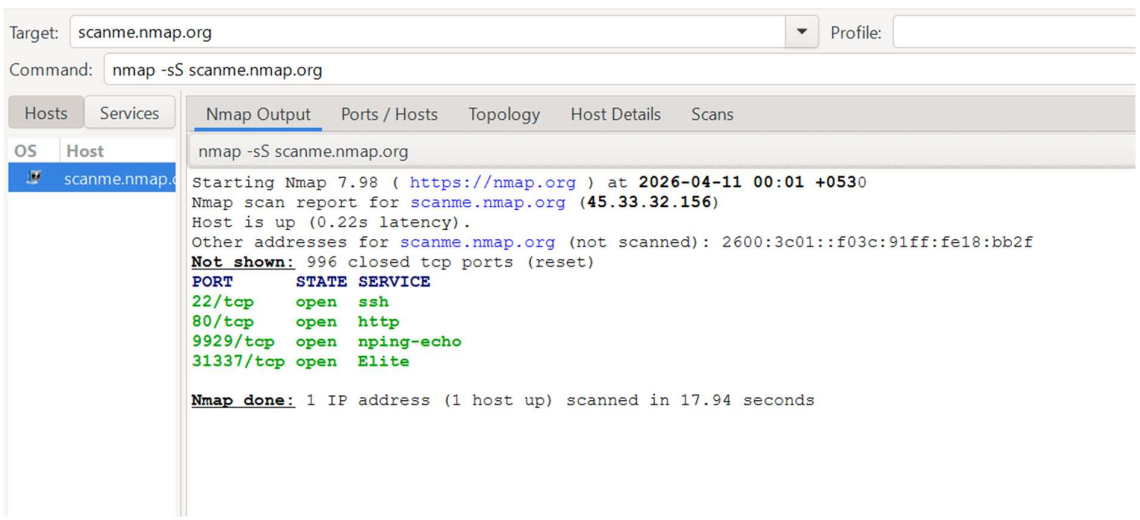

This scan checks common ports using a TCP SYN scan. It is a fast and stealthy scan used to find open ports. The result shows that ports 22, 80, 9929, and 31337 are open on the target system.

3.Service version detection on port 80

Command: *nmap -sV -p 80 scanme.nmap.org*

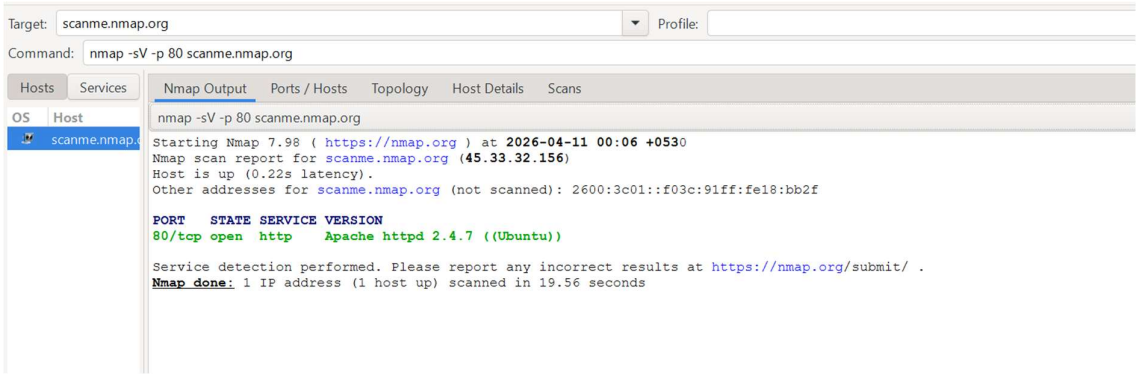

This scan detects the service and version running on port 80. The result shows that an HTTP web server is running on port 80 of the target system.

4.OS detection scan 5

Command: *nmap -O scanme.nmap.org*

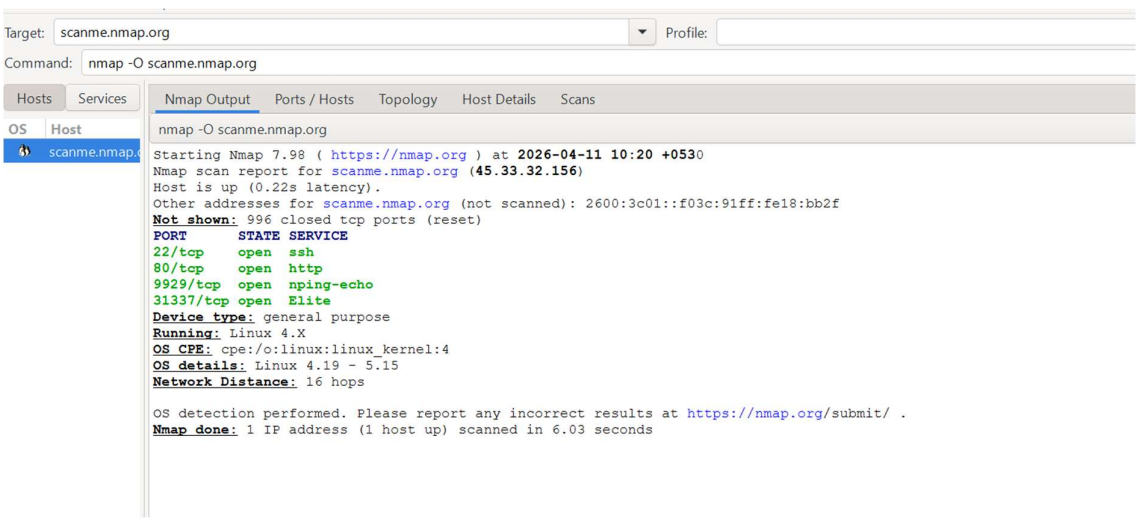

This scan attempts to identify the operating system of the target system. The result shows that the target is likely running Linux (kernel version 4.x / 4.19–5.15). It also detected the device type as a general-purpose system.

5.Scan using default NSE scripts

Command: *nmap -sC scanme.nmap.org*

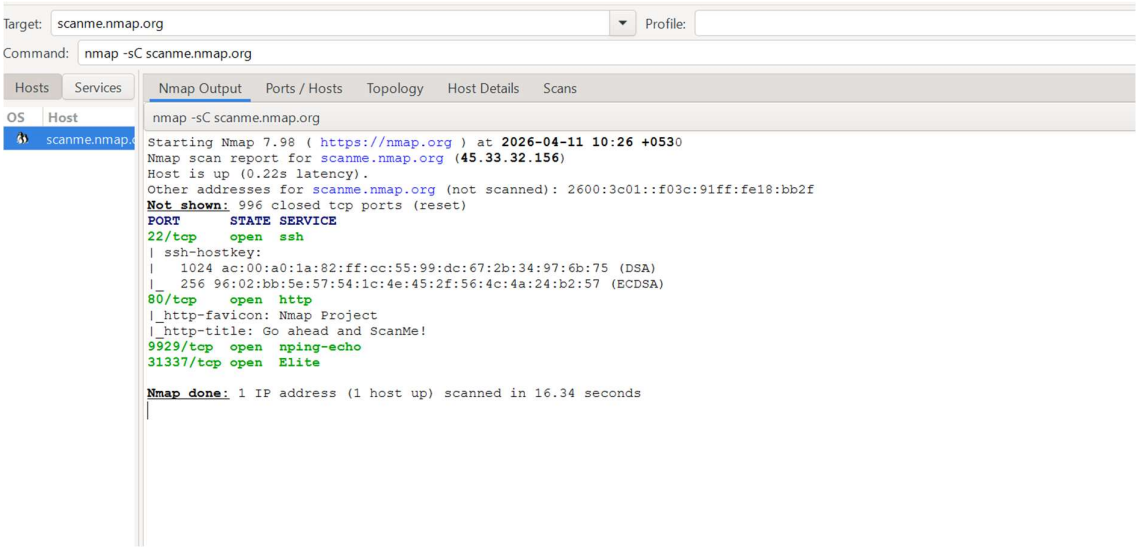

This scan runs Nmap's default NSE (Nmap Scripting Engine) scripts to gather additional information about the target. The scan found open ports and also retrieved details such as SSH host keys and the HTTP page title ("Go ahead and ScanMe!").