


# Independent-codec routing

One source patch selects one complete encoder → entropy → decoder chain

## RGB source patches

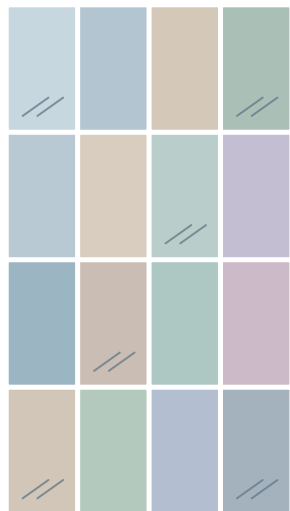

same tile geometry  
for all six codecs


## Encoder-side decision

- Y** luma / chroma
- ∇** edge / texture
- R** target rate
- T** time budget




tiny MLP

## Six independent codec paths

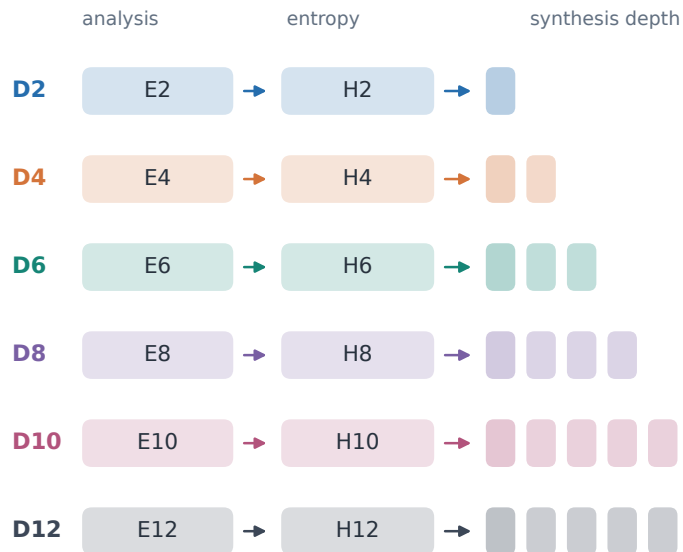

Independent weights and latents at every depth.

## Transmitted stream

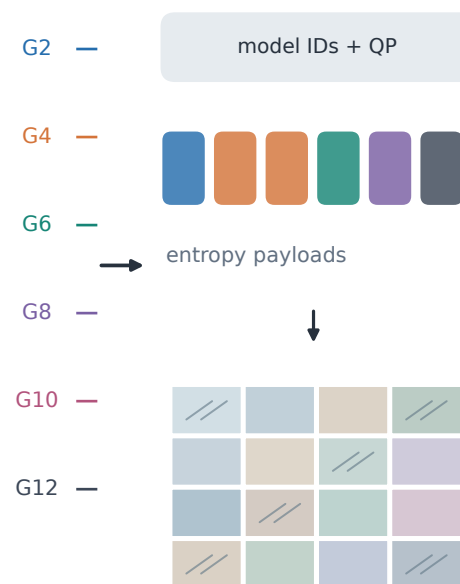

decoded + assembled image

Schematic only. Source-aware routing occurs at the encoder; the decoder reads the transmitted model ID. End-to-end time must include routing, entropy, transfers and assembly.