



a A shared representation, spatially variable synthesis

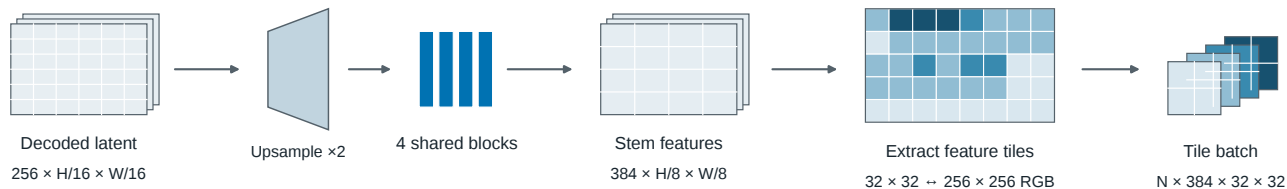

b Only surviving tiles traverse the next block pair




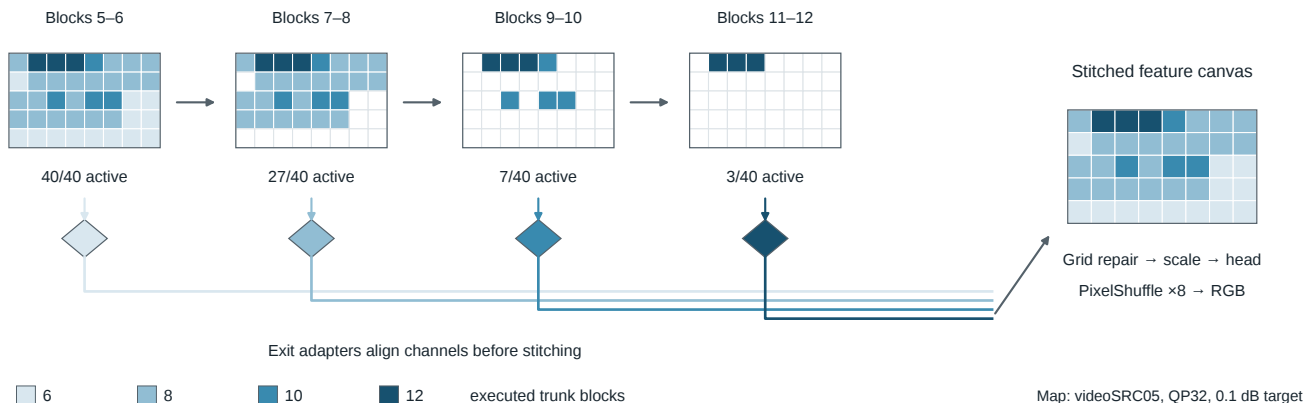


Frozen encoder + entropy model


The synthesis network and exit adapters are fine-tuned.

Shared head couples neighbouring tiles


Evaluate the final mixed reconstruction after cropping.

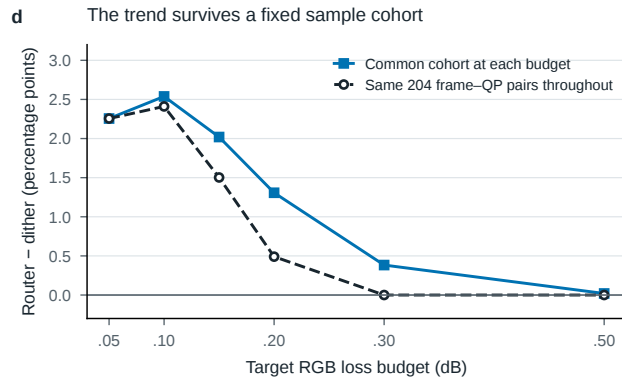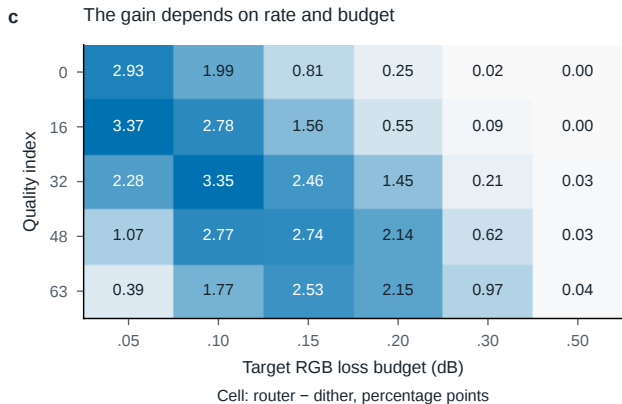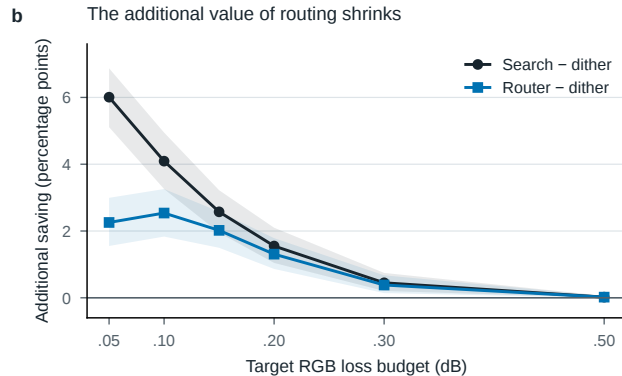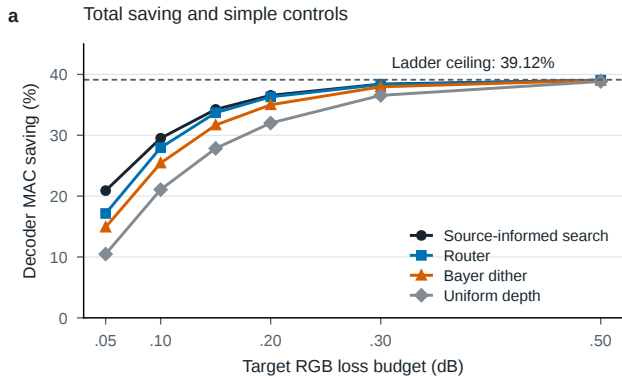


a Achieved quality differs across rules

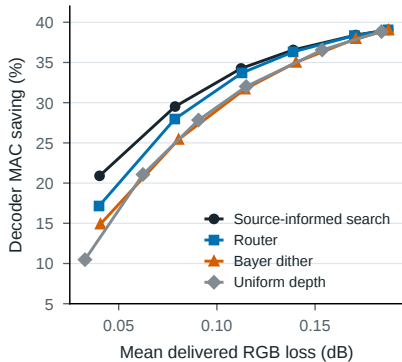


b A target is not a framewise guarantee

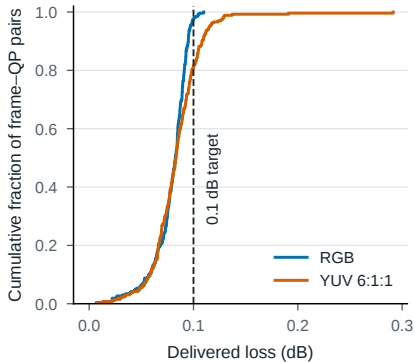


c Count violations in the output metric

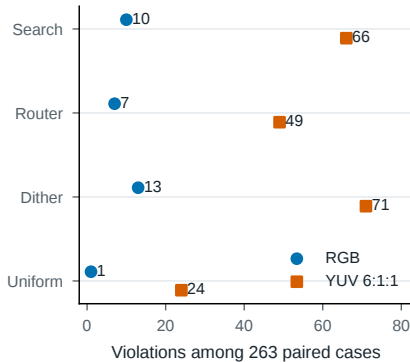

a The source is available at the encoder, but the error table must be computed

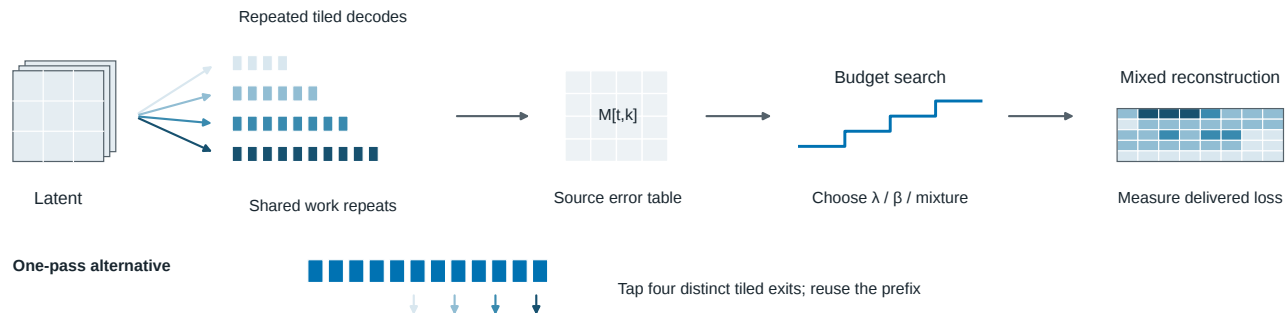

b Recorded table construction time

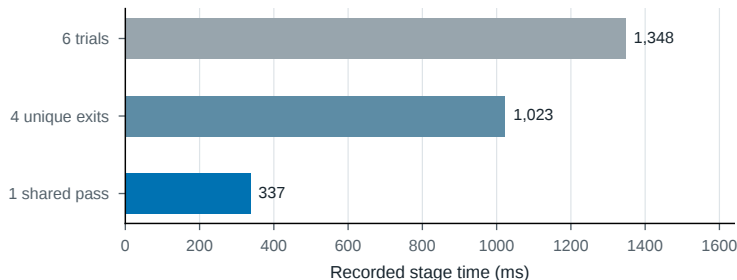

Historical timing: 8 frames $\times$ 3 repetitions at QP32. No new end-to-end latency measurement.

c Calibration changes the cost

Fixed, held-out β


Router uses decoded features.
No per-frame source table is required.

Per-frame source-calibrated β


The plotted budget sweep uses $M[t,k]$.
A fast router does not remove that cost.

a Spatial decisions converge as the quality budget relaxes

videoSRC05_1920x1080_25.yuv · QP32 · archived source luma

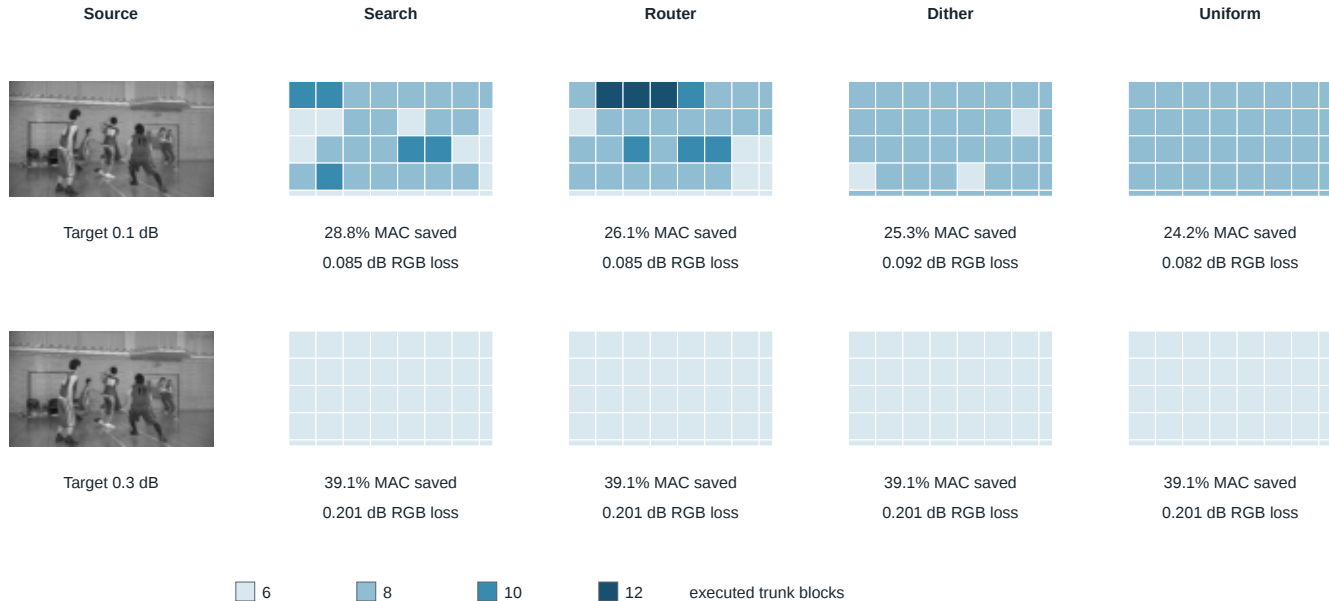

a A source-informed map does not always win

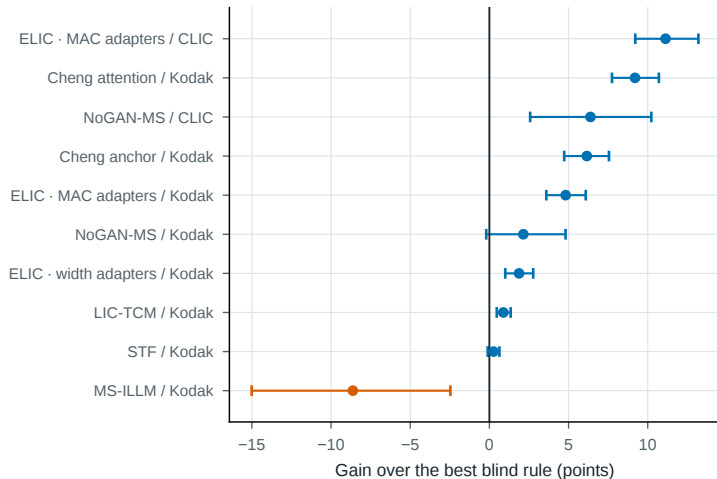

b PSNR permits perceptual loss

