




a Recover once; assign a stopping depth to each tile

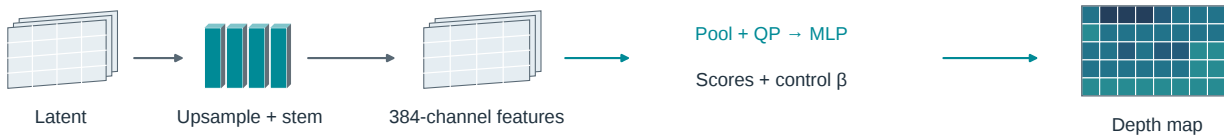

b Continue only the surviving tiles

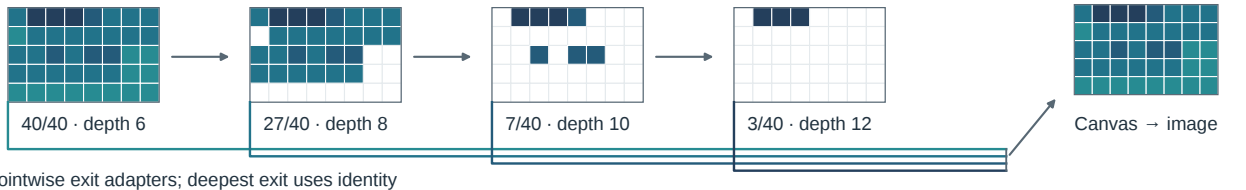





a Budget shapes the compute frontier

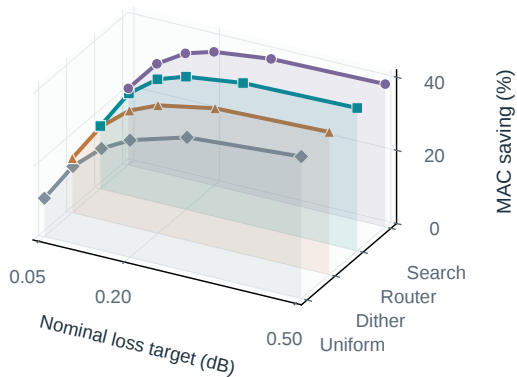


Uniform depth Bayer dither Router Source-informed search

b Increment over dithering

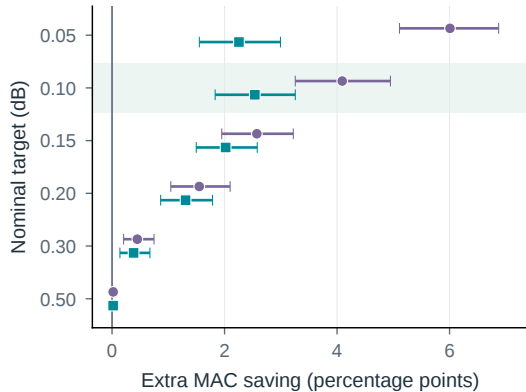


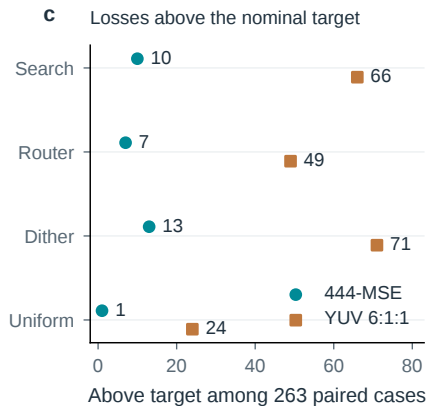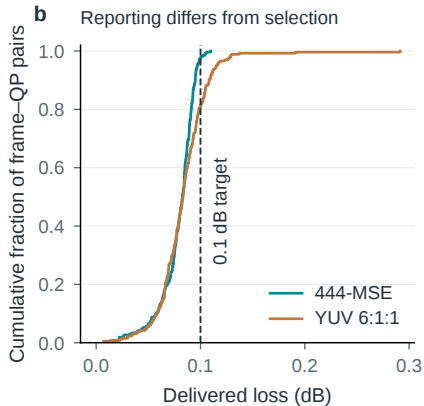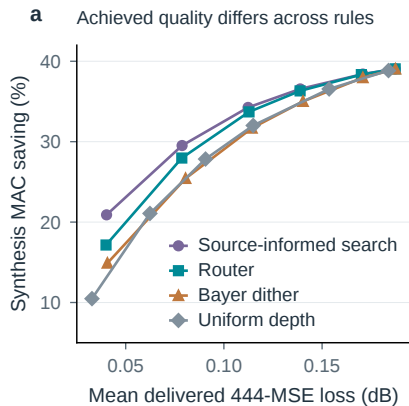

a The source is available at the encoder, but the error table must be computed

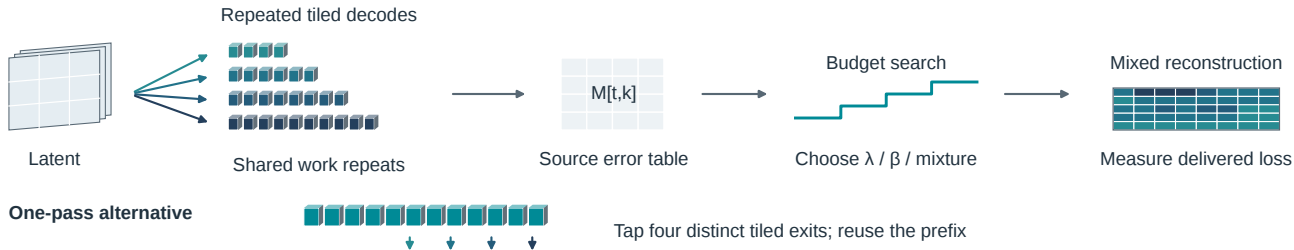

b Recorded table construction time

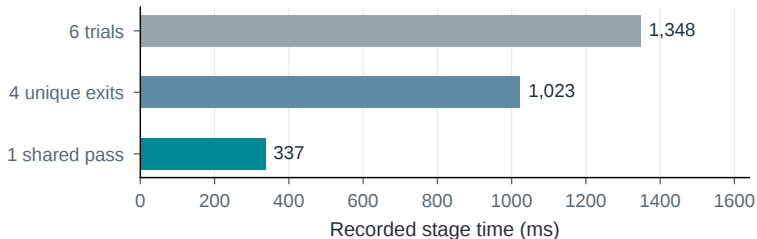

Historical timing: 8 frames $\times$ 3 repetitions at QP32. No new end-to-end latency measurement.

c Calibration changes the cost

Fixed validation-selected β

Router uses decoded features.
No per-frame source table is required.

Per-frame source-calibrated β

The plotted budget sweep uses $M[t,k]$.
A fast router does not remove that cost.

Source R · .05 R · .10 R · .30 D · .10 S · .10

a YachtRide · UVG



b Bosphorus · UVG



c videoSRC03 · MCL-JCV



d videoSRC20 · MCL-JCV



R: router D: dither S: source search · QP32

Source R · .05 R · .10 R · .30 D · .10 S · .10

e Kimono1 · HEVC_B



f BasketballDrill · HEVC_C



g BasketballPass · HEVC_D




h FourPeople · HEVC_E




Spatial work disappears as tiles exit

Recorded 5×8 tile grid · one shared latent

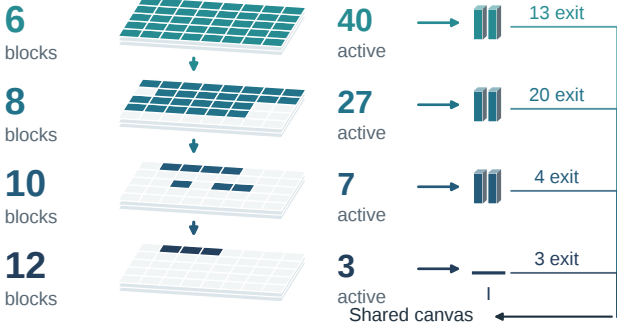

Counts describe execution; they are not timings.

a Shared early exit: one representation, nested synthesis

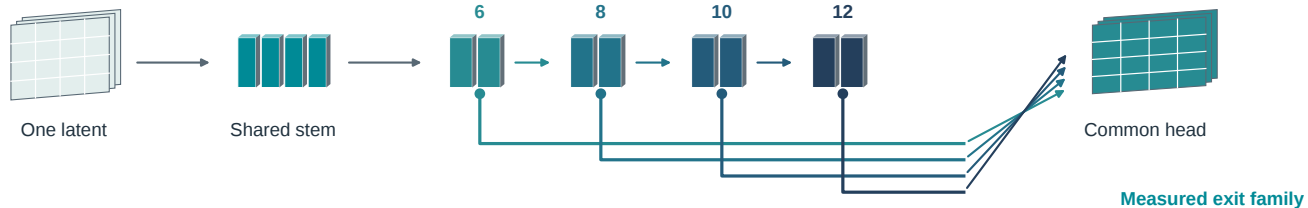

b Independent depth controls: each codec learns its own representation



Same-recipe D12 is an additional control. The released anchor alone does not isolate depth.

c Later routing study: select before encoding; signal which expert owns the payload



