
What You Are Building

Right now, n8n only lives on your computer (`localhost:5678`). Outside programs (like Postman or web services) can't see it. **ngrok** acts as a secure tunnel/bridge: it gives your local n8n a public internet address so outside programs can talk to it.

Open your computer's **Terminal** (Mac) or **Command Prompt** (Windows) and run:

ngrok config add-authtoken 3Cmqp5V91Rqqff0RDJM8dO57yl8_3iYPKFkjintcPD4ZFSvpw

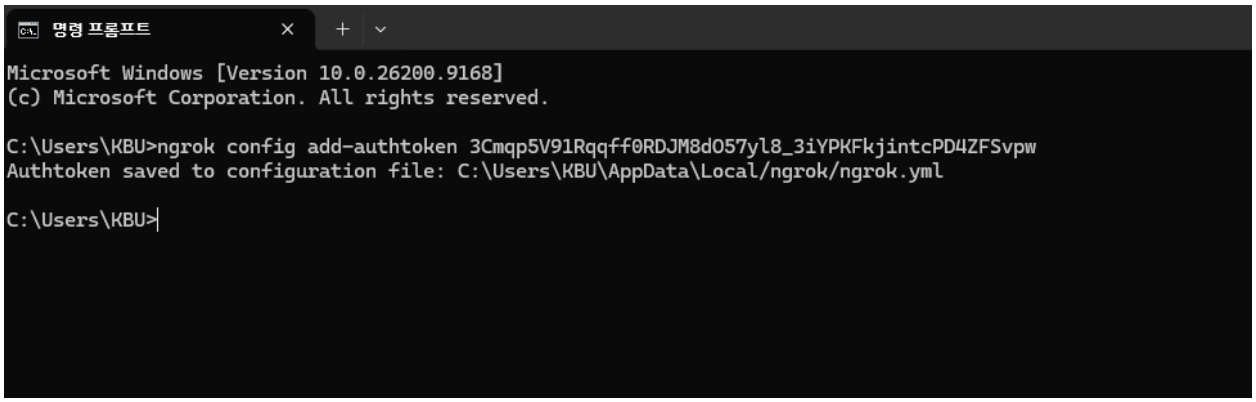

Start the tunnel to your local n8n port:


ngrok http 5678



Step 2: Build the Workflow in n8n


1. Open n8n in your browser (`http://localhost:5678`).

2. Create a new workflow and add a **Webhook** node.
3. In the node settings:
    - Set **HTTP Method** to `POST`.
    - Set **Path** to `test`.
4. Click **Listen for Test Event**.

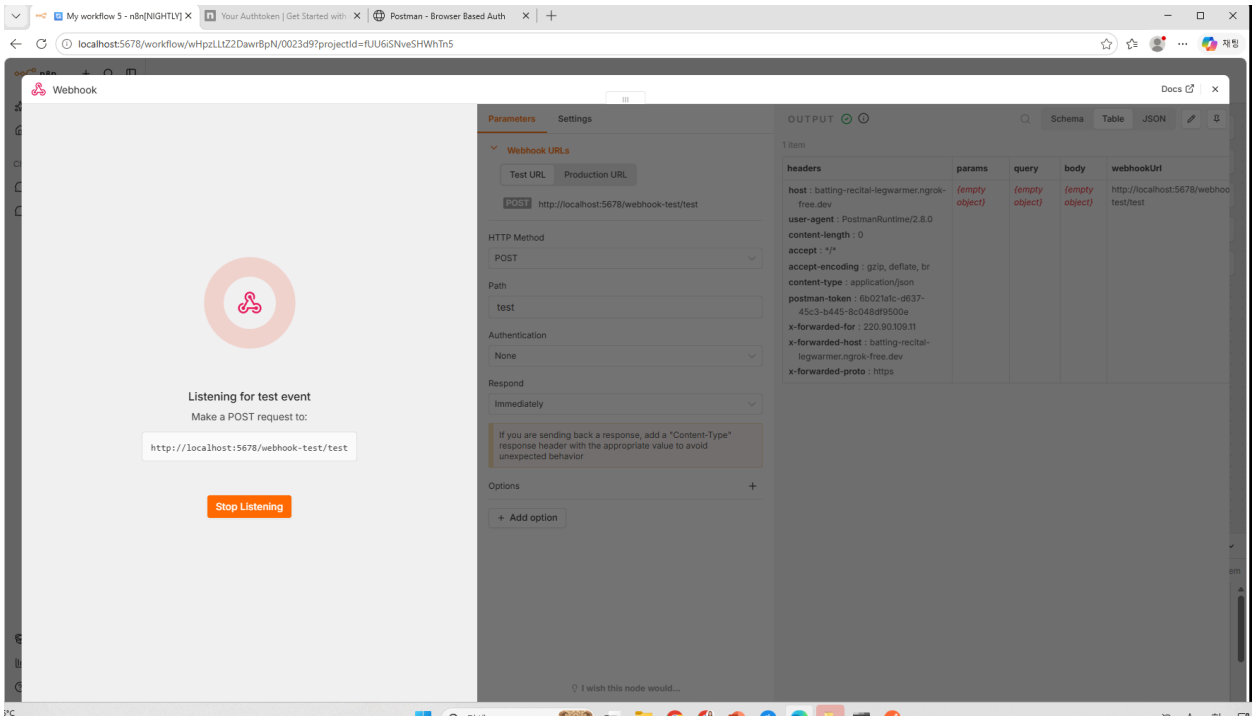


Send a Request with Postman

1. Open **Postman**.
2. Create a new request and set the method to **POST**.
3. For the URL, combine your ngrok link with the n8n webhook test path: https://xxxx.ngrok-free.app/webhook-test/test

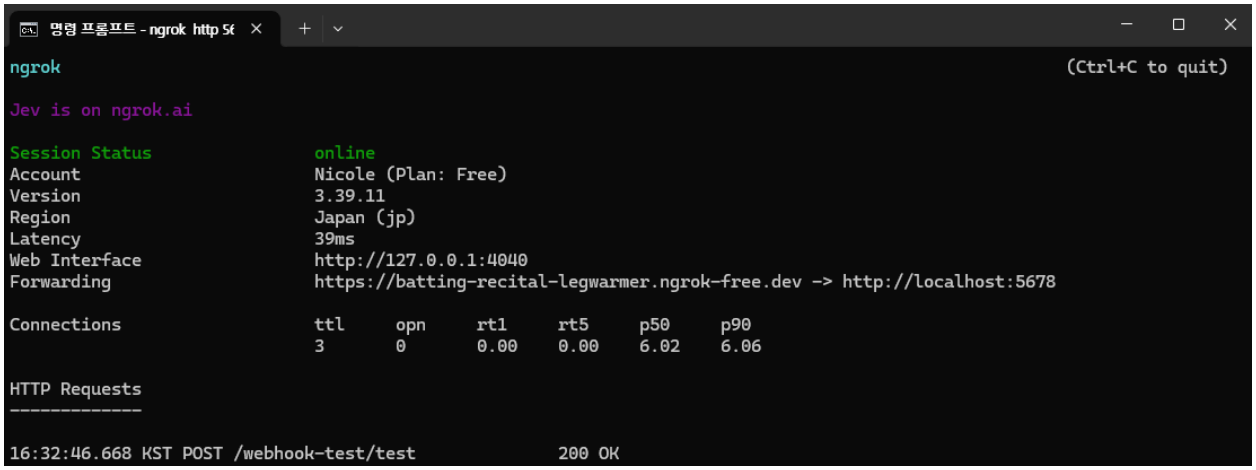

4. Go to the **Body** tab in Postman → select **raw** → choose **JSON** from the dropdown.
5. Paste a simple JSON object:

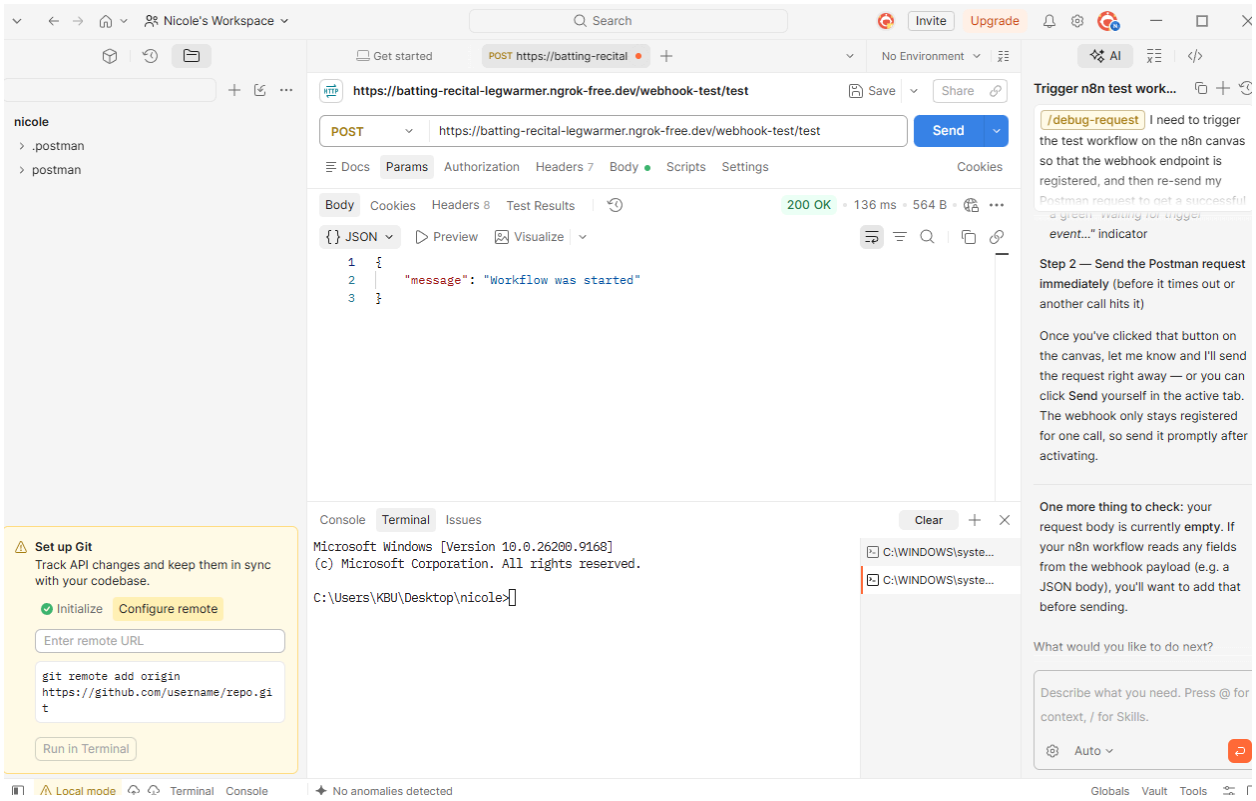

My workflow.json file

```
{
  "name": "My workflow 5",
```

```
  "nodes": [
    {
      "parameters": {
        "httpMethod": "POST",
        "path": "test",
        "options": {}
      },
      "type": "n8n-nodes-base.webhook",
      "typeVersion": 2.1,
      "position": [
        0,
        0
      ],
      "id": "0023d9a0-f5a1-4a07-bf03-0729210accfe",
      "name": "Webhook",
      "webhookId": "e478d56e-6f6b-4e58-85b2-c946d24bd409"
    }
  ],
  "pinData": {},
  "connections": {},
  "active": false,
  "settings": {
    "executionOrder": "v1",
    "binaryMode": "separate"
  },
  "versionId": "63d053af-b6dd-45d9-a1bc-bfc82eb74098",
  "meta": {
    "instanceId":
"06f7b26b4b064f1d72aa636caa8a7bd7087ae6b95b859135af2ee43167bb4d02"
  },
  "nodeGroups": [],
  "id": "wHpzLLtZ2DawrBpN",
  "tags": []
}
```


RAG Ingestion Pipeline
Google Drive → Gemini Embeddings → Supabase (pgvector)

1. Watches a Drive folder for new + updated files (polls every minute)
2. Deletes old chunks of that file (no duplicates on re-upload)

3. Downloads the file (Google Docs → plain text, Sheets → CSV)
4. Splits into 1,000-char chunks (200 overlap)
5. Embeds with Gemini and stores in `documents`

Before running: set the folder ID in both triggers, attach credentials, run `supabase-setup.sql` once.

