

Canal

a static code analysis tool

Karel Klíč

August 24, 2012

Contents

1	Overview	5
1.1	Use cases	5
1.1.1	Analysis of program behaviour	5
1.1.2	Comparison with a specification	5
1.1.3	Conformance to environment constraints	5
1.2	Artifacts	6
1.2.1	Source code	6
1.2.2	Specification	6
1.2.3	Models	6
2	Installation	7
2.1	Installation from source code on Red Hat Enterprise Linux 6	7
2.2	Installation from source code on Fedora 17	7
I	Concepts	9
3	Preliminaries	11
4	LLVM	13
5	Abstract Interpretation	15
5.0.1	Tuning	15
5.0.2	Context sensitivity	16
5.0.3	Flow sensitivity	16
6	Abstractions	17
6.1	Multi threading	17
6.2	Memory	17
6.3	Arrays	18
6.4	Structures	18
6.5	Integers	18
6.6	Floating-point numbers	18
6.7	Pointers	18
7	Wishlist	19
II	Implementation	21
8	Overview	23
9	Library Class Index	25
9.1	Class Hierarchy	25

9.2	Class List	26
10	Library Class Documentation	27
10.1	Canal::AccuracyValue Class Reference	27
10.1.1	Detailed Description	28
10.1.2	Member Function Documentation	28
10.2	Canal::Integer::Bits Class Reference	28
10.2.1	Detailed Description	30
10.2.2	Member Function Documentation	31
10.2.3	Member Data Documentation	32
10.3	Canal::Callbacks Class Reference	32
10.3.1	Detailed Description	33
10.4	Canal::Constant Class Reference	33
10.4.1	Member Function Documentation	34
10.5	Canal::Integer::Container Class Reference	35
10.5.1	Constructor & Destructor Documentation	37
10.5.2	Member Function Documentation	37
10.6	Canal::Integer::Enumeration Class Reference	39
10.6.1	Member Function Documentation	42
10.7	Canal::Environment Class Reference	43
10.8	Canal::Array::ExactSize Class Reference	44
10.8.1	Detailed Description	46
10.8.2	Member Function Documentation	46
10.9	Canal::FunctionModel Class Reference	47
10.10	Canal::FunctionModelManager Class Reference	47
10.11	Canal::Pointer::InclusionBased Class Reference	47
10.11.1	Detailed Description	49
10.11.2	Member Function Documentation	49
10.12	Canal::Array::Interface Class Reference	50
10.12.1	Member Function Documentation	51
10.13	Canal::Interpreter Class Reference	52
10.13.1	Detailed Description	55
10.13.2	Member Function Documentation	55
10.14	Canal::Float::Range Class Reference	57
10.14.1	Member Function Documentation	58
10.15	Canal::Integer::Range Class Reference	59
10.15.1	Detailed Description	62
10.15.2	Member Function Documentation	62
10.16	Canal::APIntUtils::SCompare Struct Reference	63
10.17	Canal::SELinuxModulePass Class Reference	63
10.18	Canal::Array::SingleItem Class Reference	64
10.18.1	Detailed Description	66
10.18.2	Member Function Documentation	66
10.18.3	Member Data Documentation	66
10.19	Canal::SlotTracker Class Reference	67
10.19.1	Detailed Description	68
10.19.2	Member Function Documentation	69
10.20	Canal::Stack Class Reference	70
10.20.1	Member Function Documentation	71
10.21	Canal::StackFrame Class Reference	72
10.21.1	Member Function Documentation	73
10.21.2	Member Data Documentation	73
10.22	Canal::State Class Reference	73
10.22.1	Detailed Description	75

10.22.2 Member Function Documentation	75
10.22.3 Member Data Documentation	76
10.23Canal::Structure Class Reference	77
10.23.1 Member Function Documentation	78
10.24Canal::Pointer::Target Class Reference	78
10.24.1 Detailed Description	80
10.24.2 Constructor & Destructor Documentation	80
10.24.3 Member Function Documentation	80
10.24.4 Member Data Documentation	80
10.25Canal::APIntUtils::UCompare Struct Reference	81
10.26Canal::Value Class Reference	82
10.26.1 Member Function Documentation	84
10.27Canal::VariablePrecisionValue Class Reference	85
10.27.1 Detailed Description	85
10.27.2 Member Function Documentation	85
11 Tool Class Index	87
11.1 Class Hierarchy	87
11.2 Class List	87
12 Tool Class Documentation	89
12.1 Arguments Class Reference	89
12.2 Command Class Reference	91
12.3 CommandBacktrace Class Reference	93
12.4 CommandBreak Class Reference	94
12.5 CommandCd Class Reference	96
12.6 CommandContinue Class Reference	97
12.7 CommandFile Class Reference	99
12.8 CommandFinish Class Reference	100
12.9 CommandHelp Class Reference	102
12.10CommandInfo Class Reference	103
12.11CommandNext Class Reference	105
12.12CommandPrint Class Reference	106
12.13CommandPwd Class Reference	108
12.14CommandQuit Class Reference	109
12.15CommandRun Class Reference	111
12.16Commands Class Reference	112
12.17CommandShell Class Reference	113
12.18CommandShow Class Reference	115
12.19CommandStart Class Reference	116
12.20CommandStep Class Reference	118
12.21State Class Reference	119
13 Known Bugs	121
Bibliography	123
Index	124

Chapter 1

Overview

For a sufficiently complex software system, its maintainability and extensibility is limited by our ability to understand and correctly approximate the behaviour of the system, trace the impact of system parts to each other, control the impact of modifications, ensure correctness of the critical parts, and fixing bugs before they cause serious consequences in production.

The maintainability and extensibility is affected by the programming language of implementation. Efficient low-level languages such as C and C++ increase the complexity of the system by being closely aligned with hardware. Systems must handle memory management, operate with machine-dependent integers and floating point numbers, and use system calls with complex invariants and interdependencies.

Canal is a framework combining existing static analysis techniques improving maintainability, understanding, traceability and correctness in a coherent manner. The purpose of the framework is to make existing techniques accessible and evaluable, to support the implementation of new techniques, and to allow experiments. Currently, techniques are often presented without proper experiments on real-world complex systems, or just with a proprietary implementation that cannot be investigated. The consequence is that actual applicability of many techniques for industrial use is unknown. We hope to change this situation.

1.1 Use cases

1.1.1 Analysis of program behaviour

You can hook on the fixpoint of function calls to inspect the calculated abstract values. You can get abstract values of function call parameters.

1.1.2 Comparison with a specification

A set of pre- and post-conditions for functions, and variable-based or module-based automata. This can be defined for certain function or library, and library/function users are watched to conform to the specification.

1.1.3 Conformance to environment constraints

Double free, memory leaks, buffer overflow and underflow, division by zero, invalid access to memory, locking and concurrency errors, uncaught exceptions.

1.2 Artifacts

1.2.1 Source code

1.2.2 Specification

1.2.3 Models

Chapter 2

Installation

2.1 Installation from source code on Red Hat Enterprise Linux 6

Canal can be built, installed, and developed on a computer with the Red Hat Enterprise Linux 6 operating system.

Prerequisites

Specific software packages are required by the build process and should be installed prior to building Canal:

- The core library requires `llvm-devel` and `clang` packages, which can be obtained from Extra Packages for Enterprise Linux (or EPEL) software repository.
- The command-line user interface tool requires `elfutils-devel` and `readline-devel` packages.
- The documentation requires `doxygen` and `texlive-latex` packages.

The compiled and installed Canal requires `llvm`, `clang`, `elfutils`, and `readline` packages.

2.2 Installation from source code on Fedora 17

Canal can be built, installed, and developed on a computer with the Fedora 17 operating system.

Prerequisites

Specific software packages are required by the build process and should be installed prior to building Canal:

- The core library requires `llvm-devel` and `clang` packages.
- The command-line user interface tool requires `elfutils-devel` and `readline-devel` packages.
- The documentation requires `doxygen` and `texlive-latex` packages.

The compiled and installed Canal requires `llvm`, `clang`, `elfutils`, and `readline` packages.

Part I

Concepts

Chapter 3

Preliminaries

Definitions from the order theory. More details can be found in [4].

A binary relation \sqsubseteq is *reflexive* on a set \mathcal{D} if every element is related to itself: $a \sqsubseteq a$ for all $a \in \mathcal{D}$. A binary relation \sqsubseteq is *antisymmetric* on a set \mathcal{D} if the following implication holds: $a \sqsubseteq b$ and $b \sqsubseteq a$ implies $a = b$. A binary relation \sqsubseteq is *transitive* on a set \mathcal{D} if whenever an element a is related to an element b , and b is in turn related to an element c , then a is also related to c : $a \sqsubseteq b$ and $b \sqsubseteq c$ implies $a \sqsubseteq c$.

A *partial order* \sqsubseteq is a binary relation on a set \mathcal{D} which is reflexive, antisymmetric and transitive. A *partial ordered set* or *poset* for short is an ordered pair $(\mathcal{D}, \sqsubseteq)$ of a set \mathcal{D} together with a partial ordering \sqsubseteq .

An element a in a poset $(\mathcal{D}, \sqsubseteq)$ is called *maximal* if it is not less than any other element in \mathcal{D} : $\nexists b \in \mathcal{D}, a \sqsubset b$. If there is a unique maximal element, we call it the *greatest element* and denote it by \top . Similarly, an element a in a poset $(\mathcal{D}, \sqsubseteq)$ is called *minimal* if it is not greater than any other element in \mathcal{D} : $\nexists b \in \mathcal{D}, b \sqsubset a$. If there is a unique minimal element, we call it the *least element* and denote it by \perp .

Let $(\mathcal{D}, \sqsubseteq)$ be a poset and $A \subseteq \mathcal{D}$. An element $u \in \mathcal{D}$ is an *upper bound* of A if $a \sqsubseteq u$ for all elements $a \in A$. The *least upper bound* or *lub* for short is an element x that is an upper bound on a subset A and is less than all other upper bounds on A ; such an element is denoted by $\sqcup A$. Similarly, an element $l \in \mathcal{D}$ is a *lower bound* of A if $l \sqsubseteq a$ for all elements $a \in A$. The *greatest lower bound* or *glb* for short is an element x that is a lower bound on a subset A and is greater than all other lower bounds on A ; such an element is denoted by $\sqcap A$.

A *lattice* $(\mathcal{D}, \sqsubseteq, \sqcup, \sqcap)$ is a partially ordered set in which any two elements $a, b \in \mathcal{D}$ have both a least upper bound, denoted by $a \sqcup b$, and a greatest lower bound, denoted by $a \sqcap b$. A *complete lattice* $(\mathcal{D}, \sqsubseteq, \sqcup, \sqcap, \perp, \top)$ is a partially ordered set in which every subset $A \subseteq \mathcal{D}$ has a least upper bound and a greatest lower bound.

A *fixpoint* of a function F is an element X such that $F(X) = X$.

A function $F \in \mathcal{D}_1 \rightarrow \mathcal{D}_2$ between two posets $(\mathcal{D}_1, \sqsubseteq_1)$ and $(\mathcal{D}_2, \sqsubseteq_2)$ is *monotonic* if $X \sqsubseteq_1 Y \implies F(X) \sqsubseteq_2 F(Y)$. A function $F \in \mathcal{D}_1 \rightarrow \mathcal{D}_2$ is *strict* if $F(\perp_1) = \perp_2$. A function $F \in \mathcal{D}_1 \rightarrow \mathcal{D}_2$ is *continuous* if it preserves the existing limits of increasing chains $(X_i)_{i \in I}$: $F(\sqcup_1 \{X_i \mid i \in I\}) = \sqcup_2 \{F(X_i) \mid i \in I\}$ whenever $\sqcup_1 \{X_i \mid i \in I\}$ exists.

Chapter 4

LLVM

LLVM was first presented in [5].

Formalized in [9].

Chapter 5

Abstract Interpretation

Our abstract interpreter comes in four flavours:

Context-insensitive flow-insensitive For every function in a program, the fixpoint is calculated with a single set of abstract values that encompasses all function calls.

Context-insensitive flow-sensitive For every function in a program, the fixpoint is calculated with a single set of abstract values that encompasses all function calls, but every possible path through the function is calculated separately.

Context-sensitive flow-insensitive The fixpoint is calculated with a set of abstract values specifically created for every function call.

Context-sensitive flow-sensitive The fixpoint is calculated with a set of abstract values specifically created for every possible path in a function call. Path conditions are taken into account.

Abstract interpreter can be either operational or equation-based. Our interpreter is operational.

5.0.1 Tuning

The precision of abstract interpreter is greatly tunable. Here are the aspects to consider:

Interpreter flavour Context-sensitivity and flow-sensitivity increase both precision and complexity.

Widening and narrowing Selection and parameters of widening and narrowing operators affect both precision and complexity.

Relations in abstract domains Type and number of relations in abstract domains affect both precision and complexity.

Memory for abstract domains Parameters of some abstract domains allow to trade memory for better precision.

Maximal precision of abstract interpreter is same as for symbolic executor, but abstract interpreter is more tunable.

5.0.2 Context sensitivity

Context sensitivity is achieved by keeping a function call stack. Every stack frame keeps the complete state of a function fixpoint calculation (all local and global variables). When a function call is reached during the fixpoint computation and function call parameters are already initialized, a new frame is placed on the top of stack and the called function is interpreted with the provided parameters.

5.0.3 Flow sensitivity

Chapter 6

Abstractions

6.1 Multi threading

Multi-threading abstraction for Abstract Interpretation appeared in [7].

6.2 Memory

Memory abstraction appeared in [6].

Our memory abstraction for abstract interpretation recognizes four kinds of memory:

Register-like stack memory This is function-level memory that is released automatically when function returns. We denote such a memory by LLVM-style names starting with the percent sign %. Memory either has a name (e.g. `%result`) or a number is generated to serve as a name (e.g. `%32` denotes thirty-second unnamed instruction call in a function).

Stack memory allocated by `alloca` This is also a function-level memory that is released automatically when function returns. The difference to register-like stack memory is that this memory is accessed by LLVM exclusively via pointers. We denote such a memory by names starting with `%^`. Every piece of memory has a name corresponding to the place where the memory has been allocated (`alloca` has been called). So if the memory has been allocated by an instruction call `%ptr = alloca i32, align 4`, it can be denoted by `%^ptr`.

Global variables Global variables are module-wise and are valid for the whole program run. We denote such a memory by LLVM-style names starting with `@`.

Heap memory Heap memory is also valid for the whole program run. We denote such a memory by names starting by `@^`. Every piece of memory has a name corresponding to the place where the memory has been allocated (`malloc` or similar function has been called). Name of the function is also included in the place name, so if a function `createString` contains an instruction call `%result = call i8* @malloc(i32 1)`, we can denote the memory allocated on this place by `@^createString:result`.

As it can be seen from the style of memory denotation, every piece of memory is associated with a place in the program. This means all operations affecting a memory block allocated at certain place forms a single abstract value. Context-sensitive abstract interpretation helps to increase the precision of this memory abstraction.

6.3 Arrays

6.4 Structures

6.5 Integers

Precise machine integer abstraction appeared in [8].

6.6 Floating-point numbers

Precise machine floating-point abstraction appeared in [8].

6.7 Pointers

Pointer can be casted to a number via the `ptrtoint` instruction. Usually, the resulting memory offset is used to achieve pointer arithmetics that are not available via `getelementptr` semantics.

Chapter 7

Wishlist

Lazy model-checking abstract value Allow to investigate just a single function, taking into account all possible parameter values and shapes (perhaps limited by a pre-condition). Parameter values and shapes must be smartly provided depending on the boundary requirements of the checked code. This allows a kind of model checking, and use of model checking algorithms and ideas.

Widening operators Implement widening operators for integers and other abstract domains as required.

Narrowing operators Implement narrowing operators for integers and other abstract domains as required.

String abstractions Implement abstract domains specific for C strings.

Weakly relational numeric abstractions Implement weakly relational integer and floating-point abstract domains.

Basic block abstraction Implement basic block summaries that speed-up the static analysis.

Function abstraction Implement function summaries that speed-up the static analysis.

Parallelization Make abstract interpreter to use multiple threads for fixpoint calculation on the right level.

Concurrency check Add support for checking of multi-threaded programs.

Part II

Implementation

Chapter 8

Overview

Canal can be used for a static analysis of real-world complex software systems written in efficient low-level languages C and C++. It uses the LLVM intermediate representation for the static analysis.

Canal is implemented in the C++ language as defined in the C++98 standard (ISO/IEC 14882:1998). It uses the C++ standard library and some additional libraries:

- LLVM core libraries. All versions from 2.8 up to 3.1 are supported.
- Clang compiler. Any version working with a supported version of LLVM should work.
- GNU readline. Any BSD-licensed reimplementations can be used as an alternative.
- elfutils. This library is used only on Linux-based operating systems.

Chapter 9

Library Class Index

9.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

Canal::AccuracyValue	27
Canal::Float::Range	57
Canal::Integer::Bits	28
Canal::Integer::Container	35
Canal::Integer::Enumeration	39
Canal::Integer::Range	59
Canal::Pointer::InclusionBased	47
Canal::Callbacks	32
Canal::Environment	43
Canal::FunctionModel	47
Canal::FunctionModelManager	47
Canal::Array::Interface	50
Canal::Array::ExactSize	44
Canal::Array::SingleItem	64
Canal::Structure	77
Canal::Interpreter	52
Canal::APIntUtils::SCompare	63
Canal::SELinuxModulePass	63
Canal::SlotTracker	67
Canal::Stack	70
Canal::StackFrame	72
Canal::State	73
Canal::Pointer::Target	78
Canal::APIntUtils::UCompare	81
Canal::Value	82
Canal::Array::ExactSize	44
Canal::Array::SingleItem	64
Canal::Constant	33
Canal::Float::Range	57
Canal::Integer::Bits	28
Canal::Integer::Container	35
Canal::Integer::Enumeration	39

Canal::Integer::Range	59
Canal::Pointer::InclusionBased	47
Canal::Structure	77
Canal::VariablePrecisionValue	85

9.2 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

Canal::AccuracyValue	
Base class for abstract states that can inform about accuracy	27
Canal::Integer::Bits	28
Canal::Callbacks	32
Canal::Constant	33
Canal::Integer::Container	35
Canal::Integer::Enumeration	39
Canal::Environment	43
Canal::Array::ExactSize	44
Canal::FunctionModel	47
Canal::FunctionModelManager	47
Canal::Pointer::InclusionBased	
Inclusion-based flow-insensitive abstract pointer	47
Canal::Array::Interface	50
Canal::Interpreter	52
Canal::Float::Range	57
Canal::Integer::Range	
Abstracts integer values as a range min - max	59
Canal::APIntUtils::SCompare	63
Canal::SELinuxModulePass	63
Canal::Array::SingleItem	
This array type is very imprecise	64
Canal::SlotTracker	67
Canal::Stack	70
Canal::StackFrame	72
Canal::State	73
Canal::Structure	77
Canal::Pointer::Target	
TODO: Pointers to functions	78
Canal::APIntUtils::UCompare	81
Canal::Value	82
Canal::VariablePrecisionValue	85

Chapter 10


Library Class Documentation

10.1 Canal::AccuracyValue Class Reference

Base class for abstract states that can inform about accuracy.

```
#include <Value.h>
```

Inheritance diagram for Canal::AccuracyValue:

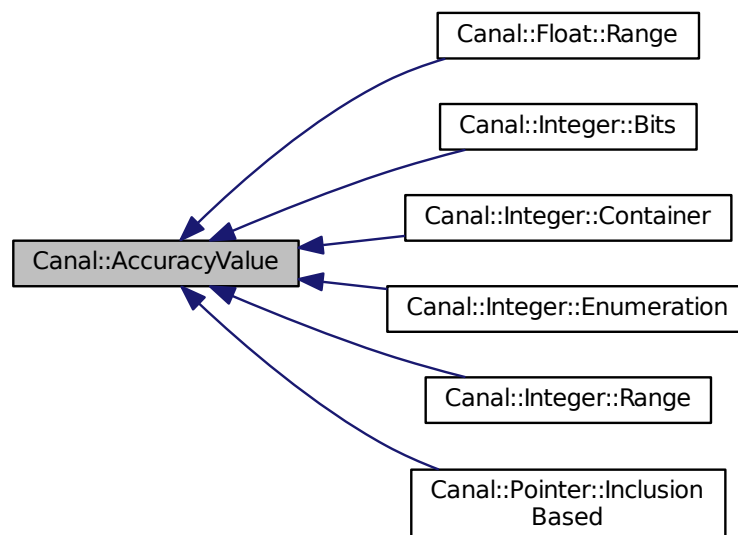

Public Member Functions

- virtual float accuracy () const
- virtual bool isBottom () const

Is it the lowest value.

- virtual void setBottom ()

Set to the lowest value.

- virtual bool isTop () const

Is it the highest value.

- virtual void setTop ()

Set it to the top value of lattice.

10.1.1 Detailed Description

Base class for abstract states that can inform about accuracy.

10.1.2 Member Function Documentation

10.1.2.1 float Canal::AccuracyValue::accuracy () const [virtual]

Get accuracy of the abstract value (0 - 1). In finite-height lattices, it is determined by the position of the value in the lattice.

Accuracy 0 means that the value represents all possible values (top). Accuracy 1 means that the value represents the most precise and exact value (bottom).

Reimplemented in Canal::Integer::Container, Canal::Integer::Bits, Canal::Integer::Enumeration, Canal::Integer::Range, Canal::Pointer::InclusionBased, and Canal::Float::Range.


The documentation for this class was generated from the following files:

- lib/Value.h
- lib/Value.cpp


10.2 Canal::Integer::Bits Class Reference

```
#include <IntegerBits.h>
```

Inheritance diagram for Canal::Integer::Bits:

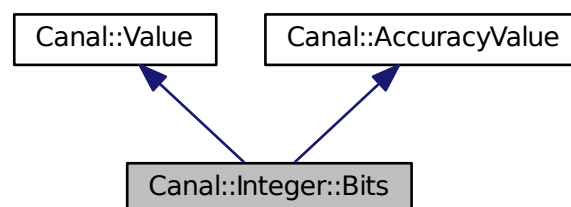

Collaboration diagram for Canal::Integer::Bits:

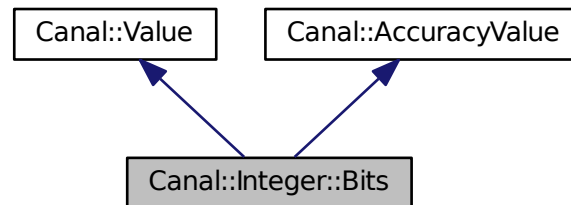

Public Member Functions

- Bits (unsigned numBits)
Initializes to the lowest value.
- Bits (const llvm::APInt &number)
Initializes to the given value.
- unsigned getBitWidth () const
Return the number of bits of the represented number.
- int getBitValue (unsigned pos) const
- void setBitValue (unsigned pos, int value)
- bool signedMin (llvm::APInt &result) const
- bool signedMax (llvm::APInt &result) const
- bool unsignedMin (llvm::APInt &result) const
- bool unsignedMax (llvm::APInt &result) const
- virtual Bits * clone () const
- virtual Bits * cloneCleaned () const
- virtual bool operator== (const Value &value) const
Implementation of Value::operator==(.)
- virtual void merge (const Value &value)
Implementation of Value::merge().
- virtual size_t memoryUsage () const
Implementation of Value::memoryUsage().
- virtual std::string toString () const
Implementation of Value::toString().
- virtual bool matchesString (const std::string &text, std::string &rational) const
Implementation of Value::matchesString().
- virtual void add (const Value &a, const Value &b)
Implementation of Value::add().
- virtual void sub (const Value &a, const Value &b)
Implementation of Value::sub().
- virtual void mul (const Value &a, const Value &b)
Implementation of Value::mul().

- virtual void udiv (const Value &a, const Value &b)
Implementation of Value::udiv().
- virtual void sdiv (const Value &a, const Value &b)
Implementation of Value::sdiv().
- virtual void urem (const Value &a, const Value &b)
Implementation of Value::urem().
- virtual void srem (const Value &a, const Value &b)
Implementation of Value::srem().
- virtual void shl (const Value &a, const Value &b)
Implementation of Value::shl().
- virtual void lshr (const Value &a, const Value &b)
Implementation of Value::lshr().
- virtual void ashr (const Value &a, const Value &b)
Implementation of Value::ashr().
- virtual void and_ (const Value &a, const Value &b)
Implementation of Value::and_().
- virtual void or_ (const Value &a, const Value &b)
Implementation of Value::or_().
- virtual void xor_ (const Value &a, const Value &b)
Implementation of Value::xor_().
- virtual void icmp (const Value &a, const Value &b, llvm::CmpInst::Predicate predicate)
Implementation of Value::icmp().
- virtual float accuracy () const
Implementation of AccuracyValue::accuracy().
- virtual bool isBottom () const
Implementation of AccuracyValue::isBottom().
- virtual void setBottom ()
Implementation of AccuracyValue::setBottom().
- virtual bool isTop () const
Implementation of AccuracyValue::isTop().
- virtual void setTop ()
Implementation of AccuracyValue::setTop().

Public Attributes

- llvm::APInt mBits0
- llvm::APInt mBits1

Additional Inherited Members

10.2.1 Detailed Description

Abstracts integers as a bitfield.

For every bit, we have 4 possible states:

mBits0 mBits1 State

0 0 Nothing was set to the bit (lowest lattice value - bottom) 1 0 The bit is set to 0 0 1 The bit is set to 1 1
 1 The bit can be both 0 and 1 (highest lattice value - top)

10.2.2 Member Function Documentation**10.2.2.1 Bits * Canal::Integer::Bits::clone () const [virtual]**

Implementation of Value::clone(). Covariant return type.

Implements Canal::Value.

10.2.2.2 Bits * Canal::Integer::Bits::cloneCleaned () const [virtual]

Implementation of Value::cloneCleaned(). Covariant return type.

Implements Canal::Value.

10.2.2.3 int Canal::Integer::Bits::getBitValue (unsigned pos) const

Returns 0 if the bit is known to be 0. Returns 1 if the bit is known to be 1. Returns -1 if the bit value is unknown. Returns 2 if the bit is either 1 or 0.

10.2.2.4 void Canal::Integer::Bits::setBitValue (unsigned pos, int value)

Sets the bit. If value is 0 or 1, the bit is set to represent exactly 0 or 1. If value is -1, the bit is set to represent unknown value. If value is 2, the bit is set to represent both 0 and 1.

10.2.2.5 bool Canal::Integer::Bits::signedMax (llvm::APInt & result) const

Highest signed number represented by this abstract domain.

Parameters

<i>result</i>	Filled by the maximum value if it is known. Otherwise, the value is undefined.
---------------	--

Returns

True if the result is known and the parameter was set to correct value.

10.2.2.6 bool Canal::Integer::Bits::signedMin (llvm::APInt & result) const

Lowest signed number represented by this abstract domain.

Parameters

<i>result</i>	Filled by the minimum value if it is known. Otherwise, the value is undefined.
---------------	--

Returns

True if the result is known and the parameter was set to correct value.

10.2.2.7 bool Canal::Integer::Bits::unsignedMax (llvm::APInt & *result*) const

Highest unsigned number represented by this abstract domain.

Parameters

<i>result</i>	Filled by the maximum value if it is known. Otherwise, the value is undefined.
---------------	--

Returns

True if the result is known and the parameter was set to correct value.

10.2.2.8 bool Canal::Integer::Bits::unsignedMin (llvm::APInt & *result*) const

Lowest unsigned number represented by this abstract domain.

Parameters

<i>result</i>	Filled by the minimum value if it is known. Otherwise, the value is undefined.
---------------	--

Returns

True if the result is known and the parameter was set to correct value.

10.2.3 Member Data Documentation**10.2.3.1 llvm::APInt Canal::Integer::Bits::mBits0**

When a bit in mBits0 is 1, the value is known to contain zero at this position.

10.2.3.2 llvm::APInt Canal::Integer::Bits::mBits1

When a bit in mBits1 is 1, the value is known to contain one at this position.

The documentation for this class was generated from the following files:

- lib/IntegerBits.h
- lib/IntegerBits.cpp

10.3 Canal::Callbacks Class Reference

```
#include <Callbacks.h>
```


Public Member Functions

- virtual void **beforeStore** (const llvm::StoreInst &instruction, State &state, const Environment &environment, Value *pointer, Value *value)
- virtual void **afterStore** (const llvm::StoreInst &instruction, State &state, const Environment &environment, Value *pointer, Value *value)

10.3.1 Detailed Description


Universal class for program behavior monitoring. It can be used via inheritance to detect invalid operations, to find static analysis precision bottlenecks, to identify situations that reach boundaries of implemented techniques, and to drive custom static analysis techniques.

The documentation for this class was generated from the following file:


- lib/Callbacks.h

10.4 Canal::Constant Class Reference

Inheritance diagram for Canal::Constant:



Collaboration diagram for Canal::Constant:



Public Member Functions

- **Constant** (const llvm::Constant *constant=NULL)
- bool **isAPInt** () const
- const llvm::APInt & **getAPInt** () const
- bool **isGetElementPtr** () const
- Value * **toModifiableValue** () const
- virtual Constant * clone () const
Create a copy of this value.
- virtual Constant * cloneCleaned () const
- virtual bool operator== (const Value &value) const
- virtual size_t memoryUsage () const
Get memory usage (used byte count) of this abstract value.
- virtual std::string toString () const
Create a string representation of the abstract value.
- virtual bool matchesString (const std::string &text, std::string &rationale) const

Public Attributes

- const llvm::Constant * **mConstant**

Additional Inherited Members

10.4.1 Member Function Documentation

10.4.1.1 Constant * Canal::Constant::cloneCleaned () const [virtual]

This is used to obtain instance of the value type and to get an empty value at the same time.

Implements Canal::Value.

10.4.1.2 bool Canal::Constant::matchesString (const std::string & text, std::string & rationale) const [virtual]

Checks if the abstract value internal state matches the text description. Full coverage of the state is not expected, the text can contain just partial information.

Implements Canal::Value.

10.4.1.3 bool Canal::Constant::operator== (const Value & value) const [virtual]

Implementing this is mandatory. Values are compared while computing the fixed point.

Implements Canal::Value.

10.4.1.4 std::string Canal::Constant::toString () const [virtual]

Create a string representation of the abstract value.

An idea for different memory interpretation. virtual Value *castTo(const llvm::Type *itemType, int offset) const = 0;


Implements Canal::Value.

The documentation for this class was generated from the following files:


- lib/Constant.h
- lib/Constant.cpp

10.5 Canal::Integer::Container Class Reference

Inheritance diagram for Canal::Integer::Container:

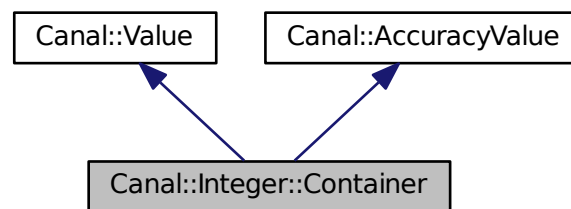

Collaboration diagram for Canal::Integer::Container:

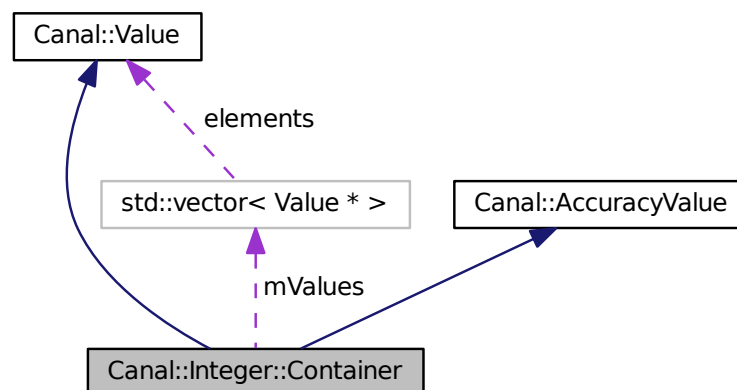

Public Member Functions

- **Container** (unsigned numBits)

- Container (const llvm::APInt &number)
- Container (const Container &container)
 - Copy constructor. Creates independent copy of the container.*
- virtual ~Container ()
 - Destructor. Deletes the contents of the container.*
- unsigned **getBitWidth** () const
- Bits & **getBits** ()
- const Bits & **getBits** () const
- Enumeration & **getEnumeration** ()
- const Enumeration & **getEnumeration** () const
- Range & **getRange** ()
- const Range & **getRange** () const
- bool signedMin (llvm::APInt &result) const
- bool signedMax (llvm::APInt &result) const
- bool unsignedMin (llvm::APInt &result) const
- bool unsignedMax (llvm::APInt &result) const
- virtual Container * clone () const
- virtual Container * cloneCleaned () const
- virtual bool operator== (const Value &value) const
 - Implementation of Value::operator==().*
- virtual void merge (const Value &value)
 - Implementation of Value::merge().*
- virtual size_t memoryUsage () const
 - Implementation of Value::memoryUsage().*
- virtual std::string toString () const
 - Implementation of Value::toString().*
- virtual bool matchesString (const std::string &text, std::string &rational) const
- virtual void add (const Value &a, const Value &b)
 - Implementation of Value::add().*
- virtual void sub (const Value &a, const Value &b)
 - Implementation of Value::sub().*
- virtual void mul (const Value &a, const Value &b)
 - Implementation of Value::mul().*
- virtual void udiv (const Value &a, const Value &b)
 - Implementation of Value::udiv().*
- virtual void sdiv (const Value &a, const Value &b)
 - Implementation of Value::sdiv().*
- virtual void urem (const Value &a, const Value &b)
 - Implementation of Value::urem().*
- virtual void srem (const Value &a, const Value &b)
 - Implementation of Value::srem().*
- virtual void shl (const Value &a, const Value &b)
 - Implementation of Value::shl().*
- virtual void lshr (const Value &a, const Value &b)
 - Implementation of Value::lshr().*
- virtual void ashr (const Value &a, const Value &b)
 - Implementation of Value::ashr().*
- virtual void and_ (const Value &a, const Value &b)

Implementation of Value::and_().

- virtual void or_ (const Value &a, const Value &b)

Implementation of Value::or_().

- virtual void xor_ (const Value &a, const Value &b)

Implementation of Value::xor_().

- virtual void icmp (const Value &a, const Value &b, llvm::CmpInst::Predicate predicate)

Implementation of Value::icmp().

- virtual void fcmp (const Value &a, const Value &b, llvm::CmpInst::Predicate predicate)

Implementation of Value::fcmp().

- virtual float accuracy () const

Implementation of AccuracyValue::accuracy().

- virtual bool isBottom () const

Implementation of AccuracyValue::isBottom().

- virtual void setBottom ()

Implementation of AccuracyValue::setBottom().

- virtual bool isTop () const

Implementation of AccuracyValue::isTop().

- virtual void setTop ()

Implementation of AccuracyValue::setTop().

Public Attributes

- std::vector< Value * > **mValues**

Additional Inherited Members

10.5.1 Constructor & Destructor Documentation

10.5.1.1 Canal::Integer::Container::Container (const llvm::APInt & *number*)

Creates a new container with an initial value. Signedness, number of bits is taken from the provided number.

10.5.2 Member Function Documentation

10.5.2.1 Container * Canal::Integer::Container::clone () const [virtual]

Implementation of Value::clone(). Covariant return type.

Implements Canal::Value.

10.5.2.2 Container * Canal::Integer::Container::cloneCleaned () const [virtual]

Implementation of Value::cloneCleaned(). Covariant return type.

Implements Canal::Value.

10.5.2.3 `bool Canal::Integer::Container::matchesString (const std::string & text, std::string & rationale) const` [virtual]

Implementation of Value::matchesString(). Examples: integer enumeration -8 integer enumeration -10 2 4 6 8 range -10 8

Implements Canal::Value.

10.5.2.4 `bool Canal::Integer::Container::signedMax (llvm::APInt & result) const`

Highest signed number represented by this container. Uses the abstract domain (enum, range, bits) with highest precision.

Parameters

<i>result</i>	Filled by the maximum value if it is known. Otherwise, the value is undefined.
---------------	--

Returns

True if the result is known and the parameter was set to correct value.

10.5.2.5 `bool Canal::Integer::Container::signedMin (llvm::APInt & result) const`

Lowest signed number represented by this container. Uses the abstract domain (enum, range, bits) with highest precision.

Parameters

<i>result</i>	Filled by the minimum value if it is known. Otherwise, the value is undefined.
---------------	--

Returns

True if the result is known and the parameter was set to correct value.

10.5.2.6 `bool Canal::Integer::Container::unsignedMax (llvm::APInt & result) const`

Highest unsigned number represented by this container. Uses the abstract domain (enum, range, bits) with highest precision.

Parameters

<i>result</i>	Filled by the maximum value if it is known. Otherwise, the value is undefined.
---------------	--

Returns

True if the result is known and the parameter was set to correct value.

10.5.2.7 bool Canal::Integer::Container::unsignedMin (llvm::APInt & *result*) const

Lowest unsigned number represented by this container. Uses the abstract domain (enum, range, bits) with highest precision.

Parameters

<i>result</i>	Filled by the minimum value if it is known. Otherwise, the value is undefined.
---------------	--

Returns


True if the result is known and the parameter was set to correct value.

The documentation for this class was generated from the following files:


- lib/IntegerContainer.h
- lib/IntegerContainer.cpp

10.6 Canal::Integer::Enumeration Class Reference

Inheritance diagram for Canal::Integer::Enumeration:

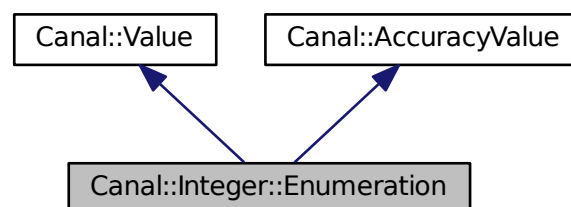

Collaboration diagram for `Canal::Integer::Enumeration`:

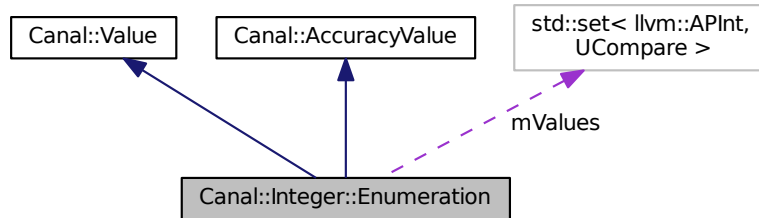

Public Member Functions

- Enumeration (unsigned numBits)
Initializes to the lowest value.
- Enumeration (const Ilvm::APInt &number)
Initializes to the given value.
- unsigned **getBitWidth** () const
- bool signedMin (Ilvm::APInt &result) const
- bool signedMax (Ilvm::APInt &result) const
- bool unsignedMin (Ilvm::APInt &result) const
- bool unsignedMax (Ilvm::APInt &result) const
- virtual Enumeration * clone () const
- virtual Enumeration * cloneCleaned () const
- virtual bool operator== (const Value &value) const
Implementation of Value::operator==().
- virtual void merge (const Value &value)
Implementation of Value::merge().
- virtual size_t memoryUsage () const
Implementation of Value::memoryUsage().
- virtual std::string toString () const
Implementation of Value::toString().
- virtual bool matchesString (const std::string &text, std::string &rationale) const
- virtual void add (const Value &a, const Value &b)
Implementation of Value::add().
- virtual void sub (const Value &a, const Value &b)
Implementation of Value::sub().
- virtual void mul (const Value &a, const Value &b)
Implementation of Value::mul().
- virtual void udiv (const Value &a, const Value &b)
Implementation of Value::udiv().
- virtual void sdiv (const Value &a, const Value &b)
Implementation of Value::sdiv().
- virtual void urem (const Value &a, const Value &b)

Implementation of Value::urem().

- virtual void srem (const Value &a, const Value &b)

Implementation of Value::srem().

- virtual void shl (const Value &a, const Value &b)

Implementation of Value::shl().

- virtual void lshr (const Value &a, const Value &b)

Implementation of Value::lshr().

- virtual void ashr (const Value &a, const Value &b)

Implementation of Value::ashr().

- virtual void and_ (const Value &a, const Value &b)

Implementation of Value::and_().

- virtual void or_ (const Value &a, const Value &b)

Implementation of Value::or_().

- virtual void xor_ (const Value &a, const Value &b)

Implementation of Value::xor_().

- virtual void icmp (const Value &a, const Value &b, llvm::CmpInst::Predicate predicate)

Implementation of Value::icmp().

- virtual void fcmp (const Value &a, const Value &b, llvm::CmpInst::Predicate predicate)

Implementation of Value::fcmp().

- virtual float accuracy () const

Implementation of AccuracyValue::accuracy().

- virtual bool isBottom () const

Implementation of AccuracyValue::isBottom().

- virtual void setBottom ()

Implementation of AccuracyValue::setBottom().

- virtual bool isTop () const

Implementation of AccuracyValue::isTop().

- virtual void setTop ()

Implementation of AccuracyValue::setTop().

Public Attributes

- APIntUtils::USet **mValues**
- bool **mTop**
- unsigned **mNumBits**

Protected Member Functions

- void **applyOperation** (const Value &a, const Value &b, APIntUtils::Operation operation1, APIntUtils::OperationWithOverflow operation2)

Additional Inherited Members

10.6.1 Member Function Documentation

10.6.1.1 Enumeration * Canal::Integer::Enumeration::clone () const [virtual]

Implementation of Value::clone(). Covariant return type.

Implements Canal::Value.

10.6.1.2 Enumeration * Canal::Integer::Enumeration::cloneCleaned () const [virtual]

Implementation of Value::cloneCleaned(). Covariant return type.

Implements Canal::Value.

10.6.1.3 bool Canal::Integer::Enumeration::matchesString (const std::string & *text*, std::string & *rationale*) const [virtual]

Implementation of Value::matchesString(). Examples of allowed input: enumeration 3 -4 5 enumeration 0xff 0xfa enumeration 0x1000000F 0xABABABAB enumeration top enumeration empty enumeration empty

Implements Canal::Value.

10.6.1.4 bool Canal::Integer::Enumeration::signedMax (llvm::APInt & *result*) const

Highest signed number represented by this abstract domain.

Parameters

<i>result</i>	Filled by the maximum value if it is known. Otherwise, the value is undefined.
---------------	--

Returns

True if the result is known and the parameter was set to correct value.

10.6.1.5 bool Canal::Integer::Enumeration::signedMin (llvm::APInt & *result*) const

Lowest signed number represented by this abstract domain.

Parameters

<i>result</i>	Filled by the minimum value if it is known. Otherwise, the value is undefined.
---------------	--

Returns

True if the result is known and the parameter was set to correct value.

10.6.1.6 bool Canal::Integer::Enumeration::unsignedMax (llvm::APInt & *result*) const

Highest unsigned number represented by this abstract domain.

Parameters

<i>result</i>	Filled by the maximum value if it is known. Otherwise, the value is undefined.
---------------	--

Returns

True if the result is known and the parameter was set to correct value.

10.6.1.7 bool Canal::Integer::Enumeration::unsignedMin (llvm::APInt & *result*) const

Lowest unsigned number represented by this abstract domain.

Parameters

<i>result</i>	Filled by the minimum value if it is known. Otherwise, the value is undefined.
---------------	--

Returns


True if the result is known and the parameter was set to correct value.

The documentation for this class was generated from the following files:

- lib/IntegerEnumeration.h
- lib/IntegerEnumeration.cpp

10.7 Canal::Environment Class Reference

Collaboration diagram for Canal::Environment:

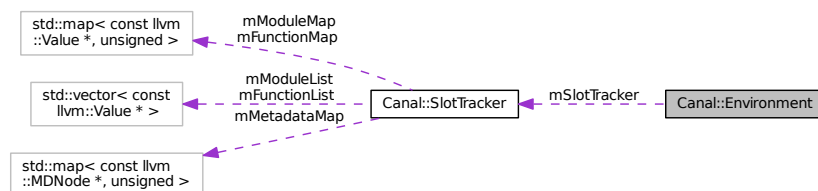

Public Member Functions

- **Environment** (const llvm::Module &module)

Public Attributes

- `const llvm::Module & mModule`
- `llvm::TargetData mTargetData`
- `SlotTracker mSlotTracker`


The documentation for this class was generated from the following files:

- `lib/Environment.h`
- `lib/Environment.cpp`


10.8 Canal::Array::ExactSize Class Reference

```
#include <ArrayExactSize.h>
```

Inheritance diagram for `Canal::Array::ExactSize`:

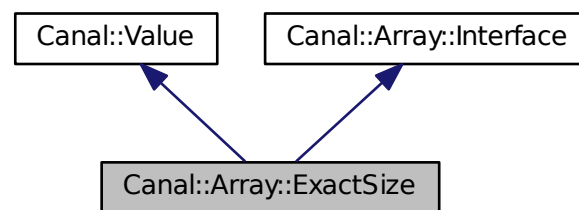

Collaboration diagram for `Canal::Array::ExactSize`:

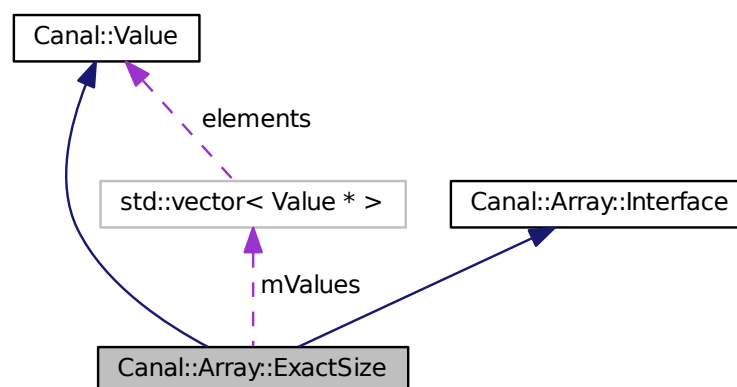

Public Member Functions

- **ExactSize** (const ExactSize &exactSize)
- **size_t size** () const
- virtual ExactSize * clone () const
- virtual ExactSize * cloneCleaned () const
- virtual bool operator== (const Value &value) const
Implementation of Value::operator==().
- virtual void merge (const Value &value)
Implementation of Value::merge().
- virtual size_t memoryUsage () const
Implementation of Value::memoryUsage().
- virtual std::string toString () const
Implementation of Value::toString().
- virtual bool matchesString (const std::string &text, std::string &rationale) const
Implementation of Value::matchesString().
- virtual void add (const Value &a, const Value &b)
Implementation of Value::add().
- virtual void fadd (const Value &a, const Value &b)
Implementation of Value::fadd().
- virtual void sub (const Value &a, const Value &b)
Implementation of Value::sub().
- virtual void fsub (const Value &a, const Value &b)
Implementation of Value::fsub().
- virtual void mul (const Value &a, const Value &b)
Implementation of Value::mul().
- virtual void fmul (const Value &a, const Value &b)
Implementation of Value::fmul().
- virtual void udiv (const Value &a, const Value &b)
Implementation of Value::udiv().
- virtual void sdiv (const Value &a, const Value &b)
Implementation of Value::sdiv().
- virtual void fdiv (const Value &a, const Value &b)
Implementation of Value::fdiv().
- virtual void urem (const Value &a, const Value &b)
Implementation of Value::urem().
- virtual void srem (const Value &a, const Value &b)
Implementation of Value::srem().
- virtual void frem (const Value &a, const Value &b)
Implementation of Value::frem().
- virtual void shl (const Value &a, const Value &b)
Implementation of Value::shl().
- virtual void lshr (const Value &a, const Value &b)
Implementation of Value::lshr().
- virtual void ashr (const Value &a, const Value &b)
Implementation of Value::ashr().
- virtual void and_ (const Value &a, const Value &b)

Implementation of Value::and_().

- virtual void or_ (const Value &a, const Value &b)

Implementation of Value::or_().

- virtual void xor_ (const Value &a, const Value &b)

Implementation of Value::xor_().

- virtual void icmp (const Value &a, const Value &b, llvm::CmpInst::Predicate predicate)

Implementation of Value::icmp().

- virtual void fcmp (const Value &a, const Value &b, llvm::CmpInst::Predicate predicate)

Implementation of Value::fcmp().

- virtual std::vector< Value * > getItem (const Value &offset) const

Implementation of Array::Interface::getItem().

- virtual Value * getItem (uint64_t offset) const

Implementation of Array::Interface::getItem().

- virtual void setItem (const Value &offset, const Value &value)

Implementation of Array::Interface::setItem().

- virtual void setItem (uint64_t offset, const Value &value)

Implementation of Array::Interface::setItem().

Public Attributes

- std::vector< Value * > **mValues**

Additional Inherited Members

10.8.1 Detailed Description

Array with exact size and limited length. It keeps all array members separately, not losing precision at all.

10.8.2 Member Function Documentation

10.8.2.1 ExactSize * Canal::Array::ExactSize::clone () const [virtual]

Implementation of Value::clone(). Covariant return type.

Implements Canal::Value.

10.8.2.2 ExactSize * Canal::Array::ExactSize::cloneCleaned () const [virtual]

Implementation of Value::cloneCleaned(). Covariant return type.

Implements Canal::Value.

The documentation for this class was generated from the following files:

- lib/ArrayExactSize.h
- lib/ArrayExactSize.cpp

10.9 Canal::FunctionModel Class Reference

Public Member Functions

- bool **canHandle** (llvm::Function *function, bool implementationAvailable)
- void **handle** (llvm::Function *function, State &state)

The documentation for this class was generated from the following file:

- lib/FunctionModel.h

10.10 Canal::FunctionModelManager Class Reference

Public Member Functions

- bool **canHandle** (llvm::Function *function, bool implementationAvailable)
- void **handle** (llvm::Function *function, State &state)

The documentation for this class was generated from the following file:


- lib/FunctionModelManager.h

10.11 Canal::Pointer::InclusionBased Class Reference


Inclusion-based flow-insensitive abstract pointer.

```
#include <Pointer.h>
```

Inheritance diagram for Canal::Pointer::InclusionBased:

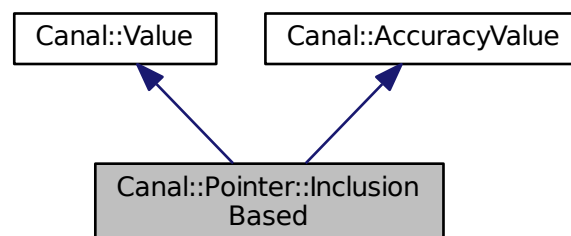

Collaboration diagram for `Canal::Pointer::InclusionBased`:

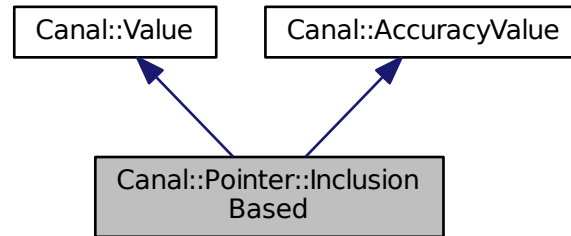

Public Member Functions

- `InclusionBased (const llvm::Module &module, const llvm::Type *type)`
Standard constructor.
- `InclusionBased (const InclusionBased &second)`
Copy constructor.
- `virtual ~InclusionBased ()`
Standard destructor.
- `void addTarget (Target::Type type, const llvm::Value *instruction, const llvm::Value *target, const std::vector< Value * > &offsets, Value *numericOffset)`
- `Value * dereferenceAndMerge (const State &state) const`
- `InclusionBased * bitcast (const llvm::Type *type) const`
Creates a copy of this object with a different pointer type.
- `InclusionBased * getElementPtr (const std::vector< Value * > &offsets, const llvm::Type *type) const`
- `void store (const Value &value, State &state)`
- `virtual InclusionBased * clone () const`
- `virtual InclusionBased * cloneCleaned () const`
- `virtual bool operator== (const Value &value) const`
Implementation of Value::operator==().
- `virtual void merge (const Value &value)`
Implementation of Value::merge().
- `virtual size_t memoryUsage () const`
Implementation of Value::memoryUsage().
- `virtual std::string toString () const`
Implementation of Value::toString().
- `virtual bool matchesString (const std::string &text, std::string &rational) const`
Implementation of Value::matchesString().
- `virtual float accuracy () const`
Implementation of AccuracyValue::accuracy().
- `virtual bool isBottom () const`

Implementation of AccuracyValue::isBottom().

- virtual void setBottom ()

Implementation of AccuracyValue::setBottom().

- virtual bool isTop () const

Implementation of AccuracyValue::isTop().

- virtual void setTop ()

Implementation of AccuracyValue::setTop().

Additional Inherited Members

10.11.1 Detailed Description

Inclusion-based flow-insensitive abstract pointer.

10.11.2 Member Function Documentation

10.11.2.1 void Canal::Pointer::InclusionBased::addTarget (Target::Type *type*, const llvm::Value * *instruction*, const llvm::Value * *target*, const std::vector< Value * > & *offsets*, Value * *numericOffset*)

Add a new target to the pointer.

Parameters

<i>type</i>	Type of the referenced memory.
<i>instruction</i>	Place where the pointer target is added.
<i>target</i>	Represents the target memory block. If type is Constant, it must be NULL. Otherwise, it must be a valid pointer to an instruction. This is a key to State::mFunctionBlocks, State::mFunctionVariables, State::mGlobalBlocks, or State::mGlobalVariables, depending on the type.
<i>offsets</i>	Offsets in the getelementptr style. The provided vector might be empty. The newly created pointer target becomes the owner of the objects in the vector.
<i>numericOffset</i>	Numerical offset that is used in addition to the getelementptr style offset and after they have been applied. It might be NULL, which indicates the offset 0. The newly created pointer target becomes the owner of the numerical offset when it's provided. This parameter is mandatory for pointers of Constant type, because it contains the constant.

10.11.2.2 InclusionBased * Canal::Pointer::InclusionBased::clone () const [virtual]

Implementation of Value::clone(). Covariant return type – it really overrides Value::clone().

Implements Canal::Value.

10.11.2.3 InclusionBased * Canal::Pointer::InclusionBased::cloneCleaned () const [virtual]

Implementation of Value::cloneCleaned(). Covariant return type.

Implements Canal::Value.

10.11.2.4 Value * Canal::Pointer::InclusionBased::dereferenceAndMerge (const State & state) const

Dereference all targets and merge the results into single abstract value. The returned value is owned by the caller.

Returns

It might return NULL.

10.11.2.5 InclusionBased * Canal::Pointer::InclusionBased::getElementPtr (const std::vector< Value * > & offsets, const llvm::Type * type) const

Creates a copy of this object pointing to subtargets.

Parameters


<i>offsets</i>	Pointer takes ownership of the values inside the vector.
----------------	--

The documentation for this class was generated from the following files:

- lib/Pointer.h
- lib/Pointer.cpp

10.12 Canal::Array::Interface Class Reference

Inheritance diagram for Canal::Array::Interface:

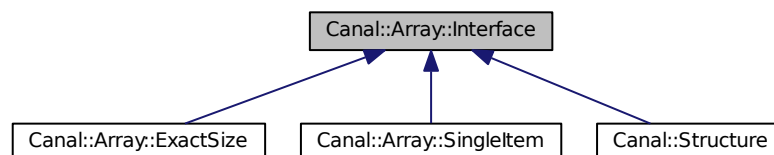

Public Member Functions

- Value * getValue (const Value &offset) const
- Value * getValue (uint64_t offset) const
- virtual std::vector< Value * > getItem (const Value &offset) const =0
- virtual Value * getItem (uint64_t offset) const =0
- virtual void setItem (const Value &offset, const Value &value)=0
- virtual void setItem (uint64_t offset, const Value &value)=0

10.12.1 Member Function Documentation

10.12.1.1 `virtual std::vector<Value*> Canal::Array::Interface::getItem (const Value & offset) const`
[pure virtual]

Get the array items pointed by the provided offset. Returns internal array items that are owned by the array. Caller must not delete the items.

Implemented in Canal::Array::SingleItem, Canal::Array::ExactSize, and Canal::Structure.

10.12.1.2 `virtual Value* Canal::Array::Interface::getItem (uint64_t offset) const` [pure virtual]

Get the array item pointed by the provided offset. Returns internal array item that is owned by the array. Caller must not delete the item.

Note

The uint64_t offset variant exists because of the extractvalue instruction, which provides exact numeric offsets.

For future array domains it might be necessary to extend this method to return a list of values.

Implemented in Canal::Array::SingleItem, Canal::Array::ExactSize, and Canal::Structure.

10.12.1.3 `Value * Canal::Array::Interface::getValue (const Value & offset) const`

Gets the value representing the array item or items pointed by the provided offset. Caller is responsible for deleting the returned value.

10.12.1.4 `Value* Canal::Array::Interface::getValue (uint64_t offset) const`

Gets the value representing the array item pointed by the provided offset. Caller is responsible for deleting the returned value.

Note

The uint64_t offset variant exists because of the extractvalue instruction, which provides exact numeric offsets.

10.12.1.5 `virtual void Canal::Array::Interface::setItem (const Value & offset, const Value & value)`
[pure virtual]

Parameters

<i>value</i>	The method does not take the ownership of this memory. It copies the contents of the value instead.
--------------	---

Implemented in Canal::Array::SingleItem, Canal::Array::ExactSize, and Canal::Structure.

10.12.1.6 `virtual void Canal::Array::Interface::setItem (uint64_t offset, const Value & value)` [pure virtual]

Parameters

<i>value</i>	The method does not take the ownership of this memory. It copies the contents of the value instead.
--------------	---

Note

The `uint64_t` offset variant exists because of the `insertvalue` instruction, which provides exact numeric offsets.

Implemented in `Canal::Array::SingleItem`, `Canal::Array::ExactSize`, and `Canal::Structure`.

The documentation for this class was generated from the following files:

- `lib/ArrayInterface.h`
- `lib/ArrayInterface.cpp`

10.13 Canal::Interpreter Class Reference

```
#include <Interpreter.h>
```

Public Member Functions

- `void addGlobalVariables (State &state, const Environment &environment)`
- `virtual bool step (Stack &stack, const Environment &environment)`
- `void interpretInstruction (Stack &stack, const Environment &environment)`

Interprets current instruction.

Protected Member Functions

- `virtual void ret (const llvm::ReturnInst &instruction, State &state, const Environment &environment)`
- `virtual void br (const llvm::BranchInst &instruction, State &state, const Environment &environment)`
- `virtual void switch_ (const llvm::SwitchInst &instruction, State &state, const Environment &environment)`
- `virtual void indirectbr (const llvm::IndirectBrInst &instruction, State &state, const Environment &environment)`
- `virtual void invoke (const llvm::InvokeInst &instruction, Stack &stack, const Environment &environment)`
- `virtual void unreachable (const llvm::UnreachableInst &instruction, State &state, const Environment &environment)`
- `virtual void add (const llvm::BinaryOperator &instruction, State &state, const Environment &environment)`

Sum of two operands. It's a binary operator.

- `virtual void fadd (const llvm::BinaryOperator &instruction, State &state, const Environment &environment)`
- `virtual void sub (const llvm::BinaryOperator &instruction, State &state, const Environment &environment)`

Difference of two operands. It's a binary operator.

- virtual void fsub (const llvm::BinaryOperator &instruction, State &state, const Environment &environment)
- virtual void mul (const llvm::BinaryOperator &instruction, State &state, const Environment &environment)

Product of two operands. It's a binary operator.

- virtual void fmul (const llvm::BinaryOperator &instruction, State &state, const Environment &environment)

Product of two operands. It's a binary operator.

- virtual void udiv (const llvm::BinaryOperator &instruction, State &state, const Environment &environment)
- virtual void sdiv (const llvm::BinaryOperator &instruction, State &state, const Environment &environment)
- virtual void fdiv (const llvm::BinaryOperator &instruction, State &state, const Environment &environment)
- virtual void urem (const llvm::BinaryOperator &instruction, State &state, const Environment &environment)

Unsigned division remainder. It's a binary operator.

- virtual void srem (const llvm::BinaryOperator &instruction, State &state, const Environment &environment)

Signed division remainder. It's a binary operator.

- virtual void frem (const llvm::BinaryOperator &instruction, State &state, const Environment &environment)

Floating point remainder. It's a binary operator.

- virtual void shl (const llvm::BinaryOperator &instruction, State &state, const Environment &environment)

It's a bitwise binary operator.

- virtual void lshr (const llvm::BinaryOperator &instruction, State &state, const Environment &environment)

It's a bitwise binary operator.

- virtual void ashr (const llvm::BinaryOperator &instruction, State &state, const Environment &environment)

It's a bitwise binary operator.

- virtual void and_ (const llvm::BinaryOperator &instruction, State &state, const Environment &environment)

It's a bitwise binary operator.

- virtual void or_ (const llvm::BinaryOperator &instruction, State &state, const Environment &environment)

It's a bitwise binary operator.

- virtual void xor_ (const llvm::BinaryOperator &instruction, State &state, const Environment &environment)

It's a bitwise binary operator.

- virtual void extractelement (const llvm::ExtractElementInst &instruction, State &state, const Environment &environment)

It's a vector operation.

- virtual void insertelement (const llvm::InsertElementInst &instruction, State &state, const Environment &environment)

It's a vector operation.

- virtual void shufflevector (const llvm::ShuffleVectorInst &instruction, Stack &stack, const Environment &environment)

It's a vector operation.

- virtual void extractvalue (const llvm::ExtractValueInst &instruction, State &state, const Environment &environment)

It's an aggregate operation.

- virtual void insertvalue (const llvm::InsertValueInst &instruction, State &state, const Environment &environment)

It's an aggregate operation.

- virtual void alloca_ (const llvm::AllocaInst &instruction, Stack &stack, const Environment &environment)

It's a memory access operation.

- virtual void load (const llvm::LoadInst &instruction, State &state, const Environment &environment)

It's a memory access operation.

- virtual void store (const llvm::StoreInst &instruction, State &state, const Environment &environment)

It's a memory access operation.

- virtual void getelementptr (const llvm::GetElementPtrInst &instruction, Stack &stack, const Environment &environment)

It's a memory addressing operation.

- virtual void trunc (const llvm::TruncInst &instruction, State &state, const Environment &environment)

It's a conversion operation.

- virtual void zext (const llvm::ZExtInst &instruction, State &state, const Environment &environment)

It's a conversion operation.

- virtual void sext (const llvm::SExtInst &instruction, State &state, const Environment &environment)

It's a conversion operation.

- virtual void fptrunc (const llvm::FPTruncInst &instruction, State &state, const Environment &environment)

It's a conversion operation.

- virtual void fpxext (const llvm::FPExtInst &instruction, State &state, const Environment &environment)

It's a conversion operation.

- virtual void fptoui (const llvm::FPToUIInst &instruction, State &state, const Environment &environment)

It's a conversion operation.

- virtual void fptosi (const llvm::FPToSIInst &instruction, State &state, const Environment &environment)

It's a conversion operation.

- virtual void uitofp (const llvm::UIToFPInst &instruction, State &state, const Environment &environment)

It's a conversion operation.

- virtual void sitofp (const llvm::SIToFPInst &instruction, State &state, const Environment &environment)

It's a conversion operation.

- virtual void ptrtoint (const llvm::PtrToIntInst &instruction, State &state, const Environment &environment)

It's a conversion operation.

- virtual void inttoptr (const llvm::IntToPtrInst &instruction, State &state, const Environment &environment)

It's a conversion operation.

- virtual void `bitcast` (const llvm::BitCastInst &instruction, State &state, const Environment &environment)

It's a conversion operation.

- virtual void **icmp** (const llvm::ICmpInst &instruction, State &state, const Environment &environment)
- virtual void **fcmp** (const llvm::FCmpInst &instruction, State &state, const Environment &environment)
- virtual void **phi** (const llvm::PHINode &instruction, State &state, const Environment &environment)
- virtual void **select** (const llvm::SelectInst &instruction, State &state, const Environment &environment)
- virtual void **call** (const llvm::CallInst &instruction, Stack &stack, const Environment &environment)
- virtual void **va_arg** (const llvm::VArgInst &instruction, State &state, const Environment &environment)

10.13.1 Detailed Description

Context-sensitive flow-insensitive operational abstract interpreter. Interprets instructions in abstract domain.

This is an abstract class, which is used as a base class for actual abstract interpretation implementations.

10.13.2 Member Function Documentation

10.13.2.1 void Canal::Interpreter::addGlobalVariables (State & state, const Environment & environment)

Adds all global variables and constants from a module to the state.

10.13.2.2 void Canal::Interpreter::br (const llvm::BranchInst & instruction, State & state, const Environment & environment) [protected], [virtual]

Transfer to a different basic block in the current function. It's a terminator instruction.

10.13.2.3 void Canal::Interpreter::fadd (const llvm::BinaryOperator & instruction, State & state, const Environment & environment) [protected], [virtual]

Sum of two operands. It's a binary operator. The operands are floating point or vector of floating point values.

10.13.2.4 void Canal::Interpreter::fdiv (const llvm::BinaryOperator & instruction, State & state, const Environment & environment) [protected], [virtual]

Quotient of two operands. It's a binary operator. The operands are floating point or vector of floating point values.

10.13.2.5 `void Canal::Interpreter::fsub (const llvm::BinaryOperator & instruction, State & state, const Environment & environment)` [protected], [virtual]

Difference of two operands. It's a binary operator. The operands are floating point or vector of floating point values.

10.13.2.6 `void Canal::Interpreter::indirectbr (const llvm::IndirectBrInst & instruction, State & state, const Environment & environment)` [protected], [virtual]

An indirect branch to a label within the current function, whose address is specified by "address". It's a terminator instruction.

10.13.2.7 `void Canal::Interpreter::invoke (const llvm::InvokeInst & instruction, Stack & stack, const Environment & environment)` [protected], [virtual]

Transfer to a specified function, with the possibility of control flow transfer to either the 'normal' label or the 'exception' label. It's a terminator instruction.

10.13.2.8 `void Canal::Interpreter::ret (const llvm::ReturnInst & instruction, State & state, const Environment & environment)` [protected], [virtual]

Return control flow (and optionally a value) from a function back to the caller. It's a terminator instruction.

10.13.2.9 `void Canal::Interpreter::sdiv (const llvm::BinaryOperator & instruction, State & state, const Environment & environment)` [protected], [virtual]

Quotient of two operands. It's a binary operator. The operands are integer or vector of integer values.

10.13.2.10 `bool Canal::Interpreter::step (Stack & stack, const Environment & environment)` [virtual]

One step of the interpreter. Interprets current instruction and moves to the next one.

Returns

True if next step is possible. False on the end of the program.

10.13.2.11 `void Canal::Interpreter::switch_ (const llvm::SwitchInst & instruction, State & state, const Environment & environment)` [protected], [virtual]

Transfer control flow to one of several different places. It is a generalization of the 'br' instruction, allowing a branch to occur to one of many possible destinations. It's a terminator instruction.

10.13.2.12 `void Canal::Interpreter::udiv (const llvm::BinaryOperator & instruction, State & state, const Environment & environment)` [protected], [virtual]

Quotient of two operands. It's a binary operator. The operands are integer or vector of integer values.

10.13.2.13 `void Canal::Interpreter::unreachable (const llvm::UnreachableInst & instruction, State & state, const Environment & environment)` [protected], [virtual]


No defined semantics. This instruction is used to inform the optimizer that a particular portion of the code is not reachable. It's a terminator instruction.

The documentation for this class was generated from the following files:


- lib/Interpreter.h
- lib/Interpreter.cpp

10.14 Canal::Float::Range Class Reference

Inheritance diagram for Canal::Float::Range:

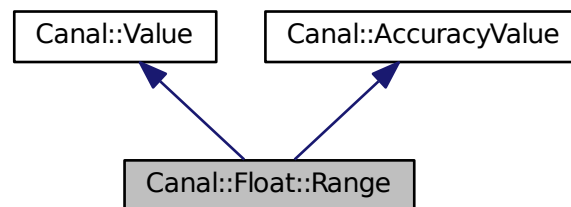

Collaboration diagram for Canal::Float::Range:

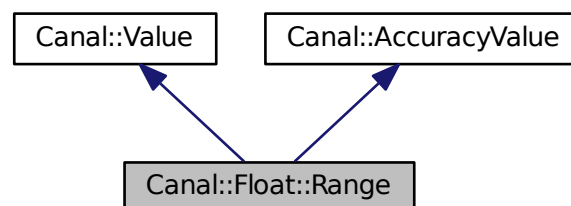

Public Member Functions

- **Range** (const llvm::fltSemantics &semantics)
- **int compare** (const Range &value, llvm::CmpInst::Predicate predicate) const

- `const llvm::fltSemantics & getSemantics () const`
- `virtual Range * clone () const`
Create a copy of this value.
- `virtual Range * cloneCleaned () const`
- `virtual bool operator== (const Value &value) const`
- `virtual void merge (const Value &value)`
Merge another value into this one.
- `virtual size_t memoryUsage () const`
Get memory usage (used byte count) of this abstract value.
- `virtual std::string toString () const`
Create a string representation of the abstract value.
- `virtual bool matchesString (const std::string &text, std::string &rationale) const`
- `virtual float accuracy () const`
- `virtual bool isBottom () const`
Is it the lowest value.
- `virtual void setBottom ()`
Set to the lowest value.
- `virtual bool isTop () const`
Is it the highest value.
- `virtual void setTop ()`
Set it to the top value of lattice.

Public Attributes

- `bool mEmpty`
- `bool mTop`
- `llvm::APFloat mFrom`
- `llvm::APFloat mTo`

Additional Inherited Members

10.14.1 Member Function Documentation

10.14.1.1 `float Canal::Float::Range::accuracy () const` [virtual]

Get accuracy of the abstract value (0 - 1). In finite-height lattices, it is determined by the position of the value in the lattice.

Accuracy 0 means that the value represents all possible values (top). Accuracy 1 means that the value represents the most precise and exact value (bottom).

Reimplemented from `Canal::AccuracyValue`.

10.14.1.2 `Range * Canal::Float::Range::cloneCleaned () const` [virtual]

This is used to obtain instance of the value type and to get an empty value at the same time.

Implements `Canal::Value`.

10.14.1.3 `bool Canal::Float::Range::matchesString (const std::string & text, std::string & rationale) const [virtual]`

Checks if the abstract value internal state matches the text description. Full coverage of the state is not expected, the text can contain just partial information.

Implements Canal::Value.

10.14.1.4 `bool Canal::Float::Range::operator== (const Value & value) const [virtual]`

Implementing this is mandatory. Values are compared while computing the fixed point.

Implements Canal::Value.

10.14.1.5 `std::string Canal::Float::Range::toString () const [virtual]`

Create a string representation of the abstract value.

An idea for different memory interpretation. `virtual Value *castTo(const llvm::Type *itemType, int offset) const = 0;`

Implements Canal::Value.

The documentation for this class was generated from the following files:


- lib/FloatRange.h
- lib/FloatRange.cpp

10.15 Canal::Integer::Range Class Reference


Abstracts integer values as a range min - max.

```
#include <IntegerRange.h>
```

Inheritance diagram for Canal::Integer::Range:

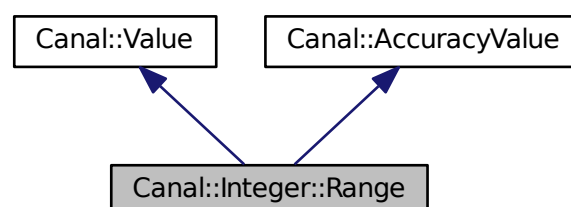

Collaboration diagram for `Canal::Integer::Range`:

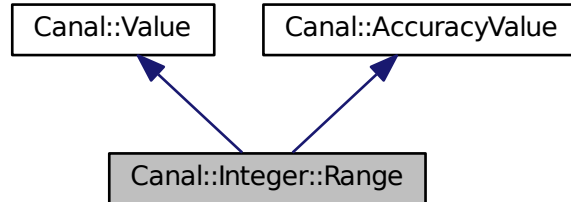

Public Member Functions

- `Range (unsigned numBits)`
Initializes to the lowest value.
- **`Range`** (`const llvm::APInt &constant`)
- unsigned **`getBitWidth`** () const
- bool `signedMin (llvm::APInt &result)` const
- bool `signedMax (llvm::APInt &result)` const
- bool `unsignedMin (llvm::APInt &result)` const
- bool `unsignedMax (llvm::APInt &result)` const
- bool `isSingleValue` () const
- virtual `Range * clone` () const
- virtual `Range * cloneCleaned` () const
- virtual bool `operator== (const Value &value)` const
Implementation of `Value::operator==()`.
- virtual void `merge (const Value &value)`
Implementation of `Value::merge()`.
- virtual `size_t memoryUsage` () const
Implementation of `Value::memoryUsage()`.
- virtual `std::string toString` () const
Implementation of `Value::toString()`.
- virtual bool `matchesString (const std::string &text, std::string &rationale)` const
Implementation of `Value::matchesString()`.
- virtual void `add (const Value &a, const Value &b)`
Implementation of `Value::add()`.
- virtual void `sub (const Value &a, const Value &b)`
Implementation of `Value::sub()`.
- virtual void `mul (const Value &a, const Value &b)`
Implementation of `Value::mul()`.
- virtual void `udiv (const Value &a, const Value &b)`
Implementation of `Value::udiv()`.
- virtual void `sdiv (const Value &a, const Value &b)`

Implementation of Value::sdiv().

- virtual void urem (const Value &a, const Value &b)

Implementation of Value::urem().

- virtual void srem (const Value &a, const Value &b)

Implementation of Value::srem().

- virtual void shl (const Value &a, const Value &b)

Implementation of Value::shl().

- virtual void lshr (const Value &a, const Value &b)

Implementation of Value::lshr().

- virtual void ashr (const Value &a, const Value &b)

Implementation of Value::ashr().

- virtual void and_ (const Value &a, const Value &b)

Implementation of Value::and_().

- virtual void or_ (const Value &a, const Value &b)

Implementation of Value::or_().

- virtual void xor_ (const Value &a, const Value &b)

Implementation of Value::xor_().

- virtual void icmp (const Value &a, const Value &b, llvm::CmpInst::Predicate predicate)

Implementation of Value::icmp().

- virtual float accuracy () const

Implementation of AccuracyValue::accuracy().

- virtual bool isBottom () const

Implementation of AccuracyValue::isBottom().

- virtual void setBottom ()

Implementation of AccuracyValue::setBottom().

- virtual bool isTop () const

Implementation of AccuracyValue::isTop().

- virtual void setTop ()

Implementation of AccuracyValue::setTop().

Public Attributes

- bool **mEmpty**
- bool **mSignedTop**
- llvm::APInt mSignedFrom

The number is included in the interval.

- llvm::APInt mSignedTo

The number is included in the interval.

- bool **mUnsignedTop**

- llvm::APInt mUnsignedFrom

The number is included in the interval.

- llvm::APInt mUnsignedTo

The number is included in the interval.

Additional Inherited Members

10.15.1 Detailed Description

Abstracts integer values as a range min - max.

10.15.2 Member Function Documentation

10.15.2.1 `Range * Canal::Integer::Range::clone () const` [virtual]

Implementation of Value::clone(). Covariant return type.

Implements Canal::Value.

10.15.2.2 `Range * Canal::Integer::Range::cloneCleaned () const` [virtual]

Implementation of Value::cloneCleaned(). Covariant return type.

Implements Canal::Value.

10.15.2.3 `bool Canal::Integer::Range::isSingleValue () const`

Returns true if the range represents a single number. Signed and unsigned representations might differ, though.

10.15.2.4 `bool Canal::Integer::Range::signedMax (llvm::APInt & result) const`

Highest signed number represented by this abstract domain.

Parameters

<i>result</i>	Filled by the maximum value if it is known. Otherwise, the value is undefined.
---------------	--

Returns

True if the result is known and the parameter was set to correct value.

10.15.2.5 `bool Canal::Integer::Range::signedMin (llvm::APInt & result) const`

Lowest signed number represented by this abstract domain.

Parameters

<i>result</i>	Filled by the minimum value if it is known. Otherwise, the value is undefined.
---------------	--

Returns

True if the result is known and the parameter was set to correct value.

10.15.2.6 bool Canal::Integer::Range::unsignedMax (llvm::APInt & *result*) const

Highest unsigned number represented by this abstract domain.

Parameters

<i>result</i>	Filled by the maximum value if it is known. Otherwise, the value is undefined.
---------------	--

Returns

True if the result is known and the parameter was set to correct value.

10.15.2.7 bool Canal::Integer::Range::unsignedMin (llvm::APInt & *result*) const

Lowest unsigned number represented by this abstract domain.

Parameters

<i>result</i>	Filled by the minimum value if it is known. Otherwise, the value is undefined.
---------------	--

Returns

True if the result is known and the parameter was set to correct value.

The documentation for this class was generated from the following files:

- lib/IntegerRange.h
- lib/IntegerRange.cpp

10.16 Canal::APIntUtils::SCompare Struct Reference

Public Member Functions

- bool **operator()** (const llvm::APInt &a, const llvm::APInt &b) const

The documentation for this struct was generated from the following file:

- lib/APIntUtils.h

10.17 Canal::SELinuxModulePass Class Reference

Public Member Functions

- virtual bool **runOnModule** (llvm::Module &module)
- void **interpretFunction** (const llvm::Function &F, const std::vector< Value > &Arguments)
- virtual void **getAnalysisUsage** (llvm::AnalysisUsage &AU) const

Static Public Attributes

- static char **ID** = 0

The documentation for this class was generated from the following file:


- lib/SELinuxModulePass.cpp

10.18 Canal::Array::SingleItem Class Reference


This array type is very imprecise.

```
#include <ArraySingleItem.h>
```

Inheritance diagram for Canal::Array::SingleItem:

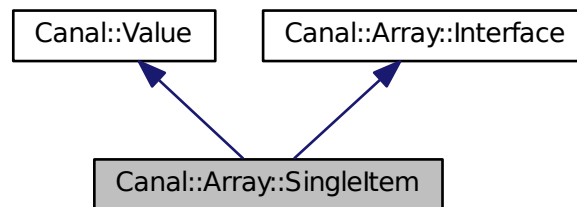

Collaboration diagram for Canal::Array::SingleItem:

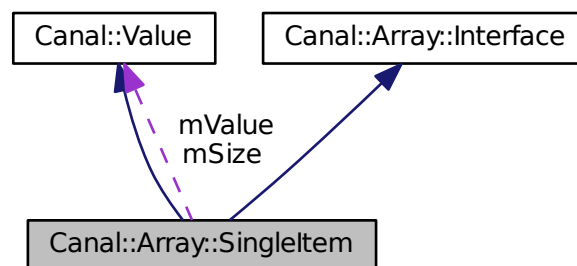

Public Member Functions

- **SingleItem** (const SingleItem &singleItem)

- virtual SingleItem * clone () const
- virtual SingleItem * cloneCleaned () const
- virtual bool operator== (const Value &value) const
Implementation of Value::operator==(.)
- virtual void merge (const Value &value)
Implementation of Value::merge().
- virtual size_t memoryUsage () const
Implementation of Value::memoryUsage().
- virtual std::string toString () const
Implementation of Value::toString().
- virtual bool matchesString (const std::string &text, std::string &rationale) const
Implementation of Value::matchesString().
- virtual void add (const Value &a, const Value &b)
Implementation of Value::add().
- virtual void fadd (const Value &a, const Value &b)
Implementation of Value::fadd().
- virtual void sub (const Value &a, const Value &b)
Implementation of Value::sub().
- virtual void fsub (const Value &a, const Value &b)
Implementation of Value::fsub().
- virtual void mul (const Value &a, const Value &b)
Implementation of Value::mul().
- virtual void fmul (const Value &a, const Value &b)
Implementation of Value::fmul().
- virtual void udiv (const Value &a, const Value &b)
Implementation of Value::udiv().
- virtual void sdiv (const Value &a, const Value &b)
Implementation of Value::sdiv().
- virtual void fdiv (const Value &a, const Value &b)
Implementation of Value::fdiv().
- virtual void urem (const Value &a, const Value &b)
Implementation of Value::urem().
- virtual void srem (const Value &a, const Value &b)
Implementation of Value::srem().
- virtual void frem (const Value &a, const Value &b)
Implementation of Value::frem().
- virtual void shl (const Value &a, const Value &b)
Implementation of Value::shl().
- virtual void lshr (const Value &a, const Value &b)
Implementation of Value::lshr().
- virtual void ashr (const Value &a, const Value &b)
Implementation of Value::ashr().
- virtual void and_ (const Value &a, const Value &b)
Implementation of Value::and_().
- virtual void or_ (const Value &a, const Value &b)
Implementation of Value::or_().
- virtual void xor_ (const Value &a, const Value &b)

Implementation of Value::xor_().

- virtual void icmp (const Value &a, const Value &b, llvm::CmpInst::Predicate predicate)

Implementation of Value::icmp().

- virtual void fcmp (const Value &a, const Value &b, llvm::CmpInst::Predicate predicate)

Implementation of Value::fcmp().

- virtual std::vector< Value * > getItem (const Value &offset) const

Implementation of Array::Interface::getItem().

- virtual Value * getItem (uint64_t offset) const

Implementation of Array::Interface::getItem().

- virtual void setItem (const Value &offset, const Value &value)

Implementation of Array::Interface::setItem().

- virtual void setItem (uint64_t offset, const Value &value)

Implementation of Array::Interface::setItem().

Public Attributes

- Value * **mValue**
- Value * mSize

Additional Inherited Members

10.18.1 Detailed Description

This array type is very imprecise.

The most trivial array type. It treats all array members as a single value. This means all the operations on the array are merged and used to move the single value up in its lattice.

10.18.2 Member Function Documentation

10.18.2.1 SingleItem * Canal::Array::SingleItem::clone () const [virtual]

Implementation of Value::clone(). Covariant return type.

Implements Canal::Value.

10.18.2.2 SingleItem * Canal::Array::SingleItem::cloneCleaned () const [virtual]

Implementation of Value::cloneCleaned(). Covariant return type.

Implements Canal::Value.

10.18.3 Member Data Documentation

10.18.3.1 Value* Canal::Array::SingleItem::mSize

Number of elements in the array. It is either a Constant or Integer::Container.


The documentation for this class was generated from the following files:

- lib/ArraySingleItem.h
- lib/ArraySingleItem.cpp

10.19 Canal::SlotTracker Class Reference

#include <SlotTracker.h>

Collaboration diagram for Canal::SlotTracker:

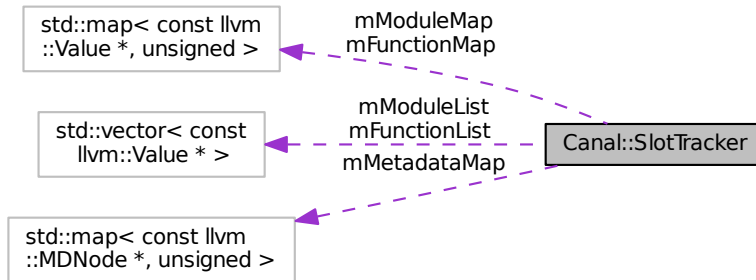

Public Types

- typedef `std::map< const llvm::MDNode *, unsigned >::iterator` `mdn_iterator`

MDNode map iterators.

Public Member Functions

- `SlotTracker (const llvm::Module &module)`
Construct from a module.
- `void setActiveFunction (const llvm::Function &function)`
- `int getLocalSlot (const llvm::Value &value)`
- `const llvm::Value * getLocalSlot (int num)`
- `int getGlobalSlot (const llvm::Value &value)`
Get the slot number of a global value.
- `const llvm::Value * getGlobalSlot (int num)`
- `int getMetadataSlot (const llvm::MDNode &node)`
Get the slot number of a MDNode.
- `mdn_iterator mdn_begin ()`
- `mdn_iterator mdn_end ()`
- `unsigned mdn_size () const`
- `bool mdn_empty () const`

Protected Types

- typedef std::map< const
llvm::Value *, unsigned > ValueMap
A mapping of Values to slot numbers.
- typedef std::vector< const
llvm::Value * > **ValueList**

Protected Member Functions

- void initialize ()
This function does the actual initialization.
- void createFunctionSlot (const llvm::Value &value)
Insert the specified Value into the slot table.*
- void createModuleSlot (const llvm::GlobalValue &value)
Insert the specified GlobalValue into the slot table.*
- void createMetadataSlot (const llvm::MDNode &node)
Insert the specified MDNode into the slot table.*
- void processModule ()
- void processFunction ()

Protected Attributes

- const llvm::Module & mModule
The module for which we are holding slot numbers.
- bool **mModuleProcessed**
- const llvm::Function * mFunction
The function for which we are holding slot numbers.
- bool **mFunctionProcessed**
- ValueMap mModuleMap
The slot map for the module level data.
- ValueList **mModuleList**
- unsigned **mModuleNext**
- ValueMap mFunctionMap
The slot map for the function level data.
- ValueList **mFunctionList**
- unsigned **mFunctionNext**
- std::map< const llvm::MDNode
*, unsigned > mMetadataMap
The slot map for MDNodes.
- unsigned **mMetadataNext**

10.19.1 Detailed Description

This class provides computation of slot numbers. Initial version was taken from LLVM source code (lib/VMCore/AsmWriter.cpp).

10.19.2 Member Function Documentation

10.19.2.1 int Canal::SlotTracker::getLocalSlot (const llvm::Value & *value*)

Get the slot number for a value that is local to a function. Return the slot number of the specified value in it's type plane. If something is not in the SlotTracker, return -1.

10.19.2.2 void Canal::SlotTracker::processFunction () [protected]

Add all of the functions arguments, basic blocks, and instructions.

10.19.2.3 void Canal::SlotTracker::processModule () [protected]

Add all of the module level global variables (and their initializers) and function declarations, but not the contents of those functions.

10.19.2.4 void Canal::SlotTracker::setActiveFunction (const llvm::Function & *function*)


If you'd like to deal with a function instead of just a module, use this method to get its data into the SlotTracker.

The documentation for this class was generated from the following files:

- lib/SlotTracker.h
- lib/SlotTracker.cpp

10.20 Canal::Stack Class Reference

Collaboration diagram for Canal::Stack:

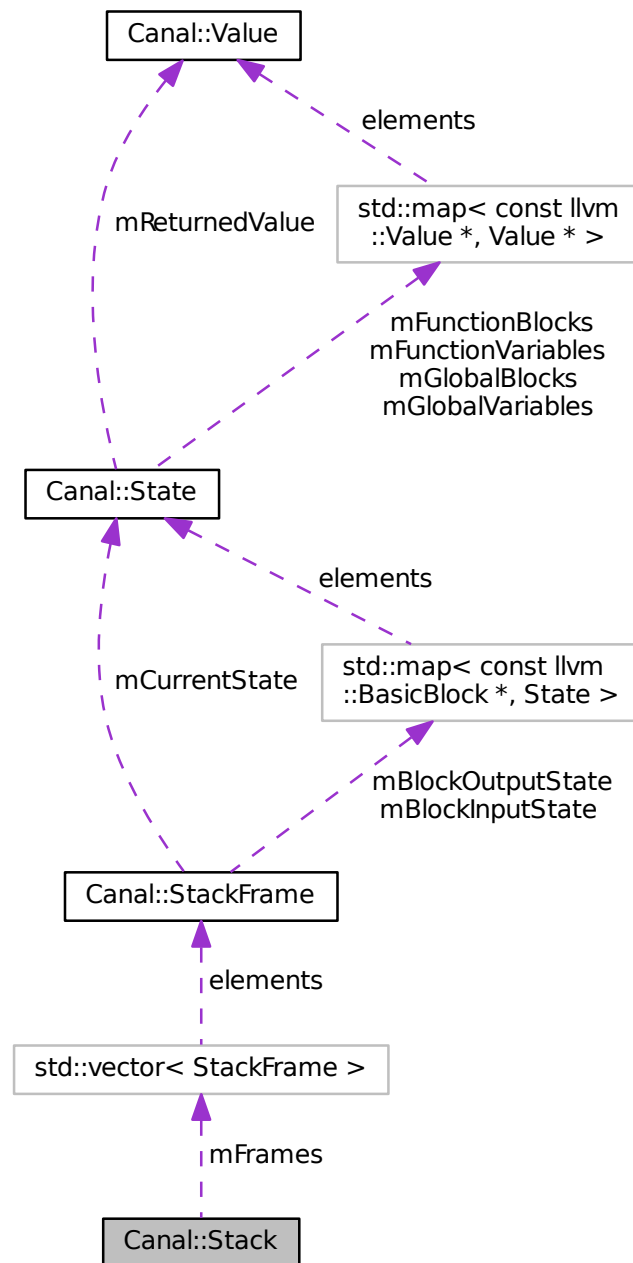

Public Member Functions

- bool **nextInstruction** ()
- bool **hasEnteredNewFrame** () const
- bool **hasReturnedFromFrame** () const
- std::vector< StackFrame > & **getFrames** ()
- const std::vector< StackFrame > & **getFrames** () const
- const llvm::Instruction & **getCurrentInstruction** () const
- State & **getCurrentState** ()
- const llvm::Function & **getCurrentFunction** () const
- void addFrame (const llvm::Function &function, const State &initialState)

Protected Attributes

- std::vector< StackFrame > **mFrames**
- bool **mHasEnteredNewFrame**
- bool **mHasReturnedFromFrame**

10.20.1 Member Function Documentation

10.20.1.1 void Canal::Stack::addFrame (const llvm::Function & *function*, const State & *initialState*)

Parameters


<i>function</i>	Function to be interpreted. Its instructions will be applied in abstract domain on the provided input state.
<i>initialState</i>	Initial state when entering the function. It includes global variables and function arguments.

The documentation for this class was generated from the following files:

- lib/Stack.h
- lib/Stack.cpp

10.21 Canal::StackFrame Class Reference

Collaboration diagram for Canal::StackFrame:

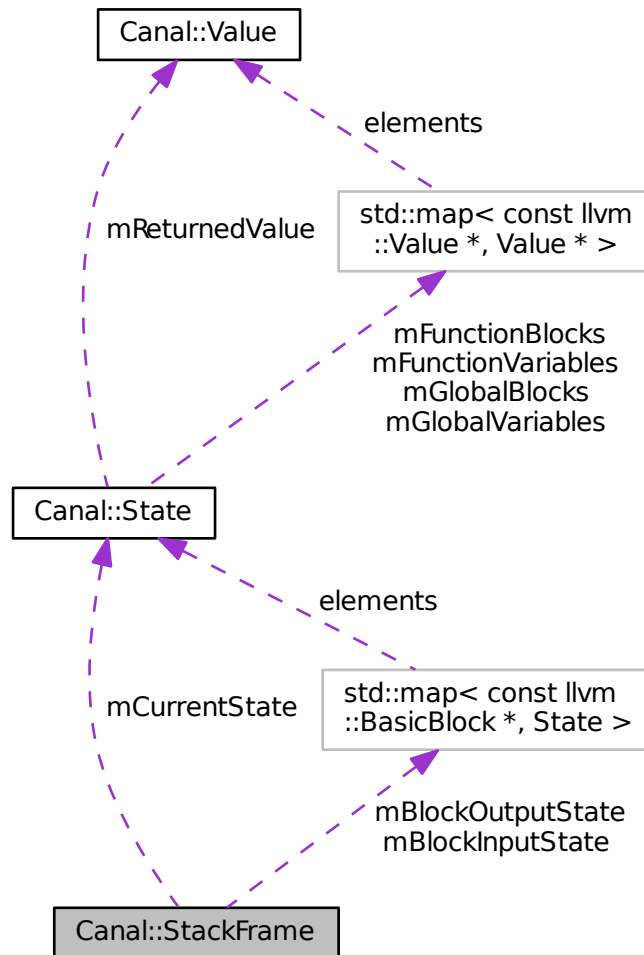

Public Member Functions

- **StackFrame** (const llvm::Function *function, const State &initialState)
- bool nextInstruction ()
- Value * **getReturnedValue** () const
- void **mergeGlobalVariables** (State &target) const

Public Attributes

- `const llvm::Function * mFunction`
- `std::map< const
llvm::BasicBlock *, State > mBlockInputState`
- `std::map< const
llvm::BasicBlock *, State > mBlockOutputState`
- `llvm::Function::const_iterator mCurrentBlock`
- `State mCurrentState`
- `llvm::BasicBlock::const_iterator mCurrentInstruction`
- `bool mChanged`

10.21.1 Member Function Documentation

10.21.1.1 `bool Canal::StackFrame::nextInstruction ()`

Returns true if next instruction should be interpreted for this frame, and false when fixpoint has been reached.

10.21.2 Member Data Documentation

10.21.2.1 `const llvm::Function* Canal::StackFrame::mFunction`

Never is NULL. It is a pointer just to allow storing instances of this class in `std::vector`.


The documentation for this class was generated from the following files:

- `lib/Stack.h`
- `lib/Stack.cpp`

10.22 Canal::State Class Reference

```
#include <State.h>
```

Collaboration diagram for Canal::State:

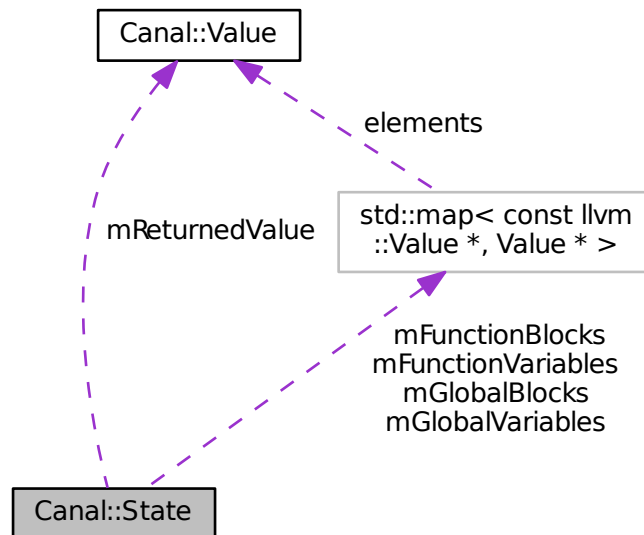

Public Member Functions

- **State** (const State &state)
- State & **operator=** (const State &state)
- bool **operator==** (const State &state) const
- bool **operator!=** (const State &state) const
- void clear ()
Clears everything. Releases all memory.
- void clearFunctionLevel ()
Clears function variables, blocks and returned value.
- void **merge** (const State &state)
- void mergeGlobalLevel (const State &state)
- void addGlobalVariable (const llvm::Value &place, Value *value)
- void addFunctionVariable (const llvm::Value &place, Value *value)
- void **addGlobalBlock** (const llvm::Value &place, Value *value)
- void addFunctionBlock (const llvm::Value &place, Value *value)
Adds a value created by alloca to the stack.
- const PlaceValueMap & **getGlobalVariables** () const
- const PlaceValueMap & **getGlobalBlocks** () const
- const PlaceValueMap & **getFunctionVariables** () const
- const PlaceValueMap & **getFunctionBlocks** () const
- Value * findVariable (const llvm::Value &place) const
- Value * findBlock (const llvm::Value &place) const

Public Attributes

- Value * mReturnedValue
Value returned from function.

Protected Attributes

- PlaceValueMap mGlobalVariables
- PlaceValueMap mGlobalBlocks
- PlaceValueMap mFunctionVariables
- PlaceValueMap mFunctionBlocks

10.22.1 Detailed Description

Includes global variables and heap. Includes function-level memory and variables (=stack).

10.22.2 Member Function Documentation

10.22.2.1 void Canal::State::addFunctionVariable (const llvm::Value & *place*, Value * *value*)

Adds a register-type value to the stack.

Parameters

<i>place</i>	Represents a place in the program where the function variable is assigned. Usually it is an instance of llvm::Instruction for a result of the instruction. It might also be an instance of llvm::Argument, which represents a function call parameter.
--------------	--

See also

To add a value created by alloca to the stack, use the method addFunctionBlock.

10.22.2.2 void Canal::State::addGlobalVariable (const llvm::Value & *place*, Value * *value*)

Parameters

<i>place</i>	Represents a place in the program where the global variable is defined and assigned.
--------------	--

10.22.2.3 Value * Canal::State::findBlock (const llvm::Value & *place*) const

Search both global and function blocks for a place. If the place is found, the block is returned. Otherwise NULL is returned.

10.22.2.4 Value * Canal::State::findVariable (const llvm::Value & *place*) const

Search both global and function variables for a place. If the place is found, the variable is returned. Otherwise NULL is returned.

10.22.2.5 void Canal::State::mergeGlobalLevel (const State & *state*)

Merge only global variables and global memory blocks of the provided state. This is used after a function call, where the modifications of the global state need to be merged to the state of the caller, but its function level state is not relevant.

10.22.3 Member Data Documentation

10.22.3.1 PlaceValueMap Canal::State::mFunctionBlocks [protected]

Nameless memory/values allocated on the stack. The values are referenced either by a pointer in mFunctionVariables or mGlobalVariables, or by another item in mFunctionBlocks or mGlobalBlocks.

The members of the list are owned by this class, so they are deleted in the state destructor.

10.22.3.2 PlaceValueMap Canal::State::mFunctionVariables [protected]

The value pointer does *not* point to mFunctionBlocks! To connect with a mFunctionBlocks item, create a Pointer object that contains a pointer to a StackBlocks item.

The key (llvm::Value*) is not owned by this class. It is not deleted. The value (Value*) memory is owned by this class, so it is deleted in state destructor.

10.22.3.3 PlaceValueMap Canal::State::mGlobalBlocks [protected]

Nameless memory/values allocated on the heap. It's referenced either by a pointer somewhere on a stack, by a global variable, or by another Block or stack Block.

The keys are not owned by this class. They represent the place where the block has been allocated. The values are owned by this class, so they are deleted in the state destructor.

10.22.3.4 PlaceValueMap Canal::State::mGlobalVariables [protected]


The key (llvm::Value*) is not owned by this class. It is not deleted. The value (Value*) memory is owned by this class, so it is deleted in state destructor.

The documentation for this class was generated from the following files:


- lib/State.h
- lib/State.cpp

10.23 Canal::Structure Class Reference

Inheritance diagram for Canal::Structure:

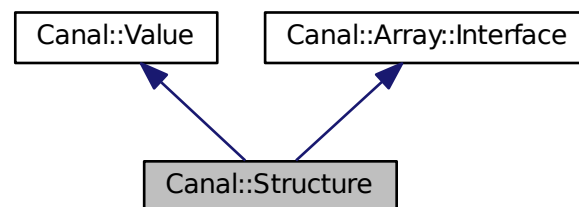

Collaboration diagram for Canal::Structure:

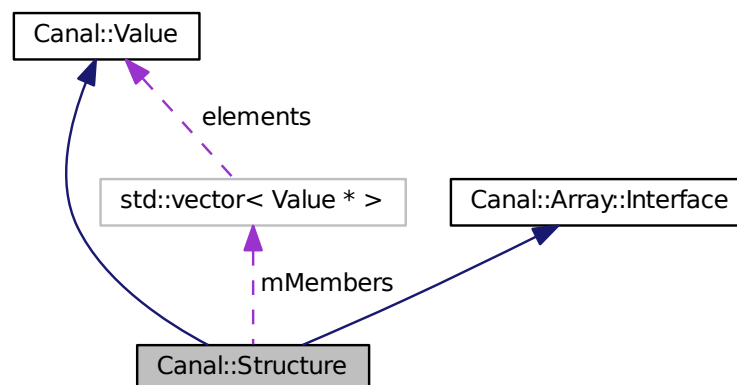

Public Member Functions

- **Structure** (const Structure &structure)
- virtual Structure * clone () const
- virtual Structure * cloneCleaned () const
- virtual bool operator== (const Value &value) const
Implementation of Value::operator==().
- virtual void merge (const Value &value)
Implementation of Value::merge().
- virtual size_t memoryUsage () const

Implementation of Value::memoryUsage().

- virtual std::string toString () const

Implementation of Value::toString().

- virtual bool matchesString (const std::string &text, std::string &rationale) const

Implementation of Value::matchesString().

- virtual std::vector< Value * > getItem (const Value &offset) const

Implementation of Array::Interface::getItem().

- virtual Value * getItem (uint64_t offset) const

Implementation of Array::Interface::getItem().

- virtual void setItem (const Value &offset, const Value &value)

Implementation of Array::Interface::set().

- virtual void setItem (uint64_t offset, const Value &value)

Implementation of Array::Interface::set().

Public Attributes

- std::vector< Value * > **mMembers**

Additional Inherited Members

10.23.1 Member Function Documentation

10.23.1.1 Structure * Canal::Structure::clone () const [virtual]

Implementation of Value::clone(). Covariant return type.

Implements Canal::Value.

10.23.1.2 Structure * Canal::Structure::cloneCleaned () const [virtual]

Implementation of Value::cloneCleaned(). Covariant return type.

Implements Canal::Value.

The documentation for this class was generated from the following files:


- lib/Structure.h
- lib/Structure.cpp

10.24 Canal::Pointer::Target Class Reference

TODO: Pointers to functions.

```
#include <PointerTarget.h>
```

Collaboration diagram for Canal::Pointer::Target:

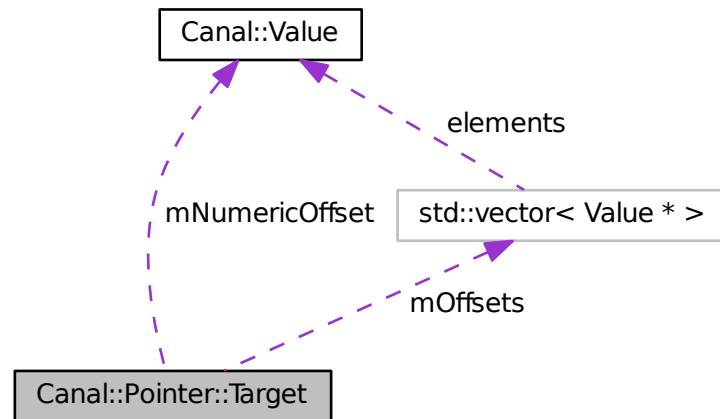

Public Types

- enum **Type** {
Constant, **FunctionBlock**, **FunctionVariable**, **GlobalBlock**,
GlobalVariable }

Public Member Functions

- Target (Type type, const llvm::Value *target, const std::vector< Value * > &offsets, Value *numeric-Offset)
- Target (const Target &target)
Copy constructor.
- bool **operator==** (const Target &target) const
- bool **operator!=** (const Target &target) const
- void merge (const Target &target)
Merge another target into this one.
- size_t memoryUsage () const
Get memory usage (used byte count) of this value.
- std::string toString (SlotTracker &slotTracker) const
Get a string representation of the target.
- std::vector< Value * > dereference (const State &state) const

Public Attributes

- Type mType
Type of the target.

- `const llvm::Value * mInstruction`
- `std::vector< Value * > mOffsets`
- `Value * mNumericOffset`

10.24.1 Detailed Description

TODO: Pointers to functions.

Pointer target – where the pointer points to. Pointer can:

- be set to a fixed constant (memory area), such as 0xbaadfood
- point to a heap object (global block)
- point to a stack object (alloca, function block) Pointer can point to some offset in an array.

10.24.2 Constructor & Destructor Documentation

10.24.2.1 `Canal::Pointer::Target::Target (Type type, const llvm::Value * target, const std::vector< Value * > & offsets, Value * numericOffset)`

Standard constructor.

Parameters

<i>type</i>	Type of the referenced memory.
<i>target</i>	Represents the target memory block. If type is Constant, it must be NULL. Otherwise, it must be a valid pointer to an instruction. This is a key to <code>State::mFunctionBlocks</code> , <code>State::mFunctionVariables</code> , <code>State::mGlobalBlocks</code> , or <code>State::mGlobalVariables</code> , depending on the type.
<i>offsets</i>	Offsets in the getelementptr style. The provided vector might be empty. The newly created pointer target becomes the owner of the objects in the vector.
<i>numericOffset</i>	Numerical offset that is used in addition to the getelementptr style offset and after they have been applied. It might be NULL, which indicates the offset 0. The target becomes the owner of the numerical offset when it's provided. This parameter is mandatory for pointers of Constant type, because it contains the constant.

10.24.3 Member Function Documentation

10.24.3.1 `std::vector< Value * > Canal::Pointer::Target::dereference (const State & state) const`

Dereference the target in a certain state. Dereferencing might result in multiple Values being returned due to the nature of `mOffsets` (offsets might include integer ranges). The returned pointers point to the memory owned by `State` and its abstract domains – caller must not release the memory.

10.24.4 Member Data Documentation

10.24.4.1 `const llvm::Value* Canal::Pointer::Target::mInstruction`

Valid when the target represents an anonymous memory block. This is a key to either `State::mGlobalBlocks` or `State::mFunctionBlocks`. The referenced `llvm::Value` instance is owned by the LLVM framework and

not by this class.

10.24.4.2 Value* Canal::Pointer::Target::mNumericOffset

An additional numeric offset on the top of mOffsets. The value represents a number of bytes. This class owns the memory. It might be NULL instead of 0.

10.24.4.3 std::vector<Value*> Canal::Pointer::Target::mOffsets

Array or struct offsets in the GetElementPtr style. This class owns the memory.

The documentation for this class was generated from the following files:

- lib/PointerTarget.h
- lib/PointerTarget.cpp

10.25 Canal::APIntUtils::UCompare Struct Reference

Public Member Functions


- bool **operator()** (const llvm::APInt &a, const llvm::APInt &b) const

The documentation for this struct was generated from the following file:

- lib/APIntUtils.h

10.26 Canal::Value Class Reference

Inheritance diagram for Canal::Value:

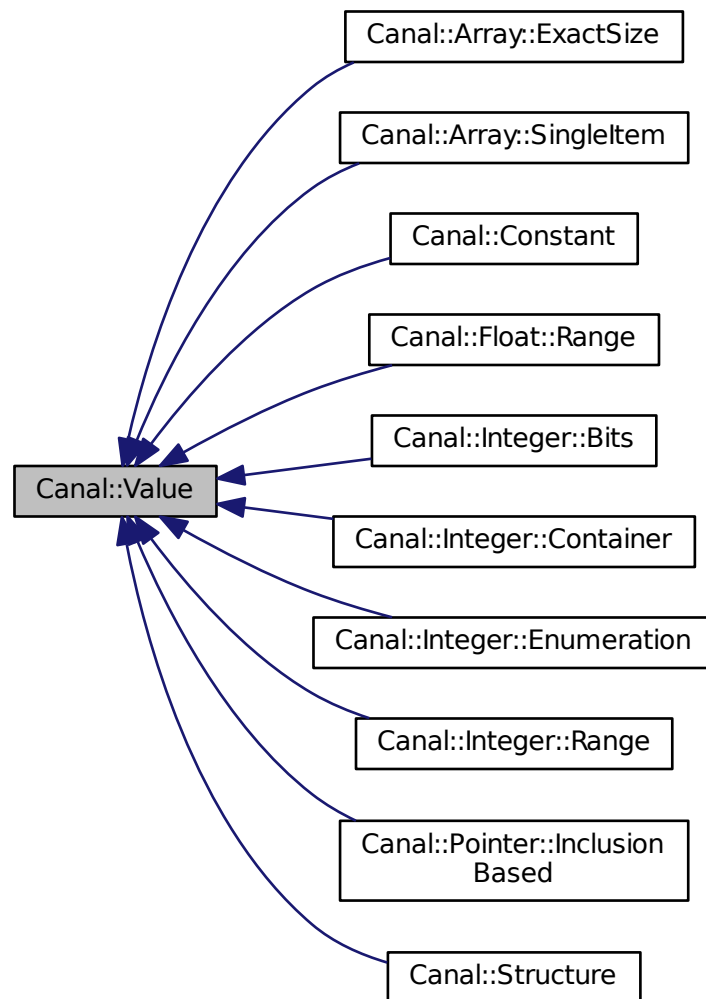

Public Types

- typedef void(Value::* **CastOperation**)(const Value &)
- typedef void(Value::* **BinaryOperation**)(const Value &, const Value &)
- typedef void(Value::* **CmpOperation**)(const Value &, const Value &, llvm::CmpInst::Predicate predicate)

Public Member Functions

- virtual Value * clone () const =0
Create a copy of this value.
- virtual Value * cloneCleaned () const =0
- virtual bool operator== (const Value &value) const =0
- virtual bool operator!= (const Value &value) const
Inequality is implemented by calling the equality operator.
- virtual void merge (const Value &value)
Merge another value into this one.
- virtual size_t memoryUsage () const =0
Get memory usage (used byte count) of this abstract value.
- virtual std::string toString () const =0
Create a string representation of the abstract value.
- virtual bool matchesString (const std::string &text, std::string &rationale) const =0
- virtual void add (const Value &a, const Value &b)
Implementation of instructions operating on values.
- virtual void **fadd** (const Value &a, const Value &b)
- virtual void **sub** (const Value &a, const Value &b)
- virtual void **fsub** (const Value &a, const Value &b)
- virtual void **mul** (const Value &a, const Value &b)
- virtual void **fmul** (const Value &a, const Value &b)
- virtual void udiv (const Value &a, const Value &b)
Unsigned division.
- virtual void sdiv (const Value &a, const Value &b)
Signed division.
- virtual void fdiv (const Value &a, const Value &b)
Floating point division.
- virtual void **urem** (const Value &a, const Value &b)
- virtual void **srem** (const Value &a, const Value &b)
- virtual void **frem** (const Value &a, const Value &b)
- virtual void **shl** (const Value &a, const Value &b)
- virtual void **lshr** (const Value &a, const Value &b)
- virtual void **ashr** (const Value &a, const Value &b)
- virtual void **and_** (const Value &a, const Value &b)
- virtual void **or_** (const Value &a, const Value &b)
- virtual void **xor_** (const Value &a, const Value &b)
- virtual void **icmp** (const Value &a, const Value &b, llvm::CmpInst::Predicate predicate)
- virtual void **fcmp** (const Value &a, const Value &b, llvm::CmpInst::Predicate predicate)
- virtual void **trunc** (const Value &value)
- virtual void **zext** (const Value &value)
- virtual void **sext** (const Value &value)
- virtual void **fptrunc** (const Value &value)
- virtual void **fpxext** (const Value &value)
- virtual void **fptoui** (const Value &value)
- virtual void **fptosi** (const Value &value)
- virtual void **uitofp** (const Value &value)
- virtual void **sitofp** (const Value &value)

10.26.1 Member Function Documentation

10.26.1.1 `void Canal::Value::add (const Value & a, const Value & b) [virtual]`

Implementation of instructions operating on values.

Load the abstract value state from a string representation.

Parameters

<i>text</i>	The textual representation. It must not contain any text that does not belong to this abstract value state.
-------------	---

Returns

True if the text has been successfully parsed and the state has been set from the text. False otherwise.

Reimplemented in `Canal::Integer::Container`, `Canal::Integer::Bits`, `Canal::Integer::Range`, `Canal::Integer::Enumeration`, `Canal::Array::SingleItem`, and `Canal::Array::ExactSize`.

10.26.1.2 `virtual Value* Canal::Value::cloneCleaned () const [pure virtual]`

This is used to obtain instance of the value type and to get an empty value at the same time.

Implemented in `Canal::Pointer::InclusionBased`, `Canal::Integer::Bits`, `Canal::Integer::Container`, `Canal::Integer::Range`, `Canal::Integer::Enumeration`, `Canal::Constant`, `Canal::Float::Range`, `Canal::Array::SingleItem`, `Canal::Array::ExactSize`, and `Canal::Structure`.

10.26.1.3 `virtual bool Canal::Value::matchesString (const std::string & text, std::string & rationale) const [pure virtual]`

Checks if the abstract value internal state matches the text description. Full coverage of the state is not expected, the text can contain just partial information.

Implemented in `Canal::Pointer::InclusionBased`, `Canal::Integer::Container`, `Canal::Integer::Bits`, `Canal::Integer::Range`, `Canal::Integer::Enumeration`, `Canal::Constant`, `Canal::Float::Range`, `Canal::Array::SingleItem`, `Canal::Array::ExactSize`, and `Canal::Structure`.

10.26.1.4 `virtual bool Canal::Value::operator== (const Value & value) const [pure virtual]`

Implementing this is mandatory. Values are compared while computing the fixed point.

Implemented in `Canal::Pointer::InclusionBased`, `Canal::Integer::Bits`, `Canal::Integer::Container`, `Canal::Integer::Range`, `Canal::Integer::Enumeration`, `Canal::Constant`, `Canal::Float::Range`, `Canal::Array::SingleItem`, `Canal::Array::ExactSize`, and `Canal::Structure`.

10.26.1.5 `virtual std::string Canal::Value::toString () const [pure virtual]`

Create a string representation of the abstract value.

An idea for different memory interpretation. `virtual Value *castTo(const llvm::Type *itemType, int offset) const = 0;`

Implemented in Canal::Pointer::InclusionBased, Canal::Integer::Bits, Canal::Integer::Container, Canal::Integer::Range, Canal::Integer::Enumeration, Canal::Constant, Canal::Float::Range, Canal::Array::SingleItem, Canal::Array::ExactSize, and Canal::Structure.

The documentation for this class was generated from the following files:

- lib/Value.h
- lib/Value.cpp

10.27 Canal::VariablePrecisionValue Class Reference

```
#include <Value.h>
```

Public Member Functions

- virtual bool limitMemoryUsage (size_t size)

10.27.1 Detailed Description

Base class for abstract values that can lower the precision and memory requirements on demand.

10.27.2 Member Function Documentation

10.27.2.1 bool Canal::VariablePrecisionValue::limitMemoryUsage (size_t size) [virtual]

Decrease memory usage of this value below the provided size in bytes. Returns true if the memory usage was limited, false when it was not possible.

The documentation for this class was generated from the following files:

- lib/Value.h
- lib/Value.cpp

Chapter 11

Tool Class Index

11.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

Arguments	89
Command	91
CommandBacktrace	93
CommandBreak	94
CommandCd	96
CommandContinue	97
CommandFile	99
CommandFinish	100
CommandHelp	102
CommandInfo	103
CommandNext	105
CommandPrint	106
CommandPwd	108
CommandQuit	109
CommandRun	111
CommandShell	113
CommandShow	115
CommandStart	116
CommandStep	118
Commands	112
State	119

11.2 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

Arguments	89
Command	91
CommandBacktrace	93
CommandBreak	94
CommandCd	96
CommandContinue	97


CommandFile	99
CommandFinish	100
CommandHelp	102
CommandInfo	103
CommandNext	105
CommandPrint	106
CommandPwd	108
CommandQuit	109
CommandRun	111
Commands	112
CommandShell	113
CommandShow	115
CommandStart	116
CommandStep	118
State	119

Chapter 12

Tool Class Documentation

12.1 Arguments Class Reference

Collaboration diagram for Arguments:

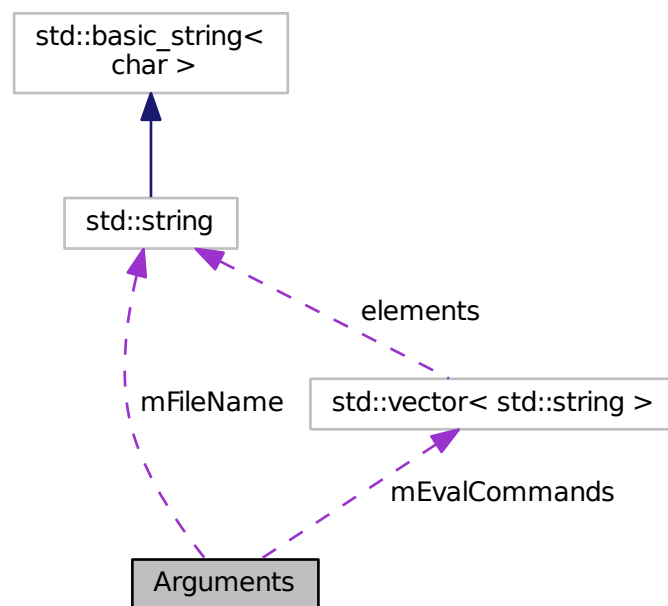

Public Attributes


- `std::vector< std::string > mEvalCommands`
- `std::string mFileName`

The documentation for this class was generated from the following file:


- `tool/Canal.cpp`

12.2 Command Class Reference

Inheritance diagram for Command:

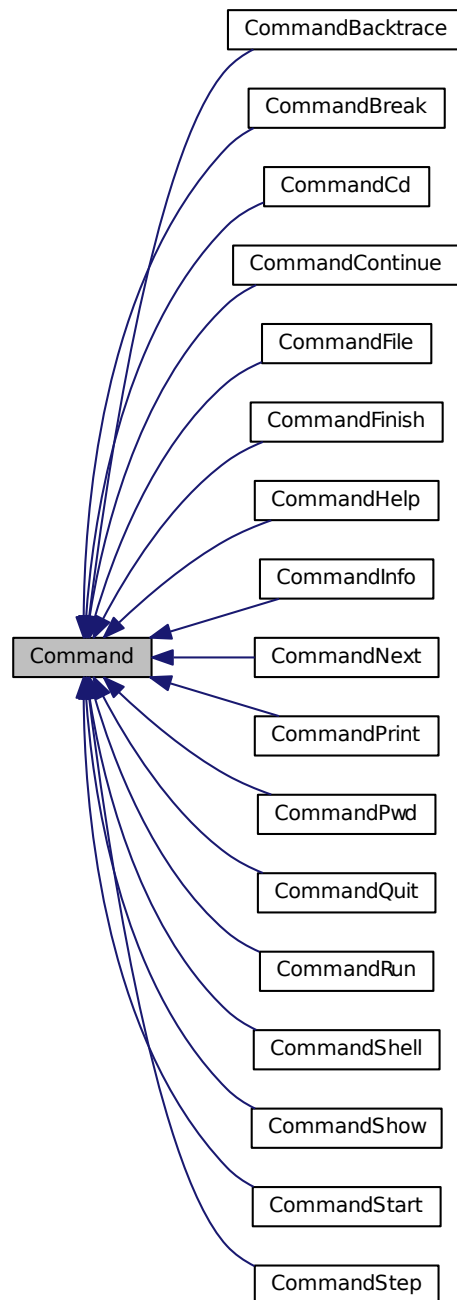

Collaboration diagram for Command:

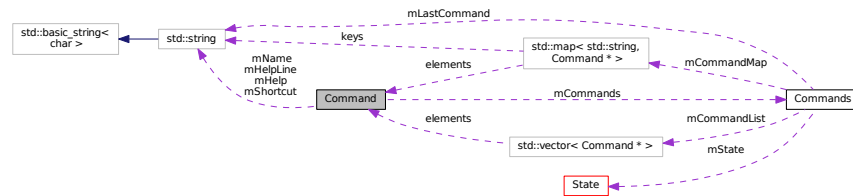

Public Member Functions

- **Command** (const std::string &name, const std::string &shortcut, const std::string &helpLine, const std::string &help, Commands &commands)
- const std::string & **getName** () const
- const std::string & **getShortcut** () const
- const std::string & **getHelpLine** () const
- const std::string & **getHelp** () const
- virtual std::vector< std::string > **getCompletionMatches** (const std::vector< std::string > &args, int pointArg, int pointArgOffset) const
- virtual void **run** (const std::vector< std::string > &args)=0

Protected Attributes


- std::string **mName**
- std::string **mShortcut**
- std::string **mHelpLine**
- std::string **mHelp**
- Commands & **mCommands**

The documentation for this class was generated from the following files:


- tool/Command.h
- tool/Command.cpp

12.3 CommandBacktrace Class Reference

Inheritance diagram for CommandBacktrace:



Collaboration diagram for CommandBacktrace:

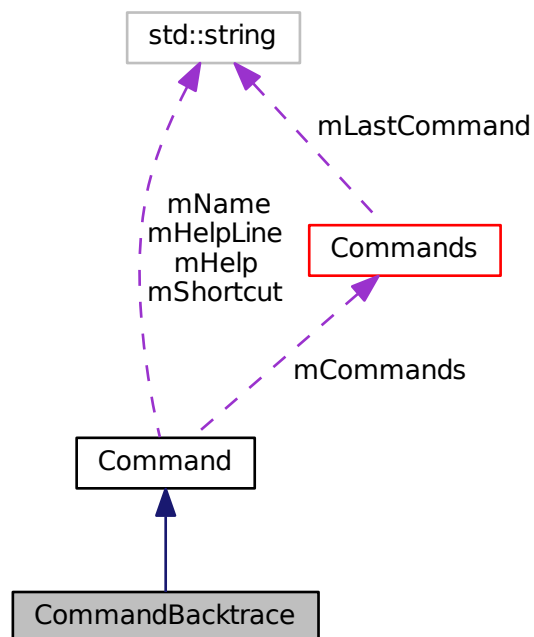

Public Member Functions

- **CommandBacktrace** (Commands &commands)

- virtual void **run** (const std::vector< std::string > &args)


Additional Inherited Members

The documentation for this class was generated from the following files:


- tool/CommandBacktrace.h
- tool/CommandBacktrace.cpp

12.4 CommandBreak Class Reference

Inheritance diagram for CommandBreak:



Collaboration diagram for CommandBreak:

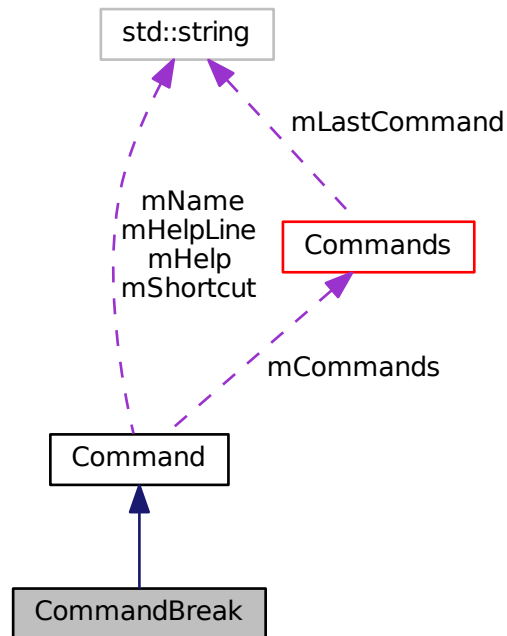

Public Member Functions

- **CommandBreak** (Commands &commands)
- virtual void **run** (const std::vector< std::string > &args)


Additional Inherited Members

The documentation for this class was generated from the following files:


- tool/CommandBreak.h
- tool/CommandBreak.cpp

12.5 CommandCd Class Reference

Inheritance diagram for CommandCd:



Collaboration diagram for CommandCd:

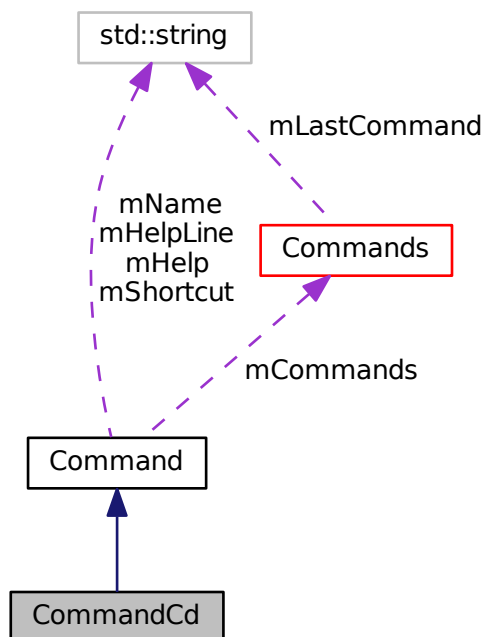

Public Member Functions

- **CommandCd** (Commands &commands)

- virtual std::vector< std::string > **getCompletionMatches** (const std::vector< std::string > &args, int pointArg, int pointArgOffset) const
- virtual void **run** (const std::vector< std::string > &args)


Additional Inherited Members

The documentation for this class was generated from the following files:

- tool/CommandCd.h
- tool/CommandCd.cpp


12.6 CommandContinue Class Reference

Inheritance diagram for CommandContinue:




12.7 CommandFile Class Reference

Inheritance diagram for CommandFile:



Collaboration diagram for CommandFile:

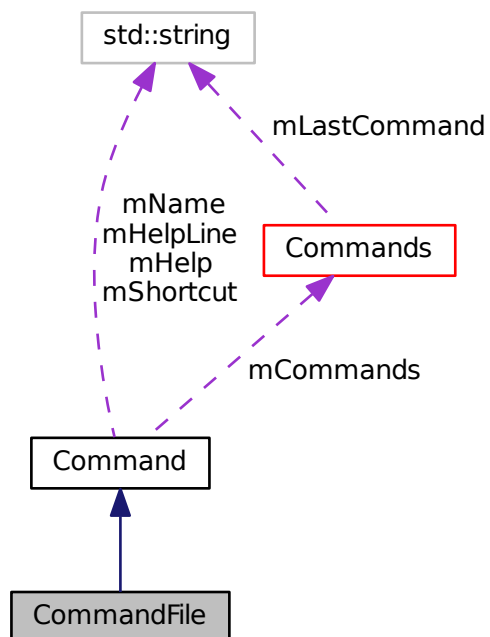

- virtual std::vector< std::string > **getCompletionMatches** (const std::vector< std::string > &args, int pointArg, int pointArgOffset) const
- virtual void **run** (const std::vector< std::string > &args)


Additional Inherited Members

The documentation for this class was generated from the following files:


- tool/CommandFile.h
- tool/CommandFile.cpp

12.8 CommandFinish Class Reference

Inheritance diagram for CommandFinish:



Collaboration diagram for CommandFinish:

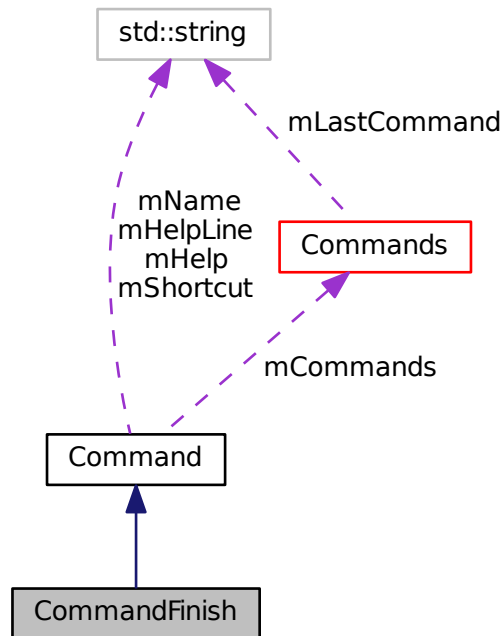

Public Member Functions

- **CommandFinish** (`Commands &commands`)
- virtual void **run** (`const std::vector< std::string > &args`)


Additional Inherited Members

The documentation for this class was generated from the following files:


- `tool/CommandFinish.h`
- `tool/CommandFinish.cpp`

12.9 CommandHelp Class Reference

Inheritance diagram for CommandHelp:



Collaboration diagram for CommandHelp:

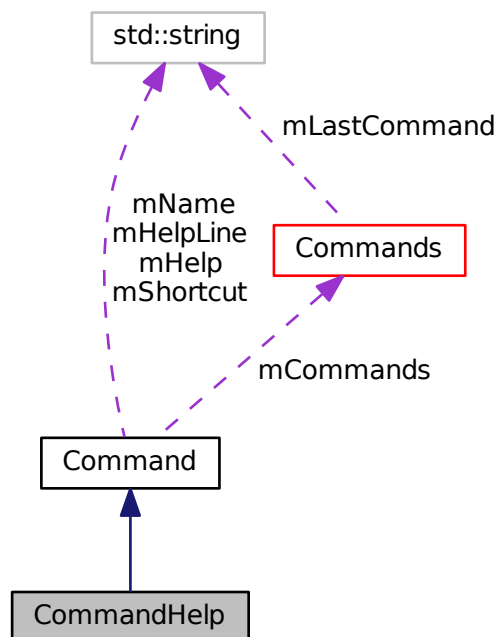

Public Member Functions

- **CommandHelp** (Commands &commands)

- virtual std::vector< std::string > **getCompletionMatches** (const std::vector< std::string > &args, int pointArg, int pointArgOffset) const
- virtual void **run** (const std::vector< std::string > &args)

Protected Member Functions

- void **allCommandsHelp** ()


Additional Inherited Members

The documentation for this class was generated from the following files:


- tool/CommandHelp.h
- tool/CommandHelp.cpp

12.10 CommandInfo Class Reference

Inheritance diagram for CommandInfo:



Collaboration diagram for CommandInfo:

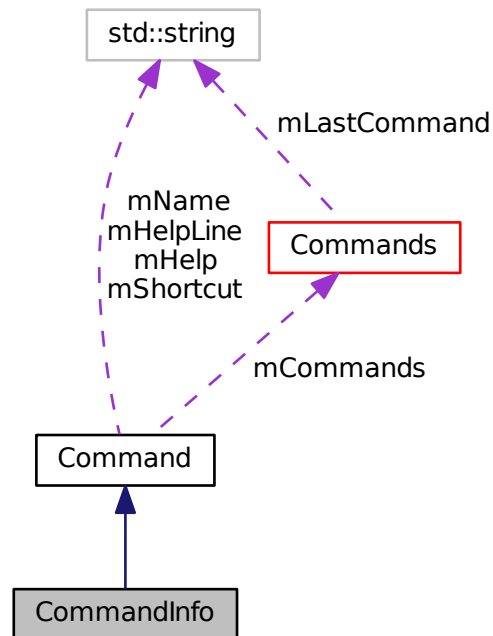

Public Member Functions

- **CommandInfo** (Commands &commands)
- virtual `std::vector< std::string > getCompletionMatches` (const `std::vector< std::string > &args`, int `pointArg`, int `pointArgOffset`) const
- virtual void **run** (const `std::vector< std::string > &args`)

Protected Member Functions

- void **infoModule** ()


Additional Inherited Members

The documentation for this class was generated from the following files:


- `tool/CommandInfo.h`
- `tool/CommandInfo.cpp`

12.11 CommandNext Class Reference

Inheritance diagram for CommandNext:



Collaboration diagram for CommandNext:

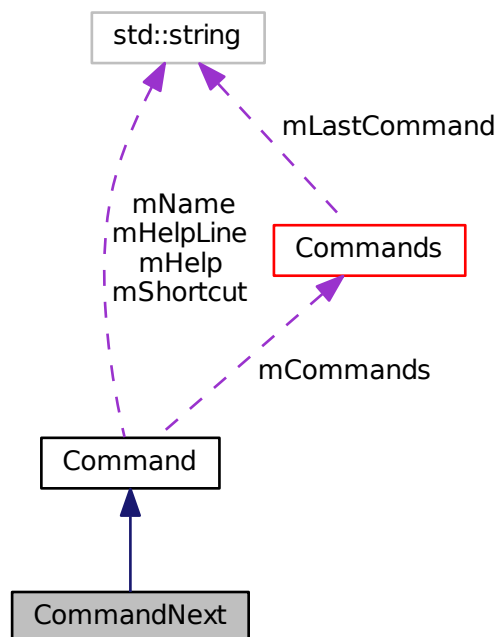

Public Member Functions

- **CommandNext** (Commands &commands)

- virtual void **run** (const std::vector< std::string > &args)


Additional Inherited Members

The documentation for this class was generated from the following files:


- tool/CommandNext.h
- tool/CommandNext.cpp

12.12 CommandPrint Class Reference

Inheritance diagram for CommandPrint:



Collaboration diagram for CommandPrint:

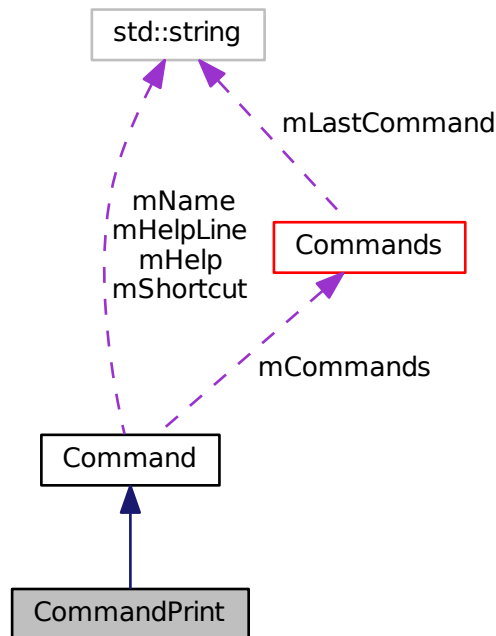

Public Member Functions

- **CommandPrint** (Commands &commands)
- virtual std::vector< std::string > **getCompletionMatches** (const std::vector< std::string > &args, int pointArg, int pointArgOffset) const
- virtual void **run** (const std::vector< std::string > &args)


Additional Inherited Members

The documentation for this class was generated from the following files:


- tool/CommandPrint.h
- tool/CommandPrint.cpp

12.13 CommandPwd Class Reference

Inheritance diagram for CommandPwd:



Collaboration diagram for CommandPwd:

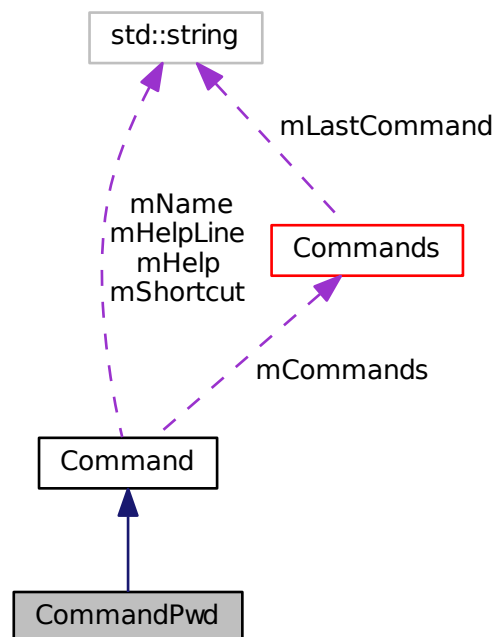

Public Member Functions

- **CommandPwd** (Commands &commands)

- virtual void **run** (const std::vector< std::string > &args)


Additional Inherited Members

The documentation for this class was generated from the following files:


- tool/CommandPwd.h
- tool/CommandPwd.cpp

12.14 CommandQuit Class Reference

Inheritance diagram for CommandQuit:



Collaboration diagram for CommandQuit:

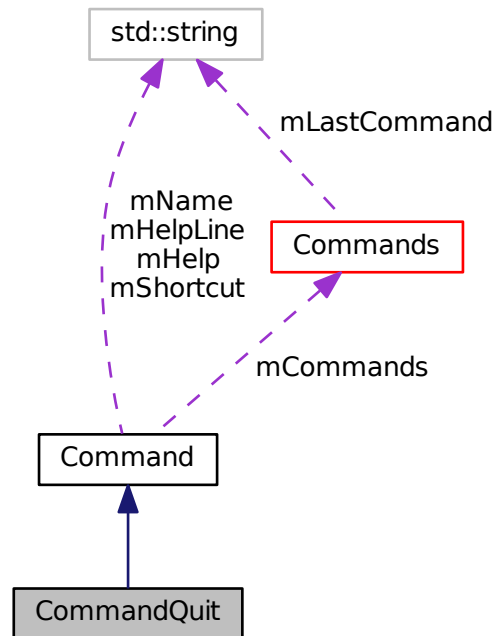

Public Member Functions

- **CommandQuit** (`Commands &commands`)
- virtual void **run** (`const std::vector< std::string > &args`)


Additional Inherited Members

The documentation for this class was generated from the following files:


- `tool/CommandQuit.h`
- `tool/CommandQuit.cpp`

12.15 CommandRun Class Reference

Inheritance diagram for CommandRun:



Collaboration diagram for CommandRun:

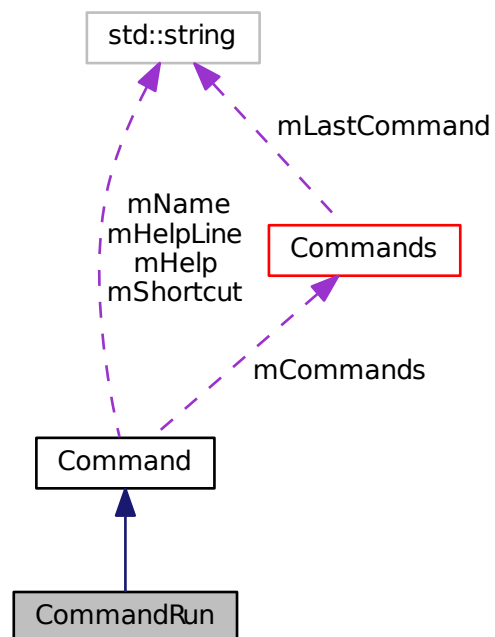

Public Member Functions

- **CommandRun** (Commands &commands)

- virtual void **run** (const std::vector< std::string > &args)


Additional Inherited Members

The documentation for this class was generated from the following files:

- tool/CommandRun.h
- tool/CommandRun.cpp

12.16 Commands Class Reference

Collaboration diagram for Commands:

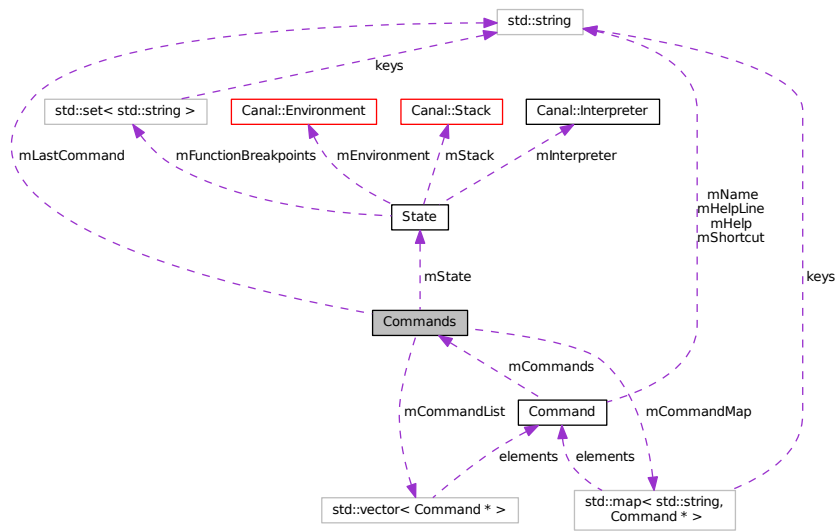

Public Types

- typedef std::map< std::string, Command * > **CommandMap**

Public Member Functions

- std::vector< std::string > **getCompletionMatches** (const std::string &text, int point) const
- std::vector< std::string > **getCommandMatches** (const std::string &command) const
- void **executeLine** (const std::string &line)
- Command * **getCommand** (const std::string &name)
- const Command * **getCommand** (const std::string &name) const
- State * **getState** ()
- const State * **getState** () const
- void **createState** (const llvm::Module *module)

Public Attributes

- `std::vector< Command * > mCommandList`
- `CommandMap mCommandMap`

Protected Attributes


- `std::string mLastCommand`
- `State * mState`

The documentation for this class was generated from the following files:

- `tool/Commands.h`
- `tool/Commands.cpp`


12.17 CommandShell Class Reference

Inheritance diagram for CommandShell:




12.18 CommandShow Class Reference

Inheritance diagram for CommandShow:



Collaboration diagram for CommandShow:

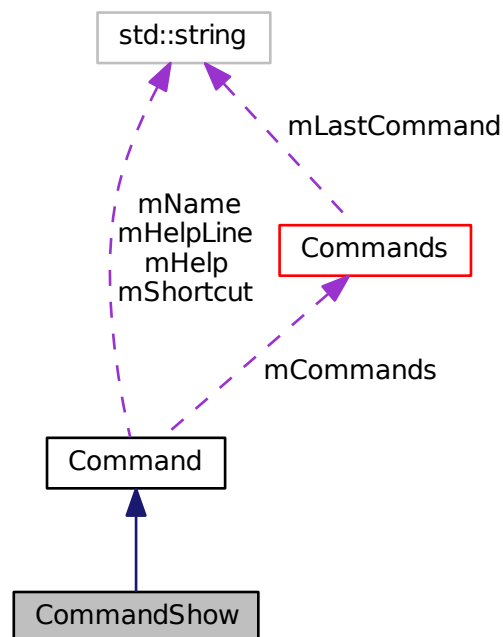

Public Member Functions

- **CommandShow** (Commands &commands)

- virtual void **run** (const std::vector< std::string > &args)


Additional Inherited Members

The documentation for this class was generated from the following files:


- tool/CommandShow.h
- tool/CommandShow.cpp

12.19 CommandStart Class Reference

Inheritance diagram for CommandStart:



Collaboration diagram for CommandStart:

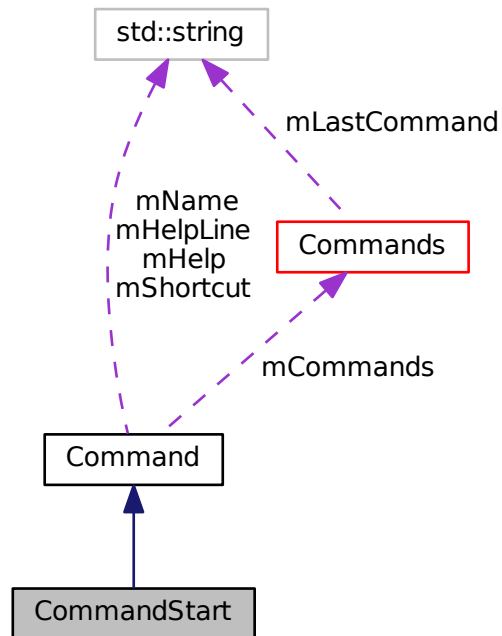

Public Member Functions

- **CommandStart** (`Commands &commands`)
- virtual void **run** (`const std::vector< std::string > &args`)


Additional Inherited Members

The documentation for this class was generated from the following files:


- `tool/CommandStart.h`
- `tool/CommandStart.cpp`

12.20 CommandStep Class Reference

Inheritance diagram for CommandStep:



Collaboration diagram for CommandStep:

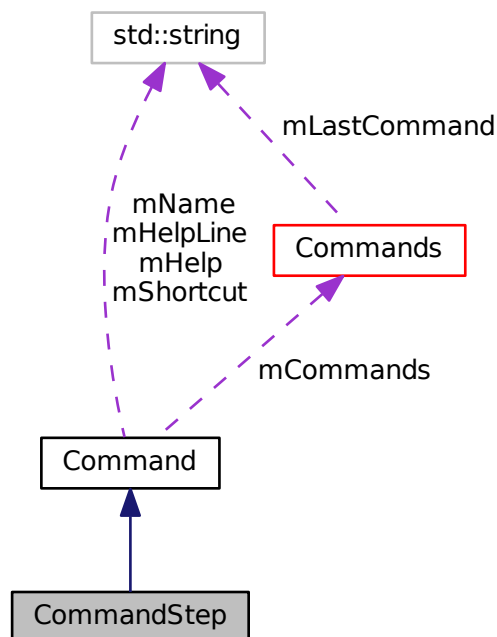

Public Member Functions

- **CommandStep** (Commands &commands)

- virtual void **run** (const std::vector< std::string > &args)


Additional Inherited Members

The documentation for this class was generated from the following files:

- tool/CommandStep.h
- tool/CommandStep.cpp

12.21 State Class Reference

Collaboration diagram for State:

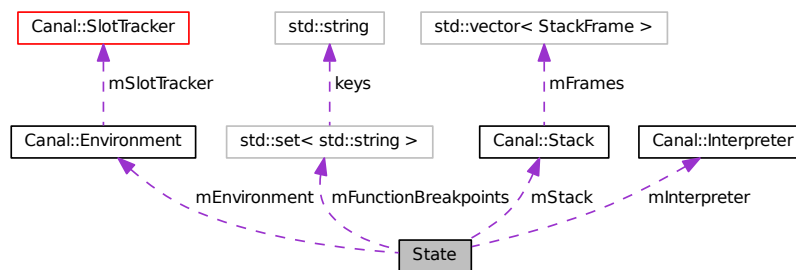

Public Member Functions

- **State** (const llvm::Module *module)
- const llvm::Module & **getModule** () const
- const **Canal::Environment** & **getEnvironment** () const
- **Canal::Stack** & **getStack** ()
- const **Canal::Stack** & **getStack** () const
- **Canal::SlotTracker** & **getSlotTracker** ()
- bool **isInterpreting** () const
- void **run** ()
- void **step** (int count)
- void **next** (int count)
- void **finish** ()
- void **addFunctionBreakpoint** (const std::string &functionName)
- void **addMainFrame** ()

Protected Member Functions

- bool **reachedBreakpoint** ()

Protected Attributes

- `const llvm::Module * mModule`
- `Canal::Environment mEnvironment`
- `Canal::Stack mStack`
- `Canal::Interpreter mInterpreter`
- `std::set< std::string > mFunctionBreakpoints`

The documentation for this class was generated from the following files:

- `tool/State.h`
- `tool/State.cpp`

Chapter 13

Known Bugs

Pointers should have the possibility to be set to top.

Bibliography

- [1] Patrick Cousot and Radhia Cousot. Abstract Interpretation: A Unified Lattice Model for Static Analysis of Programs by Construction or Approximation of Fixpoints. In *POPL '77: Proceedings of the 4th ACM SIGACT-SIGPLAN symposium on Principles of programming languages*, 1977.
- [2] Patrick Cousot and Radhia Cousot. Systematic Design of Program Analysis Frameworks. In *POPL '79: Proceedings of the 6th ACM SIGACT-SIGPLAN symposium on Principles of Programming Languages*, 1979.
- [3] Seth Hallem, Benjamin Chelf, Yichen Xie, and Dawson Engler. A System and Language for Building System-Specific, Static Analyses. In *PLDI '02: Proceedings of the ACM SIGPLAN 2002 Conference on Programming language design and implementation*, 2002.
- [4] Brian Albert Davey and Hilary Ann Priestley. Introduction to Lattices and Order. 2nd ed. Cambridge University Press, 2002.
- [5] Chris Lattner and Vikram Adve. LLVM: A Compilation Framework for Lifelong Program Analysis & Transformation. In *CGO '04: Proceedings of the International Symposium on Code Generation and Optimization: Feedback-directed and Runtime Optimization*, 2004.
- [6] Antoine Miné. Field-Sensitive Value Analysis of Embedded C Programs with Union Types and Pointer Arithmetics. In *LCTES '06: Proceedings of the 2006 ACM SIGPLAN/SIGBED conference on Language, compilers, and tool support for embedded systems*, 2006.
- [7] Antoine Miné. Static Analysis of Run-time Errors in Embedded Critical Parallel C Programs. In *ESOP '11: Proceedings of The 20th European Symposium on Programming*, 2011.
- [8] Antoine Miné. Abstract Domains for Bit-Level Machine Integer and Floating-point Operations. In *WING '12: Proceedings of The 4th International Workshop on Invariant Generation*, 2012.
- [9] Jianzhou Zhao, Santosh Nagarakatte, Milo M. K. Martin, and Steve Zdancewic. Formalizing the LLVM Intermediate Representation for Verified Program Transformations. In *POPL '12: Proceedings of the 39th annual ACM SIGPLAN-SIGACT symposium on Principles of programming languages*, 2012.

Index

- accuracy
 - Canal::AccuracyValue, 26
 - Canal::Float::Range, 56
- add
 - Canal::Value, 82
- addFrame
 - Canal::Stack, 69
- addFunctionVariable
 - Canal::State, 73
- addGlobalVariable
 - Canal::State, 73
- addGlobalVariables
 - Canal::Interpreter, 53
- addTarget
 - Canal::Pointer::InclusionBased, 47
- Arguments, 87
- br
 - Canal::Interpreter, 53
- Canal::APIIntUtils::SCompare, 61
- Canal::APIIntUtils::UCompare, 79
- Canal::AccuracyValue, 25
 - accuracy, 26
- Canal::Array::ExactSize, 42
 - clone, 44
 - cloneCleaned, 44
- Canal::Array::Interface, 48
 - getItem, 49
 - getValue, 49
 - setItem, 49
- Canal::Array::SingleItem, 62
 - clone, 64
 - cloneCleaned, 64
 - mSize, 64
- Canal::Callbacks, 30
- Canal::Constant, 31
 - cloneCleaned, 32
 - matchesString, 32
 - operator==, 32
 - toString, 32
- Canal::Environment, 41
- Canal::Float::Range, 55
 - accuracy, 56
 - cloneCleaned, 56
 - matchesString, 56
 - operator==, 57
 - toString, 57
- Canal::FunctionModel, 45
- Canal::FunctionModelManager, 45
- Canal::Integer::Bits, 26
 - clone, 29
 - cloneCleaned, 29
 - getBitValue, 29
 - mBits0, 30
 - mBits1, 30
 - setBitValue, 29
 - signedMax, 29
 - signedMin, 29
 - unsignedMax, 30
 - unsignedMin, 30
- Canal::Integer::Container, 33
 - clone, 35
 - cloneCleaned, 35
 - Container, 35
 - matchesString, 35
 - signedMax, 36
 - signedMin, 36
 - unsignedMax, 36
 - unsignedMin, 37
- Canal::Integer::Enumeration, 37
 - clone, 40
 - cloneCleaned, 40
 - matchesString, 40
 - signedMax, 40
 - signedMin, 40
 - unsignedMax, 40
 - unsignedMin, 41
- Canal::Integer::Range, 57
 - clone, 60
 - cloneCleaned, 60
 - isSingleValue, 60
 - signedMax, 60
 - signedMin, 60
 - unsignedMax, 60
 - unsignedMin, 61
- Canal::Interpreter, 50
 - addGlobalVariables, 53
 - br, 53

- fadd, 53
- fdiv, 53
- fsub, 53
- indirectbr, 54
- invoke, 54
- ret, 54
- sdiv, 54
- step, 54
- switch_, 54
- udiv, 54
- unreachable, 54
- Canal::Pointer::InclusionBased, 45
 - addTarget, 47
 - clone, 47
 - cloneCleaned, 47
 - dereferenceAndMerge, 47
 - getElementPtr, 48
- Canal::Pointer::Target, 76
 - dereference, 78
 - mInstruction, 78
 - mNumericOffset, 79
 - mOffsets, 79
 - Target, 78
- Canal::SELinuxModulePass, 61
- Canal::SlotTracker, 65
 - getLocalSlot, 67
 - processFunction, 67
 - processModule, 67
 - setActiveFunction, 67
- Canal::Stack, 68
 - addFrame, 69
- Canal::StackFrame, 70
 - mFunction, 71
 - nextInstruction, 71
- Canal::State, 71
 - addFunctionVariable, 73
 - addGlobalVariable, 73
 - findBlock, 73
 - findVariable, 73
 - mFunctionBlocks, 74
 - mFunctionVariables, 74
 - mGlobalBlocks, 74
 - mGlobalVariables, 74
 - mergeGlobalLevel, 73
- Canal::Structure, 75
 - clone, 76
 - cloneCleaned, 76
- Canal::Value, 80
 - add, 82
 - cloneCleaned, 82
 - matchesString, 82
 - operator==, 82
 - toString, 82
- Canal::VariablePrecisionValue, 83
 - limitMemoryUsage, 83
- clone
 - Canal::Array::ExactSize, 44
 - Canal::Array::SingleItem, 64
 - Canal::Integer::Bits, 29
 - Canal::Integer::Container, 35
 - Canal::Integer::Enumeration, 40
 - Canal::Integer::Range, 60
 - Canal::Pointer::InclusionBased, 47
 - Canal::Structure, 76
- cloneCleaned
 - Canal::Array::ExactSize, 44
 - Canal::Array::SingleItem, 64
 - Canal::Constant, 32
 - Canal::Float::Range, 56
 - Canal::Integer::Bits, 29
 - Canal::Integer::Container, 35
 - Canal::Integer::Enumeration, 40
 - Canal::Integer::Range, 60
 - Canal::Pointer::InclusionBased, 47
 - Canal::Structure, 76
 - Canal::Value, 82
- Command, 89
- CommandBacktrace, 91
- CommandBreak, 92
- CommandCd, 94
- CommandContinue, 95
- CommandFile, 97
- CommandFinish, 98
- CommandHelp, 100
- CommandInfo, 101
- CommandNext, 103
- CommandPrint, 104
- CommandPwd, 106
- CommandQuit, 107
- CommandRun, 109
- CommandShell, 111
- CommandShow, 113
- CommandStart, 114
- CommandStep, 116
- Commands, 110
- Container
 - Canal::Integer::Container, 35
- dereference
 - Canal::Pointer::Target, 78
- dereferenceAndMerge
 - Canal::Pointer::InclusionBased, 47
- fadd
 - Canal::Interpreter, 53
- fdiv
 - Canal::Interpreter, 53
- findBlock

- Canal::State, 73
- findVariable
 - Canal::State, 73
- fsub
 - Canal::Interpreter, 53
- getBitValue
 - Canal::Integer::Bits, 29
- getElementPtr
 - Canal::Pointer::InclusionBased, 48
- getItem
 - Canal::Array::Interface, 49
- getLocalSlot
 - Canal::SlotTracker, 67
- getValue
 - Canal::Array::Interface, 49
- indirectbr
 - Canal::Interpreter, 54
- invoke
 - Canal::Interpreter, 54
- isSingleValue
 - Canal::Integer::Range, 60
- limitMemoryUsage
 - Canal::VariablePrecisionValue, 83
- mBits0
 - Canal::Integer::Bits, 30
- mBits1
 - Canal::Integer::Bits, 30
- mFunction
 - Canal::StackFrame, 71
- mFunctionBlocks
 - Canal::State, 74
- mFunctionVariables
 - Canal::State, 74
- mGlobalBlocks
 - Canal::State, 74
- mGlobalVariables
 - Canal::State, 74
- mInstruction
 - Canal::Pointer::Target, 78
- mNumericOffset
 - Canal::Pointer::Target, 79
- mOffsets
 - Canal::Pointer::Target, 79
- mSize
 - Canal::Array::SingleItem, 64
- matchesString
 - Canal::Constant, 32
 - Canal::Float::Range, 56
 - Canal::Integer::Container, 35
 - Canal::Integer::Enumeration, 40
- Canal::Value, 82
- mergeGlobalLevel
 - Canal::State, 73
- nextInstruction
 - Canal::StackFrame, 71
- operator==
 - Canal::Constant, 32
 - Canal::Float::Range, 57
 - Canal::Value, 82
- processFunction
 - Canal::SlotTracker, 67
- processModule
 - Canal::SlotTracker, 67
- ret
 - Canal::Interpreter, 54
- sdiv
 - Canal::Interpreter, 54
- setActiveFunction
 - Canal::SlotTracker, 67
- setBitValue
 - Canal::Integer::Bits, 29
- setItem
 - Canal::Array::Interface, 49
- signedMax
 - Canal::Integer::Bits, 29
 - Canal::Integer::Container, 36
 - Canal::Integer::Enumeration, 40
 - Canal::Integer::Range, 60
- signedMin
 - Canal::Integer::Bits, 29
 - Canal::Integer::Container, 36
 - Canal::Integer::Enumeration, 40
 - Canal::Integer::Range, 60
- State, 117
- step
 - Canal::Interpreter, 54
- switch_
 - Canal::Interpreter, 54
- Target
 - Canal::Pointer::Target, 78
- toString
 - Canal::Constant, 32
 - Canal::Float::Range, 57
 - Canal::Value, 82
- udiv
 - Canal::Interpreter, 54
- unreachable
 - Canal::Interpreter, 54

unsignedMax

- Canal::Integer::Bits, 30
- Canal::Integer::Container, 36
- Canal::Integer::Enumeration, 40
- Canal::Integer::Range, 60

unsignedMin

- Canal::Integer::Bits, 30
- Canal::Integer::Container, 37
- Canal::Integer::Enumeration, 41
- Canal::Integer::Range, 61