



東北大學 秦皇島分校

学院	计算机与通信工程学院
专业	计算机科学与技术
班级号	200523
学号	202012143
姓名	熊舟桐

Linux 操作系统及内核分析实验报告

Linux 基本命令

实验环境

Linux 版本

```
Linux northboat-nhx0dbde 6.1.12-1-MANJARO #1 SMP PREEMPT_DYNAMIC Tue Feb 14
21:59:10 UTC 2023 x86_64 GNU/Linux
```

ssh 版本

```
OpenSSH_9.2p1, OpenSSL 3.0.8 7 Feb 2023
```

目标机版本

```
Linux VM-0-17-debian 5.10.0-19-amd64 #1 SMP Debian 5.10.149-2 (2022-10-21) x86_64
GNU/Linux
```

实验内容

ssh 连接 Linux

在 manjaro 上连接 debian 服务器

```
ssh root@43.163.218.127
```

查看主机基本信息

```
$ root@VM-0-17-debian /home $ uname -a
Linux VM-0-17-debian 5.10.0-19-amd64 #1 SMP Debian 5.10.149-2 (2022-10-21) x86_64
GNU/Linux
$ root@VM-0-17-debian /home Fri 10 Mar 2023 08:26:05 AM CST
```

查看网卡信息

```
$ root@VM-0-17-debian /home $ ifconfig
eth0: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet 10.0.0.17 netmask 255.255.252.0 broadcast 10.0.3.255
    inet6 fe80::5054:ff:fe69:78e8 prefixlen 64 scopeid 0x20<link>
    ether 52:54:00:69:78:e8 txqueuelen 1000 (Ethernet)
    RX packets 792772 bytes 439249956 (418.9 MiB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 530303 bytes 108429285 (103.4 MiB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536
    inet 127.0.0.1 netmask 255.0.0.0
    inet6 ::1 prefixlen 128 scopeid 0x10<host>
    loop txqueuelen 1000 (Local Loopback)
    RX packets 67961 bytes 3142869 (2.9 MiB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 67961 bytes 3142869 (2.9 MiB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

$ root@VM-0-17-debian /home Fri 10 Mar 2023 08:28:01 AM CST
```

文件管理命令

搜索文件

```

$ root@VM-0-17-debian /home cd ~ Fri 10 Mar 2023 08:28:01 AM CST
$ root@VM-0-17-debian ~ find / -name "?asswd" | more
find: /etc/passwd
/etc/pam.d/passwd
'/proc/791538/task/791538/net': Invalid argument
find: '/proc/791538/net': Invalid argument
/usr/share/lintian/overrides/passwd
/usr/share/bash-completion/completions/passwd
/usr/share/doc/passwd
/usr/bin/passwd
$ root@VM-0-17-debian ~ 5.1s < Fri 10 Mar 2023 08:29:28 AM CST

```

查看文件内容

```

$ root@VM-0-17-debian ~ cat /etc/passwd
root:x:0:0:root:/root:/usr/bin/fish
daemon:x:1:1:daemon:/usr/sbin:/usr/sbin/nologin
bin:x:2:2:bin:/bin:/usr/sbin/nologin
sys:x:3:3:sys:/dev:/usr/sbin/nologin
sync:x:4:65534:sync:/bin:/bin/sync
games:x:5:60:games:/usr/games:/usr/sbin/nologin
man:x:6:12:man:/var/cache/man:/usr/sbin/nologin
lp:x:7:7:lp:/var/spool/lpd:/usr/sbin/nologin
mail:x:8:8:mail:/var/mail:/usr/sbin/nologin
news:x:9:9:news:/var/spool/news:/usr/sbin/nologin
uucp:x:10:10:uucp:/var/spool/uucp:/usr/sbin/nologin
proxy:x:13:13:proxy:/bin:/usr/sbin/nologin
www-data:x:33:33:www-data:/var/www:/usr/sbin/nologin
backup:x:34:34:backup:/var/backups:/usr/sbin/nologin
list:x:38:38:Mailing List Manager:/var/list:/usr/sbin/nologin
irc:x:39:39:ircd:/run/ircd:/usr/sbin/nologin
gnats:x:41:41:Gnats Bug-Reporting System (admin):/var/lib/gnats:/usr/sbin/nologin
nobody:x:65534:65534:nobody:/nonexistent:/usr/sbin/nologin
_apt:x:100:65534::/nonexistent:/usr/sbin/nologin
systemd-timesync:x:101:101:systemd Time Synchronization,,:/run/systemd:/usr/sbin/nologin
systemd-network:x:102:103:systemd Network Management,,:/run/systemd:/usr/sbin/nologin
systemd-resolve:x:103:104:systemd Resolver,,:/run/systemd:/usr/sbin/nologin
messagebus:x:104:110::/nonexistent:/usr/sbin/nologin
sshd:x:105:65534::/run/sshd:/usr/sbin/nologin
systemd-coredump:x:999:999:systemd Core Dumper,:/usr/sbin/nologin
_chrony:x:106:112:Chrony daemon,,:/var/lib/chrony:/usr/sbin/nologin
lighthouse:x:1000:1000:/home/lighthouse:/bin/bash
mysql:x:1001:1002::/home/mysql:/sbin/nologin
www:x:1002:1003::/home/www:/sbin/nologin
redis:x:1003:1004:/home/redis:/sbin/nologin
epmd:x:107:113:/run/epmd:/usr/sbin/nologin
rabbitmq:x:108:114:RabbitMQ messaging server,,:/var/lib/rabbitmq:/usr/sbin/nologin
$ root@VM-0-17-debian ~

```

通过管道过滤查找关键字

```

$ root@VM-0-17-debian ~ cat /etc/passwd | grep "root"
root:x:0:0:root:/root:/usr/bin/fish
$ root@VM-0-17-debian ~ Fri 10 Mar 2023 08:

```

创建目录

```

$ root@VM-0-17-debian / mkdir test1 Fri 10 Mar 2023 08:33:53 AM CST
$ root@VM-0-17-debian / mkdir test2 Fri 10 Mar 2023 08:33:57 AM CST
$ root@VM-0-17-debian / Fri 10 Mar 2023 08:34:00 AM CST

```

创建文本文件

```

$ root@VM-0-17-debian / cd test1
$ root@VM-0-17-debian /test1 touch mytext
$ root@VM-0-17-debian /test1 ls
mytext
$ root@VM-0-17-debian /test1

```

编辑文件

```

$ root@VM-0-17-debian /test1 mv mytext hello
$ root@VM-0-17-debian /test1 vim hello Fri 10
$ root@VM-0-17-debian /test1 cat hello
echo "hello debain"
$ root@VM-0-17-debian /test1 mv hello hello.sh
$ root@VM-0-17-debian /test1 sh hello.sh
hello debain

```

复制文件

```
$ root@VM-0-17-debian / test1 cp hello.sh ../test2/
$ root@VM-0-17-debian / test1 cd .. Fri 10 Mar 2023 08:41:48 AM CST
$ root@VM-0-17-debian / ls Fri 10 Mar 2023 08:42:00 AM CST
bin@ home/ lib64@ opt/ srv/ tmp/
boot/ initrd.img@ libx32@ proc/ swapfile usr/
data/ initrd.img.old@ lost+found/ root/ sys/ var/
dev/ lib@ media/ run/ test1/ vmlinuz@
etc/ lib32@ mnt/ sbin@ test2/ vmlinuz.old@

$ root@VM-0-17-debian / cd test2 Fri 10 Mar 2023 08:42:01 AM CST
$ root@VM-0-17-debian / test2 ls Fri 10 Mar 2023 08:42:03 AM CST
hello.sh
```

删除文件

```
$ root@VM-0-17-debian / test1 rm hello.sh
$ root@VM-0-17-debian / test1 ls Fri
$ root@VM-0-17-debian / test1 Fri
```

删除目录

```
$ root@VM-0-17-debian / ls Fri 10 Mar 2023 08:44:16 AM C
bin@ home/ lib64@ opt/ srv/ tmp/
boot/ initrd.img@ libx32@ proc/ swapfile usr/
data/ initrd.img.old@ lost+found/ root/ sys/ var/
dev/ lib@ media/ run/ test1/ vmlinuz@
etc/ lib32@ mnt/ sbin@ test2/ vmlinuz.old@

$ root@VM-0-17-debian / rm -rf test1 test2
$ root@VM-0-17-debian / ls Fri 10 Mar 2023 08:44:24 AM C
bin@ etc/ lib@ lost+found/ proc/ srv/ usr/
boot/ home/ lib32@ media/ root/ swapfile var/
data/ initrd.img@ lib64@ mnt/ sys/ vmlinuz@
dev/ initrd.img.old@ libx32@ opt/ sbin@ tmp/ vmlinuz.old@

$ root@VM-0-17-debian / Fri 10 Mar 2023 08:44:25 AM C
```

用户管理

新建用户

```
$ root@VM-0-17-debian / useradd northboat
$ root@VM-0-17-debian / passwd northboat Fri 10 Mar 2023 08:45:46 AM CST
New password:
Retype new password:
passwd: password updated successfully
$ root@VM-0-17-debian / 4498ms < Fri 10 Mar 2023 08:46:00 AM CST
```

切换并测试用户

```
$ root@VM-0-17-debian / su northboat Fri 10 Mar 20
$ pwd
/
$ mkdir /test
mkdir: cannot create directory '/test': Permission denied
$ _
```

```
[northboat-nhx0dbde /]# su northboat
[northboat@northboat-nhx0dbde /]$ sudo mkdir /test
[northboat@northboat-nhx0dbde /]$ cd / & ls
[1] 6176
bin home opt sbin tmp
boot lib proc srv usr
desktopfs-pkgs.txt lib64 root sys var
dev lost+found rootfs-pkgs.txt test
etc mnt run timeshift
[1]+ 已完 成 cd /
[northboat@northboat-nhx0dbde /]$ _
```

修改用户权限

```
$ root@VM-0-17-debian / addgroup wheel Fri 10 Mar 2023
Adding group 'wheel' (GID 1006) ...
Done.
$ root@VM-0-17-debian / usermod -a -G wheel northboat
```

查看用户组

```
$ root@VM-0-17-debian / cat /etc/group
root:x:0:
daemon:x:1:
bin:x:2:
sys:x:3:
adm:x:4:
tty:x:5:
disk:x:6:
lp:x:7:
mail:x:8:
news:x:9:
uucp:x:10:
man:x:12:
proxy:x:13:
kmem:x:15:
dialout:x:20:
fax:x:21:
voice:x:22:
cdrom:x:24:
floppy:x:25:
tape:x:26:
sudo:x:27:
audio:x:29:
dip:x:30:
www-data:x:33:
backup:x:34:
```

删除用户

```
$ root@VM-0-17-debian / userdel -r northboat
userdel: northboat mail spool (/var/mail/northboat) not found
userdel: northboat home directory (/home/northboat) not found
```

文件解压缩

压缩文件 .tar

```
$ root@VM-0-17-debian /home ls Fri 10 Mar 2023 09:00:00 AM CST
lighthouse/
$ root@VM-0-17-debian /home mkdir test Fri 10 Mar 2023 09:00:02 AM CST
$ root@VM-0-17-debian /home tar -cvf test.tar test/
test/
$ root@VM-0-17-debian /home ls Fri 10 Mar 2023 09:00:29 AM CST
lighthouse/ test/ test.tar
$ root@VM-0-17-debian /home _ Fri 10 Mar 2023 09:00:33 AM CST
```

解压文件

```
$ root@VM-0-17-debian /home rm -rf test Fri 10 Mar 2023 09:00:33 AM CST
$ root@VM-0-17-debian /home tar -xvf test.tar
test/
$ root@VM-0-17-debian /home ls Fri 10 Mar 2023 09:01:26 AM CST
lighthouse/ test/ test.tar
$ root@VM-0-17-debian /home _ Fri 10 Mar 2023 09:01:27 AM CST
```

压缩文件 .tar.gz

```
$ root@VM-0-17-debian /home tar -cvf test.tar.gz test/
test/
$ root@VM-0-17-debian /home ls Fri 10 Mar 2023 09:01:27 AM CST
lighthouse/ test/ test.tar test.tar.gz
```

解压文件

```
$ root@VM-0-17-debian /home tar -xvf test.tar.gz
test/
$ root@VM-0-17-debian /home ls Fri 10 Mar 202
lighthouse/ test/ test.tar test.tar.gz
$ root@VM-0-17-debian /home _ Fri 10 Mar 202
```

实验总结

debain 默认没有 wheel 组，在加入用户进 wheel 组时会报错：group wheel does not exist

需要新增组

```
groupadd wheel
```

再将用户加入组

```
usermod -a -G wheel northboat
```

删除组

```
groupdel wheel
```

通过查看组 `cat /etc/group` 发现存在 root 组，将用户加入 root 组

```
usermod -a -G root northboat
```

Linux 系统管理

实现环境

Linux 版本

```
Linux northboat-nhx0dbde 6.1.12-1-MANJARO #1 SMP PREEMPT_DYNAMIC Tue Feb 14
21:59:10 UTC 2023 x86_64 GNU/Linux
```

本地 Shell

实验内容

Linux 网络管理

设置静态 IP，manjaro 下，使用 netctl 实现

下载 netctl

```
yay -S netctl
```

查看网卡信息

```
[northboat@northboat-nhx0dbde Desktop]$ ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host
        valid_lft forever preferred_lft forever
2: enp13s0f1: <NO-CARRIER,BROADCAST,MULTICAST,UP> mtu 1500 qdisc fq_codel state DOWN group default qlen 1000
    link/ether 00:e0:4c:88:00:cb brd ff:ff:ff:ff:ff:ff
3: wlp12s0: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc noqueue state UP group default qlen 1000
    link/ether d8:c0:a6:1f:47:15 brd ff:ff:ff:ff:ff:ff
    inet 192.168.106.185/24 brd 192.168.106.255 scope global dynamic noprefixroute wlp12s0
        valid_lft 2595sec preferred_lft 2595sec
    inet6 2408:841d:2530:4acd:4ce3:5f9c:8087:8635/64 scope global dynamic noprefixroute
        valid_lft 2597sec preferred_lft 2597sec
    inet6 fe80::75aa:7519:2df4:7588/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
```

得知网卡名称 `enp13s0f1`

终止网络服务

```
sudo systemctl stop NetworkManager
sudo systemctl disable NetworkManager
```

复制 `netctl` 默认配置文件

```
sudo cp /etc/netctl/examples/ethernet-static /etc/netctl/enp13s0f1
```

编辑文件 `enp13s0f1`

```
Northboat's Terminal
文件(F) 编辑(E) 视图(V) 终端(T) 标签(A) 帮助(H)
Description='A basic static ethernet connection'
Interface=eth0
Connection=ethernet
IP=static
Address=('192.168.1.23/24' '192.168.1.87/24')
#Routes=('192.168.0.0/24 via 192.168.1.2')
Gateway='192.168.1.1'
DNS=('192.168.1.1')

## For IPv6 autoconfiguration
#IP6=stateless

## For IPv6 static address configuration
#IP6=static
#Address6=('1234:5678:9abc:def::1/64' '1234:3456::123/96')
#Routes6=('abcd::1234')
#Gateway6='1234:0:123::abcd'
~
~
```

配置 DNS 解析

```
[northboat@northboat-nhx0dbde netctl]$ cat /etc/resolv.conf
# Generated by NetworkManager
nameserver 192.168.106.90
nameserver 2408:841d:2530:4acd::fd
```

重启网络服务

```
sudo systemctl start NetworkManager
sudo systemctl enable NetworkManager
```

查看网络连接状态

```
[northboat@northboat-nhx0dbde Desktop]$ netstat
Active Internet connections (w/o servers)
Proto Recv-Q Send-Q Local Address           Foreign Address         State
tcp        0      0 northboat-nhx0dbd:51736 20.198.162.78:https     ESTABLISHED
tcp        0      0 northboat-nhx0dbd:36594 47.93.247.194:https     ESTABLISHED
tcp        0      0 northboat-nhx0dbd:41698 server-13-227-62-:https ESTABLISHED
tcp        0      0 northboat-nhx0dbd:55554 server-99-84-140-:https TIME_WAIT
tcp        0      0 northboat-nhx0dbd:35086 121.29.38.32:https     ESTABLISHED
tcp        0      0 northboat-nhx0dbd:44170 51.104.15.252:https     ESTABLISHED
tcp        0      0 northboat-nhx0dbd:44158 51.104.15.252:https     ESTABLISHED
tcp        0      0 northboat-nhx0dbd:55554 server-99-84-140-:https TIME_WAIT
tcp        0      0 northboat-nhx0dbd:35086 121.29.38.32:https     ESTABLISHED
tcp6       0      0 ipv6.localhost.cn:39046 ipv6.localhost.cn:https ESTABLISHED
tcp6       0      0 ipv6.localhost.cn:32880 ipv6.localhost.cn:https ESTABLISHED
tcp6       0      0 ipv6.localhost.cn:51934 ipv6.localhost:www-http ESTABLISHED
tcp6       0      0 ipv6.localhost.cn:51940 ipv6.localhost.cn:https ESTABLISHED
tcp6       0      0 ipv6.localhost.cn:39674 ipv6.localhost.cn:https ESTABLISHED
tcp6       0      0 ipv6.localhost.cn:47970 ipv6.localhost.cn:https ESTABLISHED
udp        0      0 northboat-nhx0db:bootpc _gateway:bootps        ESTABLISHED
udp6       0      0 ipv6.localhost.cn:55380 ipv6.localhost.cn:https ESTABLISHED

Active UNIX domain sockets (w/o servers)
Proto RefCnt Flags               Type           State         I-Node      Path
unix    3      [ ]                   STREAM         CONNECTED     29163
unix    3      [ ]                   STREAM         CONNECTED     31785
unix    3      [ ]                   STREAM         CONNECTED     17228
unix    3      [ ]                   STREAM         CONNECTED     987
unix    3      [ ]                   STREAM         CONNECTED     27976      /run/user/1000/bus
unix    2      [ ]                   DGRAM          CONNECTED     26628
unix    3      [ ]                   STREAM         CONNECTED     34928      @/tmp/.X11-unix/X0
unix    3      [ ]                   STREAM         CONNECTED     25066      /run/user/1000/at-spi/bus_0
unix    3      [ ]                   STREAM         CONNECTED     25926      /run/user/1000/bus
unix    3      [ ]                   STREAM         CONNECTED     27800
```

进程管理

ps 命令查看进程

```
[northboat@northboat-nhx0dbde ~]$ ps
  PID TTY          TIME CMD
  5066 pts/1        00:00:00 bash
  5072 pts/1        00:00:00 ps
```

查看所有用户所有进程信息

```
[northboat@northboat-nhx0dbde netctl]$ ps -aux
USER          PID  %CPU  %MEM    VSZ   RSS TTY      STAT START   TIME COMMAND
root           1   0.0  0.0 170320 14876 ?        Ss   11:46   0:01 /sbin/init
root           2   0.0  0.0     0     0 ?        S    11:46   0:00 [kthreadd]
root           3   0.0  0.0     0     0 ?        I<   11:46   0:00 [rcu_gp]
root           4   0.0  0.0     0     0 ?        I<   11:46   0:00 [rcu_par_gp]
root           5   0.0  0.0     0     0 ?        I<   11:46   0:00 [slub_flushwq]
root           6   0.0  0.0     0     0 ?        I<   11:46   0:00 [netns]
root           8   0.0  0.0     0     0 ?        I<   11:46   0:00 [kworker/0:0H]
root          10   0.0  0.0     0     0 ?        I<   11:46   0:00 [mm_percpu_wq]
root          12   0.0  0.0     0     0 ?        I    11:46   0:00 [rcu_tasks_kt]
root          13   0.0  0.0     0     0 ?        I    11:46   0:00 [rcu_tasks_ru]
root          14   0.0  0.0     0     0 ?        I    11:46   0:00 [rcu_tasks_tr]
root          15   0.0  0.0     0     0 ?        S    11:46   0:00 [ksoftirqd/0]
root          16   0.0  0.0     0     0 ?        I    11:46   0:00 [rcu_preempt]
root          17   0.0  0.0     0     0 ?        S    11:46   0:00 [rcub/0]
root          18   0.0  0.0     0     0 ?        S    11:46   0:00 [migration/0]
root          19   0.0  0.0     0     0 ?        S    11:46   0:00 [idle_inject/]
root          21   0.0  0.0     0     0 ?        S    11:46   0:00 [cpuhp/0]
root          22   0.0  0.0     0     0 ?        S    11:46   0:00 [cpuhp/1]
root          23   0.0  0.0     0     0 ?        S    11:46   0:00 [idle_inject/]
root          24   0.0  0.0     0     0 ?        S    11:46   0:00 [migration/1]
root          25   0.0  0.0     0     0 ?        S    11:46   0:00 [ksoftirqd/1]
root          27   0.0  0.0     0     0 ?        I<   11:46   0:00 [kworker/1:0H]
root          28   0.0  0.0     0     0 ?        S    11:46   0:00 [cpuhp/2]
root          29   0.0  0.0     0     0 ?        S    11:46   0:00 [idle_inject/]
root          30   0.0  0.0     0     0 ?        S    11:46   0:00 [migration/2]
root          31   0.0  0.0     0     0 ?        S    11:46   0:00 [ksoftirqd/2]
root          33   0.0  0.0     0     0 ?        I<   11:46   0:00 [kworker/2:0H]
root          34   0.0  0.0     0     0 ?        S    11:46   0:00 [cpuhp/3]
root          35   0.0  0.0     0     0 ?        S    11:46   0:00 [idle_inject/]
root          36   0.0  0.0     0     0 ?        S    11:46   0:00 [migration/3]
root          37   0.0  0.0     0     0 ?        S    11:46   0:00 [ksoftirqd/3]
root          39   0.0  0.0     0     0 ?        I<   11:46   0:00 [kworker/3:0H]
root          40   0.0  0.0     0     0 ?        S    11:46   0:00 [cpuhp/4]
root          41   0.0  0.0     0     0 ?        S    11:46   0:00 [idle_inject/]
```

进程信息排序

- 按内存占用

```
[northboat@northboat-nhx0dbde netctl]$ ps -auxw --sort=rss
USER      PID  %CPU  %MEM    VSZ   RSS TTY      STAT START   TIME COMMAND
root         2  0.0  0.0      0     0 ?        S    11:46    0:00 [kthreadd]
root         3  0.0  0.0      0     0 ?        I<   11:46    0:00 [rcu_gp]
root         4  0.0  0.0      0     0 ?        I<   11:46    0:00 [rcu_par_gp]
root         5  0.0  0.0      0     0 ?        I<   11:46    0:00 [slub_flushwq]
root         6  0.0  0.0      0     0 ?        I<   11:46    0:00 [netns]
root         8  0.0  0.0      0     0 ?        I<   11:46    0:00 [kworker/0:0H-acpi_thermal_pm]
root        10  0.0  0.0      0     0 ?        I<   11:46    0:00 [mm_percpu_wq]
root        12  0.0  0.0      0     0 ?        I    11:46    0:00 [rcu_tasks_kthread]
root        13  0.0  0.0      0     0 ?        I    11:46    0:00 [rcu_tasks_rude_kthread]
root        14  0.0  0.0      0     0 ?        I    11:46    0:00 [rcu_tasks_trace_kthread]
root        15  0.0  0.0      0     0 ?        S    11:46    0:00 [ksoftirqd/0]
root        16  0.0  0.0      0     0 ?        I    11:46    0:00 [rcu_preempt]
root        17  0.0  0.0      0     0 ?        S    11:46    0:00 [rcub/0]
root        18  0.0  0.0      0     0 ?        S    11:46    0:00 [migration/0]
root        19  0.0  0.0      0     0 ?        S    11:46    0:00 [idle_inject/0]
root        21  0.0  0.0      0     0 ?        S    11:46    0:00 [cpuhp/0]
root        22  0.0  0.0      0     0 ?        S    11:46    0:00 [cpuhp/1]
root        23  0.0  0.0      0     0 ?        S    11:46    0:00 [idle_inject/1]
root        24  0.0  0.0      0     0 ?        S    11:46    0:00 [migration/1]
root        25  0.0  0.0      0     0 ?        S    11:46    0:00 [ksoftirqd/1]
root        27  0.0  0.0      0     0 ?        I<   11:46    0:00 [kworker/1:0H-events_highpri]
root        28  0.0  0.0      0     0 ?        S    11:46    0:00 [cpuhp/2]
root        29  0.0  0.0      0     0 ?        S    11:46    0:00 [idle_inject/2]
root        30  0.0  0.0      0     0 ?        S    11:46    0:00 [migration/2]
root        31  0.0  0.0      0     0 ?        S    11:46    0:00 [ksoftirqd/2]
root        33  0.0  0.0      0     0 ?        I<   11:46    0:00 [kworker/2:0H-events_highpri]
root        34  0.0  0.0      0     0 ?        S    11:46    0:00 [cpuhp/3]
root        35  0.0  0.0      0     0 ?        S    11:46    0:00 [idle_inject/3]
root        36  0.0  0.0      0     0 ?        S    11:46    0:00 [migration/3]
root        37  0.0  0.0      0     0 ?        S    11:46    0:00 [ksoftirqd/3]
root        39  0.0  0.0      0     0 ?        I<   11:46    0:00 [kworker/3:0H-events_highpri]
root        40  0.0  0.0      0     0 ?        S    11:46    0:00 [cpuhp/4]
root        41  0.0  0.0      0     0 ?        S    11:46    0:00 [idle_inject/4]
root        42  0.0  0.0      0     0 ?        S    11:46    0:00 [migration/4]
root        43  0.0  0.0      0     0 ?        S    11:46    0:00 [ksoftirqd/4]
root        44  0.0  0.0      0     0 ?        I    11:46    0:00 [kworker/4:0-cgroup_destroy]
root        45  0.0  0.0      0     0 ?        I<   11:46    0:00 [kworker/4:0H-events_highpri]
root        46  0.0  0.0      0     0 ?        S    11:46    0:00 [cpuhp/5]
```

- 按CPU 占用

```
[northboat@northboat-nhx0dbde netctl]$ ps -auxw --sort=%cpu
USER      PID  %CPU  %MEM    VSZ   RSS TTY      STAT START   TIME COMMAND
root         1  0.0  0.0 170320 14876 ?        Ss   11:46    0:01 /sbin/init
root         2  0.0  0.0      0     0 ?        S    11:46    0:00 [kthreadd]
root         3  0.0  0.0      0     0 ?        I<   11:46    0:00 [rcu_gp]
root         4  0.0  0.0      0     0 ?        I<   11:46    0:00 [rcu_par_gp]
root         5  0.0  0.0      0     0 ?        I<   11:46    0:00 [slub_flushwq]
root         6  0.0  0.0      0     0 ?        I<   11:46    0:00 [netns]
root         8  0.0  0.0      0     0 ?        I<   11:46    0:00 [kworker/0:0H-acpi_thermal_pm]
root        10  0.0  0.0      0     0 ?        I<   11:46    0:00 [mm_percpu_wq]
root        12  0.0  0.0      0     0 ?        I    11:46    0:00 [rcu_tasks_kthread]
root        13  0.0  0.0      0     0 ?        I    11:46    0:00 [rcu_tasks_rude_kthread]
root        14  0.0  0.0      0     0 ?        I    11:46    0:00 [rcu_tasks_trace_kthread]
root        15  0.0  0.0      0     0 ?        S    11:46    0:00 [ksoftirqd/0]
root        16  0.0  0.0      0     0 ?        I    11:46    0:00 [rcu_preempt]
root        17  0.0  0.0      0     0 ?        S    11:46    0:00 [rcub/0]
root        18  0.0  0.0      0     0 ?        S    11:46    0:00 [migration/0]
root        19  0.0  0.0      0     0 ?        S    11:46    0:00 [idle_inject/0]
root        21  0.0  0.0      0     0 ?        S    11:46    0:00 [cpuhp/0]
root        22  0.0  0.0      0     0 ?        S    11:46    0:00 [cpuhp/1]
root        23  0.0  0.0      0     0 ?        S    11:46    0:00 [idle_inject/1]
root        24  0.0  0.0      0     0 ?        S    11:46    0:00 [migration/1]
root        25  0.0  0.0      0     0 ?        S    11:46    0:00 [ksoftirqd/1]
root        27  0.0  0.0      0     0 ?        I<   11:46    0:00 [kworker/1:0H-events_highpri]
root        28  0.0  0.0      0     0 ?        S    11:46    0:00 [cpuhp/2]
root        29  0.0  0.0      0     0 ?        S    11:46    0:00 [idle_inject/2]
root        30  0.0  0.0      0     0 ?        S    11:46    0:00 [migration/2]
root        31  0.0  0.0      0     0 ?        S    11:46    0:00 [ksoftirqd/2]
root        33  0.0  0.0      0     0 ?        I<   11:46    0:00 [kworker/2:0H-events_highpri]
root        34  0.0  0.0      0     0 ?        S    11:46    0:00 [cpuhp/3]
root        35  0.0  0.0      0     0 ?        S    11:46    0:00 [idle_inject/3]
root        36  0.0  0.0      0     0 ?        S    11:46    0:00 [migration/3]
root        37  0.0  0.0      0     0 ?        S    11:46    0:00 [ksoftirqd/3]
root        39  0.0  0.0      0     0 ?        I<   11:46    0:00 [kworker/3:0H-events_highpri]
root        40  0.0  0.0      0     0 ?        S    11:46    0:00 [cpuhp/4]
root        41  0.0  0.0      0     0 ?        S    11:46    0:00 [idle_inject/4]
root        42  0.0  0.0      0     0 ?        S    11:46    0:00 [migration/4]
root        43  0.0  0.0      0     0 ?        S    11:46    0:00 [ksoftirqd/4]
root        44  0.0  0.0      0     0 ?        I    11:46    0:00 [kworker/4:0-cgroup_destroy]
```

动态查看进程信息

```
[northboat@northboat-nhx0dbde netctl]$ top

top - 12:23:45 up 37 min, 1 user, load average: 0.87, 0.63, 0.52
任务: 323 total, 1 running, 322 sleeping, 0 stopped, 0 zombie
%Cpu(s): 1.7 us, 0.9 sy, 0.0 ni, 97.0 id, 0.0 wa, 0.3 hi, 0.2 si, 0.0 st
MiB Mem: 15821.4 total, 10135.8 free, 2682.1 used, 3003.5 buff/cache
MiB Swap: 17405.8 total, 17405.8 free, 0.0 used, 11881.3 avail Mem

 进 程 号  USER      PR    NI     VIRT     RES     SHR    %CPU    %MEM    TIME+  COMMAND
    894    root        20     0    26.1g    166568    94908 S    16.3    1.0    2:25.21 Xorg
   1381  northbo+    20     0   738664    78820    53076 S     8.6    0.5    0:13.83 panel-1+
   1337  northbo+    20     0  1735468  107708    72328 S     5.0    0.7    0:27.11 xfwm4
    883    mysql       20     0  2307672  420644    35268 S     0.7    2.6    0:14.71 mysqld
   2414  northbo+    20     0    37.1g   176480   118860 S     0.7    1.1    1:04.34 Typora
   4011  northbo+    20     0  1130.1g  199904   139536 S     0.7    1.2    0:12.83 electron
   4313  northbo+    20     0  1125.3g  203460   121720 S     0.7    1.3    0:33.33 msedge
   5312  northbo+    20     0    14044    4520     3400 R     0.7    0.0    0:00.05 top
    93    root        20     0         0         0         0 I     0.3    0.0    0:00.67 kworker+
   231    root        0  -20         0         0         0 I     0.3    0.0    0:00.21 kworker+
  1645  northbo+    20     0  1694228   98364    57036 S     0.3    0.6    0:01.76 xdg-des+
  1923  northbo+    20     0    32.9g   157884    88584 S     0.3    1.0    0:17.93 msedge
  2487  northbo+    20     0   41.1g   738748   626296 S     0.3    4.6    3:06.62 Typora
```

终止进程

```
# 根据 pid 杀死进程
kill -9 pid

# 根据进程名查找 pid
pgrep -f name

# 根据进程名杀死进程
pkill -f name
```

磁盘管理

查看已挂载磁盘总容量、已使用、剩余容量

```
[northboat@northboat-nhx0dbde netctl]$ df -h
文件系统      大小  已用  可用  已用% 挂载点
dev            7.8G      0  7.8G     0% /dev
run            7.8G   1.7M  7.8G     1% /run
/dev/sda2      452G   139G  290G    33% /
tmpfs          7.8G   560M  7.2G     8% /dev/shm
tmpfs          7.8G    5.6M  7.8G     1% /tmp
/dev/sda1      300M    308K  300M     1% /boot/efi
tmpfs          1.6G    88K   1.6G     1% /run/user/1000
```

查看目录或文件所占空间

```
[northboat@northboat-nhx0dbde file]$ ls
ai  bash  c  compiler  fe  java  python  reco  school
[northboat@northboat-nhx0dbde file]$ du -s java/
212780  java/
[northboat@northboat-nhx0dbde file]$ _

[northboat@northboat-nhx0dbde reco]$ du -s pull.sh
4      pull.sh
[northboat@northboat-nhx0dbde reco]$ _
```

实验总结

修改静态 IP 可以方便局域网内对本机进行访问，感觉用处不大，之前使用系统提供的配置文件对静态 IP 进行过修改，但每次重启或重新联网后都会重置该 IP，后采用 `netctl` 对静态 IP 进行统一管理，解决了问题

Linux 服务器配置

实现环境

centos7

```
Linux VM-0-17-centos 3.10.0-1160.88.1.el7.x86_64 #1 SMP Tue Mar 7 15:41:52 UTC 2023 x86_64 x86_64 x86_64 GNU/Linux
```

ssh

实验内容

下载 Nginx 服务器

通过 wget 在 nginx 官网下载

```
wget http://nginx.org/download/nginx-1.17.6.tar.gz
```

安装必要依赖

```
yum -y install gcc pcre pcre-devel zlib zlib-devel openssl openssl-devel
```

创建目录

```
mkdir /usr/local/nginx
```

解压 nginx 压缩包

```
tar -zxvf nginx-1.17.6.tar.gz -C /usr/local/nginx
```


编译 nginx

```
cd /usr/local/nginx/nginx-1.17.6
./configure
make
make install
```

启动 nginx

```
cd /usr/local/nginx
./nginx
```

查看启动情况，浏览器进入 <http://43.163.218.127/>




Welcome to nginx!

If you see this page, the nginx web server is successfully installed and working. Further configuration is required.

For online documentation and support please refer to nginx.org.
Commercial support is available at nginx.com.

Thank you for using nginx.



下载 MariaDB

通过 yum 安装

```
yum install mariadb-server
```

启动 mariadb

```
systemctl start mariadb # 开启服务  
systemctl enable mariadb # 设置为开机自启动服务
```

数据库配置

```
mysql_secure_installation
```

```
Enter current password for root (enter for none): # 输入数据库超级管理员root的密码(注意不是系统root的密码)，第一次进入还没有设置密码则直接回车
```

```
Set root password? [Y/n] # 设置密码, y
```

```
New password: # 新密码
```

```
Re-enter new password: # 再次输入密码
```

```
Remove anonymous users? [Y/n] # 移除匿名用户, y
```

```
Disallow root login remotely? [Y/n] # 拒绝root远程登录, n, 不管y/n, 都会拒绝root远程登录
```

```
Remove test database and access to it? [Y/n] # 删除test数据库, y: 删除。n: 不删除, 数据库中会有一个test数据库, 一般不需要
```

```
Reload privilege tables now? [Y/n] # 重新加载权限表, y。或者重启服务也许
```

登录

```
[root@VM-0-17-centos ~]# mysql -u root -p
Enter password:
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MariaDB connection id is 7
Server version: 5.5.68-MariaDB MariaDB Server

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]> exit
Bye
```

下载 Redis

wget 下载

```
wget https://github.com/redis/redis/archive/redis-7.0.9.tar.gz
```

解压

```
tar -zxvf redis-7.0.9.tar.gz -C /usr/local/redis
```

编译

```
cd /usr/local/redis/redis/redis-7.0.9
make
```

安装

```
make PREFIX=/usr/local/redis install
```

复制默认配置文件

```
cp redis.conf ../bin
```

启动

```
cd /usr/local/redis/bin
./redis-server& ./redis.conf
```

```
446:M 17 Mar 2023 23:02:00.967 * monotonic clock: POSIX clock_gettime

Redis 7.0.9 (00000000/0) 64 bit
Running in standalone mode
Port: 6379
PID: 446

https://redis.io

446:M 17 Mar 2023 23:02:00.968 # WARNING: The TCP backlog setting of 511 cannot
be enforced because /proc/sys/net/core/somaxconn is set to the lower value of 128.
```

安装 OpenJDK17

wget 下载最新的jdk17

```
wget https://download.oracle.com/java/17/latest/jdk-17_linux-x64_bin.tar.gz
```

解压

```
tar xf jdk-17_linux-x64_bin.tar.gz
```

移动位置

```
mv jdk-17.0.6/ /usr/lib/jvm/jdk-17.0.6
```

修改环境配置

```
vim /etc/profile
```

添加以下内容

```
export JAVA_HOME=/usr/lib/jvm/jdk-17.0.6
export CLASSPATH=$JAVA_HOME/lib:$JRE_HOME/lib:$CLASSPATH
export PATH=$JAVA_HOME/bin:$JRE_HOME/bin:$PATH
```

重新加载配置

```
source /etc/profile
```

测试安装

```
java -version
```

```
[root@VM-0-17-centos lib]# java -version
java version "17.0.6" 2023-01-17 LTS
Java(TM) SE Runtime Environment (build 17.0.6+9-LTS-190)
Java HotSpot(TM) 64-Bit Server VM (build 17.0.6+9-LTS-190, mixed mode, sharing)
[root@VM-0-17-centos lib]# _
```

安装 RabbitMQ

安装 Erlang 环境 , yum 下载

安装依赖

```
curl -s
https://packagecloud.io/install/repositories/rabbitmq/erlang/script.rpm.sh | sudo
bash
```

下载 erlang

```
yum install -y erlang
```

测试安装

```
erl -version
```

```
[root@VM-0-17-centos local]# erl -version
Erlang (SMP,ASYNC_THREADS,HIPE) (BEAM) emulator version 11.2.2.10
[root@VM-0-17-centos local]# _
```

安装 RabbitMQ

导入 key

```
rpm --import https://packagecloud.io/rabbitmq/rabbitmq-server/gpgkey
rpm --import https://packagecloud.io/gpg.key
```

安装依赖

```
curl -s https://packagecloud.io/install/repositories/rabbitmq/rabbitmq-
server/script.rpm.sh | sudo bash
```

wget 下载 rabbitmq

```
wget https://github.com/rabbitmq/rabbitmq-
server/releases/download/v3.8.5/rabbitmq-server-3.8.5-1.el7.noarch.rpm
```

直接安装将报错

```
rpm -ivh rabbitmq-server-3.8.5-1.el7.noarch.rpm

warning: rabbitmq-server-3.8.5-1.el7.noarch.rpm: Header V4 RSA/SHA256 Signature,
key ID 6026dfca: NOKEY
error: Failed dependencies:
    socat is needed by rabbitmq-server-3.8.5-1.el7.noarch
```

导入 key

```
rpm --import https://www.rabbitmq.com/rabbitmq-release-signing-key.asc
```

安装 socat

```
yum -y install epel-release
yum -y install socat
```

重新安装

```
rpm -ivh rabbitmq-server-3.8.5-1.el7.noarch.rpm
```

启用 rabbitmq 插件

```
rabbitmq-plugins enable rabbitmq_management
```

启动 rabbitmq

```
systemctl start rabbitmq-server
```

创建用户

```
rabbitmqctl add_user admin 011026
```

设置超级管理员权限

```
rabbitmqctl set_user_tags admin administrator
```

重启 rabbitmq

```
systemctl restart rabbitmq-server
```

查看可视化界面：`43.163.218.127:15672`

服务器使用

使用 ftp 工具上传文件

- 一个前端网页
- 一个 jar 包


将 nginx 目录下 html 文件夹内容替换为上传的 `index.html`，并将资源放在相应目录下

配置 nginx.conf 文件，设置端口及负载均衡

启动 jar 包

```
nohup java -jar Shadow-0.0.1-SNAPSHOT.jar &
```

访问 `43.163.218.127:80`

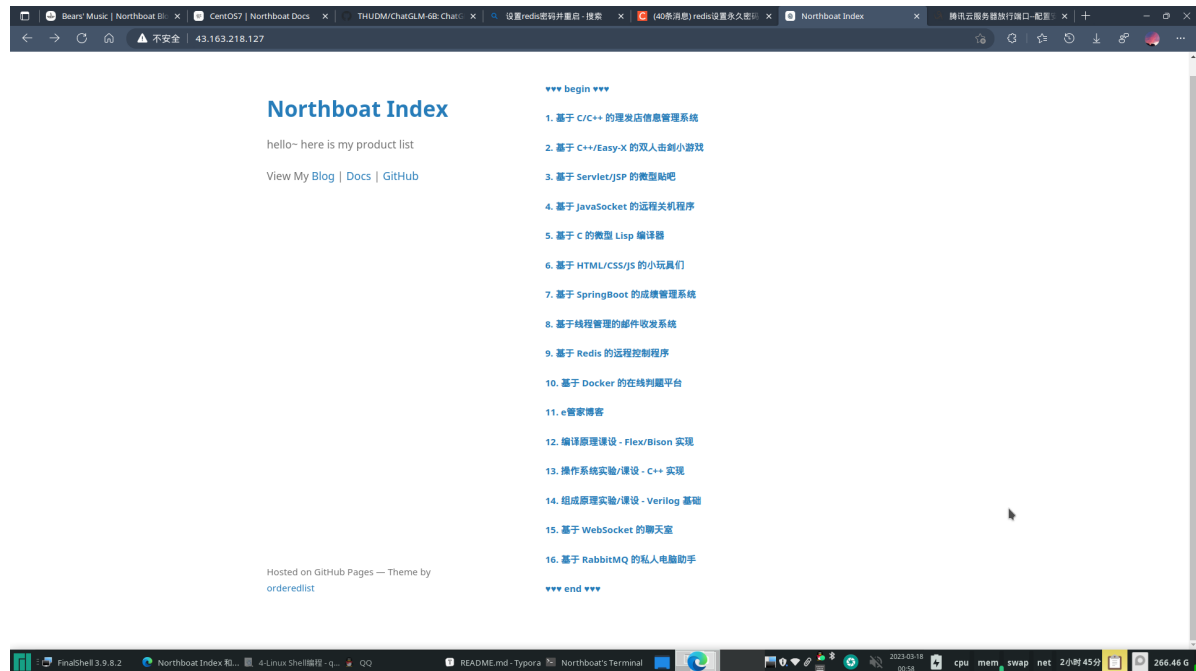

实验总结

好麻烦，宁愿用宝塔一键安装

Linux Shell 编程

实现环境

manjaro 本地 shell

```
Linux northboat-nhx0dbde 6.1.12-1-MANJARO #1 SMP PREEMPT_DYNAMIC Tue Feb 14
21:59:10 UTC 2023 x86_64 GNU/Linux
```

实验内容

实验总结

洒洒水啦