


SCALE: 3/16"= 1'-0"






GONDOLA SHALL NOT BE HIGHER THAN 5'-9" MAX

## EQUIPMENT NOTES

- ATM MACHINE & POINT OF SALE EQUIPMENT TO BE USED BY THE PUBLIC SHALL BE ACCESSIBLE PER CBC SEC. IIB-308.
- PROVIDE PUSH BUTTON DISPENSING SYSTEMS ON ALL SELF-SERVICE BEVERAGE AND/OR ICE DISPENSERS. LEVERS OF ANY TYPE CANNOT BE USED ON SELF-SERVICE BEVERAGE AND/OR
- LOCKERS SHALL BE INSTALLED 6" ABOVE THE FLOOR WITHOUT LEGS. ANCHOR LOCKERS TO WALL & PROVIDE SOLID BLOCKING AS NECESSARY.
- PROVIDE A MINIMUM 6- INCH LEGS, CASTERS, TABLETOP MOUNTING, OR A MINIMUM 4- INCH HIGH INTEGRALLY COVED BASE ON ALL EQUIPMENT. IF CASTERS ARE USED, THE EQUIPMENT MUST BE READILY MOVABLE, AND SECURED BY TETHERS TO THE SATISFACTION OF THE LOCAL FIRE DEPARTMENT; IF TABLE-TOP MOUNTED, THE EQUIPMENT MUST BE ON LEGS, READILY MOVABLE, OR SEALED IN AN APPROVED MANNER.
- ALL CONDUITS, PLUMBING, ELECTRICAL, GAS, AND SIMILAR LINES SHALL BE INSTALLED WITHIN WALLS, CEILINGS, CABINETS AND FLOORS TO THE GREATEST EXTENT POSSIBLE. EXPOSED CONDUITS, PLUMBING LINES AND OTHER LINES SHALL BE INSTALLED AT LEAST 1/2 INCH FROM WALL ¢ CEILINGS ¢ AT LEAST 6 INCHES ABOVE FLOORS USING STAND- OFF TYPE BRACKETS, ALL EXPOSED CONDUITS, PLUMBING LINES AND OTHER LINES SHALL HAVE A SMOOTH AND EASILY CLEANABLE SURFACE. ALL MULTIPLE RUNS OR CLUSTERS OF CONDUITS, PLUMBING, ELECTRICAL, GAS, AND SIMILAR LINES SHALL BE ENCASED IN APPROVED RUNWAYS, CHASES, OR OTHER APPROVED SEALED ENCLOSURES. WHERE PIPE LINES OR CONDUITS ENTER A WALL, CEILING, OR
- FLOOR, THE OPENING AROUND THE LINE SHALL BE TIGHTLY SEALED WITH AN APPROVED MATERIAL. ALL EQUIPMENT SHALL BE NSF APPROVED, OR APPROVED EQUAL.
- ALL CASHIER, BEVERAGE/FOOD SERVICE COUNTERS ARE OF METAL CONSTRUCTION ON 6" HIGH MTL. LEGS W/ REMOVABLE KICKPLATES. COUNTERTOPS SHALL BE ½" CORIAN W/ 1½" EDGE. ALL EXTERIOR EXPOSED SURFACES, INTERIOR FINISHES (INCLUDING THE UNDERSIDE OF THE COUNTERTOP) AND ALL SHELVES SHALL BE FINISHED W/ LOW PRESSURE LAMINATE. ALL COUNTER FINISH COLORS SHALL BE SELECTED BY THE OWNER.
- COAT HOOKS SHALL BE INSTALLED (ADJACENT TO EMPLOYEE LOCKERS) +6'-8" A.F.F. (MOUNT AT LEAST (I) ONE ACCESSIBLE COAT HOOK @ +40" TO 48" A.F.F. (MAX.)
- ALL INTERIOR GRAPHICS & MENU BOARDS, BY OTHERS.
- IO. ALL OPERABLE PARTS OF ALL CONTROLS, DISPENSERS, EQUIPMENTS AND ATM MACHINE IN THE SALES AREA ACCESSIBLE TO THE GENERAL PUBLIC SHALL BE WITHIN AT LEAST ONE OF THE REACH RANGE PER CBC SEC. IIB-308 & ADAAG 308.

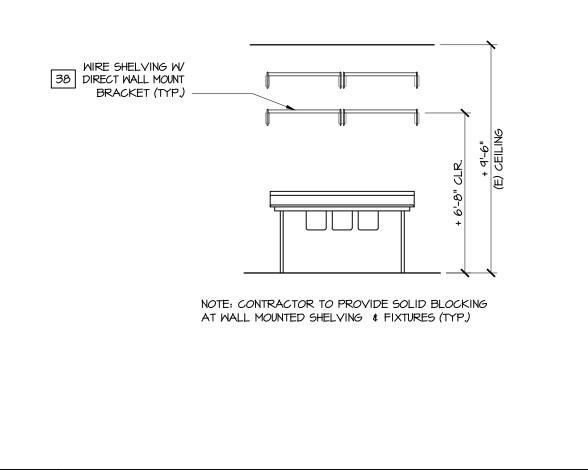

18 SHELVING @ 3-COMP SINK

					EQUIF	MEN		HEDU			
ITE		ITY.	ITEM DESCRIPTION	MANUFACTURER	MODEL NO.	VOLTAGE	PHASE	AMPERAGE- MCA / MOPD	FILTERED WATER	REMARKS	
	_	1	WALK-IN COOLER	AS SELECTED	CUSTOM	120V	1	SEE ELEC.	-	PROVIDE COOLER & FREEZER ACCESS DOOR(S)	
	_	3	& WALK-IN FREEZER WALK-IN COOLER	BY OWNER  LARKIN	(I) LCA6-I35AEMCM6B (MASTER)	1207	'	2.9 AMP	_	DRAIN IN-DIRECTLY TO FLOOR SINK	Architect
2			EVAPORATOR  WALK-IN COOLER		\$ (2) LCA6-I35AETXV6B (SLAVE)		7				
3			CONDENSER  WALK-IN COOLER	HEAT CRAFT	MOHO50X6CFMT	208-230V	3	SEE ELEC.	-	LOCATED ON ROOF (313 LBS.)	M I Architects, In
4		14	MERCHANDISING DOORS  WALK-IN FREEZER	ANTHONY	#IOI-NT	120V	I	SEE ELEC.	-	28" x 75" DOORS \$ (7) 27" DEEP SHELVES PER DOOR	ARCHITECTURE PLANNING
5		1	EVAPORATOR  WALK-IN FREEZER	LARKIN	#IOI-NT	208-230V	I	I.I AMP	-	DRAIN IN-DIRECTLY TO FLOOR SINK	MANAGEMENT DESIGN
6		1	CONDENSER	HEAT CRAFT	MOHO3IL6CF	200-230V	3	SEE ELEC.	-	LOCATED ON ROOF (223 LBS.)	2221 OLYMPIC BLVD.,
7	]   2	2	WALK-IN FREEZER MERCHANDISING DOORS	ANTHONY	#IOI-LT	120V	I	SEE ELEC.	-	28" x 75" DOORS \$ (7) 27" DEEP SHELVES PER DOOR	SUITE 1 <i>00</i> WALNUT CREEK, CA
8		1	ISLAND MERCHANDISER	SOUTHERN CASE ARTS	MDI-03MS	-	-	SEE ELEC.	-	SELF-CONTAINED, PROVIDE CONDENSING UNIT W ELECTRIC CONDENSATE DISSIPATOR	94595 925-287-1174 Tel
9		1	UNDERCOUNTER MICROWAVE OVEN	SHARP	#R-2ILVF	120V	I	14.0 AMP	-		925-943-1581 Fax
10	]		CHILI / CHEESE DISP. W SIDE-BY-SIDE RACK	GEHL'S	DUAL	1207	1	I.7 AMP	-		925-878-9875 Cell muthana@miarchitect.com
П		1 .	REFRIGERATED OPEN DISPLAY CASE	TURBO AIR	TOM-60-DX	II5V	1	16.5 AMP	-	SELF CONTAINED	ими.miarchitect.com
12	]	ı	CAPPUCCINO	CURTIS	#PCGT5	1207	I	15.0 AMP	YES	I/4" FITTING, I/4 TURN SHUT OFF VALVE REQUIRED AT EACH WATER SUPPLY	
13	]	ı	SINGLE SERVE COFFEE BREWER	DOUME EGBERTS	#C-300	208-240\	I	30.0 AMP	YES	3/8" FITTING, I/4 TURN SHUT OFF VALVE REQUIRED AT EACH WATER SUPPLY	Z
14			SPECIALTY COFFEE BREWER	DOUME EGBERTS	#C-60	1207	1	15.0 AMP	YES	3/8" FITTING, I/4 TURN SHUT OFF VALVE REQUIRED AT EACH WATER SUPPLY	
15	1	1	BAKERY DISPLAY NON-REFRIGERTED	FEDERAL	(#CD362855)	120V	1	I.5 AMP	-	TREACH CD / (1 E/ OH / V (1 E/ OH / E )	0 2
16			SOFT SERVE	ELECTRO FREEZE	#5LX400E	208-230V	l	16.0 AMP	-	DEDICATED ELECTRICAL CIRCUIT	
		1 1	FREEZER FOUNTAIN BEVERAGE	COCA-COLA	#8V	115V	1	20.0 AMP	YES	3/8" FITTING, I/4 TURN SHUT OFF VALVE REQUIRED AT	0 0
		<u>'</u>   '	ICE MACHINE	COMPANY MANITOWOC	#IB-0696YC		'	I.I AMP	YES	EACH WATER SUPPLY, DRAIN IN-DIRECTLY TO FLOOR SINK 3/8" FITTING, I/4 TURN SHUT OFF VALVE REQUIRED AT	ZZ
18	-	'	ICE MACHINE  ICE MACHINE			115V	1			EACH WATER SUPPLY, DRAIN IN-DIRECTLY TO FLOOR SINK	3
19			REMOTE CONDENSER	MANITOWOC	#ICVD-0696	2087	3	15.0 AMP	-	MOUNTED ON ROOF (208 LBS.)  3/8" FITTING, I/4 TURN SHUT OFF VALVE	
20		<u> </u>	FROZEN BEVERAGE	FBD	#563	208∨	l	20.0 AMP	YES	REQUIRED AT EACH WATER SUPPLY	<u>.</u>
21		1	ATM MACHINE	TRITON	RL1600	1207	I	SEE ELEC.	-	DEDICATED CIRCUIT & TELE/DATA LINE	
22			REACH-IN MERCHANDISER	TRUE	GDM-I2-LD	II5V	1	4.I AMP	-	SELF CONTAINED	-
23		1	ICE CREAM MERCHANDISER	TRUE	TFM-4IAL	II5V	I	2.5 AMP	-	SELF CONTAINED	
24	] Lo	ОТ	CABINETS \$ GONDOLAS	ROYSTON, LLC	CUSTOM	-	-	-	-	SEE "EQUIPMENT NOTES" #7	7
25			NOT USED								
26	]	1	TABACCO BAR	IMAGE WORKS	7 FOOT STANDARD (ENHANCED)	-	-	-	-		<b> </b>
27	]	1	SAFE	NKL	D8X	120V	1	SEE ELEC.	-		<b>U</b> ₩
28	]	1	INTERCOM	3M	78-6911-4796-7	120V	I	SEE ELEC.	-	8 STATION (PROVIDE INTERCOM @ EACH DISPENSER, @ CASHIER & @ SECURE STORAGE	
29		1	ON-COUNTER LOTTO	STATE LOTTERY	-	1207	I	SEE ELEC.	-	DEDICATED CIRCUIT & TELE/DATA LINE	$O M \cdot M$
30	1	1	IN-COUNTER LOTTERY TICKET	STATE LOTTERY	-	-	1	-	-		<b>戶</b> <u>0</u> 四4
31	- 1 :	2	POINT-OF-SALE	AS SELECTED	-	AS REQUIRED	-	SEE ELEC.	-	DEDICATED CIRCUIT & TELE/DATA LINE	T C III I
32			SYSTEM SECURITY DRAWER	BY OWNER  SHURESAFE	#992219	AS REQUIRED	_	SEE ELEC.	_	CONNECT TO INTERCOM SYSTEM	
33		<u> </u>	WRITING SHELF	SHURESAFE	#400 46	-	_	-	_	MOUNTED @ +34" A.F.G. (MAX.)	\$ 0 0 \$ 0 0
34		<u>'</u>	WALL MOUNTED	EAGLE GROUP	#HSA-IO-FDP	_	_		_	PROVIDE HOT & COLD WATER, SEE PLUMBING DWGS.	
-			HAND SINK BAG-N-BOX					_		PROVIDE NOT & COLD MATER, SEE PLUMBING DMGS.	_ m oi 🛣
35		2	EQUIPMENT	MANITOMOC	AS REQUIRED	-	-	-	-		
36	_		Co2 TANK	CHART INDUSTRIES	CARBO-MIZER #450	-	-	-	-	SECURE TO WALL PER DTL. 19 ON SHT. A5.4	$\mathcal{C}$
37	_	8	WIRE SHELVING WIRE SHELVING W	T55	SEE REMARKS	-	-	-	-	(8) 2448CH, (I) 2442, 4 - TIER, 69" MAX. HEIGHT	サ 文 内 立 内 立 大 に に に に に に に に に に に に に
38		4 ,	WALL MOUNT BRACKETS	T55	1842CH	-	-	-	-	SEE DTL. 19 ON THIS SHT.	10047 1055
39	]	1	BACKROOM ICE MAKER	MANITOMOC	#IY-0976C	120V	I	I.I AMP	YE5	3/8" WATER INLET W/ I/4 TURN SHIT-OFF VALVE AT WATER SUPPLY, DRAIN TO FLOOR SINK	
40		1	BACKROOM ICE MAKER CONDENSER	MANITOWOC	#ICVD-0996	208-230V	I	MCA: 12.5 AMPS MAX. FUSE: 20 AMP		LOCATED ON ROOF (206 LBS.)	
41		1	ICE STORAGE BIN	MANITOWOC	#B-57 <i>0</i>	-	-	-	-	#430 LB CAPACITY, 6" HIGH (MIN.) STAINLESS STEEL LEGS, DRAIN TO FLOOR SINK	INTERNATION OF THE PROPERTY OF
42		ı	SOLID DOOR FREEZER	TRUE	#T-43F	II5∨	I	7.5 AMP	-	SELF-CONTAINED	上 * E C-29627 至 * * * * * * * * * * * * * * * * * *
 	,		3-COMP SINK \$	TURBO AIR /	#TSA-3-14-DI &					PROVIDE HOT & COLD WATER, SEE PLUMBING DWGS. PROVIDE	2 6/30/2017 ₹ RENEWAL DATE
43	۱	1	PRE-RINSE W/ FAUCET	GREEN WORLD & FISHER	2210-WB W/ 2901-14	_	_	_	-	A 6" HIGH (MIN.) SPLASH GUARD BETWEEN THE 3-COMP SINK & WIRE SHELVING. DRAIN IN-DIRECTLY TO FLOOR SINK	OF CALLED
44		1	WATER FILTER	PENTAIR	EV9328-06	-	-	-	-	3/4" WATER LINE, SEE PLUMBING DWGS. CONNECT TO EQUIP. #'S #12, #13, #14, #17, #18, #20 & #39	
45	] (	9	WIRE SHELVING	TSS	2448PW	-	-	-	-	4 - TIER, 69" MAX. HEIGHT	- ISSUED FOR CONSTRUCTI 02-16-16 ISSUED FOR PLAN CHECK
46	7	1	IN-COUNTER HAND SINK	ADVANCE TABCO	DI-I-105P	-	-	-	-	PROVIDE HOT & COLD WATER, SEE PLUMBING DWGS., SINK HAS BUILT-IN 6" HIGH REAR & SIDE SPLASH	12-27-13 ISSUED FOR PLANNING
			TIVAND SHAN	TABOO						PROVIDE HOT & COLD WATER, SEE PLUMBING DWGS.	NO. DATE DESCRIPTION
											O4-07-16 REVISED PER PLAN CHECK CO
											$\frac{\Delta}{\Delta}$
											EQUIPMENT PLAN, EQUIPME SCHEDULE, NOTES & DETAI
											PROJECT #: 13-3903
											DRAWN: JM CHECKED:
											SCALE: AS NOTED DATE: 09-2
1											
		+									
											Δ1 1
											A1.4

rchitects

rchitects, Inc. CHITECTURE PLANNING NAGEMENT DESIGN I OLYMPIC BLVD., SUITE 100 \_NUT CREEK, CA

ISSUED FOR CONSTRUCTION ISSUED FOR PLAN CHECK ISSUED FOR PLANNING

DESCRIPTION REVISED PER PLAN CHECK COMMENTS

IENT PLAN, EQUIPMENT ILE, NOTES & DETAILS

13-3903 CHECKED: MII NOTED DATE: 09-29-15