


Lug Type

Valve Construction - Lug Type


Products Range

Retainer Type (C Type)

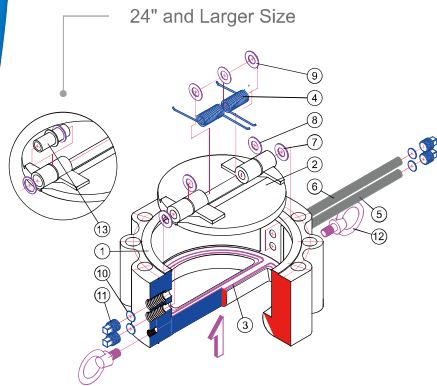

Retainer Type (C Type)			
No.	Parts Name	Q'ty	Remarks
1	Body	1	
2	Plate	2	
3	Seat	1	
4	Spring	1	1-1/2"(40A) to 5"(125A)
		2	6"(150A) to 22"(550A)
		4	24"(600A) & Larger size
5	Hinge Pin	1	
6	Stop Pin	1	
7	Body Bearing	2	
8	Plate Bearing	2	
9	Spring Bearing	0	1-1/2"(40A) to 5"(125A)
		3	6"(150A) to 22"(550A)
		5	24"(600A) & Larger size
10	Stabilizer	4	For Rubber Seat Valve Only
11	Retainer	4	
12	Eye Bolt	1	8"(200A) & Larger size
13	Sleeve	2	24"(600A) & Larger size

Retainerless Type (G Type)

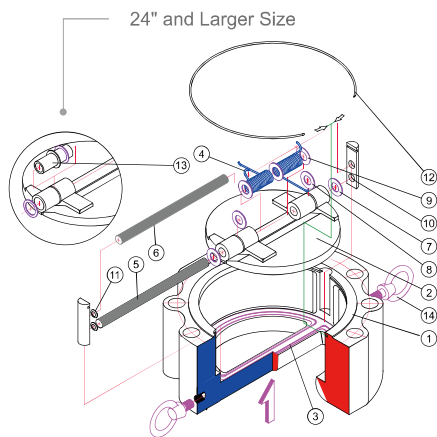

Retainerless Type (G Type)			
No.	Parts Name	Q'ty	Remarks
1	Body	1	
2	Plate	2	
3	Seat	1	
4	Spring	2	1-1/2"(40A) to 22"(550A)
		4	24"(600A) & Larger size
5	Hinge Pin	1	
6	Stop Pin	1	
7	Body Bearing	2	
8	Plate Bearing	2	
9	Spring Bearing	3	1-1/2"(40A) to 22"(550A)
		5	24"(600A) & Larger size
10	Adjust Plate	2	
11	Spring Washer	2	
12	Fix Ring	1	
13	Sleeve	2	24"(600A) & Larger size
14	Eye Bolt	1	8"(200A) & Larger size

Products Range


Body Material		CI			DI			CI / DI		CS / SS / AS												
Size		JIS		ANSI	JIS		ANSI	ISO/DIN		JIS			ANSI					ISO / DIN				
Inch	mm	5K	10K	125LB	5K	10K	150LB	PN10	PN16	5K	10K	20K	150LB	300LB	600LB	900LB	1500LB	2500LB	PN10	PN16	PN25	PN40
1-1/2"	40A	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2"	50A	-	-	-	-	-	-	-	-	-	●	●	●	●	●	●	●	●	-	-	-	-
2-1/2"	65A	-	-	-	-	-	-	-	-	-	●	●	●	●	●	●	●	●	-	-	-	-
3"	80A	-	-	-	-	-	-	-	-	-	●	●	●	●	●	●	●	●	-	-	-	-
4"	100A	-	-	-	-	-	-	-	-	-	●	●	●	●	●	●	●	●	-	-	-	-
5"	125A	-	-	-	-	-	-	-	-	-	●	●	●	●	●	-	-	-	-	-	-	-
6"	150A	-	-	-	-	-	-	-	-	-	●	●	●	●	●	●	●	●	-	-	-	-
8"	200A	-	-	-	-	-	-	-	-	-	●	●	●	●	●	●	●	●	-	-	-	-
10"	250A	-	-	-	-	-	-	-	-	-	●	●	●	●	●	●	●	●	-	-	-	-
12"	300A	-	-	-	-	-	-	-	-	-	●	●	●	●	●	●	●	●	-	-	-	-
14"	350A	-	-	-	-	-	-	-	-	-	●	●	●	●	●	●	●	-	-	-	-	-
16"	400A	-	-	-	-	-	-	-	-	-	●	●	●	●	●	●	●	-	-	-	-	-
18"	450A	-	-	-	-	-	-	-	-	-	●	●	●	●	●	●	●	-	-	-	-	-
20"	500A	-	-	-	-	-	-	-	-	-	●	●	●	●	●	●	-	-	-	-	-	-
22"	550A	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
24"	600A	-	-	-	-	-	-	-	-	-	●	●	●	●	●	●	-	-	-	-	-	-
26"	650A	-	-	-	-	-	-	-	-	-	●	-	●	-	-	-	-	-	-	-	-	-
28"	700A	-	-	-	-	-	-	-	-	-	●	●	●	●	●	-	-	-	-	-	-	-
30"	750A	-	-	-	-	-	-	-	-	-	●	●	●	●	●	-	-	-	-	-	-	-
32"	800A	-	-	-	-	-	-	-	-	-	●	●	●	●	●	-	-	-	-	-	-	-
36"	900A	-	-	-	-	-	-	-	-	-	●	●	●	●	●	-	-	-	-	-	-	-
40"	1000A	-	-	-	-	-	-	-	-	-	●	-	●	●	●	-	-	-	-	-	-	-
42"	1050A	-	-	-	-	-	-	-	-	-	-	-	●	●	●	-	-	-	-	-	-	-
48"	1200A	-	-	-	-	-	-	-	-	-	●	-	●	●	●	-	-	-	-	-	-	-
54"	1350A	-	-	-	-	-	-	-	-	-	●	-	●	●	-	-	-	-	-	-	-	-
56"	1400A	-	-	-	-	-	-	-	-	-	-	-	●	-	-	-	-	-	-	-	-	-
60"	1500A	-	-	-	-	-	-	-	-	-	●	-	●	●	-	-	-	-	-	-	-	-

Note CI=Cast Iron ; DI=Ductile Iron ; CS=Carbon Steel ; SS=Stainless Steel ; AS=Alloy Steel

Lug Type

Dual Plate Lug Type Check Valve

2"(50A) - 8"(200A)

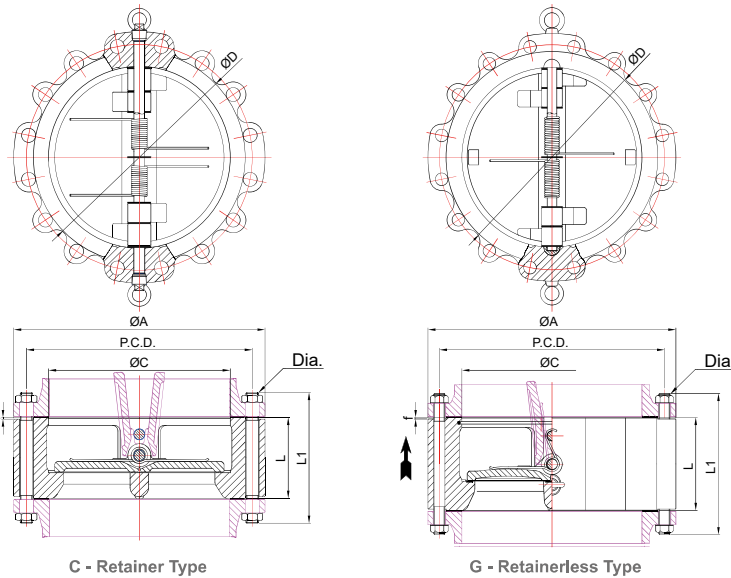

Dual Plate Lug Type Check Valve


NPS	Class	Ø A	Ø C	L	P.C.D.	Ø D	f	Stud		L1		Approx. WT (kgs)
								No.	Dia.	FF/RF	RJ	
2" (50A)	10K	155	62	60	120.0	96	2	4	M16	145	-	6.0
	20K	155	62	60	120.0	96	2	8	M16	150	-	6.0
	150LB	150	62	60	120.7	92	2	4	5/8"	150	-	7.0
	300LB	165	62	60	127.0	92	2	8	5/8"	165	-	8.0
	600LB	165	62	60	127.0	92	7	8	5/8"	170	185	8.0
	900LB	215	62	70	165.1	92	7	8	7/8"	220	235	16.0
	1500LB	215	62	70	165.1	92	7	8	7/8"	220	235	16.0
2-1/2" (65A)	2500LB	235	62	70	171.4	92	7	8	1"	250	265	19.0
	10K	175	75	67	140.0	116	2	4	M16	155	-	9.0
	20K	175	75	67	140.0	116	2	8	M16	160	-	9.0
	150LB	180	75	67	139.7	105	2	4	5/8"	160	-	12.0
	300LB	190	75	67	149.2	105	2	8	3/4"	185	-	14.0
	600LB	190	75	67	149.2	105	7	8	3/4"	190	205	14.0
	900LB	245	75	83	190.5	105	7	8	1"	245	260	27.0
	1500LB	245	75	83	190.5	105	7	8	1"	245	260	31.0
	2500LB	265	75	83	196.8	105	7	8	1-1/8"	290	310	38.0

NPS	Class	Ø A	Ø C	L	P.C.D.	Ø D	f	Stud		L1		Approx. WT (kgs)
								No.	Dia.	FF/RF	RJ	
3" (80A)	10K	185	90	73	150.0	126	2	8	M16	160	-	11.0
	20K	200	90	73	160.0	132	2	8	M20	175	-	13.0
	150LB	190	90	73	152.4	127	2	4	5/8"	170	-	12.0
	300LB	210	90	73	168.3	127	2	8	3/4"	195	-	14.0
	600LB	210	90	73	168.3	127	7	8	3/4"	200	215	14.0
	900LB	240	90	83	190.5	127	7	8	7/8"	230	245	25.0
	1500LB	265	90	83	203.2	127	7	8	1-1/8"	275	290	29.0
4" (100A)	2500LB	305	90	86	228.6	127	7	8	1-1/4"	320	340	38.0
	10K	210	115	73	175.0	151	2	8	M16	160	-	17.0
	20K	225	115	73	185.0	160	2	8	M20	180	-	21.0
	150LB	230	115	73	190.5	157	2	8	5/8"	180	-	19.0
	300LB	255	115	73	200.0	157	2	8	3/4"	200	-	23.0
	600LB	275	115	79	215.9	157	7	8	7/8"	225	240	30.0
	900LB	290	115	102	235.0	157	7	8	1-1/8"	285	300	45.0
5" (125A)	1500LB	310	115	102	241.3	157	7	8	1-1/4"	310	325	51.0
	2500LB	355	115	105	273.0	157	7	8	1-1/2"	370	395	69.0
	10K	250	141	86	210.0	182	2	8	M20	185	-	24.0
	20K	270	141	86	225.0	195	2	8	M22	200	-	26.0
	150LB	255	141	86	215.9	186	2	8	3/4"	200	-	25.0
	300LB	280	141	86	235.0	186	2	8	3/4"	220	-	29.0
	600LB	330	141	105	266.7	186	7	8	1"	270	285	39.0
6" (150A)	10K	280	170	98	240.0	212	2	8	M20	200	-	29.0
	20K	305	170	98	260.0	230	2	12	M22	215	-	41.0
	150LB	280	170	98	241.3	216	2	8	3/4"	215	-	32.0
	300LB	320	170	98	269.9	216	2	12	3/4"	235	-	45.0
	600LB	355	170	136	292.1	216	7	12	1"	310	325	81.0
	900LB	380	170	159	317.5	216	7	12	1-1/8"	365	380	115.0
	1500LB	395	170	159	317.5	216	7	12	1-3/8"	430	450	119.0
8" (200A)	2500LB	485	170	159	368.3	216	7	8	2"	515	504	184.0
	10K	330	219	127	290.0	262	2	12	M20	230	-	53.0
	20K	350	219	127	305.0	275	2	12	M22	250	-	68.0
	150LB	345	219	127	298.5	270	2	8	3/4"	250	-	63.0
	300LB	380	219	127	330.2	270	2	12	7/8"	280	-	78.0
	600LB	420	219	165	349.2	270	7	12	1-1/8"	370	385	134.0
	900LB	470	219	206	393.7	270	7	12	1-3/8"	440	455	217.0
	1500LB	485	219	206	393.7	270	7	12	1-5/8"	510	530	283.0
	2500LB	550	219	206	438.2	270	7	12	2"	600	625	382.0

Lug Type

Dual Plate Lug Type Check Valve

10"(250A) - 24"(600A)

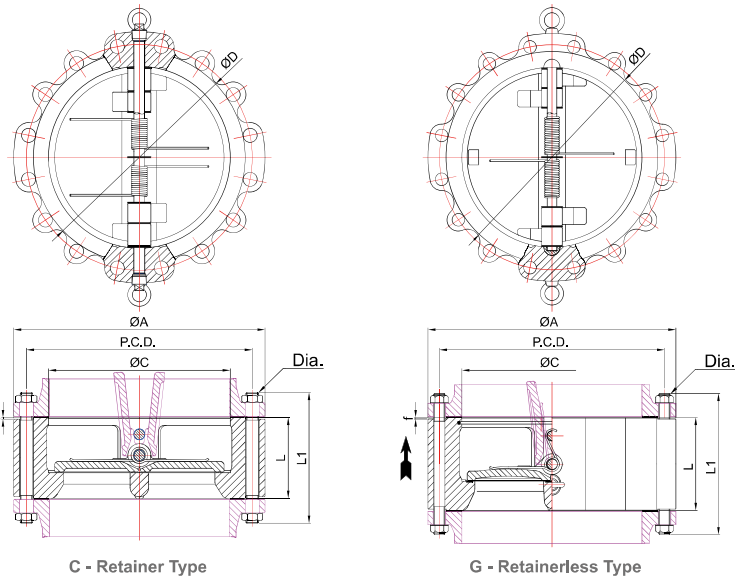

Dual Plate Lug Type Check Valve

NPS	Class	Ø A	Ø C	L	P.C.D.	Ø D	f	Stud		L1		Approx. WT (kgs)
								No.	Dia.	FF/RF	RJ	
10" (250A)	10K	400	272	146	355.0	324	2	12	M22	255	-	90.0
	20K	430	272	146	380.0	345	2	12	M24	280	-	105.0
	150LB	405	272	146	362.0	324	2	12	7/8"	280	-	93.0
	300LB	445	272	146	387.4	324	2	16	1"	320	-	115.0
	600LB	510	272	213	431.8	324	7	16	1-1/4"	440	455	234.0
	900LB	545	272	241	469.9	324	7	16	1-3/8"	485	505	330.0
	1500LB	585	272	248	482.6	324	7	12	1-7/8"	595	620	361.0
12" (300A)	2500LB	675	272	254	539.8	324	7	12	2-1/2"	750	785	489.0
	10K	445	322	181	400.0	368	3	16	M22	290	-	150.0
	20K	480	322	181	430.0	395	3	16	M24	315	-	222.0
	150LB	485	322	181	431.8	381	2	12	7/8"	315	-	170.0
	300LB	520	322	181	450.8	381	2	16	1-1/8"	375	-	242.0
	600LB	560	322	229	489.0	381	7	20	1-1/4"	465	480	304.0
	900LB	610	322	292	533.4	381	7	20	1-3/8"	555	575	420.0
14" (350A)	1500LB	675	322	305	571.5	381	7	16	2"	690	720	637.0
	2500LB	760	322	305	619.1	381	7	12	2-3/4"	850	885	747.0


NPS	Class	Ø A	Ø C	L	P.C.D.	Ø D	f	Stud		L1		Approx. WT (kgs)
								No.	Dia.	FF/RF	RJ	
14" (350A)	10K	490	356	184	445.0	413	3	16	M22	300	-	169.0
	20K	540	356	222	480.0	440	3	16	M30	385	-	207.0
	150LB	535	356	184	476.3	413	2	12	1"	330	-	199.0
	300LB	585	356	222	514.4	413	2	20	1-1/8"	424	-	237.0
	600LB	605	356	273	527.0	413	7	20	1-3/8"	520	535	571.0
	900LB	640	356	356	558.8	413	7	20	1-1/2"	640	665	775.0
	1500LB	750	356	356	635.0	413	7	16	2-1/4"	775	805	1097.0
16" (400A)	10K	560	406	191	510.0	475	3	16	M24	310	-	162.0
	20K	605	406	232	540.0	495	3	16	M30	410	-	167.0
	150LB	595	406	191	539.8	470	2	16	1"	340	-	246.0
	300LB	650	406	232	571.5	470	2	20	1-1/4"	445	-	489.0
	600LB	685	406	305	603.2	470	7	20	1-1/2"	570	585	547.0
	900LB	705	406	384	616.0	470	7	20	1-5/8"	680	705	608.0
	1500LB	825	406	384	704.8	470	7	16	2-1/2"	840	875	1150.0
18" (450A)	10K	620	457	203	565.0	530	3	20	M24	325	-	275.0
	20K	675	457	264	605.0	560	3	20	M30	445	-	543.0
	150LB	635	457	203	577.9	533	2	16	1-1/8"	365	-	290.0
	300LB	710	457	264	628.6	533	2	24	1-1/4"	485	-	558.0
	600LB	745	457	362	654.0	533	7	20	1-5/8"	645	665	1078.0
	900LB	785	457	451	685.8	533	7	20	1-7/8"	785	810	1450.0
	1500LB	915	457	468	774.7	533	7	16	2-3/4"	970	1005	1775.0
20" (500A)	10K	675	508	219	620.0	585	3	20	M24	345	-	330.0
	20K	730	508	292	660.0	615	3	20	M30	475	-	750.0
	150LB	700	508	219	635.0	584	2	20	1-1/8"	400	-	348.0
	300LB	775	508	292	685.8	584	2	24	1-1/4"	520	-	766.0
	600LB	815	508	368	723.9	584	7	24	1-5/8"	665	685	1297.0
	900LB	855	508	451	749.3	584	7	20	2"	805	830	1960.0
	10K	795	610	222	730.0	690	3	24	M30	370	-	500.0
24" (600A)	20K	845	610	318	770.0	720	3	24	M36	520	-	735.0
	150LB	815	610	222	749.3	692	2	20	1-1/4"	420	-	520.0
	300LB	915	610	318	812.8	692	2	24	1-1/2"	570	-	756.0
	600LB	940	610	438	838.2	692	7	24	1-7/8"	775	795	1554.0
	900LB	1040	610	495	901.7	692	7	20	2-1/2"	940	970	2351.0

Lug Type

Dual Plate Lug Type Check Valve

26" (650A) - 60" (1500A)

Products Range

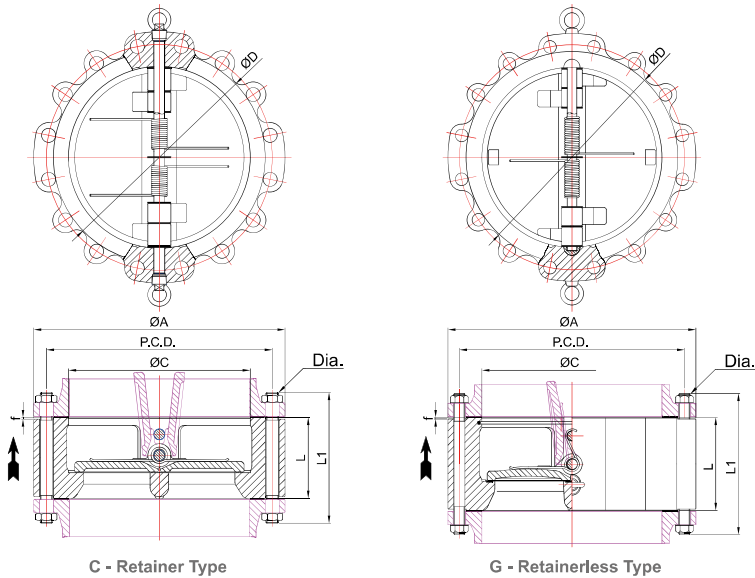

Dual Plate Lug Type Check Valve

NPS	Class	Ø A	Ø C	L	P.C.D.	Ø D	f	Stud		L1		Approx. WT (kgs)
								No.	Dia.	FF/RF	RJ	
26" (650A)	10K	845	660	222	780.0	740	3	24	M30	510	-	1200.0
	150LB	870	660	222	806.4	749	2	24	1-1/4"	595	-	1250.0
	10K	905	711	305	840.0	800	3	24	M30	465	-	1230.0
28" (700A)	20K	995	711	368	900.0	840	5	24	M45	615	-	1340.0
	150LB	925	711	305	863.6	800	2	28	1-1/4"	565	-	1270.0
	300LB	1035	711	368	939.8	800	2	28	1-5/8"	670	-	1395.0
	600LB	1075	711	483	965.2	800	7	28	2"	845	670	1830.0
30" (750A)	10K	970	762	305	900.0	855	3	24	M30	485	-	1050.0
	20K	1080	762	368	970.0	900	5	24	M52	655	-	1650.0
	150LB	985	762	305	914.4	857	2	28	1-1/4"	595	-	1560.0
	300LB	1090	762	368	997.0	857	2	28	1-3/4"	705	-	1996.0
	600LB	1130	762	505	1022.4	857	7	28	2"	870	900	3045.0

NPS	Class	Ø A	Ø C	L	P.C.D.	Ø D	f	Stud		L1		Approx. WT (kgs)
								No.	Dia.	FF/RF	RJ	
32" (800A)	10K	1020	813	356	950.0	905	3	28	M30	510	-	1200.0
	20K	1140	813	368	1030.0	960	5	24	M52	670	-	1990.0
	150LB	1060	813	356	977.9	914	2	28	1-1/2"	630	-	1260.0
	300LB	1150	813	368	1054.1	914	2	28	1-7/8"	735	-	2020.0
36" (900A)	600LB	1195	813	533	1079.5	914	7	28	2-1/4"	920	945	3428.0
	10K	1120	914	368	1050.0	1005	3	28	M30	555	-	1350.0
	20K	1250	914	483	1140.0	1070	5	28	M52	745	-	2400.0
	150LB	1170	914	368	1085.8	1022	2	32	1-1/2"	680	-	1430.0
40" (1000A)	300LB	1270	914	483	1168.4	1022	2	32	2"	830	-	2660.0
	600LB	1315	914	635	1193.8	1022	7	28	2-1/2"	1045	-	5896.0
	10K	1235	1016	432	1160.0	1110	3	28	M36	595	-	1450.0
	150LB	1290	1016	432	1200.2	1124	2	36	1-1/2"	710	-	1520.0
42" (1050A)	300LB	1240	1016	546	1155.7	1086	2	32	1-5/8"	895	-	3830.0
	600LB	1320	1016	660	1212.8	1111	7	32	2-1/4"	1130	-	7860.0
	150LB	1345	1067	432	1257.3	1194	2	36	1-1/2"	740	-	2340.0
48" (1200A)	300LB	1290	1067	568	1206.5	1137	2	32	1-5/8"	925	-	5515.0
	600LB	1405	1067	702	1282.7	1168	7	28	2-1/2"	1200	*	6570.0
	10K	1465	1219	524	1380.0	1325	3	32	M36	705	-	3100.0
54" (1350A)	150LB	1510	1219	524	1422.4	1359	2	44	1-1/2"	850	-	3350.0
	300LB	1465	1219	629	1371.6	1302	2	32	1-7/8"	1030	-	6239.0
	600LB	1595	1219	787	1460.5	1334	7	32	2-3/4"	1240	-	-
56" (1400A)	10K	1630	1372	540	1540.0	1480	3	36	M42	735	-	-
	150LB	1685	1372	540	1593.8	1511	2	44	1-3/4"	905	-	-
	300LB	1660	1372	718	1549.4	1467	2	28	2-1/4"	1095	-	-
60" (1500A)	150LB	1745	1422	568	1651.0	1575	2	48	1-3/4"	940	-	-
	10K	1795	1524	660	1700.0	1635	3	40	M42	860	-	-
	150LB	1855	1524	660	1759.0	1676	2	52	1-3/4"	1050	-	-
	300LB	1810	1524	838	1701.8	1626	2	32	2-1/4"	1315	-	-