

Distributed and Fault-Tolerant System for Tuple Streaming

Jorge Santos, Miguel Vera, José Semedo
Instituto Superior Tecnico
Computer Science Department
??IN-F?? Av. Rovisco Pais, 1, 1049-001 Lisboa
{jorge.pessoa, miguel.vera, jose.semedo}@tecnico.ulisboa.pt

Abstract

The ABSTRACT is to be in fully-justified italicized text, at the top of the left-hand column, below the author and affiliation information. Use the word "Abstract" as the title, in 12-point Times, boldface type, centered relative to the column, initially capitalized. The abstract is to be in 10-point, single-spaced type. The abstract may be up to 3 inches (7.62 cm) long. Leave two blank lines after the Abstract, then begin the main text.

1. Introduction

Please follow the steps outlined below when submitting your manuscript to the IEEE Computer Society Press. Note there have been some changes to the measurements from previous instructions.

2. Solutions

Describe the solutions in an overall way

2.1. Solution 1

Solution 1 advantages/disadvantages

2.2. Solution 2

Solution 1 advantages/disadvantages

3. Fault-Tolerance

Talk about fault-tolerance in a general way

Our fault tolerance algorithm provides the ability to tolerate a downed replica of any operator, as well as the it's recuperation. The algorithm we used is possible due to the use

of a simple, yet resourceful abstraction mechanism, which the semantics algorithm will greatly benefit from aswell. Each of the replica maintains three sets of of dictionaries, except the first and last operator's replicas. This is because each of the dictionaries holds the correspondence between a replica and the dictionary holder's view of it. One dictionary abstracts all of the colleague replicas of the holder (replicas of the same operator as itself), another distinct dictionary abstracts the replicas of the above operator, and again for the one below. So every replica of every operator has the ability to establish a connection with what they think is every replica above and below them, as well as their colleagues.

3.1. Fault Detection

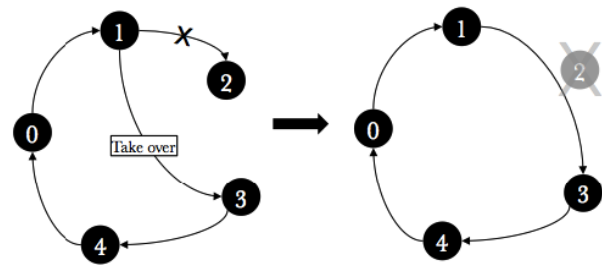


Figure 1. How colleague replicas ping each other

Going into more detail on how a downed replica can be detected. Colleague replicas among themselves have the illusion of being in a ring like topology. Each replica periodically pings the following colleague like illustrated in fig.X (FIGURA DE REPLICAS EM CIRCULO COM INDEXES E SETAS DE PING). A replica can efficiently know what replica it preceeds. It knows it's own replica index (i)therefor it knows the index of the replica it has to ping (ping i), by applying the following rule: ping i = (i +

1) % number of replicas. If the pinged replica is detected to be down, then the replica can just calculate the following replica's index using the very same rule, and contact it, asking for it to take over the downed replica's spot.

3.2. Take Over Procedure

The replica taking over goes through the 3 sets of replica holding abstractions aforementioned. Firstly it iterates over the the replica holding abstractions corresponding to the operator above it, and for each one, it substitutes the place of the replica detected as downed with a representation of itself. It literally takes over it's spot, so every command that would be aimed at the downed replica, is routed to the one that took over it's functions. It then repeats the process for it's colleague replicas and the ones of the operator below it. (FIGURA COM SETAS E O CRLH)

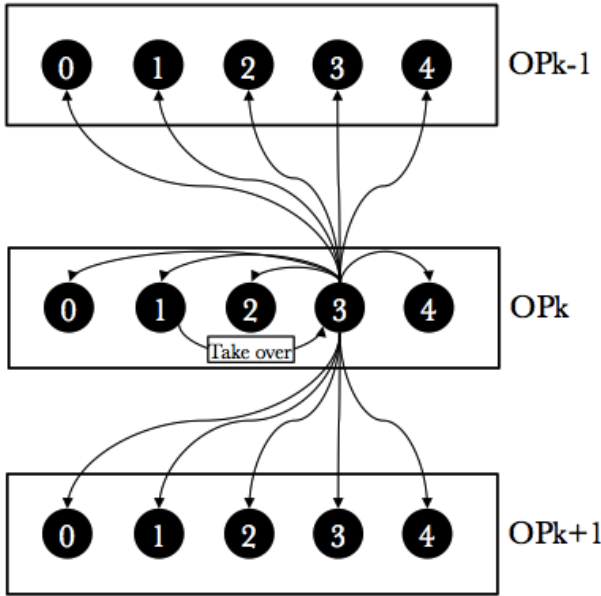


Figure 2. Take over prodecure illustrated

There is however a small detail that caused a somewhat meaningful problem. In the case of an operator having only two replicas, and one of them going down, the only remaining replica would substitute the representation of it's colleague with itself, and then effectively start pinging itself. This caused not only some performance issues besides other problems. In order to fix this efficiently we had to break a small layer of abstraction and add another structure to the replicas, a list containing the indexes of the replicas it has taken over. This allows a replica to know whether it would be attempting to connect to itself or not.

After a replica has fully taken over for another one, all other replicas have the illusion of the topology state re-

maining the same. This is because every method that implies connecting to another replica, obtains the connection through the abstraction layer previously described, so every work load is seamlessly diverted to the new replica. Only replicas within the same operator can detect downed replicas. If any other remoting method fails due to the target replica being down, it enters an active wait untill another replica takes over and the method is succesfully carried out. We chose this implementation over the option of any remoting task possibly triggering a take over, due to the possibility of the retrying of the faulting method being faster than the take over process. Fixing this issue would over complicate things, and the simpler implementation as we have now revealed it self as the faster one.

3.3. Reinststate Procedure

The reinstating protocol is simply put, the reverse of the take over process. Once a replica is brought back it goes through the same process of accessing previous, colleague and following operator's replica abstraction holding structures in that respective order, and inserting a representation of itself in it's rightful spot. After this, all remote methods are once again routed correctly to the reinstated replica. The replica that had taken over for it also has it's index list updated, meaning that the index of the reinstated replica is removed from that list.

4. Semantics

One of the biggest concerns in distributed tuple processing is being able to a guarantee certain semantics associated with the processing of a tuple in the presence of system failures, and inevitably the way it needs to reconfigure in order to continue functioning properly. This issue is inevitably linked to the way that the system does fault tolerance. The algorithm used for any semantic guarantee is very similar, using the same data structures and most of the same procedures. We will first explain the general idea behind the algorithm, then used data structures and the algorithm and finally how it used to assure that a tuple is processed at most once, at least once and exactly once.

4.1. Explanation

If the system must process a certain tuple at least once then there must a guarantee that in any kind of a node failure the tuples that weren't successfully sent to a node in failure are sent either to another node or to the the original node if it recovers. There are however other scenarios in which a node can fail, For example after receiving a tuple but before sending it to the next operator. Keeping in mind that

the system must obviously be asynchronous in this confirmation, then the previous node can't easily know it has to resend the tuple, and when it doesn't, or how long it needs to keep the tuple. In this approach the tuples would need to be kept in every operator at least until the tuple was processed by every node, presenting scalability issues. That's why we opted to use an algorithm based in keeping the information of the tuples being processed and by which replica, as well as which replica originally contains the tuple. That way all the tuples that weren't sent can be processed and sent again if a new node takes over a dead node without the need to replica tuples by all nodes of an operator.

4.2. Data Structures

To understand how the algorithm works we must first explain the used data structures: A tuple is identified by it's Tuple Id structure which represents a stream of a tuple along the processing chain. In each specific tuple there is an unique id that is usually kept along all operators, unless there must an output of several tuples from the same one, efectively diverging the tuple stream. The remaining information kept in the Tuple Id refers to the operator and replica it came from.

In each node there is a delivery table (a simple Hash-based Map that stores each tuple by its unique id) and that keeps every tuple received in a replica until it can be disposed.

There is also a shared tuple table in each node that stores Tuple Records associated to a tuple id (in a simillar Hash Map). A tuple record is a small representation of a tuple containing its Tuple Id, as well as the replica emitting the tuple record. This way the tuple record contains only the necessary information for a node to re-process a tuple that wasn't properly processed due to failure. For information storing purposes the tuple records have a state (pending or purged) that is used to store tuple records of the tuples processed by a replica in a purged state instead of deleting them in order to properly know what tuples have already been processed by that replica.

4.3. Algorithm

The ordered steps represented in figure 1 show most of the necessary procedures executed every time a tuple is received, to keep the data structures synchronized in order to allow a proper recovery when a node fails. When a node receives a tuple (1) the first thing it must do is insert it into it's delivery table (2) and it's shared tuple record table (3). The node then synchronizes every table with other replicas shared tables (4) and finally processes the tuple, sending it afterwards (5). After the tuple is sent and confirmation is received (6) the node will first issue the deletion of the tuple

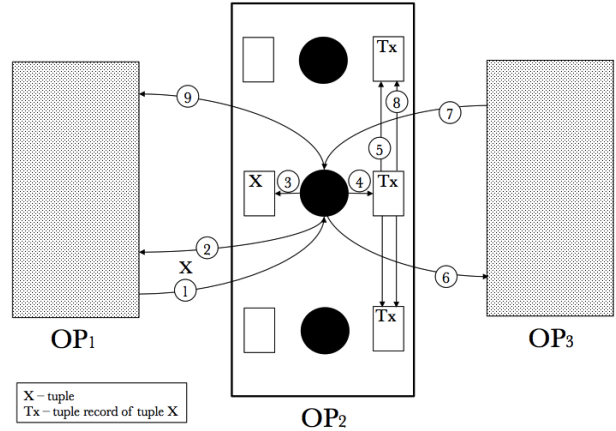


Figure 3. Ordered steps taken when a node processes a tuple

record of every other shared table and purge its own shared table of the same tuple (7). Finally it will warn the replica which the tuple originated from that it can finally delete it from its delivery table (8) since it was already received by the forward node. This information is used whenever a node takes over another failing node. It scans its shared table looking for tuple records of the dead node and for each record it finds, it requests the tuple to the replica that the tuple originated from. Finally that tuple is processed and sent to the following node, by the same procedures explained before, as if a new tuple was received.

Note that this approach only ensures the semantics of the delivery in case of a single horizontal failure (when two sequential replicas on the path of processing a tuple fail). It could also support more failures if necessary by extending the number of nodes where a tuple is kept before it is delivered.

4.4. Differences for each guarantee

4.4.1 At-Most-Once

To assure that a tuple is processed at most once, a system must only send any tuple once, independent of failure. Since a configuration for this system is dependent on being an acyclic graph, the only guarantee we need to provide is that there isn't any kind of mechanism to resend tuples in case of a takeover of a node that crashed by another node. As such the implementation of this strategy relies on not sharing any kind of information about tuples already processed, which is achieved by not executing any kind of the procedures explained before related to the applied algorithm (that isn't really applied in this case of semantics). This way, a certain tuple from an input is only sent once in the forward

direction of the distributed network, and in case of a node failing all the tuples that it had processed but not sent yet won't be processed at all. The same applies to a replica that sends a tuple to the next replica, which in case of not getting a response, will just drop the tuple.

4.4.2 At-Least-Once

The algorithm previously basically accomplishes at least once delivery by itself, without the need of any changes.

4.4.3 Exactly-Once

Finally to guarantee that tuples are delivered only exactly once, and taking the algorithm described as a starting point, there is the need to guarantee that a tuple is never processed twice on the same operator. The first thing to remember is that each tuple has a unique Id that identifies its path along the processing chain. Based on that, each received tuple on a node is checked by its id to guarantee that it has never been processed, by comparing its unique id to every tuple record stored in the shared tuple record table (hence the possible states for a certain tuple). The tuple is accepted with success in case it was never inserted in the table, assuring the replica that the tuple was never processed and sent to next operator before, which together with the guarantees provided by the algorithm assure exactly once delivery of tuples.

5. Evaluation

In order to properly understand the effectiveness of the developed solution it is necessary to understand the performance implications of the used algorithm and how it compares with other possible solutions. Firstly we will analyze from a theoretical standpoint the used solution and compare it with other possibilities and then we will test a few measures and compare them to the theoretical results in order to provide some sort of confirmation.

5.1. Analysis

To simplify the process of developing a model that fits the developed system we will consider a few assumptions that hopefully won't distort the obtained results by much:

- The considered system is only comprised of simple operators where one tuple can only originate another tuple, without stream divergences
- The system can be simplified by some measures where R is the average replication factor of each operator, and T is the average size of a tuple being sent

- Tuple Records have a constant size of 64 bits for the unique id plus 32 bits to identify the operator and replica and 1 bit for the state. This value is represented by $TR \approx 128 \text{ bits}$

In this case the system consists of an acyclic (forward) graph where we can attribute a weight to each transition depending on what measure we're analyzing.

Let's start by considering the amount of data transferred per tuple sent: For each tuple received by a replica it sends a tuple record to every other replica, so $(R - 1) \times TR$. There is also a purge message that contains only a unique id, which we will approximate to the Tuple Record (TR) size. The confirmation to the previous node also only contains the id. All things considered the total amount of data for each tuple received per replica is around

$$(R - 1 + 1 + 1) \times TR \Rightarrow O(R \times TR)$$

Comparatively a naive solution that receives a tuple on a replica and replicates it through all the replicas (removing the necessity for forward and backwards confirmation) would require

$$(R - 1) \times T \Rightarrow O(R \times T)$$

The difference of both approaches being that our proposed solution scales on with the Average Replication Factor R , and TR which is a constant value, while the naive approach will scale with both R and tuple size T , both scaling factors. In this sense, we can start to understand the performance advantages presented by our solution when $T \gg TR$

5.2. Qualitative

Qualitative evaluation

6. Discussion

Prior to analyzing the used algorithms, we have to acknowledge that the solutions aren't perfect but are a step forward from the naive approaches that might be picked in this situation. Most of the differences are actually ?intelligible?(do you mean unintelligible?) when processing small datasets, in which each tuple is small. For example in this case there is an advantage of replicating tuples in each node after receiving from the operator, considering their sizes might be even smaller than the tuple records and there are less steps involved in the algorithm. But on the other hand, if we try to scale the tuple size even a little bit, then the tuple-replicating approach would scale much worse, resulting in huge amounts of exchanged data between replicas of the same operator before they can even process the tuples. On the other hand, replicating only tuple records scales in

a constant way with tuple size (doesn't increase). So as analyzed from this feature, one thing to note is that there is no perfect solution that applies to every kind of system in a scalable and efficient way. A much better compromise is to develop the system according to whatever are its needs, and if possible without forgetting the scalability to a real word scenario of applying the developed solution.

7. Conclusion

Evaluation of the solution

8. Style Guidelines

Please follow the steps outlined below when submitting your manuscript to the IEEE Computer Society Press. Note there have been some changes to the measurements from previous instructions.

8.1. Margins and page numbering

All printed material, including text, illustrations, and charts, must be kept within a print area 6-7/8 inches (17.5 cm) wide by 8-7/8 inches (22.54 cm) high. Do not write or print anything outside the print area. Number your pages lightly, in pencil, on the upper right-hand corners of the BACKS of the pages (for example, 1/10, 2/10, or 1 of 10, 2 of 10, and so forth). Please do not write on the fronts of the pages, nor on the lower halves of the backs of the pages.

8.2. Formatting your paper

All text must be in a two-column format. The total allowable width of the text area is 6-7/8 inches (17.5 cm) wide by 8-7/8 inches (22.54 cm) high. Columns are to be 3-1/4 inches (8.25 cm) wide, with a 5/16 inch (0.8 cm) space between them. The main title (on the first page) should begin 1.0 inch (2.54 cm) from the top edge of the page. The second and following pages should begin 1.0 inch (2.54 cm) from the top edge. On all pages, the bottom margin should be 1-1/8 inches (2.86 cm) from the bottom edge of the page for 8.5 × 11-inch paper; for A4 paper, approximately 1-5/8 inches (4.13 cm) from the bottom edge of the page.

8.3. Type-style and fonts

Wherever Times is specified, Times Roman may also be used. If neither is available on your word processor, please use the font closest in appearance to Times that you have access to.

MAIN TITLE. Center the title 1-3/8 inches (3.49 cm) from the top edge of the first page. The title should be

in Times 14-point, boldface type. Capitalize the first letter of nouns, pronouns, verbs, adjectives, and adverbs; do not capitalize articles, coordinate conjunctions, or prepositions (unless the title begins with such a word). Leave two blank lines after the title.

AUTHOR NAME(s) and **AFFILIATION(s)** are to be centered beneath the title and printed in Times 12-point, non-boldface type. This information is to be followed by two blank lines.

The **ABSTRACT** and **MAIN TEXT** are to be in a two-column format.

MAIN TEXT. Type main text in 10-point Times, single-spaced. Do NOT use double-spacing. All paragraphs should be indented 1 pica (approx. 1/6 inch or 0.422 cm). Make sure your text is fully justified—that is, flush left and flush right. Please do not place any additional blank lines between paragraphs. Figure and table captions should be 10-point Helvetica boldface type as in

Figure 4. Example of caption.

Long captions should be set as in

Figure 5. Example of long caption requiring more than one line. It is not typed centered but aligned on both sides and indented with an additional margin on both sides of 1 pica.

Callouts should be 9-point Helvetica, non-boldface type. Initially capitalize only the first word of section titles and first-, second-, and third-order headings.

FIRST-ORDER HEADINGS. (For example, **1. Introduction**) should be Times 12-point boldface, initially capitalized, flush left, with one blank line before, and one blank line after.

SECOND-ORDER HEADINGS. (For example, **1.1. Database elements**) should be Times 11-point boldface, initially capitalized, flush left, with one blank line before, and one after. If you require a third-order heading (we discourage it), use 10-point Times, boldface, initially capitalized, flush left, preceded by one blank line, followed by a period and your text on the same line.

8.4. Footnotes

Please use footnotes sparingly; avoid footnotes altogether. To help your readers, avoid using footnotes altogether and include necessary peripheral observations in the text (within parentheses, if you prefer, as in this sentence). and place them at the bottom of the column on the page on which they are referenced. Use Times 8-point type, single-spaced.

8.5. References

List and number all bibliographical references in 9-point Times, single-spaced, at the end of your paper. When referenced in the text, enclose the citation number in square brackets, for example [?]. Where appropriate, include the name(s) of editors of referenced books.

8.6. Illustrations, graphs, and photographs

All graphics should be centered. Your artwork must be in place in the article (preferably printed as part of the text rather than pasted up). If you are using photographs and are able to have halftones made at a print shop, use a 100- or 110-line screen. If you must use plain photos, they must be pasted onto your manuscript. Use rubber cement to affix the images in place. Black and white, clear, glossy-finish photos are preferable to color. Supply the best quality photographs and illustrations possible. Penciled lines and very fine lines do not reproduce well. Remember, the quality of the book cannot be better than the originals provided. Do NOT use tape on your pages!

8.7. Color

The use of color on interior pages (that is, pages other than the cover) is prohibitively expensive. We publish interior pages in color only when it is specifically requested and budgeted for by the conference organizers. DO NOT SUBMIT COLOR IMAGES IN YOUR PAPERS UNLESS SPECIFICALLY INSTRUCTED TO DO SO.

8.8. Symbols

If your word processor or typewriter cannot produce Greek letters, mathematical symbols, or other graphical elements, please use pressure-sensitive (self-adhesive) rub-on symbols or letters (available in most stationery stores, art stores, or graphics shops).

8.9. Copyright forms

You must include your signed IEEE copyright release form when you submit your finished paper. We MUST have this form before your paper can be published in the proceedings.

8.10. Conclusions

Please direct any questions to the production editor in charge of these proceedings at the IEEE Computer Society Press: Phone (714) 821-8380, or Fax (714) 761-1784.