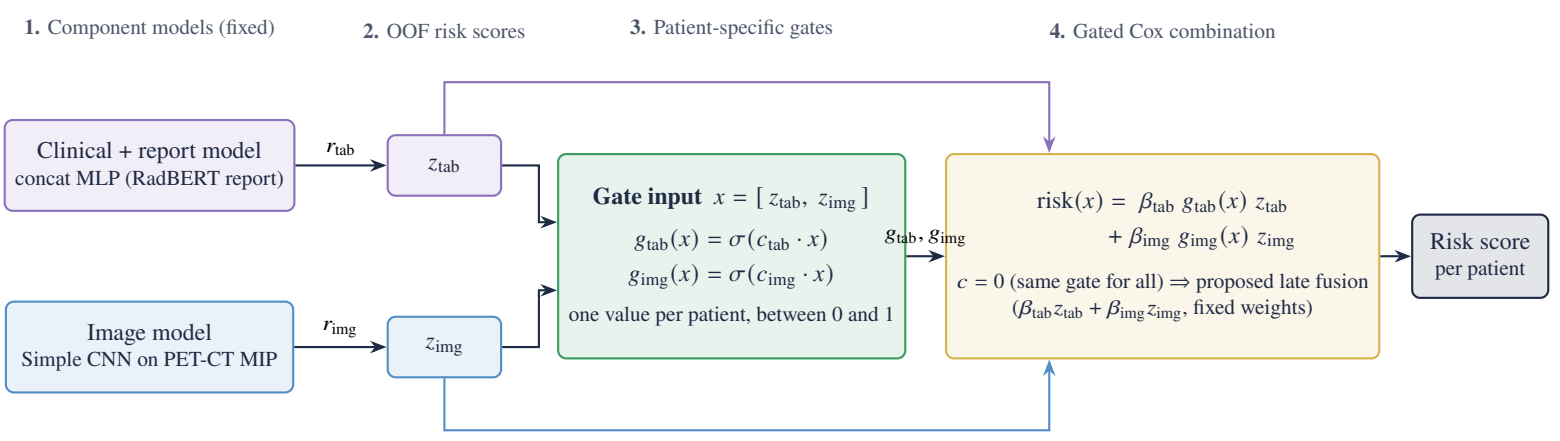



**Training** (each outer fold, 171 training patients, out-of-fold scores as in the proposed model): Cox partial likelihood + $\lambda \|c\|^2$; 6 trainable parameters ($\beta_{tab}, \beta_{img}, c_{tab}, c_{img}$). $\lambda \in \{0.01, 0.1, 1, 10, 100\}$ chosen by inner 5-fold cross-validation; a large $\lambda$ drives $c \to 0$, so every patient gets the same gate (0.5): the gate switches itself off.