

EVS Express SHIPMENTS LOCAL API
API VERSION 3.1

API URL: <https://api.muvi.dev/Shipments/Local/>

Testing Credentials:

Parameter	Value
username	betacompany
password	7m6ZF5McSm

METHODS

/CreateShipment [POST]

Parameter	Description
username	
password	
method	Accepted values: "Standard"
pickup	1 or 0 (default = 1). 0 is converted into False. 1 and any other value is converted into True.
type	Values accepted: "validate", "record" We strongly recommend to use this parameter to debug/validate the request.
api	API version

Following parameters are included for testing purposes:

```
"Shipper": {  
  "Type": "Branch",  
  "Branch": {  
    "Code": "000000195",  
    "ContactPersonCode": "000003485"  
  }  
}
```

Add JSON Media. Example:

```
[{  
  "Shipper": {  
    "Type": "Branch",  
    "Branch": {  
      "Code": "000000195",  
      "ContactPersonCode": "000003485"  
    }  
  }  
}]
```

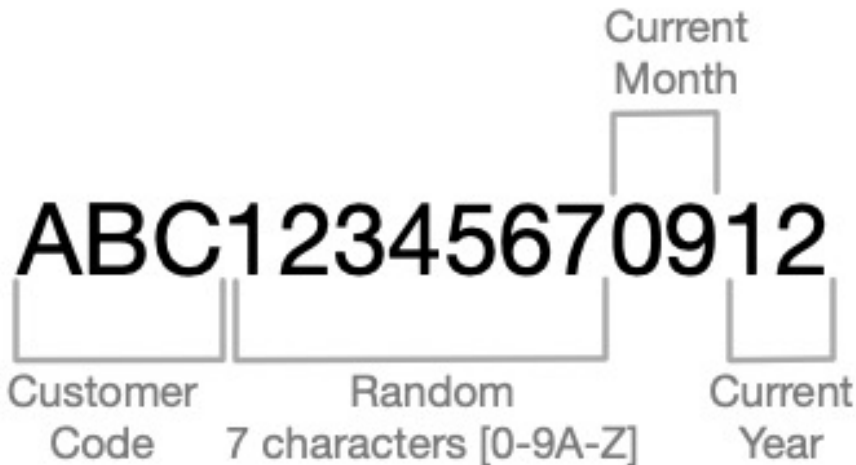
```

    }
  },
  "Receiver": {
    "Type": "Custom",
    "Custom": {
      "Name": "",
      "ContactPersonName": "",
      "InternalID": "",
      "Phones": ["+(373)000 00000", "11111111"],
      "Emails": ["a@muvi.md", "b@muvi.md"],
      "AddressType": "Standard",
      "AddressStandard": {
        "Line_1": "street, block, locality, region",
        "Line_2": "ap., floor, block section",
        "ZIP": "0001",
        "Comment": ""
      }
    }
  },
  "AWB": "BTC06000010322",
  "InternalID_1": "",
  "InternalID_2": "",
  "Service": 1,
  "COD": {
    "Type": "Fixed",
    "Amount": 0
  },
  "DeclaredValue": 1,
  "PayServiceAtDelivery": {
    "Type": "Full",
    "Amount": 0
  },
  "ReturnDocsSpecification": "1,3",
  "Labels": [{
    "Code": "BTC06000010322-1/2",
    "Weight": 1,
    "InternalCode": ""
  },
  {
    "Code": "BTC06000010322-2/2",
    "Weight": 3,
    "InternalCode": ""
  }
],
  "Weight": 2.4,
  "AllowOpenParcel": false,
  "Comment": ""
}]

```

Some of JSON parameters explained

Parameter	Description
Shipper.Type	"Branch" - For already saved Destinations "Custom" - For new Destinations

Receiver.Type	"Custom" - For new Destinations
Receiver.Custom.Phones	Please make sure you'll include valid Phone Numbers.
Receiver.Custom.Emails	Please make sure you'll include an array of valid Emails
Receiver.Custom.AddressStandard	<pre>"AddressStandard": { "Line_1": "street, block, locality, region", "Line_2": "ap., floor, block section", "ZIP": "0001", "Comment": "hi" }</pre> We strongly recommend to use AddressLine_1 for defining the building of delivery address and the AddressLine_2 for the office/apartament inside of it (if any).
Receiver.Custom.AddressStandard.ZIP	"XXXX" format accepted
AWB	It should follow this format: XXX[0-9A-Z]MMYY XXX - customer code. It is generate by us and assigned individually to each customer. For testing purposes, please use "BTC" as the CustomerCode assigned for Beta Company. [0-9A-Z] - A random of 7 characters MM - Current Month YY - Current Year Total: 14 characters 
Service	1 - Courier Services, parcels 2 - Mail Services, envelops
COD.Type	None - No COD will be picked up Fixed - Fixed amount Variable - Receiver can pay a different amount (smaller or larger) Minimum - Receiver can pay a minim COD amount or larger

PayServiceAtDelivery.Type	<i>This parameter should not be confused with the case when the cost of delivery is included in COD. It will be used when the Receiver represents a payer of services from Muvi perspective.</i> None - The Receiver will not pay delivery services Fixed - The Receiver will pay a fixed amount for delivery services (even if the cost of delivery is different). The difference will be charged from Shipper. Full - The Receiver will pay the exact and full price of the delivery services.
ReturnDocsSpecification	Accepts comma separated values (as a string). For example, "2,3" will represent a contract and a copy of the ID. 1 - Invoice (Fiscal Invoice) 2 - Contract 3 - A copy of the ID 4 - An individual POD
Labels.Code	Labels are linked to AWB. Basically, it represents the AWB plus "-1/2" - meaning parcel 1 out of 2. 
Labels.Weight	KG value
Labels.InternalCode	Used in case when you have an ID which should be mapped with ours at Parcel level.

/GetAWBActions [GET, POST]

Parameter	Description
username	
password	
datestart	"20151215204222", Format "15.12.2015 20:42:22"
dateend	"20151215204222", Format "15.12.2015 20:42:22"
api	API version

* The period between "datestart" and "dateend" cannot be larger then 7 days.

Example: <https://api.muvi.dev/Shipments/Local/GetAWBActions?username=betacompany&password=7m6ZFMcSm&datestart=20151215204222&dateend=20151215204222>

Returned Statuses:

ReceivedInformation, PlannedForCourierPickUp, PickedUp, PlannedForReceiveAtSortingHub, Warehoused, PostponedDeliveryAtWarehouse, DiscontinuedDeliveryAtWarehouse, LeftSortingFacilityForDelivery, Delivered, PostponedDeliveryAtCourier, DiscontinuedDeliveryAtCourier, LeftSortingFacilityForReturn, ReturnedToShipper, Closed

Returned Actions:

ReceiveInformation, AssignPickUpCourier, PickUp, PlanSortingHubPickUp, ReceiveAtSortingHub, PostponeDelivery, DiscontinueDelivery, ReActivateDelivery, GetFromSortingHub, ChangeCourier, Deliver, Reweight, PriceRecalculation, ReportIssue, AttributesModification, Sorted

/GetGroupAWBActions [POST]

Parameter	Description
username	
password	
api	API version

Add JSON Media. Example:

```
[
  {
    "AWB": "AWBNumber_1"
  },
  {
    "AWB": "AWBNumber_2"
  }
]
```

/GetDeliveryOptions [GET, POST]

Parameter	Description
username	
password	
service_code	
weight	Value in kg
from	ZIP code in the format of 'XXXX'
to	ZIP code in the format of 'XXXX'
packing	1 or 0 (default 0)
api	API version

Example: https://api.muvi.dev/Shipments/Local/GetDeliveryOptions?username=betacompany&password=7m6ZFMcSm&service_code=000000004&weight=3&from=2004&to=7450&packing=0&api=2.9

/GetDocs [GET, POST]

Returns data for last 30 days.

Parameter	Description
username	
password	
type	"AWBReturn", Returns the list of Documents with returned AWBs "CODReturn", Returns the list of COD Documents

Example: <https://api.muvi.dev/Shipments/Local/GetDocs?username=betacompany&password=7m6ZFMcSm&type=AWBReturn&api=2.9>

/GetDoc [GET, POST]

Parameter	Description
username	
password	
type	Accepted values: "AWB", "AWBReturn", "CODReturn"
doc_code	
format	Accepted values: "PDF", "JSON"
size	Accepted values: "A4", "100x100"
api	API version

Example: https://api.muvi.dev/Shipments/Local/GetDoc?username=betacompany&password=7m6ZFMcSm&type=AWB&doc_code=BTC01000191221&format=PDF&size=A5&api=2.9

/GetBranches [GET, POST]

Parameter	Description
username	
password	
api	API version

Example: <https://api.muvi.dev/Shipments/Local/GetBranches?username=betacompany&password=7m6ZF5McSm&api=2.9>

/CreateBranch [POST]

Parameter	Description
username	
password	
api	API version

Example: <https://api.muvi.dev/Shipments/Local/CreateBranch?username=betacompany&password=7m6ZF5McSm&api=2.9>

Add JSON Media. Example:

```
{
  "Name": "Oficiu Chisinau",
  "Address": "Chisinau, Chisinau, Bd. Stefan cel Mare, nr. 1, et. 5, of. 54",
  "Phone": "07999999,022721212"
}
```

/CreateContact [POST]

Parameter	Description
username	
password	
branch_code	
api	API version

Example: https://api.muvi.dev/Shipments/Local/CreateContact?username=betacompany&password=7m6ZF5McSm&branch_code=000005993&api=2.9

Add JSON Media. Example:

```
{
  "Name": "Nume prenume",
```

```
"Phone": "07999999,02272121"
}
```

/ActivatePickUp [POST]

Parameter	Description
username	
password	
api	API version

Add JSON Media. Example:

```
[
  {
    "AWB": "AWBNumber_1"
  },
  {
    "AWB": "AWBNumber_2"
  }
]
```

/SavePayment [POST]

Parameter	Description
username	
password	
api	API version

Example: <https://api.muvi.dev/Shipments/Local/SavePayment?username=betacompany&password=7m6ZFSMcSm&api=2.9>

Add JSON Media. Example:

```
{
  "AWB": "",
  "Amount": 12.34,
  "TransactionID": "TransactionID"
}
```

/RemoveDoc [GET, POST]

Parameter	Description
username	
password	
type	Accepted values: "AWB"
doc_code	
api	API version

Example: [https://api.muvi.dev/Shipments/Local/RemoveDoc?](https://api.muvi.dev/Shipments/Local/RemoveDoc?username=betacompany&password=7m6ZF5McSm&type=AWB&doc_code=BTC01000151121&api=2.9)

[username=betacompany&password=7m6ZF5McSm&type=AWB&doc_code=BTC01000151121&api=2.9](https://api.muvi.dev/Shipments/Local/RemoveDoc?username=betacompany&password=7m6ZF5McSm&type=AWB&doc_code=BTC01000151121&api=2.9)

/GetNomenclatures [GET, POST]

Parameter	Description
username	
password	
type	"regions", Returns the list of Regions "localities", Returns the list of Localities "services", Returns the list of available Delivery Services, and values for 'service_code' parameter
api	API version

Example: [https://api.muvi.dev/Shipments/Local/GetNomenclatures?](https://api.muvi.dev/Shipments/Local/GetNomenclatures?username=betacompany&password=7m6ZF5McSm&type=localities&api=2.9)

[username=betacompany&password=7m6ZF5McSm&type=localities&api=2.9](https://api.muvi.dev/Shipments/Local/GetNomenclatures?username=betacompany&password=7m6ZF5McSm&type=localities&api=2.9)