Control Node (cerberus)

1. periodically (i.e. using cron) use rsync to copy new files from storage node. rsync will occur if status file on storage node indicates a new script is present. Status file is removed after rsync.

2. if new files are copied, generate new SHA256 fingerprints from local copies of submitted files.

3. recreate gdbm database with new sums

4. use existing distribution system to publish sums

5. To unpublish a fingerprint, the file must be removed from the storage node and moved to a storage archive… TBD

6. an automated process will remove DEVEL role scripts automatically as per policy.

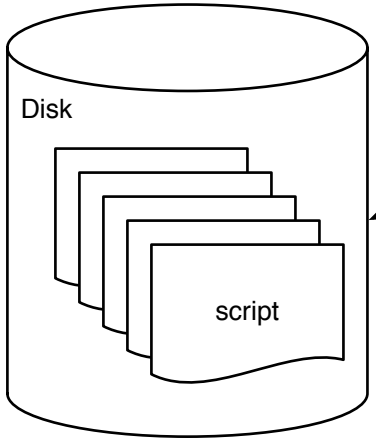

pull via rsync without overwrite

Storage Node (fs-01)

1, user submits script - at present only scripts are allowed

2. script is saved to secure storage area using filename, role, unix seconds, submitter login name to form unique id, i.e

filename%role%unix_seconds%submitter_name

where role is a member of the set {QA, QA-DEVEL, SPM, SPM-DEVEL}.

3. reject if filename contains whitespace or other troublesome characters, i.e. only [-_[:alnum:]] allowed.

4. email copies of file is sent to the security officer.
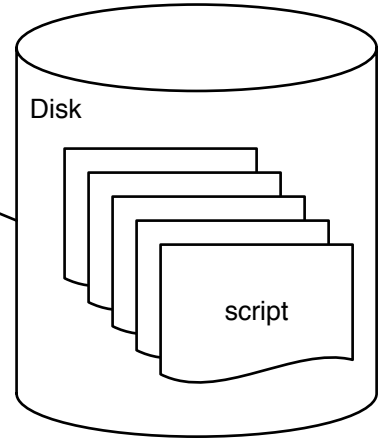
5. create status file in secure storage area indicating a new script has been created.