

```

class p1 extends object
  field a  field b
  method initialize(x,y) begin set a = x; set b = y end
  method sum(x)
    begin set a = +(a,1); +(a,b,x, send self m1()) end
  method m1() 1

```

```

class p2 extends p1
  field c  field d  field e
  method initialize(x,y,z)
    begin
      super initialize(x,y);
      set c = +(x,1); set d = +(y,2); set e = z
    end
  method sum(s)
    +(c,d,e, send self m1())


```

```

let
  o1 = new p1(2,3)
  o2 = new p2(3,4,5)
in
  list(
    send o1 sum(2),
    send o2 sum(3))

```


1) Representation
Simple



Plang




Send o1 sum(2)

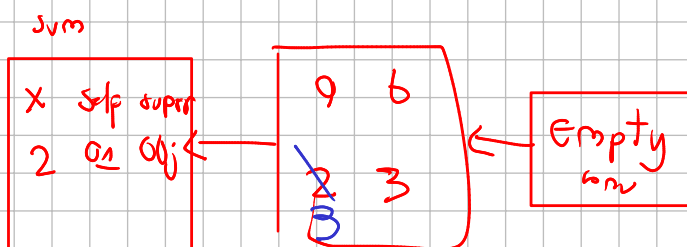

$+(9, b, x, \text{send self m1()})$

$+(3, 3, 2, \text{send o1 m1()}) = 9$

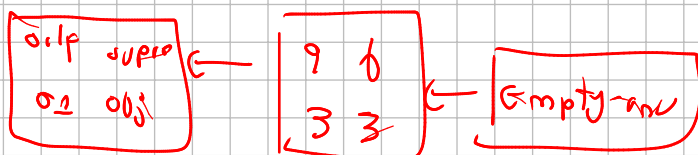

```

class p1 extends object
  field a  field b
  method initialize(x,y) begin set a = x; set b = y end
  method sum(x)
    begin set a = +(a,1); +(a,b,x, send self m1()) end
  method m1() 1

class p2 extends p1
  field c  field d  field e
  method initialize(x,y,z)
    begin
      super initialize(x,y);
      set c = +(x,1); set d = +(y,2); set e = z
    end
  method sum(s)
    +(c,d,e, send self m1())




```

```

let
  o1 = new p1(2,3)
  o2 = new p2(3,4,5)
in
  list(
    send o1 sum(2),
    send o2 sum(3))


```

2)

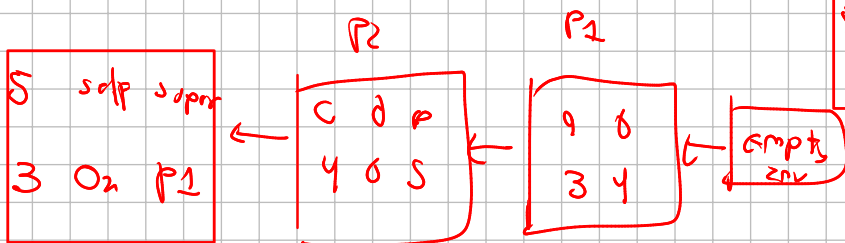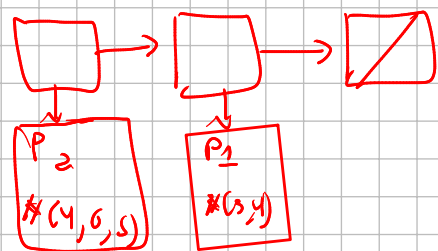

$+(c, d, e, \text{send self m1()})$

$+(4, 6, 5, \text{send O2 m1()}) = 16$

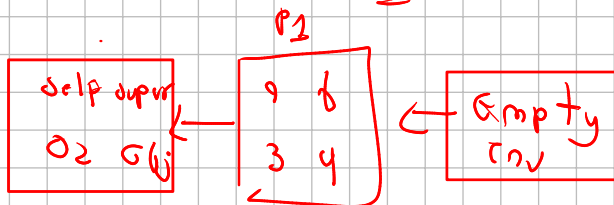

$(9, 16)$