
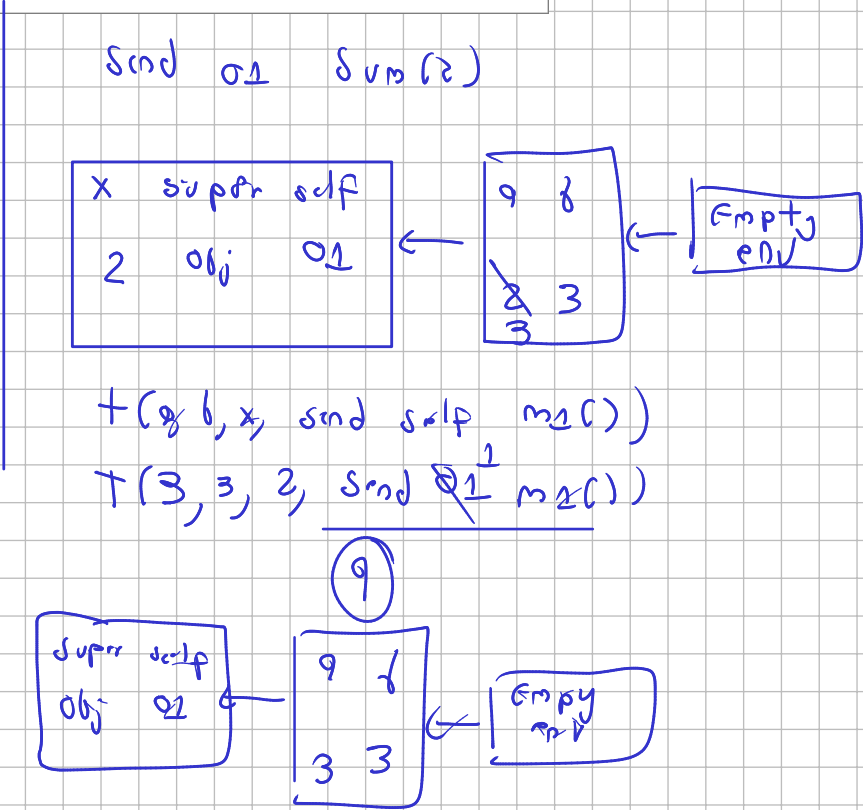


```
class p1 extends object
  field a  field b
  method initialize(x,y) begin set a = x; set b = y end
  method sum(x)
  { begin set a = +(a,1); +(a,b,x, send self m1()) end
  method m1() 1

class p2 extends p1
  field c  field d  field e
  method initialize(x,y,z)
  begin
    super initialize(x,y);
    set c = +(x,1); set d = +(y,2); set e = z
  end
  method sum(s)
  +(c,d,e, send self m1())
```

```
let
  o1 = new p1(2,3)
  o2 = new p2(3,4,5)
in
  list(
    → send o1 sum(2),
    send o2 sum(3))
```

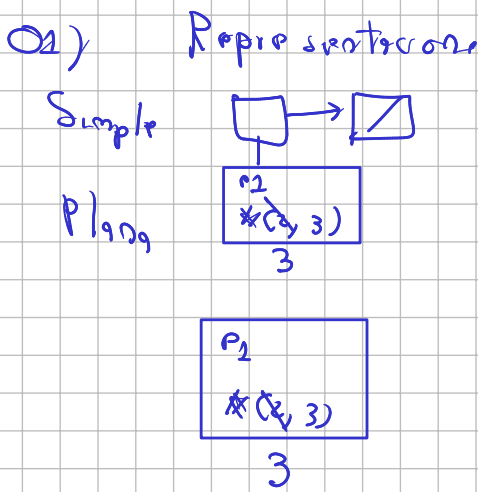

```

class p1 extends object
  field a field b
  method initialize(x,y) begin set a = x; set b = y end
  method sum(x)
    begin set a = +(a,1); +(a,b,x, send self m1()) end
  method m1() 1

```

```

class p2 extends p1
  field c field d field e
  method initialize(x,y,z)
    begin
      super initialize(x,y);
      set c = +(x,1); set d = +(y,2); set e = z
    end
  method sum(s)
    +(c,d,e, send self m1())

```


```

let
  o1 = new p1(2,3)
  o2 = new p2(3,4,5)
in
  list(
    send o1 sum(2),
    send o2 sum(3))


```

02) Representation

Simple

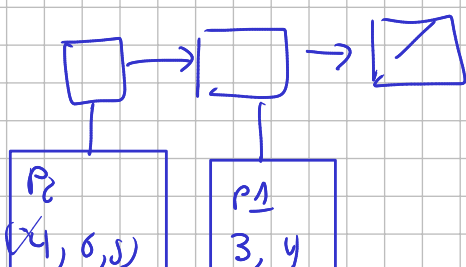

Send o2 sum(3)

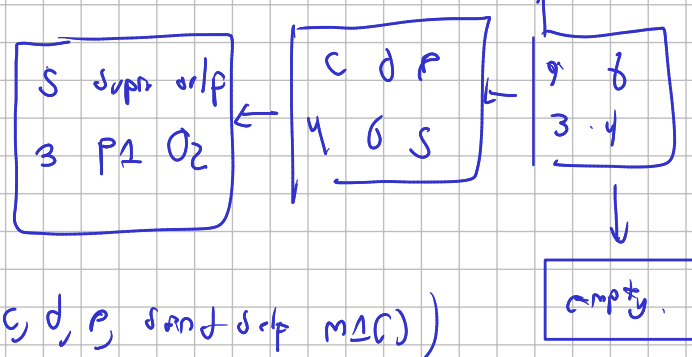

+(c, d, e, send self m1())

+(4, 0, 5, ¹send o2 m1()) = 16

Plans

