

```
class m1 extends object
  field a
  field b

  method initialize(x,y)
    begin
      set a = x;
      set b = y
    end

  method k(x,y)
    begin
      set a = +(x,a);
      set b = +(y,b);
      send self q(+(a,x),+(b,y))
    end


  method q(x,y)
    +(x,y,a,b)
```

```
class m2 extends m1
  field b
  field c


  method initialize(x,y)
    begin
      super initialize(+(x,y),*(x,y));
      set b = x;
      set c = y
    end

  method q(x,y)
    begin
      set b = +(x,a);
      set c = +(y,b);
      +(a,b)
    end
```


```
let
  o1 = new m1(4,5)
  o2 = new m2(7,3)
in
  let
    => u = send o1 k(3,5)
    v = send o2 k(3,8)
    in
      +(u,v)
  end
```

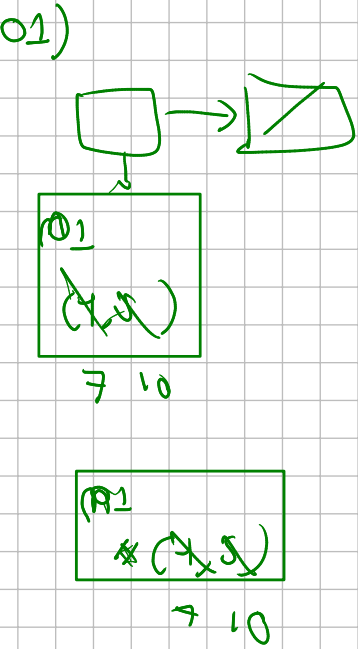

2)

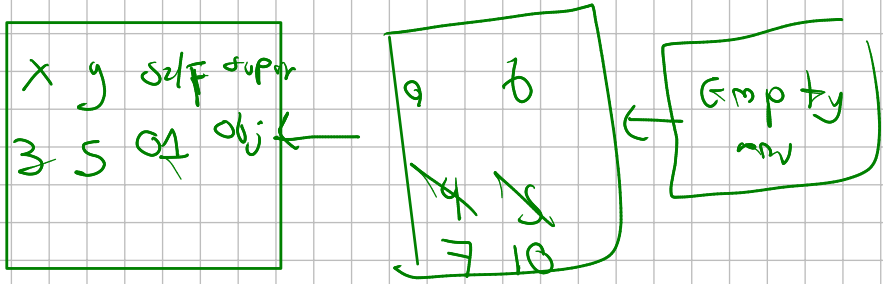

send o1 q(10,15)

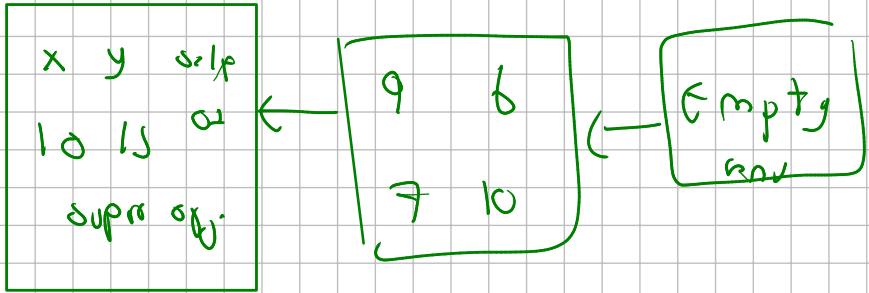

+(x,y,a,b)

+(10,15,7,10)

42

```
class m1 extends object
  field a
  field b

  method initialize(x,y)
    begin
      set a = x;
      set b = y
    end

  method k(x,y)
    begin
      set a = +(x,a);
      set b = +(y,b);
      send self q(+(a,x),+(b,y))
    end



  method q(x,y)
    +(x,y,a,b)
```

```
class m2 extends m1
  field b
  field c


  method initialize(x,y)
    begin
      super initialize(+(x,y),*(x,y));
      set b = x;
      set c = y
    end

  method q(x,y)
    begin
      set b = +(x,a);
      set c = +(y,b);
      +(a,b)
    end
```

```
let
o1 = new m1(4,5)
o2 = new m2(7,3)
in
  let
    u = send o1 k(3,5)
    v = send o2 k(3,8)
  in
    +(u,v)
```

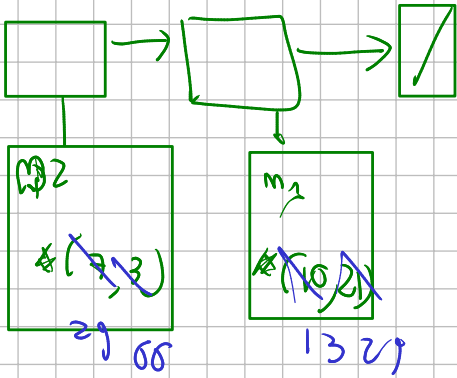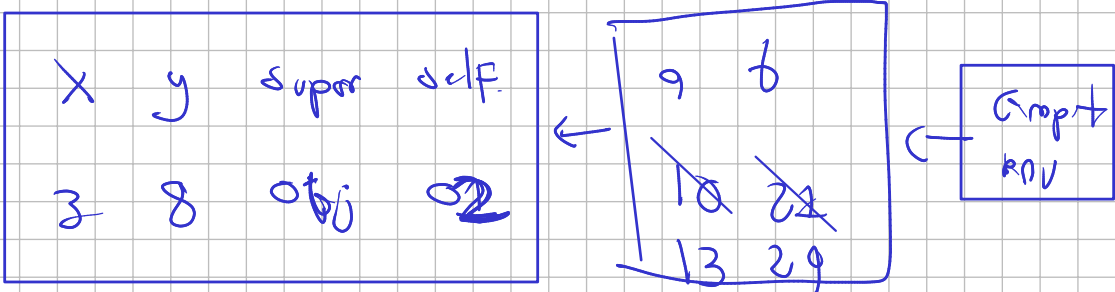

Send o2 q(16, 37)

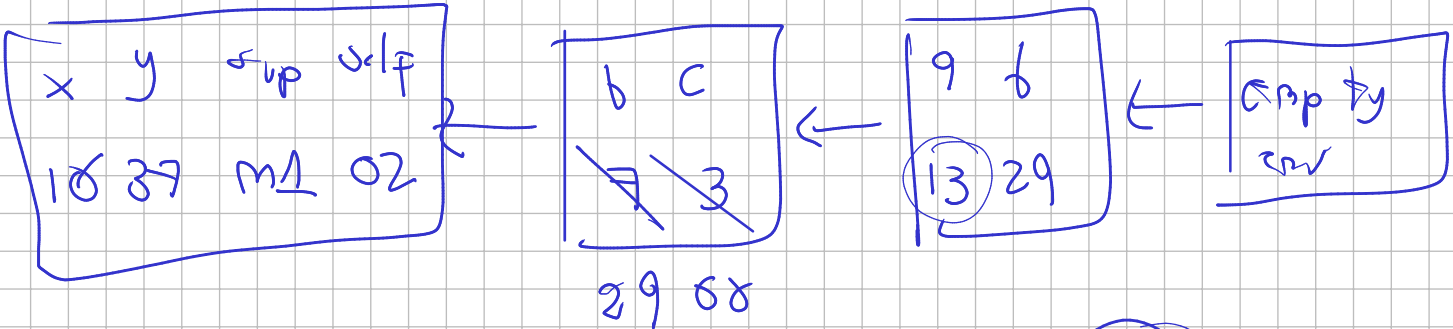

$+(a, b) = +(13, 29) = 42$