


Cesar Recinos


CS380-EX6

[www.github.com/carecinos/CS380-EX6](https://www.github.com/carecinos/CS380-EX6)

### Login ted without a password


In order to login as ted without providing a password, I ended the condition after requiring name = 'ted', then commented out the rest of the line. This bypassed the password by only requiring a name. the username I enter was: **ted');#**

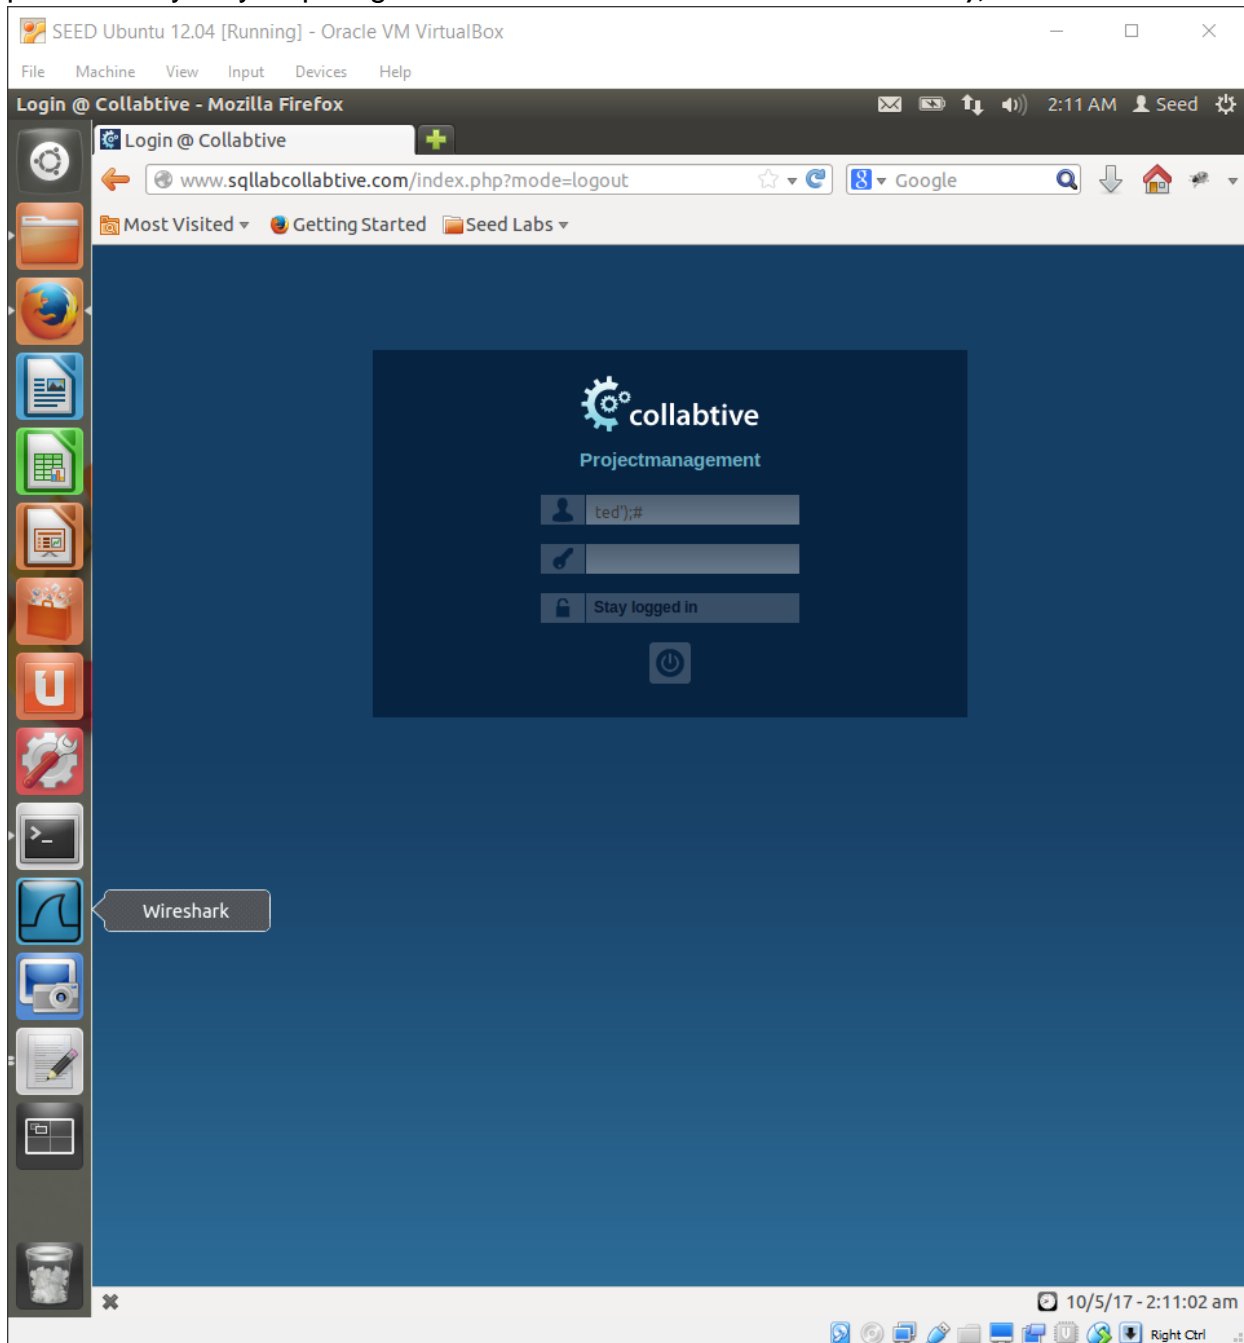


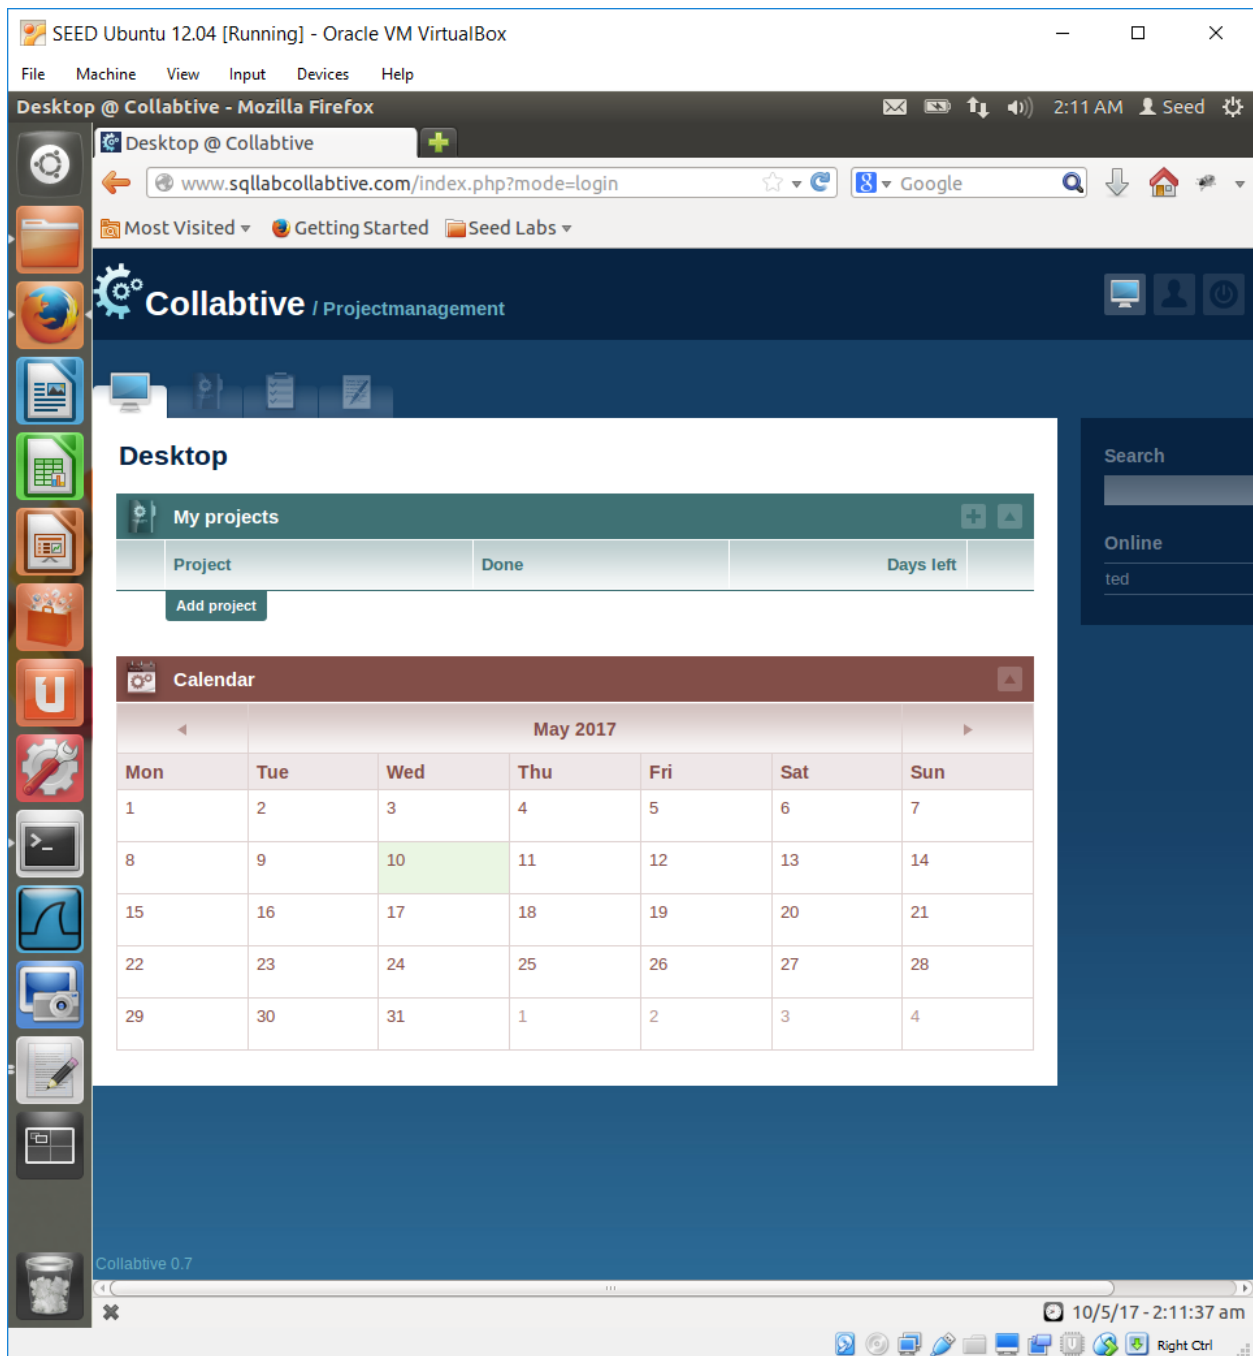

## Login admin without a password

In order to login as admin without a password, I used the same strategy that was used in the previous problem. The username I used was as follows: **admin ');#**

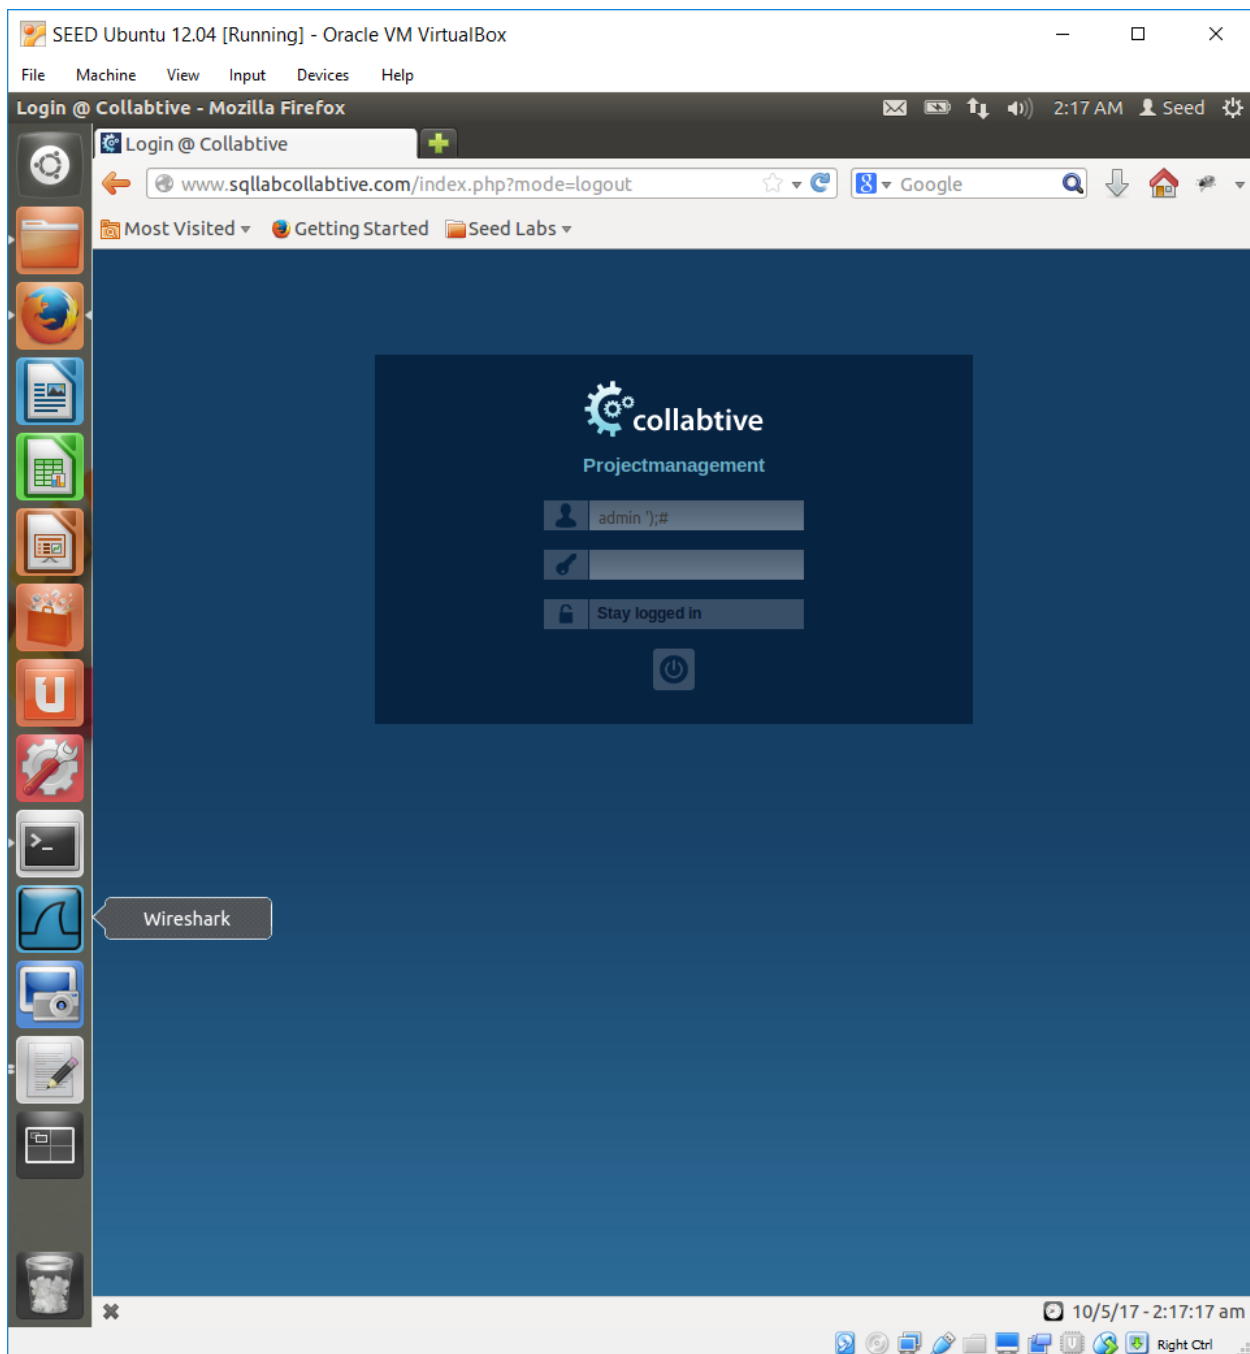

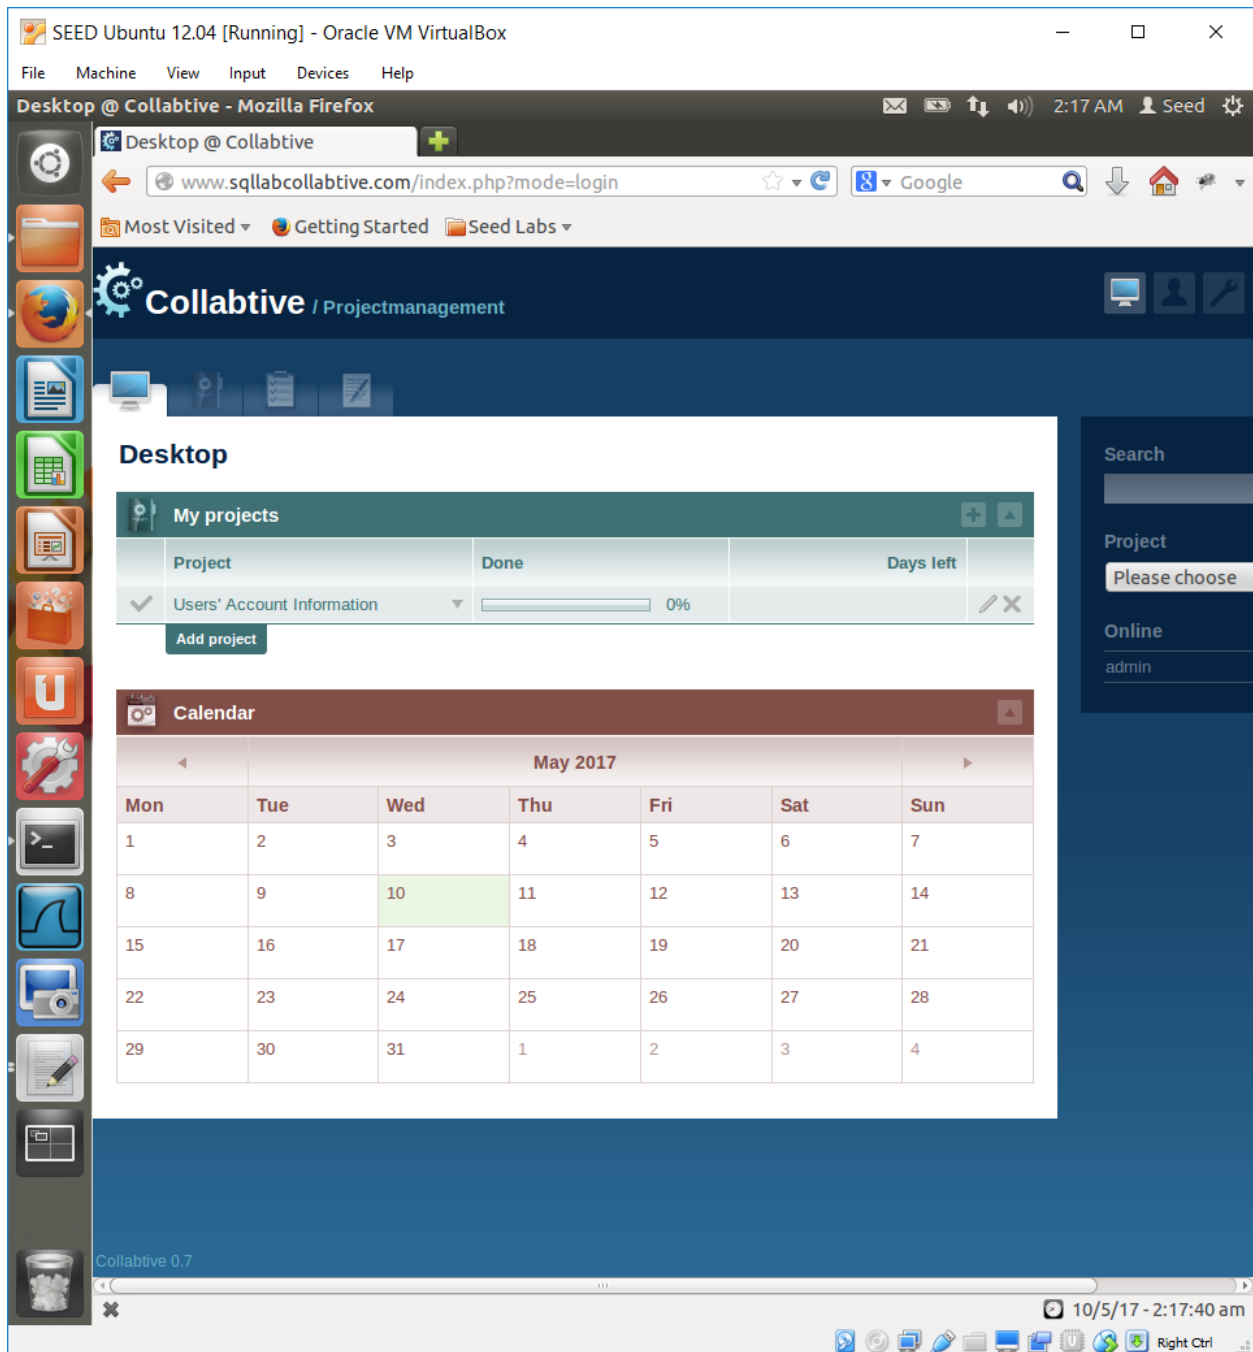

## Login without a username or password

In order to login without a username, in included an OR condition that is always true, therefore it will always satisfy the login. The username I used is: ' or "=");#

This condition is satisfied when " = " which is always.



Projectmanagement

☐ Stay logged in



