

**AD 2 AERODROMES**

Note: The following sections in this chapter are intentionally left blank: AD-2.7, AD-2.16, AD-2.20, AD-2.21, AD-2.23

**RPUT AD 2.1 AERODROME LOCATION INDICATOR AND NAME****RPUT - TUGUEGARAO PRINCIPAL AIRPORT (Class 1)****RPUT AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA**

|   |                                                      |                                                                                                                                      |
|---|------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| 1 | ARP coordinates and site at AD                       | 173836.7290N<br>1214359.2930E.                                                                                                       |
| 2 | Direction and distance from (city)                   | 2KM NE (1.1NM).                                                                                                                      |
| 3 | Elevation/Reference temperature                      | 22.708M (74.501FT).                                                                                                                  |
| 4 | Geoid undulation at AD ELEV PSN                      | Nil.                                                                                                                                 |
| 5 | MAG VAR/Annual Change                                | 2.4°W (2014) / 2.4' increasing.                                                                                                      |
| 6 | AD Operator, address, telephone, telefax, telex, AFS | Civil Aviation Authority of the Philippines<br>Tuguegarao Airport, Tuguegarao<br>3500 Cagayan<br>Tel. No.: (078) 304-1015 / 304-1177 |
| 7 | Types of traffic permitted (IFR/VFR)                 | VFR.                                                                                                                                 |
| 8 | Remarks                                              | Nil.                                                                                                                                 |

**RPUT AD 2.3 OPERATIONAL HOURS**

|    |                            |                                                                |
|----|----------------------------|----------------------------------------------------------------|
| 1  | AD Operator                | MON - FRI: 0000 - 0800.                                        |
| 2  | Customs and immigration    | Nil.                                                           |
| 3  | Health and sanitation      | Nil.                                                           |
| 4  | AIS Briefing Office        | Nil.                                                           |
| 5  | ATS Reporting Office (ARO) | 0000 - 0800. For extension of SER, one (1) day PN is required. |
| 6  | MET Briefing Office        | Nil.                                                           |
| 7  | ATS                        | MON - FRI: 0000 - 0800.                                        |
| 8  | Fuelling                   | Nil.                                                           |
| 9  | Handling                   | Nil.                                                           |
| 10 | Security                   | H24.                                                           |
| 11 | De-icing                   | Nil.                                                           |
| 12 | Remarks                    | Airport Operations: 0000 - 0800.                               |

**RPUT AD 2.4 HANDLING SERVICES AND FACILITIES**

|   |                                         |                                     |
|---|-----------------------------------------|-------------------------------------|
| 1 | Cargo-handling facilities               | GD Travel Agency/GMB Travel Agency. |
| 2 | Fuel/oil types                          | Nil.                                |
| 3 | Fuelling facilities/capacity            | Nil.                                |
| 4 | De-icing facilities                     | Nil.                                |
| 5 | Hangar space for visiting aircraft      | Nil.                                |
| 6 | Repair facilities for visiting aircraft | Nil.                                |
| 7 | Remarks                                 | Nil.                                |

### RPUT AD 2.5 PASSENGER FACILITIES

|   |                      |                         |
|---|----------------------|-------------------------|
| 1 | Hotels               | Within the town proper. |
| 2 | Restaurants          | Within the town proper. |
| 3 | Transportation       | Vehicle for hire.       |
| 4 | Medical facilities   | Within the town proper. |
| 5 | Bank and Post Office | Within the town proper. |
| 6 | Tourist Office       | Within the town proper. |
| 7 | Remarks              | Nil.                    |

### RPUT AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

|   |                                             |                                                                          |
|---|---------------------------------------------|--------------------------------------------------------------------------|
| 1 | AD category for fire fighting               | CAT VI.                                                                  |
| 2 | Rescue equipment                            | Three (3) fire trucks (SIDES VMA28, SIDES VIRM13 & Oshkosh Striker 4X4). |
| 3 | Capability for removal of disabled aircraft | Nil.                                                                     |
| 4 | Remarks                                     | Nil.                                                                     |

### RPUT AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS/POSITIONS DATA

|   |                                             |                                                                 |
|---|---------------------------------------------|-----------------------------------------------------------------|
| 1 | Apron surface and strength                  | Surface: CONC.<br>Strength: PCN 34.                             |
| 2 | Taxiway width, surface and strength         | Width: 92M.<br>Surface: CONC.<br>Strength: PCN 34.              |
| 3 | Altimeter checkpoint location and elevation | Location: 173817.9175N 1214350.2113E.<br>Elevation: 21M (70FT). |
| 4 | VOR checkpoints                             | Nil.                                                            |
| 5 | INS checkpoints                             | Nil.                                                            |
| 6 | Remarks                                     | Nil.                                                            |

### RPUT AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS

|   |                                                                                                               |                                               |
|---|---------------------------------------------------------------------------------------------------------------|-----------------------------------------------|
| 1 | Use of aircraft stand ID signs, TWY guide lines and visual docking/parking guidance system of aircraft stands | Distance-to-go and SWY end markers, windcone. |
| 2 | RWY and TWY markings and LGT                                                                                  | Threshold, Center line and side markers.      |
| 3 | Stop bars                                                                                                     | Threshold markers and holding point marker.   |
| 4 | Remarks                                                                                                       | Nil.                                          |

### RPUT AD 2.10 AERODROME OBSTACLES

| In approach/TKOF areas |                                                           |             | In circling area and at AD                 |             | Remarks               |
|------------------------|-----------------------------------------------------------|-------------|--------------------------------------------|-------------|-----------------------|
| 1                      |                                                           |             | 2                                          |             | 3                     |
| RWY/Area affected      | Obstacle type<br>Elevation<br>Markings/LGT                | Coordinates | Obstacle type<br>Elevation<br>Markings/LGT | Coordinates |                       |
| a                      | b                                                         | c           | a                                          | b           |                       |
| 35/APCH                | Trees & houses<br>91.46M                                  | Nil         | Nil                                        | Nil         | Nil                   |
|                        | High Antenna<br>TWR<br>Painted red &<br>white and lighted | Nil         | Nil                                        | Nil         | 2827M North of<br>ARO |

| In approach/TKOF areas |                                            |                               | In circling area and at AD                 |             | Remarks |
|------------------------|--------------------------------------------|-------------------------------|--------------------------------------------|-------------|---------|
| 1                      |                                            |                               | 2                                          |             | 3       |
| RWY/Area affected      | Obstacle type<br>Elevation<br>Markings/LGT | Coordinates                   | Obstacle type<br>Elevation<br>Markings/LGT | Coordinates |         |
| a                      | b                                          | c                             | a                                          | b           |         |
| 35                     | Terrain<br>407FT                           | 173930.5040N<br>1214514.5890E | Nil                                        | Nil         | Nil     |
|                        | Terrain<br>373FT                           | 174006.0300N<br>1214507.1100E | Nil                                        | Nil         | Nil     |
|                        | Terrain<br>363FT                           | 173830.0010N<br>1214513.9920E | Nil                                        | Nil         | Nil     |
|                        | Terrain<br>308FT                           | 173640.5050N<br>1214351.5930E | Nil                                        | Nil         | Nil     |
|                        | Terrain<br>273FT                           | 173658.0820N<br>1214235.0240E | Nil                                        | Nil         | Nil     |
|                        | Terrain<br>240FT                           | 173717.1640N<br>1214318.7860E | Nil                                        | Nil         | Nil     |
|                        | Terrain<br>236FT                           | 173702.2230N<br>1214334.5880E | Nil                                        | Nil         | Nil     |
|                        | Terrain<br>226FT                           | 173657.8580N<br>1214349.0640E | Nil                                        | Nil         | Nil     |
|                        | Terrain<br>215FT                           | 173749.3940N<br>1214426.3770E | Nil                                        | Nil         | Nil     |
|                        | Terrain<br>209FT                           | 173856.7030N<br>1214319.5960E | Nil                                        | Nil         | Nil     |
|                        | Terrain<br>187FT                           | 173729.5110N<br>1214353.2810E | Nil                                        | Nil         | Nil     |
| 17/35                  | Terrain<br>149FT                           | 173801.8790N<br>1214411.0990E | Nil                                        | Nil         | Nil     |
|                        | Terrain<br>4000FT                          | 173521.2000N<br>1215733.3700E | Nil                                        | Nil         | Nil     |
|                        | Terrain<br>2000FT                          | 174554.7300N<br>1215337.5600E | Nil                                        | Nil         | Nil     |
|                        | Terrain<br>1500FT                          | 174149.9500N<br>1215549.5500E | Nil                                        | Nil         | Nil     |
|                        | Terrain<br>1200FT                          | 173954.1700N<br>1215327.5200E | Nil                                        | Nil         | Nil     |
|                        | Terrain<br>1100FT                          | 174657.4100N<br>1214918.3200E | Nil                                        | Nil         | Nil     |
|                        | Terrain<br>900FT                           | 172654.0400N<br>1213035.2100E | Nil                                        | Nil         | Nil     |
|                        | Terrain<br>850FT                           | 174225.7100N<br>1214938.1200E | Nil                                        | Nil         | Nil     |
|                        | Terrain<br>600FT                           | 173125.3800N<br>1213055.2600E | Nil                                        | Nil         | Nil     |

### RPUT AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

|    |                                                                        |                                   |
|----|------------------------------------------------------------------------|-----------------------------------|
| 1  | Associated MET Office                                                  | PAGASA.                           |
| 2  | Hours of service<br>MET Office outside hours                           | H24.<br>-                         |
| 3  | Office responsible for TAF preparation<br>Periods of validity          | PAGASA/FSS.<br>-                  |
| 4  | Trend forecast<br>Interval of issuance                                 | -<br>-                            |
| 5  | Briefing/consultation provided                                         | FSS (Upon filing of flight plan). |
| 6  | Flight documentation<br>Language(s) used                               | -<br>English.                     |
| 7  | Charts and other information available for<br>briefing or consultation | Nil.                              |
| 8  | Supplementary equipment available for<br>providing information         | Nil.                              |
| 9  | ATS units provided with information                                    | Nil.                              |
| 10 | Additional information (limitation of service,<br>etc.)                | Nil.                              |

### RPUT AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

| Designations<br>RWY NR          | TRUE BRG               | Dimensions of<br>RWY | Strength (PCN)<br>and surface of<br>RWY and SWY          | THR coordinates<br>RWY end<br>coordinates THR<br>geoid undulation | THR elevation and<br>highest elevation<br>of TDZ of precision<br>APP RWY |
|---------------------------------|------------------------|----------------------|----------------------------------------------------------|-------------------------------------------------------------------|--------------------------------------------------------------------------|
| 1                               | 2                      | 3                    | 4                                                        | 5                                                                 | 6                                                                        |
| 17                              | 171° GEO<br>173.4° MAG | 1965M X 45M          | PCN 42 R/B/W/U<br>RWY: CONC<br>SWY: Compacted<br>MACADAM | 173908.3880N<br>1214354.7440E                                     | 22.325M/73.245FT                                                         |
| 35                              | 351° GEO<br>353.4° MAG | 1965M X 45M          | PCN 42 R/B/W/U<br>RWY: CONC<br>SWY: Compacted<br>MACADAM | 173805.0700N<br>1214403.8410E                                     | 22.708M/74.501FT                                                         |
| Slope of<br>RWY-SWY             | SWY<br>dimensions      | CWY<br>dimensions    | Strip<br>dimensions                                      | OFZ                                                               | Remarks                                                                  |
| 7                               | 8                      | 9                    | 10                                                       | 11                                                                | 12                                                                       |
| 0.0210% uphill<br>towards THR35 | 99M X 30M              | 99M X 125M           | 2230M X 125M                                             | Nil                                                               | Nil                                                                      |
|                                 | 59M X 30M              | 59M X 125M           | 2230M X 125M                                             | Nil                                                               | Nil                                                                      |

### RPUT AD 2.13 DECLARED DISTANCES

| RWY<br>Designator | TORA  | TODA  | ASDA  | LDA   | Remarks |
|-------------------|-------|-------|-------|-------|---------|
| 1                 | 2     | 3     | 4     | 5     | 6       |
| 17                | 1965M | 2064M | 2064M | 1965M | Nil     |
| 35                | 1965M | 2024M | 2024M | 1965M | Nil     |

**RPUT AD 2.14 APPROACH AND RUNWAY LIGHTING**

| RWY Designator                                     | APCH LGT type, LEN, INTST                  | THR LGT colour, WBAR     | VASIS, (MEHT), PAPI  | TDZ, LGT LEN                                                                                                                                                                                                                                                                                                                     |
|----------------------------------------------------|--------------------------------------------|--------------------------|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1                                                  | 2                                          | 3                        | 4                    | 5                                                                                                                                                                                                                                                                                                                                |
| 17                                                 | RTIL<br>LIH                                | Green                    | PAPI<br>Left<br>3.0° | Nil                                                                                                                                                                                                                                                                                                                              |
| 35                                                 | RTIL<br>LIH                                | Green                    | PAPI<br>Left<br>3.0° | Nil                                                                                                                                                                                                                                                                                                                              |
| RWY Centre Line LGT Length, spacing, colour, INTST | RWY edge LGT LEN, spacing, colour, INTST   | RWY End LGT colour, WBAR | SWY LGT LEN, colour  | Remarks                                                                                                                                                                                                                                                                                                                          |
| 6                                                  | 7                                          | 8                        | 9                    | 10                                                                                                                                                                                                                                                                                                                               |
| Nil                                                | 1964M, 60M, White/Yellow, White/White, LIH | Red                      | Nil                  | PAPI:<br>Path WID: 0.33°. VIS RG: 5.0 Miles. VER OBST CLR: <1.83°. Horizontal OBST CLR: ±10° FM RWY CL. DIST FM THR: 270M. RTIL:<br>Color: FLG White LGT. Interval: 60 - 120 flash per MIN. VIS RG: 4NM, CLR and Distinct. DIST FM Edge LGT: 10M<br>Horizontal coverage LTD to 8° AZM FM RWY 17 CL Co-pilot side due vegetation. |
| Nil                                                | 1964M, 60M, White/Yellow, White/White, LIH | Red                      | Nil                  | PAPI:<br>Path WID: 0.33°. RTIL:<br>Color: FLG White LGT. Interval: 60 - 120 flash per MIN. VIS RG: 4NM, CLR and Distinct. DIST FM Edge LGT: 10M<br>Horizontal coverage LTD to 8° AZM FM RWY 17 CL Co-pilot side due vegetation.                                                                                                  |

### RPUT AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

|   |                                                          |                                                                                                                    |
|---|----------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|
| 1 | ABN/IBN location, characteristics and hours of operation | Location: On top of TWR.<br>Characteristics: ALTN W G EV 24-30 flashes per MIN.<br>INTST - LIH.<br>HR of OPS: H24. |
| 2 | LDI location and LGT<br>Anemometer location and LGT      | In front of FSS.                                                                                                   |
| 3 | TWY edge and centre line lighting                        | Edge: Blue; NR of LGT: 32 LGT at various spacing.<br>Centre Line: Nil.                                             |
| 4 | Secondary power supply/switch-over time                  | Secondary power supply to all lighting at AD.<br>Switch-over time of 15 seconds.                                   |
| 5 | Remarks                                                  | Nil.                                                                                                               |

### RPUT AD 2.17 ATS AIRSPACE

|   |                                   |                                                                                                                   |
|---|-----------------------------------|-------------------------------------------------------------------------------------------------------------------|
| 1 | Designation and lateral limits    | TUGUEGARAO AERODROME ADVISORY ZONE (AAZ):<br>A circle radius 5NM centered on 173836.7290N<br>1214359.2930E (ARP). |
| 2 | Vertical limits                   | AAZ: SFC up to but excluding 2000FT.                                                                              |
| 3 | Airspace classification           | G.                                                                                                                |
| 4 | ATS unit call sign<br>Language(s) | Tuguegarao Radio.<br>English.                                                                                     |
| 5 | Transition altitude               | Nil.                                                                                                              |
| 6 | Remarks                           | Nil.                                                                                                              |

### RPUT AD 2.18 ATS COMMUNICATION FACILITIES

| Service Designation | Call Sign        | Frequency                        | Hours of operation | Remarks                                                                                                                  |
|---------------------|------------------|----------------------------------|--------------------|--------------------------------------------------------------------------------------------------------------------------|
| 1                   | 2                | 3                                | 4                  | 5                                                                                                                        |
| FSS                 | Tuguegarao Radio | 122.8MHZ<br>5062.5KHZ<br>3608KHZ | 0000 - 0800        | A/G FREQ.<br>P/P PRI FREQ<br>(Laoag Network).<br>P/P SRY FREQ<br>For extension of SER,<br>one (1) day PN is<br>required. |

### RPUT AD 2.19 RADIO NAVIGATION AND LANDING AIDS

| Type of aid,<br>MAG VAR,<br>Type of supported<br>OP(for VOR/ILS/MLS,<br>give declination) | ID  | Frequency | Hours of<br>operation | Position of<br>transmitting<br>antenna<br>coordinates | Elevation of<br>DME<br>transmitting<br>antenna | Remarks |
|-------------------------------------------------------------------------------------------|-----|-----------|-----------------------|-------------------------------------------------------|------------------------------------------------|---------|
| 1                                                                                         | 2   | 3         | 4                     | 5                                                     | 6                                              | 7       |
| DME                                                                                       | TUG | CH58X     | 0000 - 0800           | 173759.9185N<br>1214411.2112E                         | Nil                                            | Nil     |

---

**RPUT AD 2.22 FLIGHT PROCEDURES**

**1. General Procedures for VFR Flights**

- 1.1 The following air traffic procedures shall apply to all VFR flights when entering, leaving or operating within Tuguegarao Aerodrome Advisory Zone.
- 1.1.1 All departing VFR flights shall maintain a listening watch on Tuguegarao Radio frequency 122.8MHZ until 20NM.
- 1.1.2 All arriving VFR flights shall establish contact and remain on listening watch thereafter with Tuguegarao Radio frequency 122.8MHZ approaching 20NM inbound the station.
- 1.1.3 Advisories and traffic information shall be acknowledged by the pilots.
- 1.1.4 Any deviation from the procedures herein shall be advised without delay to Tuguegarao Radio.

**1.2 VFR Procedures in RWY17**

**1.2.1 Departure**

- a. Southbound aircraft shall turn left towards PEÑA BLANCA. Continue climb and keep to the east side of CAGAYAN RIVER following MAHARLIKA HIGHWAY. Report when over SAN PABLO. Report over CABAGAN and when leaving/switching frequency.
- b. Northbound aircraft shall turn RIGHT for a RIGHT downwind departure RWY17. Request to cross Final Approach RWY17 towards IGUIG. Keep to the east side of CAGAYAN RIVER. Report when over AMULUNG EAST and ALCALA.

**1.2.2 Arrival**

- a. From the South: Report when over MINAGBAG. Keep to the west side of CAGAYAN RIVER and continue towards ENRILE. Join downwind or proceed as advised by Tuguegarao FSS.
- b. From the North: Report over SANTO NIÑO. Keep to the west side of CAGAYAN RIVER towards AMULUNG WEST. Report over AMULUNG WEST and continue towards IPIL. Advise to join right base or final leg RWY17 when over IPIL. Proceed as intended or as advised by Tuguegarao FSS.

**1.3 VFR Procedures in RWY35**

**1.3.1 Departure**

- a. Jet Aircraft: Turn LEFT for a LEFT downwind departure. Report 20NM.  
Propeller Aircraft: Turn LEFT for LEFT downwind departure towards PEÑA BLANCA. Continue climb and keep to the east side of CAGAYAN RIVER following MAHARLIKA HIGHWAY. Report when over SAN PABLO. Report over CABAGAN and when leaving/switching frequency.
- b. Northbound aircraft shall climb straight-out towards IGUIG. Keep to the east side of CAGAYAN RIVER. Report when over AMULUNG EAST and ALCALA.

**1.3.2 Arrival**


- a. From the South: Report when over MINAGBAG. Keep to the west side of CAGAYAN RIVER towards ENRILE. Advise to join right base or final leg RWY35 when over ENRILE. Proceed as intended or as advised by Tuguegarao FSS.
- b. From the North: Report over SANTO NIÑO. Keep to the west side of CAGAYAN RIVER towards AMULUNG WEST. Report over AMULUNG WEST and continue towards IPIL. Advise to join downwind RWY35 or proceed as advised by Tuguegarao FSS.

VFR  
ARR/DEP  
CHART

AD ELEV  
74.50 ft

FSS - 122.8

TUGUEGARAO/Tuguegarao (RPUT)

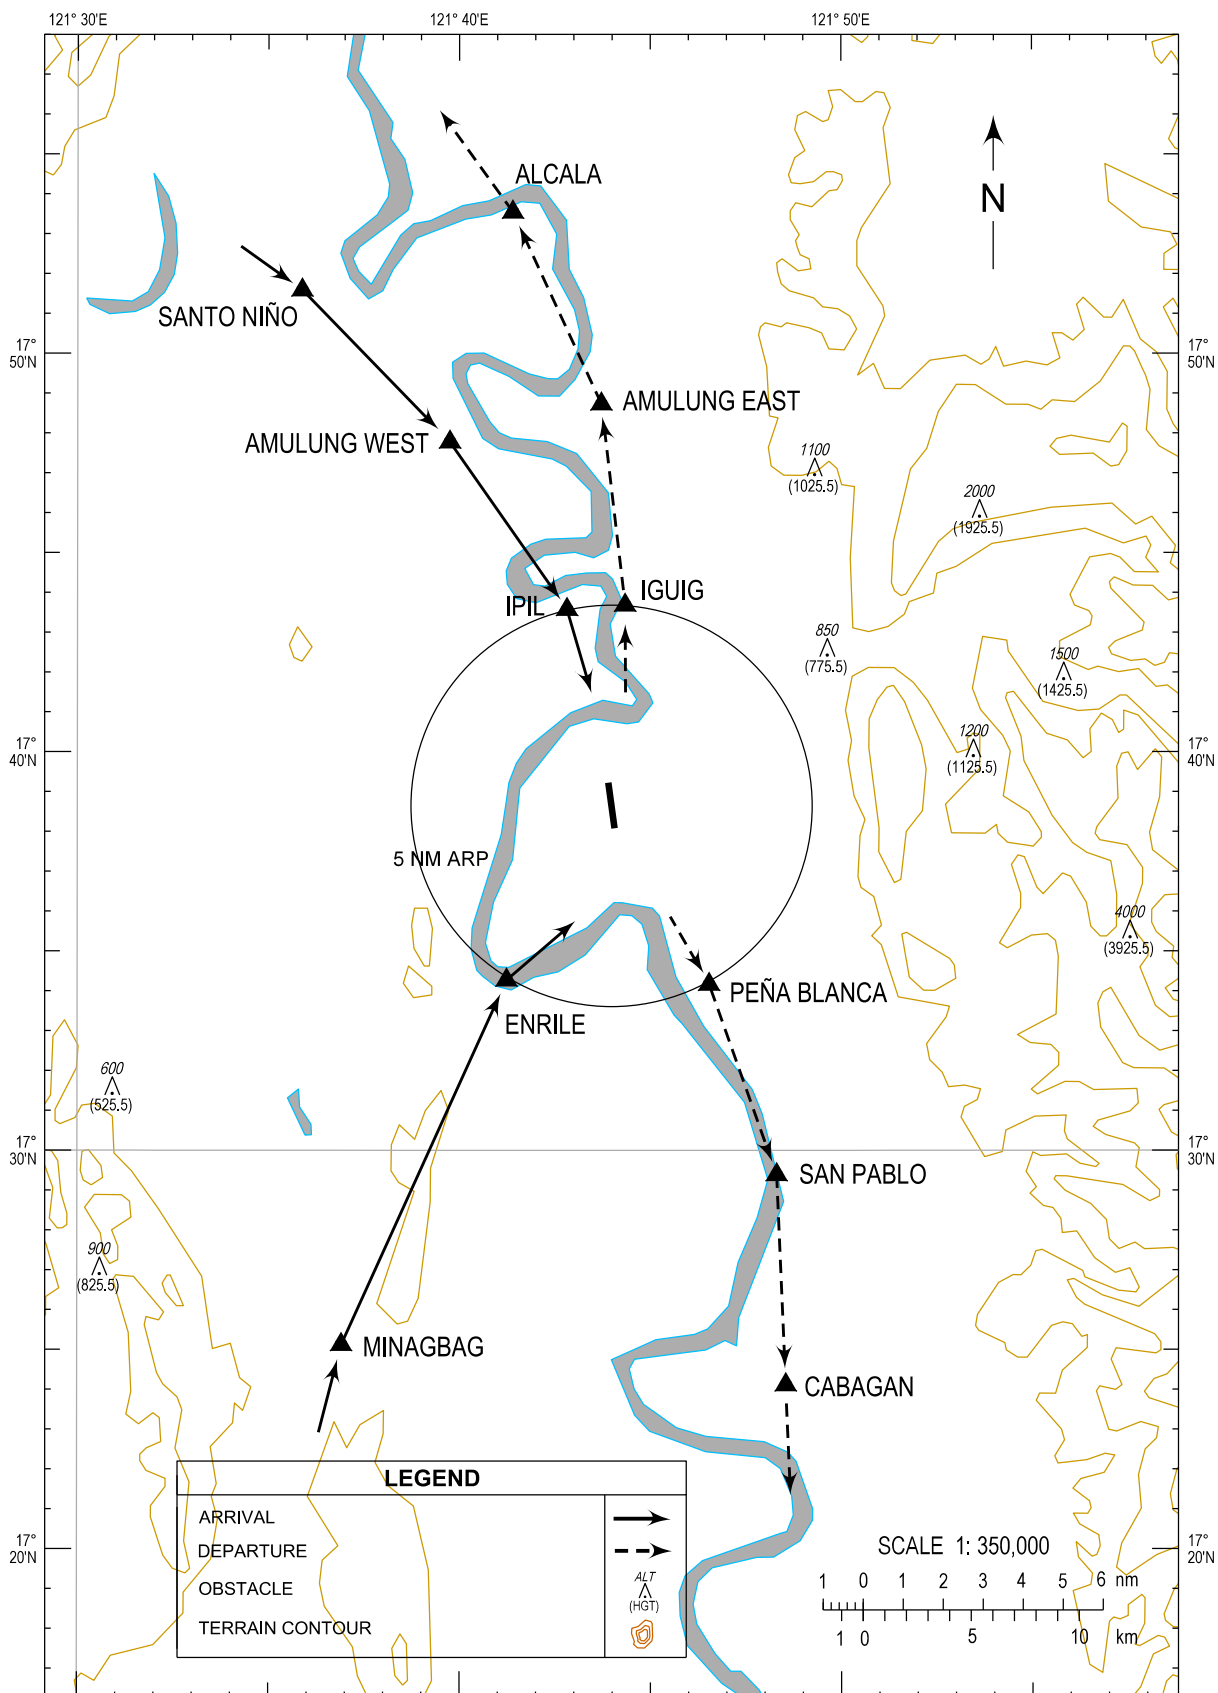



**RPUT AD 2.24 CHARTS RELATED TO AN AERODROME**

| TITLE                         | Page           |
|-------------------------------|----------------|
| Traffic Circuit Chart (RWY35) | RPUT AD 2 - 11 |

INTENTIONALLY  
LEFT  
BLANK

TRAFFIC  
CIRCUIT  
CHART


AERODROME ELEV  
75 ft

FSS - 122.8

TUGUEGARAO / Tuguegarao (RPUT)


RWY 35

ALT, ELEV AND HGT IN FEET  
DIST IN NM  
BRG ARE MAG  
VAR 2.4° W (2014)

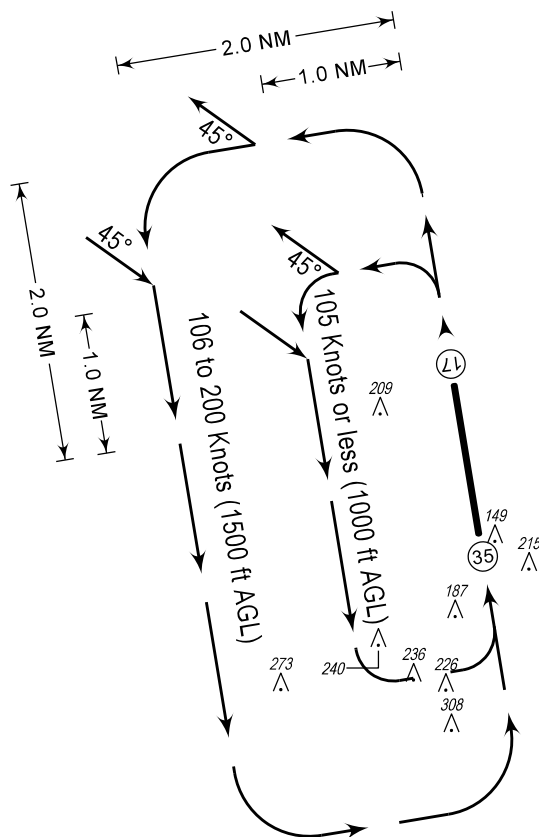

RIGHT

SCALE 1: 100,000



## PROCEDURE

- Arriving aircraft shall enter the traffic circuit on the downwind leg at an angle of 45 degrees.
- Departing aircraft shall follow the traffic circuit and leave the circuit at an angle of 45 degrees.

CHANGES: Data Resolution, Editorial (SER Designation).

INTENTIONALLY  
LEFT  
BLANK