



ROBERT GORDON
UNIVERSITY ABERDEEN

GRADUATE APPRENTICESHIP

CM4701 - Human Computer Interaction
Week 8: Cognitive Evaluation

Carlos Moreno-García

Optimising Interfaces

- To optimise interfaces, we need to minimise the cognitive load!
 - People spend more time in software use every day
- According to latest pools from [uSwitch.com](https://www.uswitch.com), an average adult spends over 30 hours a week browsing the Internet, increasing to 45 hours for young adults i.e. 18-24 years old.



Optimising Interfaces

- New guidelines for designing usable interfaces such as [Web Content Accessibility Guidelines \(WCAG\)](#) recommend reducing short term memory load.
- Cognitive load, i.e. working memory requests during problem solving, reasoning, or thinking or when moving a limb such as a hand, may affect users' general satisfaction and performance when completing tasks such as browsing an internet web application¹.
- [In this paper](#), Schmutz et al. addresses some of points mentioned above.

¹ This includes motor functions which are only possible after some cognitive processes

Optimising Interfaces

- Optimisation often is based on human testing, however it is:
 - Time consuming
 - Expensive
 - Slow processing
 - Many participants must be involved
 - Many tests must be completed by participants
 - Difficult to integrate into software development

Optimising Interfaces

- There are other methods. Using Cognitive Architectures provides:
 - Fast processing
 - No participants are involved
 - Not expensive
 - Easy to integrate into software development
 - Difficult to model human motor and cognitive functions


Optimising Interfaces

- Methods to model user interaction have been researched for many decades.
- In 1983, Stuart Card developed the GOMS (Goals, Operators, Methods, and Selection rules). They also developed another form of GOMS called Keystroke-Level Model (KLM) which is simpler, easier to use and more adapted to HCI i.e. computer interfaces.
- KLM allows for time prediction for completion of tasks. These widely used modelling systems reduce a user's interaction to its basic components i.e. involving physical, cognitive and perceptual actions.
- They can be analysed and optimisation can be achieved through them.

GRADUATE APPRENTICESHIP

7.2.1. ACT-R

Cognitive Architectures

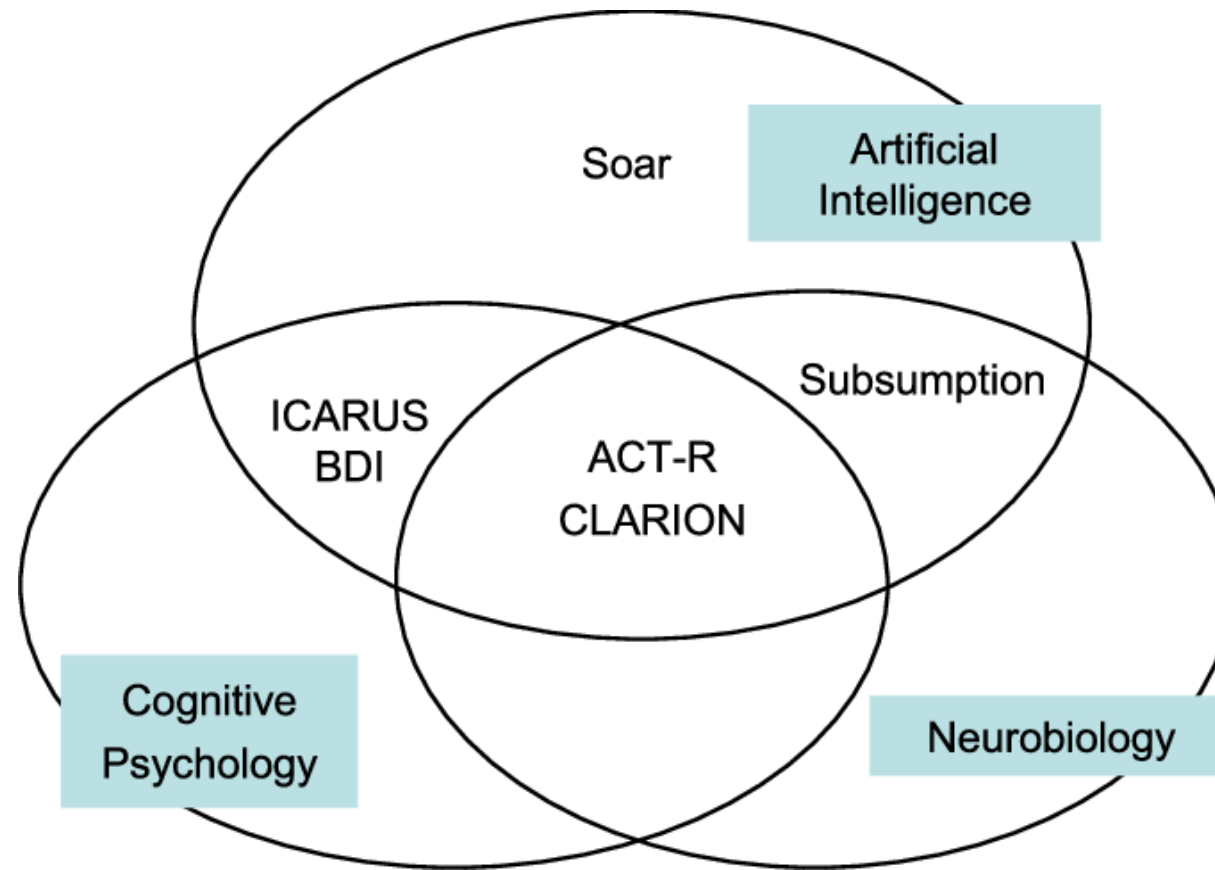

SOAR



- First mentioned by Allen Newell in 1972, SOAR was the first attempt (1983) to produce an Unified Theory of human cognition.
- It is capable of simulating human learning, reasoning, skill acquisition and mental processes.
- SOAR is widely used in research involving the understanding of human cognition.

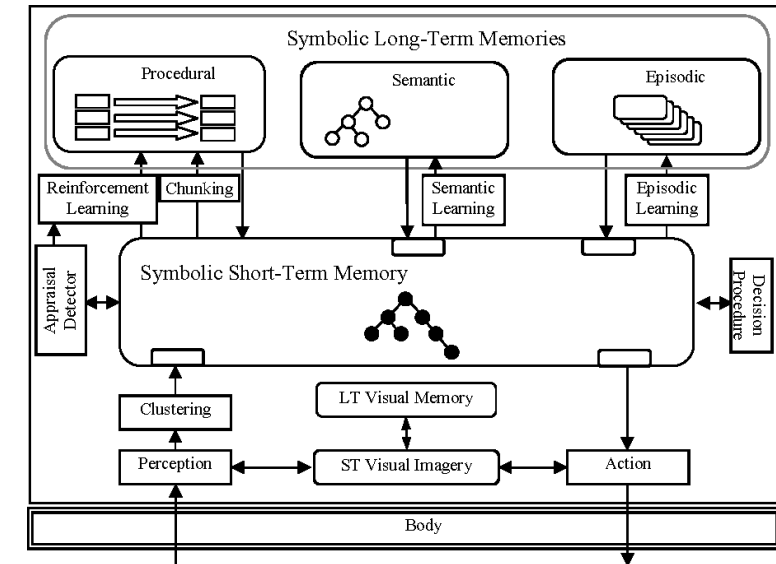


Figure 3: Soar 9

The Soar User's Manual
Version 9.6.0

<https://soar.eecs.umich.edu/downloads/Documentation/SoarManual.pdf>

Atomic Control of Thought - Rational (ACT-R)

- Inspired by the work of Newell et al.¹ and Lebiere et al., who later devoted their research to create a universal theory of cognition which underpin ACT-R.
- Later, this framework was completed with the addition of human motor functions to become ACT-R/PM.
- ACT-R uses the Fitt's law as part of its latency calculations².
- ACT-R/PM is used in many research areas, such as military and medical applications.

¹ Started with HAM, followed by ACT, he then went on to develop ACT-R which then was followed by ACT-R/PM

² In short, smaller and further is the target object to go to and higher will be the timing


ACT-R/PM

- ACT-R is a cognitive architecture: a theory for simulating and understanding human cognition as well as simple motor functions. It also contains audible and visual functions that are well developed.
- Researchers working on ACT-R strive to understand how people organise knowledge and produce intelligent and rational behaviour.
- As research continues, ACT-R evolves ever closer into a system which can perform the full range of human cognitive tasks i.e. capturing in granular detail the way we (human) perceive, think about, and act on the world the way we do.
- Theory about how human cognition works based on assumptions on numerous facts derived from psychology experiments.

ACT-R/PM

- ACT-R is like a programming language; a framework where researchers create models (i.e. programs) that are written in ACT-R and that, beside incorporating the ACT-R's view of cognition embedded in this architecture, add their own assumptions about the particular task.
 - These assumptions can be tested by comparing the results of the model with the results of people doing the same tasks.
 - By “results” we mean the traditional measures of cognitive psychology i.e. time to perform the task and accuracy in the task etc.

ACT-R/PM Example

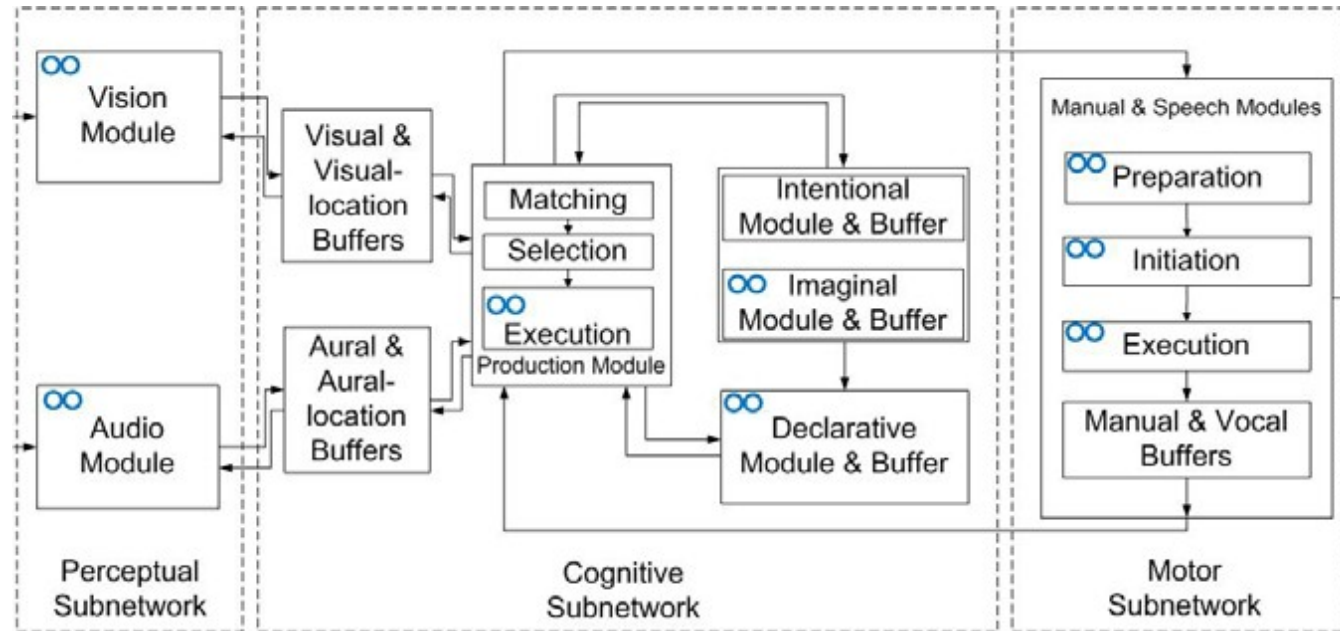

```

:GA 1.0 default: 1.0 : source spread for the GOAL buffer
:PRODUCTION-ACTIVATION 0 default: 0 : source spread for the PRODUCTION buff
||| :VISUAL-ACTIVATION 0 default: 0 : source spread for the VISUAL buffer
:VISUAL-LOCATION-ACTIVATION 0 default: 0 : source spread for the VISUAL-LOCATIC
:MANUAL-ACTIVATION 0 default: 0 : source spread for the MANUAL buffer
:AURAL-ACTIVATION 0 default: 0 : source spread for the AURAL buffer
:AURAL-LOCATION-ACTIVATION 0 default: 0 : source spread for the AURAL-LOCATIC
:VOCAL-ACTIVATION 0 default: 0 : source spread for the VOCAL buffer
:IMAGINAL-ACTION-ACTIVATION 0 default: 0 : source spread for the IMAGINAL-ACTIO
:IMAGINAL-ACTIVATION 0 default: 0 : source spread for the IMAGINAL buffer
:TEMPORAL-ACTIVATION 0 default: 0 : source spread for the TEMPORAL buffer
:FRAME-ACTIVATION 0 default: 0 : source spread for the FRAME buffer
#Warning: Creating chunk VISIBLE of default type chunk |#
0.000 GOAL SET-BUFFER-CHUNK GOAL GOAL REQUESTED NIL
0.000 PROCEDURAL CONFLICT-RESOLUTION
0.000 PROCEDURAL PRODUCTION-SELECTED SET-START-FRAME-2
0.000 PROCEDURAL BUFFER-READ-ACTION GOAL
0.000 PROCEDURAL PRODUCTION-FIRED SET-START-FRAME-2
0.000 COGTOOL TRANSITION-TO "screen1"
0.000 PROCEDURAL MOD-BUFFER-CHUNK GOAL
0.000 VISION SET-BUFFER-CHUNK VISUAL-LOCATION EXCERCISE IN SCREEN1-0 RE
0.000 PROCEDURAL CONFLICT-RESOLUTION
0.000 PROCEDURAL PRODUCTION-SELECTED FIND-3
0.000 PROCEDURAL BUFFER-READ-ACTION GOAL
0.000 PROCEDURAL QUERY-BUFFER-ACTION FRAME
0.050 VISION CHANGE-STATE LAST NONE PREP FREE
0.050 PROCEDURAL PRODUCTION-FIRED FIND-3
0.050 PROCEDURAL MOD-BUFFER-CHUNK GOAL
0.050 PROCEDURAL MODULE-REQUEST VISUAL-LOCATION
0.050 PROCEDURAL CLEAR-BUFFER VISUAL-LOCATION
0.050 VISION Find-location
0.050 VISION SET-BUFFER-CHUNK VISUAL-LOCATION DIET IN SCREEN1-0 "diet in scr
0.050 PROCEDURAL CONFLICT-RESOLUTION
0.050 PROCEDURAL PRODUCTION-SELECTED LOOK-AT-5
0.050 PROCEDURAL BUFFER-READ-ACTION GOAL
0.050 PROCEDURAL BUFFER-READ-ACTION VISUAL-LOCATION
0.050 PROCEDURAL QUERY-BUFFER-ACTION VISUAL
0.050 PROCEDURAL QUERY-BUFFER-ACTION FRAME
0.100 PROCEDURAL PRODUCTION-FIRED LOOK-AT-5

```

ACT-Simple

- Developed by Salvucci et al. in 2003¹, merges the concepts of KLM and ACT-R in one environment.
- User interaction is analysed and produces KLM rules which are then translated into an ACT-R model to simulate human cognitive, motor and visual functions for a scenario of tasks. It returns a latency (timing) for this series of tasks.
- It is much easier than modelling KLM and ACT-R, but it is still a challenging environment to use.
- In 2004, Bonnie John created a prototyping interface called **CogTool** in which user interaction is modelled by demonstration using ACT-Simple.

¹ACT-Simple is widely used in research for both hardware and software interfaces

GRADUATE APPRENTICESHIP

7.2.1.1. CogTool

CogTool

- CogTool is relatively simple to use and is based on the idea of using sketches and storyboards to demonstrate the user interaction.
- It was available for free originally at the Carnegie Mellon University¹ but can now be downloaded from GitHub
 - <https://github.com/cogtool/cogtool/releases>



1.3 development build 2014-02-10

 dfmorrison released this on 11 Feb 2014

This is an executable build of the ongoing development of CogTool. Most of the differences from the released version (1.2.x) are in support of ongoing research, primarily using CogTool-explorer. Little of the new functionality is documented. Unless you are involved in this ongoing research, or at least in contact with those who are, you will probably be better off using the [released version](#).

See the source tree for a brief description of the [command line interface](#).

▼ Assets 4

 CogTool-1_3dev-2014-02-10-setup.exe	26 MB
 CogToolMac-1_3dev-2014-02-10.tgz	23.7 MB
 Source code (zip)	
 Source code (tar.gz)	


¹Carnegie University is well-known for its research in human cognition as well as developing ACT-R.




CogTool

First we create a project in CogTool. The scenario we wish to have is:

- Look at flower picture
- Look at river picture
- Click on the “Enter Gallery” link

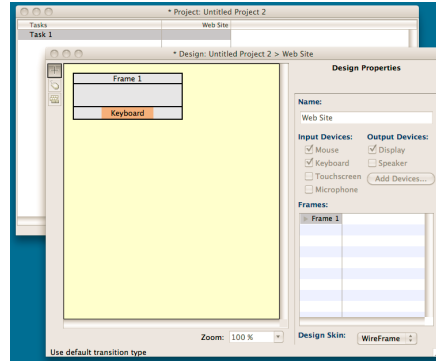

The background image has been set to a screenshot of the web page we want to test

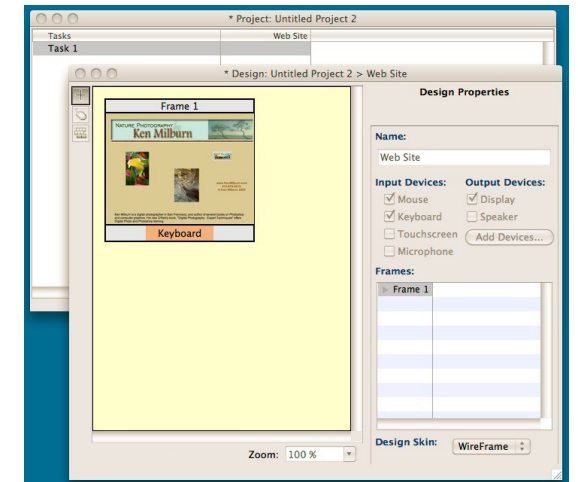

Once the user interaction has been setup in CogTool, we can compute the simulated time to achieve the tasks. For this experiment, it is 2.784 second


* Project: Untitled Project 2	
Tasks	Web Site
Task 1	2.784 s

GRADUATE APPRENTICESHIP

8. Storyboarding

Storyboards

- Series of sketches showing how a user might interact with the technology / app / device / website / etc., or to show the progress through a series of tasks
- Often used with a scenario to bring in more detail and context.
 - A storyboard often contains elements such as background, text fonts used, widgets and design components used, if any multimedia components are used such as videos, animations etc.
 - Can use pen and paper screenshots, PowerPoint slides, screenshots, etc.

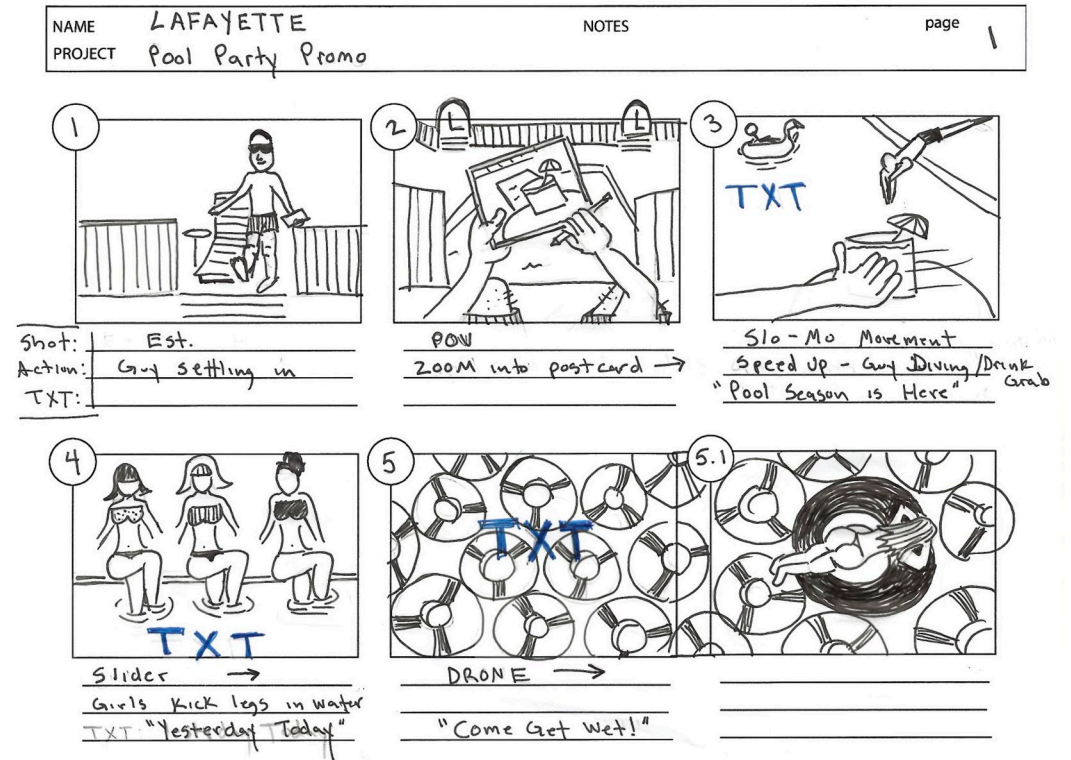

Storyboards


- Pros

- Simple to design by yourself
- Do not need technical knowledge
- Pushes to think through the process of how proposed device/app will be used and helpful to identify needed features
- Very useful for communicating ideas of concept

- Cons


- Rough representations/sketches
- Not everything can go in, often main components only
- Limited in scope, and at times can be impractical to use on a whole project

Storyboarding - Sketching


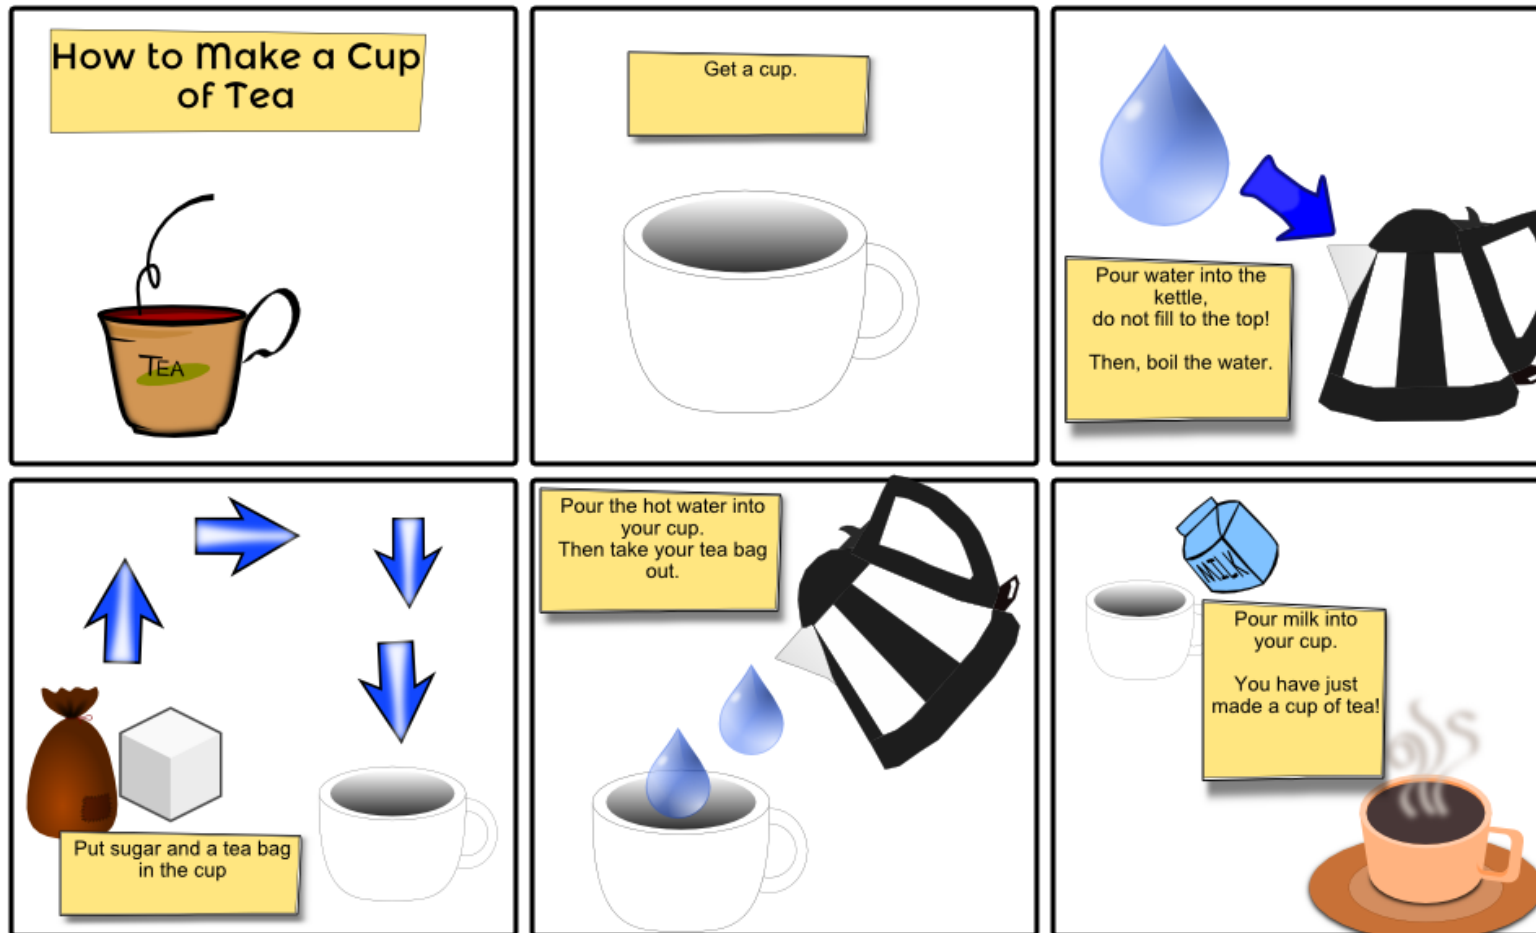


Create your own at StoryboardThat.com

Storyboarding - Examples

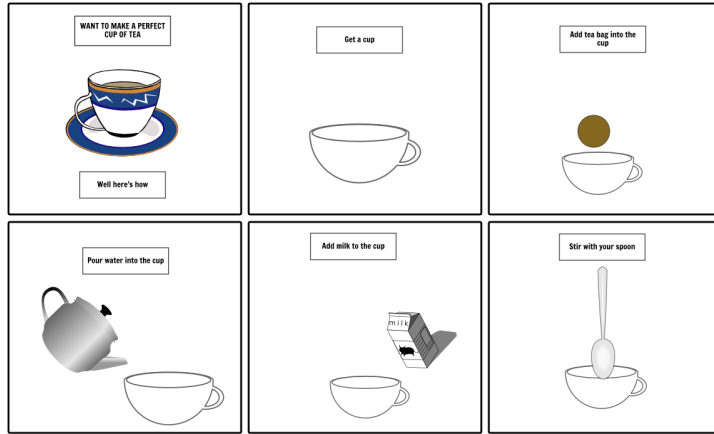


Create your own at Storyboard That

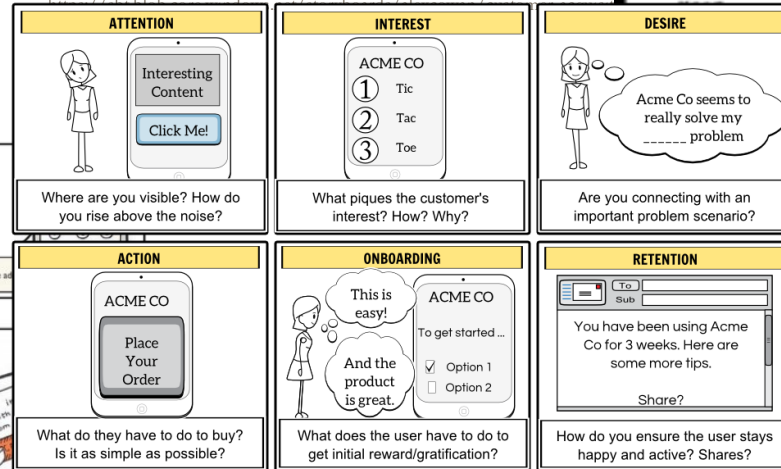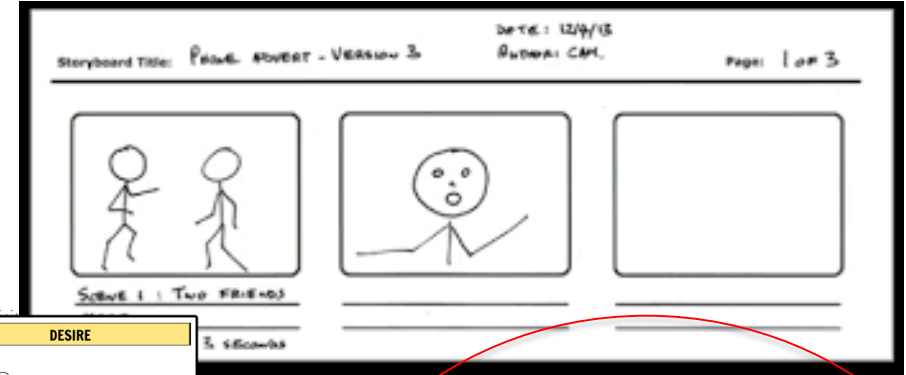


Create your own at StoryboardThat.com

Beenstagram Sign Up and First Entry

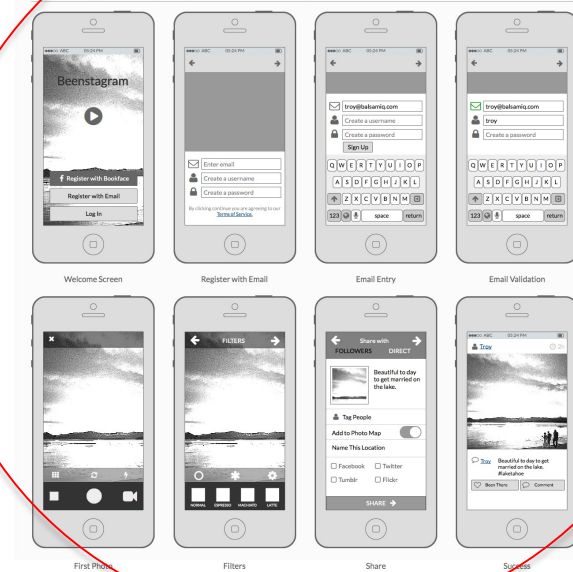


Storyboarding - Examples

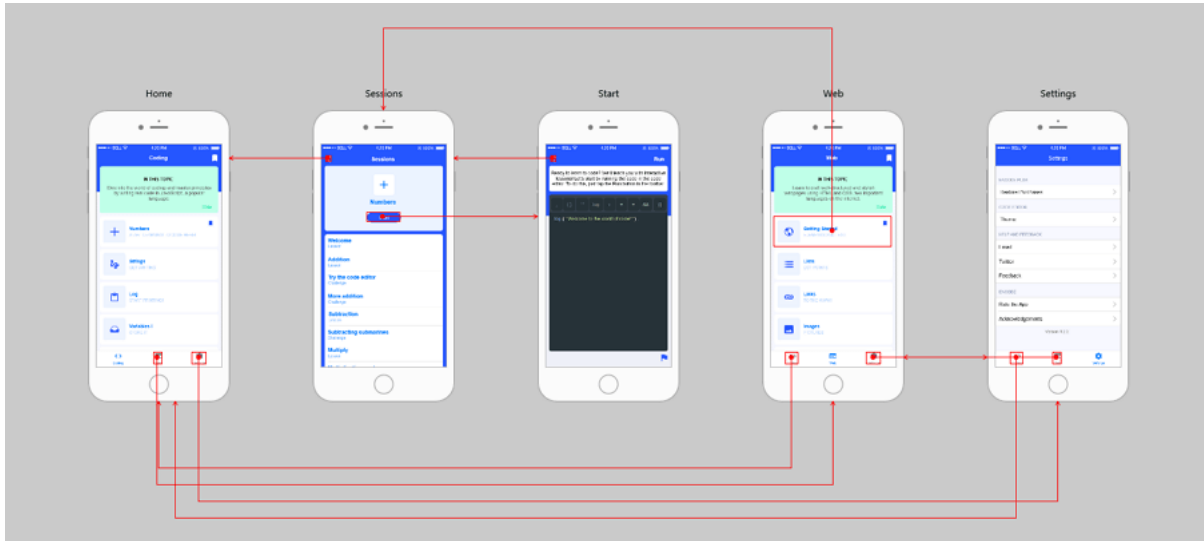

<https://file.mockplus.com/image/2018/03/0fd1f9b7-a3b1-4a80-ba15-ed1324af72a7.png>

<https://file.mockplus.com/image/2018/03/ef08b01e-3461-4833-9e23-a50663989b0e.png>

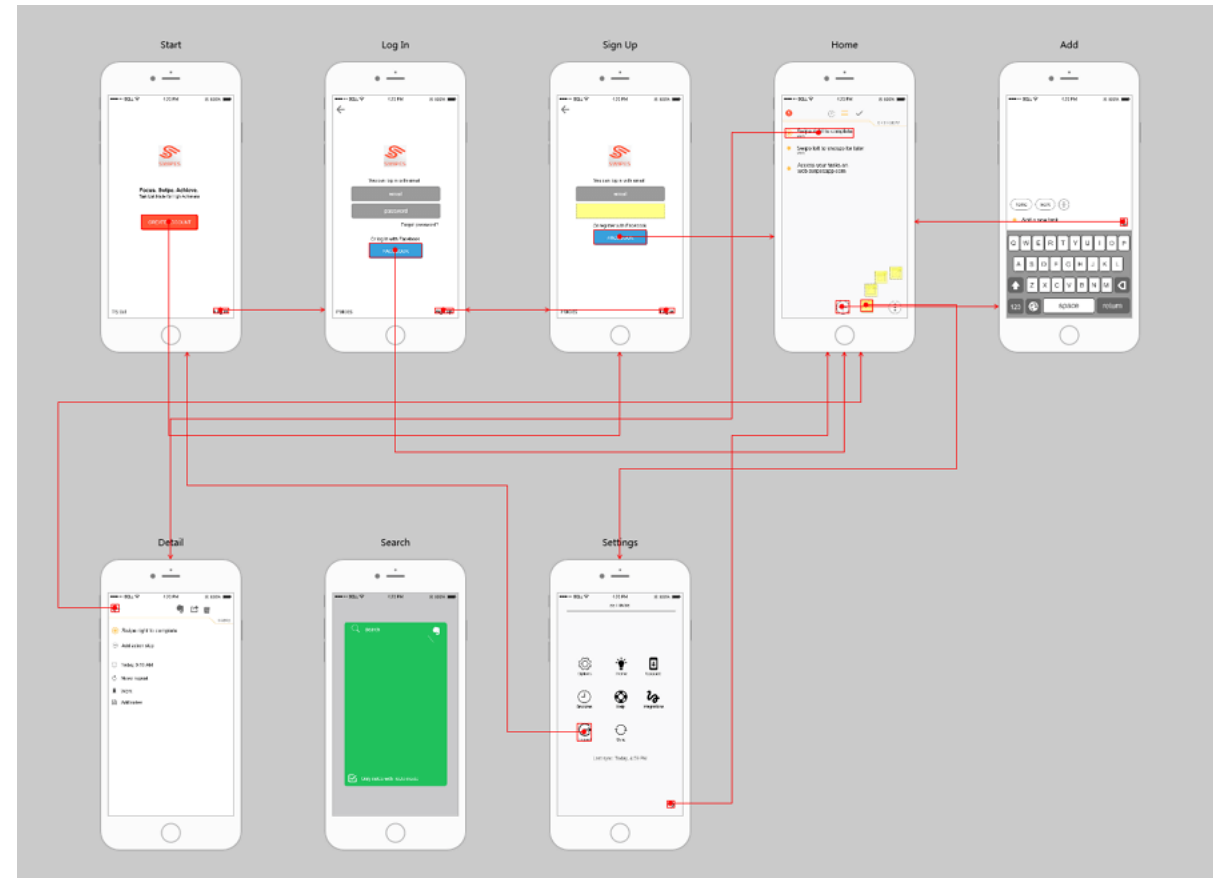

GRADUATE APPRENTICESHIP

CogTool Demos
You will find all the material in Moodle