

Try Mermaid Advanced Editor — OSS users get 10% off with code JS26

[Get started](#)

Quadrant Chart

A quadrant chart is a visual representation of data that is divided into four quadrants. It is used to plot data points on a two-dimensional grid, with one variable represented on the x-axis and another variable represented on the y-axis. The quadrants are determined by dividing the chart into four equal parts based on a set of criteria that is specific to the data being analyzed. Quadrant charts are often used to identify patterns and trends in data, and to prioritize actions based on the position of data points within the chart. They are commonly used in business, marketing, and risk management, among other fields.

Example


Code:

mermaid

```
quadrantChart
  title Reach and engagement of campaigns
  x-axis Low Reach --> High Reach
  y-axis Low Engagement --> High Engagement
  quadrant-1 We should expand
  quadrant-2 Need to promote
  quadrant-3 Re-evaluate
  quadrant-4 May be improved
  Campaign A: [0.3, 0.6]
  Campaign B: [0.45, 0.23]
  Campaign C: [0.57, 0.69]
  Campaign D: [0.78, 0.34]
  Campaign E: [0.40, 0.34]
  Campaign F: [0.35, 0.78]
```

⌘ + Enter | [Run ▶](#)

Reach and engagement of campaigns

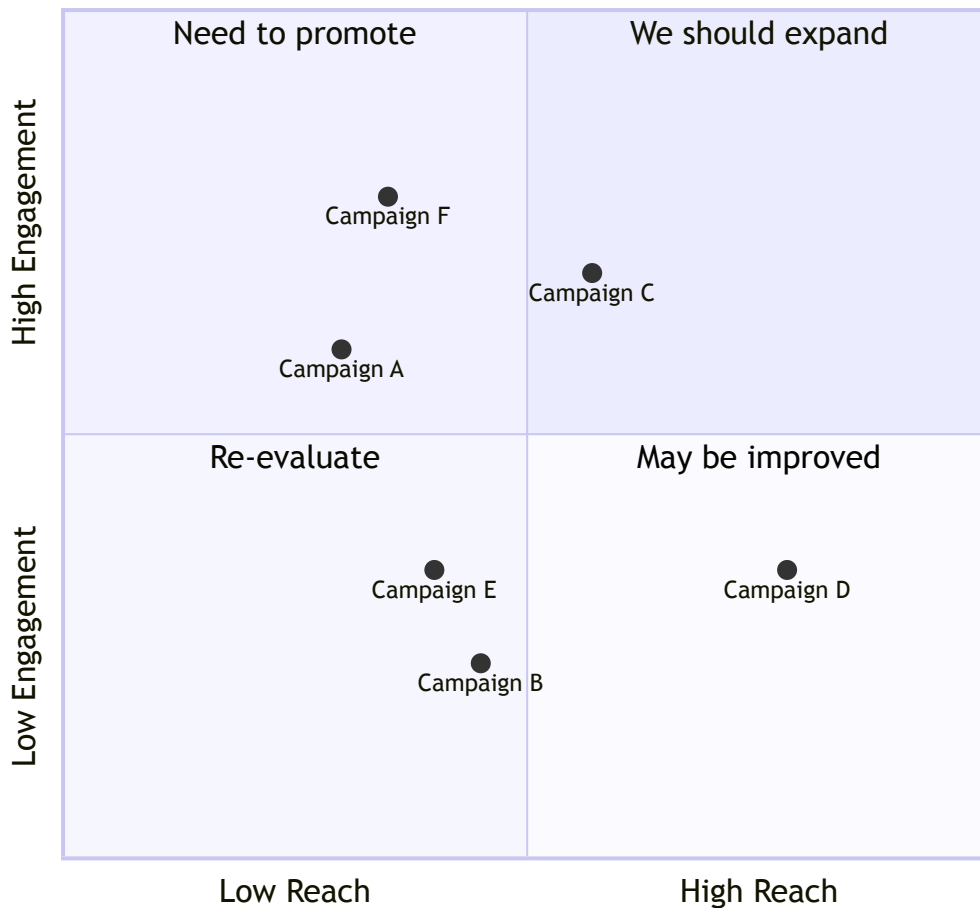

Syntax

INFO

If there are no points available in the chart both **axis** text and **quadrant** will be rendered in the center of the respective quadrant. If there are points **x-axis** labels will rendered from the left of the respective quadrant also they will be displayed at the bottom of the chart, and **y-axis** labels will be rendered at the bottom of the respective quadrant, the quadrant text will render at the top of the respective quadrant.

INFO

For points x and y value min value is 0 and max value is 1.

Title

The title is a short description of the chart and it will always render on top of the chart.

Example

```
quadrantChart
  title This is a sample example
```

x-axis

The x-axis determines what text would be displayed in the x-axis. In x-axis there is two part **left** and **right** you can pass **both** or you can pass only **left**. The statement should start with `x-axis` then the `left axis text` followed by the delimiter `-->` then `right axis text`.

Example

1. `x-axis <text> --> <text>` both the left and right axis text will be rendered.
2. `x-axis <text>` only the left axis text will be rendered.

y-axis

The y-axis determines what text would be displayed in the y-axis. In y-axis there is two part **top** and **bottom** you can pass **both** or you can pass only **bottom**. The statement should start with `y-axis` then the `bottom axis text` followed by the delimiter `-->` then `top axis text`.

Example

1. `y-axis <text> --> <text>` both the bottom and top axis text will be rendered.
2. `y-axis <text>` only the bottom axis text will be rendered.

Quadrants text

The `quadrant-[1,2,3,4]` determine what text would be displayed inside the quadrants.

Example

1. `quadrant-1 <text>` determine what text will be rendered inside the top right quadrant.

2. **quadrant-2** **<text>** determine what text will be rendered inside the top left quadrant.
3. **quadrant-3** **<text>** determine what text will be rendered inside the bottom left quadrant.
4. **quadrant-4** **<text>** determine what text will be rendered inside the bottom right quadrant.

Points

Points are used to plot a circle inside the quadrantChart. The syntax is **<text>: [x, y]** here x and y value is in the range 0 - 1.

Example

1. **Point 1: [0.75, 0.80]** here the Point 1 will be drawn in the top right quadrant.
2. **Point 2: [0.35, 0.24]** here the Point 2 will be drawn in the bottom left quadrant.

Chart Configurations

Parameter	Description	Default value
chartWidth	Width of the chart	500
chartHeight	Height of the chart	500
titlePadding	Top and Bottom padding of the title	10
titleFontSize	Title font size	20
quadrantPadding	Padding outside all the quadrants	5
quadrantTextTopPadding	Quadrant text top padding when text is drawn on top (not data points are there)	5
quadrantLabelFontSize	Quadrant text font size	16
quadrantInternalBorderStrokeWidth	Border stroke width inside the quadrants	1
quadrantExternalBorderStrokeWidth	Quadrant external border stroke width	2
xAxisLabelPadding	Top and bottom padding of x-axis text	5

Parameter	Description	Default value
xAxisLabelFontSize	X-axis texts font size	16
xAxisPosition	Position of x-axis (top , bottom) if there are points the x-axis will always be rendered in bottom	'top'
yAxisLabelPadding	Left and Right padding of y-axis text	5
yAxisLabelFontSize	Y-axis texts font size	16
yAxisPosition	Position of y-axis (left , right)	'left'
pointTextPadding	Padding between point and the below text	5
pointLabelFontSize	Point text font size	12
pointRadius	Radius of the point to be drawn	5

Chart Theme Variables

Parameter	Description
quadrant1Fill	Fill color of the top right quadrant
quadrant2Fill	Fill color of the top left quadrant
quadrant3Fill	Fill color of the bottom left quadrant
quadrant4Fill	Fill color of the bottom right quadrant
quadrant1TextFill	Text color of the top right quadrant
quadrant2TextFill	Text color of the top left quadrant
quadrant3TextFill	Text color of the bottom left quadrant
quadrant4TextFill	Text color of the bottom right quadrant
quadrantPointFill	Points fill color
quadrantPointTextFill	Points text color
quadrantXAxisTextFill	X-axis text color
quadrantYAxisTextFill	Y-axis text color

Parameter	Description
quadrantInternalBorderStrokeFill	Quadrants inner border color
quadrantExternalBorderStrokeFill	Quadrants outer border color
quadrantTitleFill	Title color


Example on config and theme

Code:

mermaid

```
---
config:
  quadrantChart:
    chartWidth: 400
    chartHeight: 400
  themeVariables:
    quadrant1TextFill: "ff0000"
---
quadrantChart
  x-axis Urgent --> Not Urgent
  y-axis Not Important --> "Important ♥"
  quadrant-1 Plan
  quadrant-2 Do
  quadrant-3 Delegate
  quadrant-4 Delete
```

⌘ + Enter | [Run ▶](#)

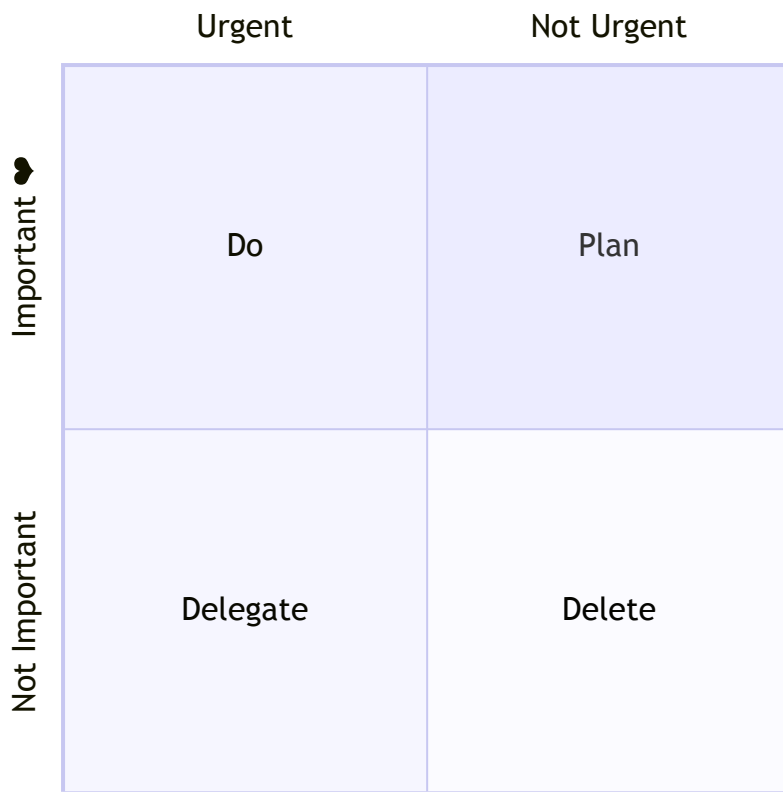

Point styling

Points can either be styled directly or with defined shared classes

1. Direct styling

```

Point A: [0.9, 0.0] radius: 12
Point B: [0.8, 0.1] color: #ff3300, radius: 10
Point C: [0.7, 0.2] radius: 25, color: #00ff33, stroke-color: #10f0f0
Point D: [0.6, 0.3] radius: 15, stroke-color: #00ff0f, stroke-width: 5px

```

2. Classes styling

```

Point A:::class1: [0.9, 0.0]
Point B:::class2: [0.8, 0.1]
Point C:::class3: [0.7, 0.2]
Point D:::class3: [0.7, 0.2]
classDef class1 color: #109060
classDef class2 color: #908342, radius : 10, stroke-color: #310085, stroke-width: 5px
classDef class3 color: #f00fff, radius : 10

```

Available styles:

Parameter	Description
color	Fill color of the point
radius	Radius of the point
stroke-width	Border width of the point
stroke-color	Border color of the point (useless when stroke-width is not specified)

INFO

Order of preference:

1. Direct styles
2. Class styles
3. Theme styles

Example on styling


Code:

mermaid

```
quadrantChart
  title Reach and engagement of campaigns
  x-axis Low Reach --> High Reach
  y-axis Low Engagement --> High Engagement
  quadrant-1 We should expand
  quadrant-2 Need to promote
  quadrant-3 Re-evaluate
  quadrant-4 May be improved
  Campaign A: [0.9, 0.0] radius: 12
  Campaign B:::class1 [0.8, 0.1] color: #ff3300, radius: 10
  Campaign C: [0.7, 0.2] radius: 25, color: #00ff33, stroke-color: #10f0f0
  Campaign D: [0.6, 0.3] radius: 15, stroke-color: #00ff0f, stroke-width:
  Campaign E:::class2 [0.5, 0.4]
  Campaign F:::class3 [0.4, 0.5] color: #0000ff
  classDef class1 color: #109060
  classDef class2 color: #908342, radius : 10, stroke-color: #310085, str
  classDef class3 color: #f00fff, radius : 10
```

⌘ + Enter | **Run** ▶

Reach and engagement of campaigns

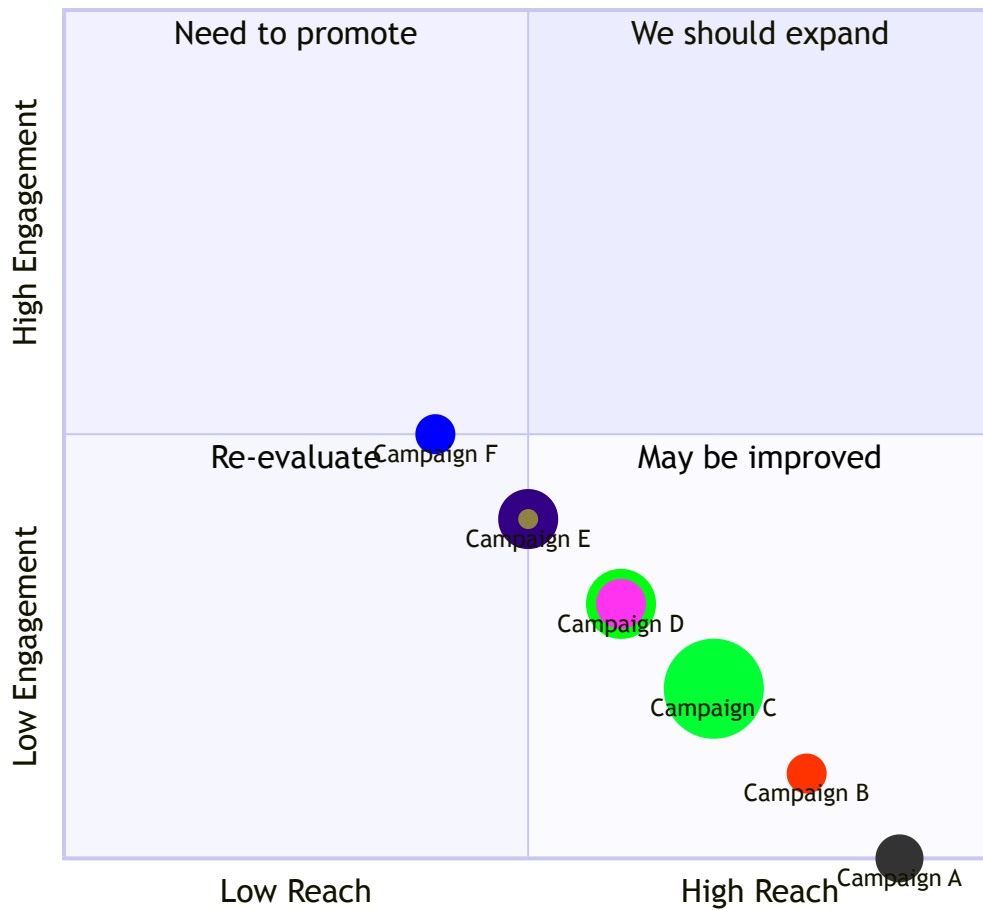

[Edit this page on GitHub](#)

Previous page

[Pie Chart](#)

Next page

[Requirement Diagram](#)