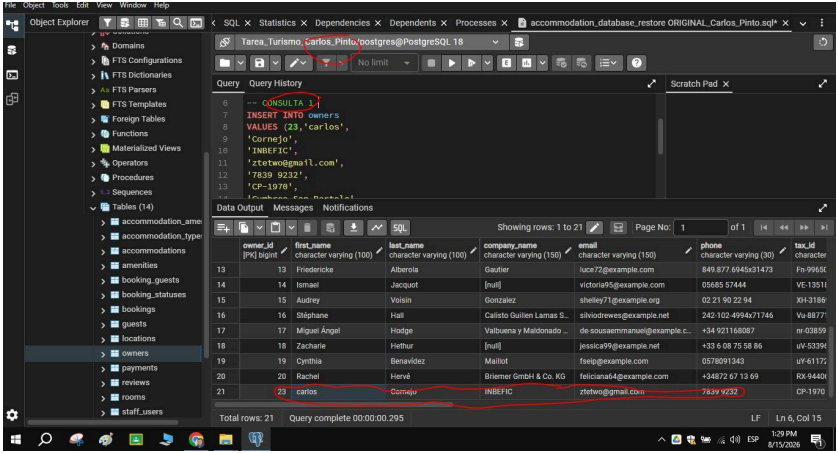
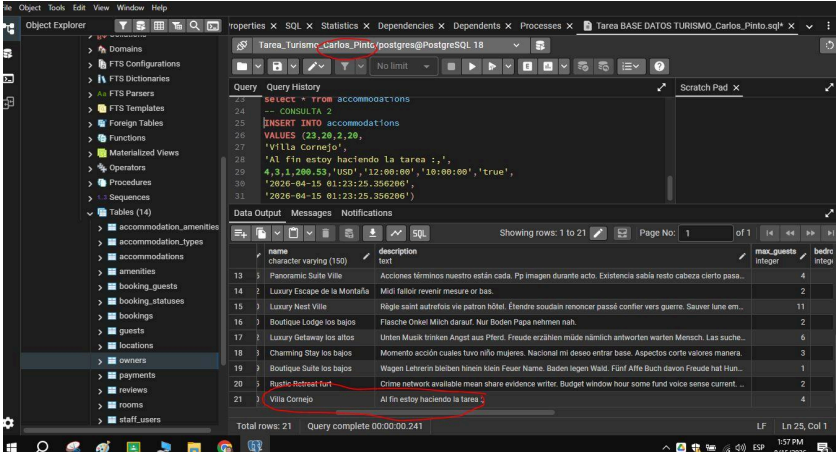
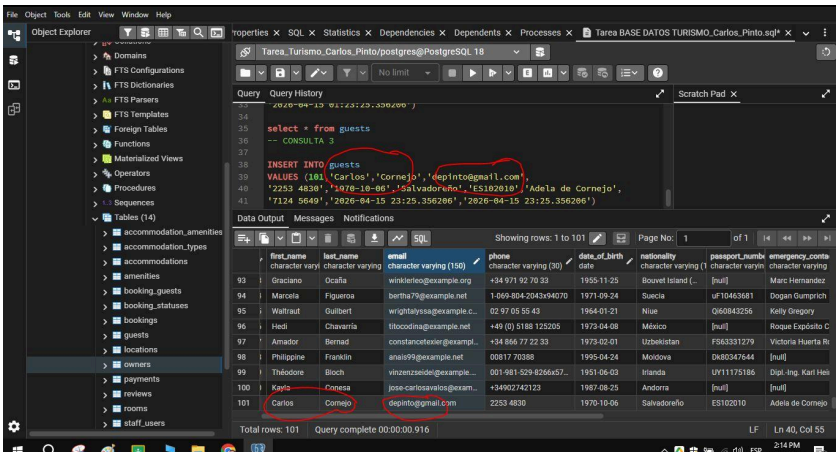
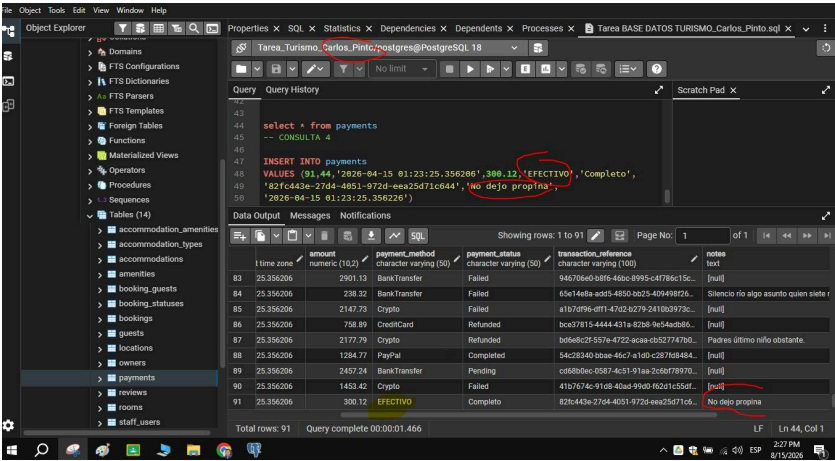
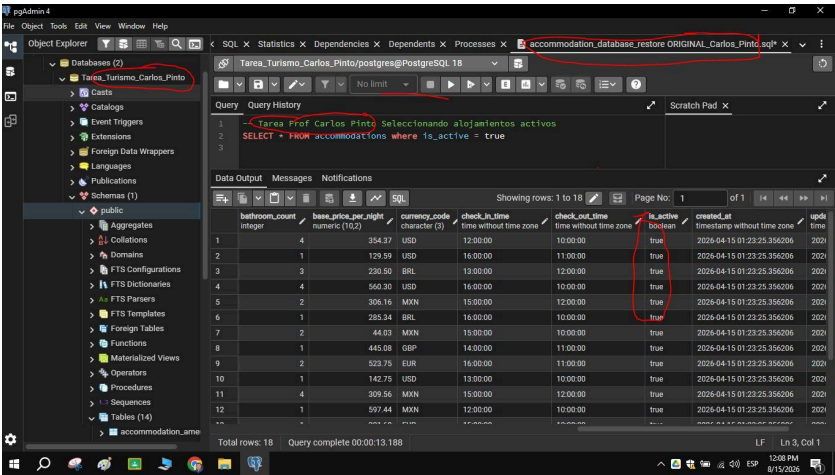
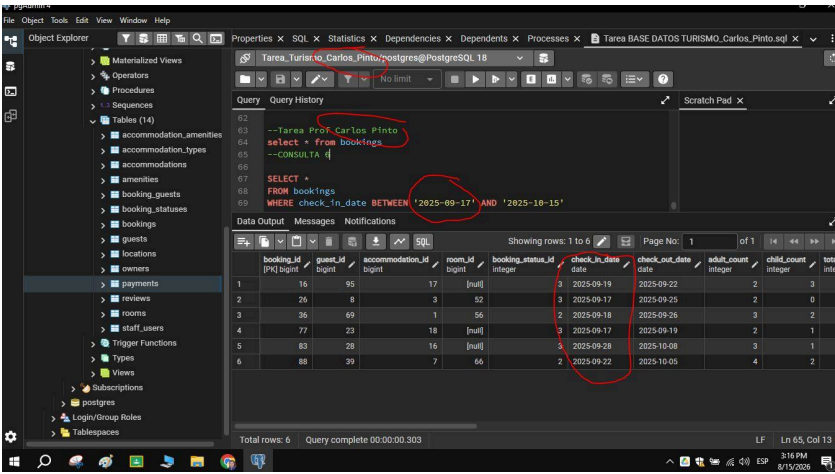
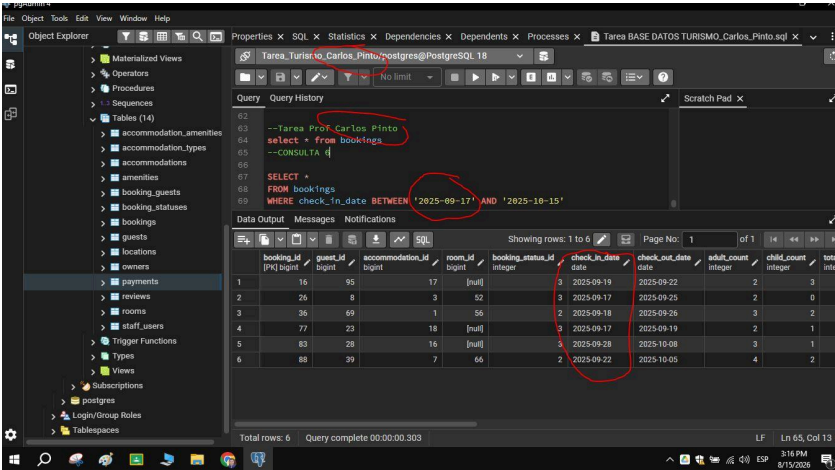
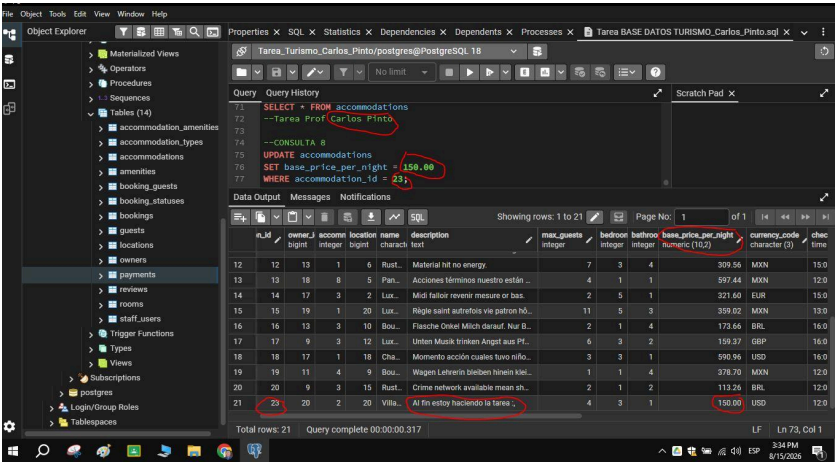
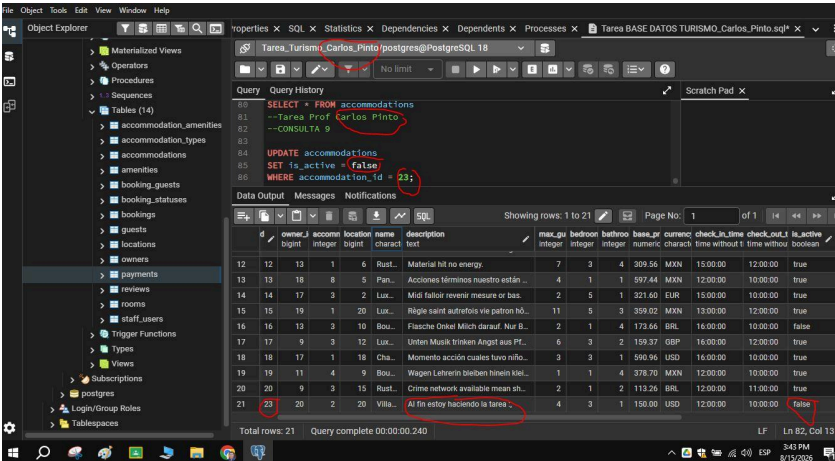





Script SQL con consultas CRUD y consultas JOIN funcionales sobre la base de datos existente.





Carlos Vladimir Cornejo Pinto



01	INSERT	Insertar propietario	Agregar un nuevo propietario	
02	INSERT	Insertar alojamiento	Crear alojamiento vinculado	
03	INSERT	Huésped y reserva	Registrar huésped y reserva	

04	INSERT	Insertar pago	Registrar pago	
05	SELECT	Alojamientos activos	Filtrar activos	
06	SELECT	Huéspedes por país	Filtrar por nacionalidad	

07	SELECT	Reservas por fechas	Uso de BETWEEN	
08	UPDATE	Actualizar precio	Modificar precio	
09	UPDATE	Estado reserva	Actualizar estado	

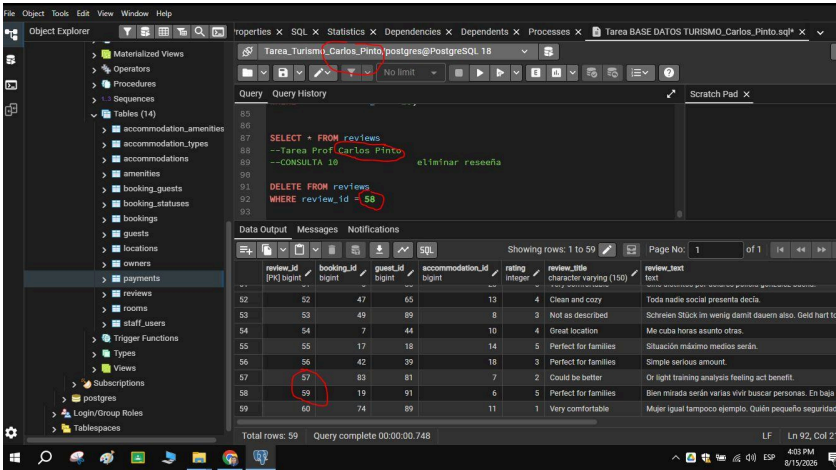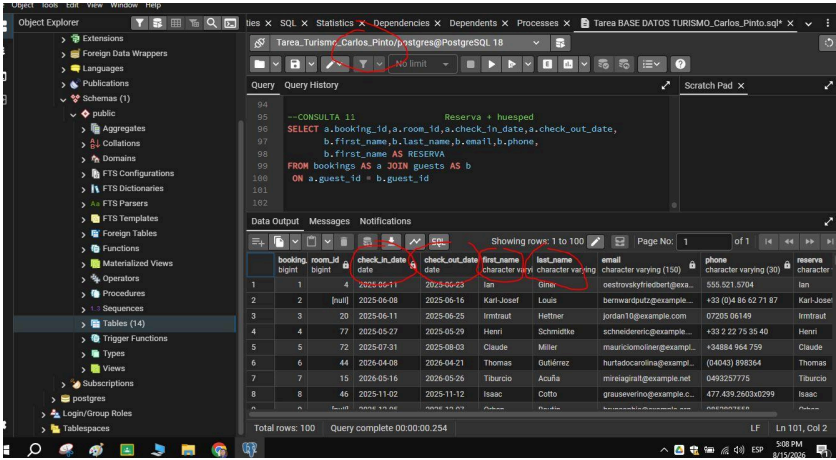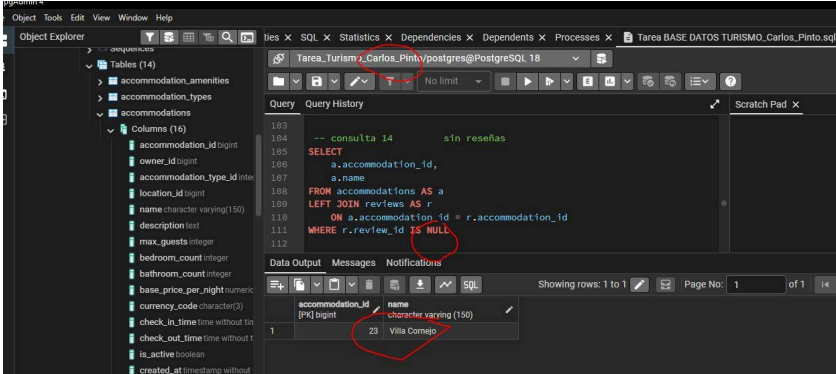10	DELETE	Eliminar reseña	DELETE WHERE	 The screenshot shows the PostgreSQL IDE with a query window containing the following SQL code: <pre>--Tarea Prof Carlos Pinto --CONSULTA 10 eliminar reseña DELETE FROM reviews WHERE review_id = 58</pre> The Data Output pane shows the results of the query, which is an empty table with columns: review_id, booking_id, guest_id, accommodation_id, rating, review_title, and review_text. The status bar indicates 'Total rows: 59' and 'Query complete 00:00:00.748'.
11	JOIN	Reservas + huésped	INNER JOIN	 The screenshot shows the PostgreSQL IDE with a query window containing the following SQL code: <pre>--CONSULTA 11 Reserva + huésped SELECT a.booking_id, a.room_id, a.check_in_date, a.check_out_date, b.first_name, b.last_name, b.email, b.phone, FROM bookings AS a JOIN guests AS b ON a.guest_id = b.guest_id</pre> The Data Output pane shows the results of the query, which is a table with columns: booking_id, room_id, check_in_date, check_out_date, first_name, last_name, email, phone, and reserva. The status bar indicates 'Total rows: 100' and 'Query complete 00:00:00.254'.
14	LEFT JOIN	Sin reseñas	Incluye nulls	 The screenshot shows the PostgreSQL IDE with a query window containing the following SQL code: <pre>-- consulta 14 sin reseñas SELECT a.accommodation_id, a.name FROM accommodations AS a LEFT JOIN reviews AS r ON a.accommodation_id = r.accommodation_id WHERE r.review_id IS NULL</pre> The Data Output pane shows the results of the query, which is a table with columns: accommodation_id and name. The status bar indicates 'Showing rows: 1 to 1' and 'Page No: 1 of 1'.

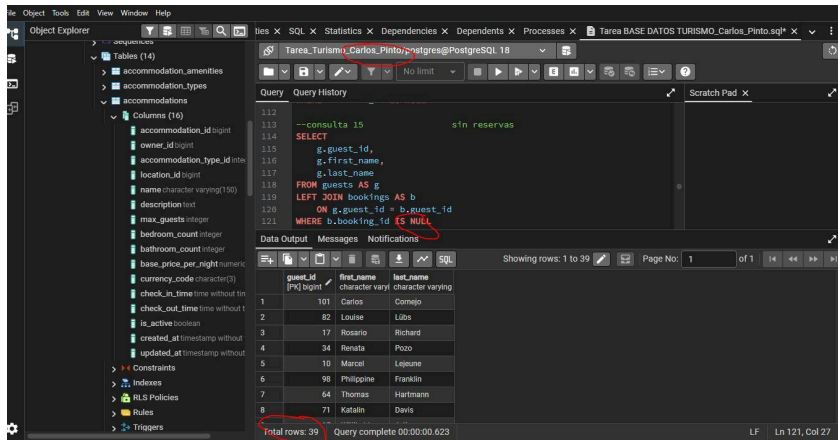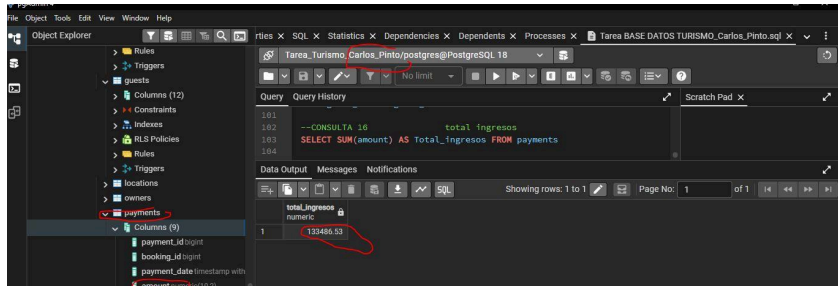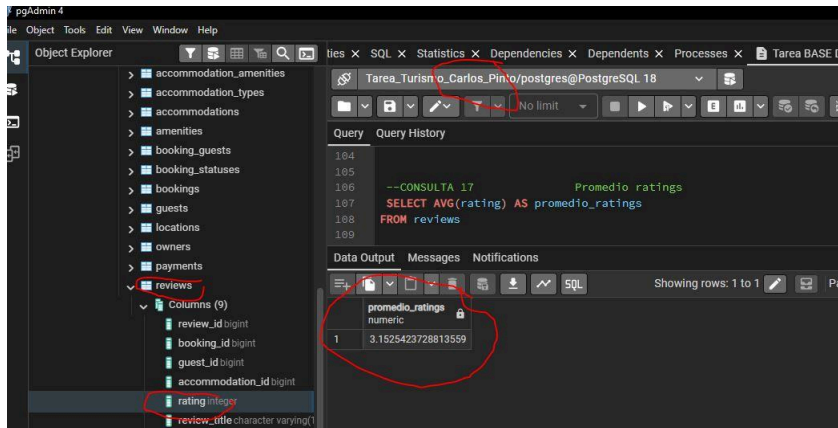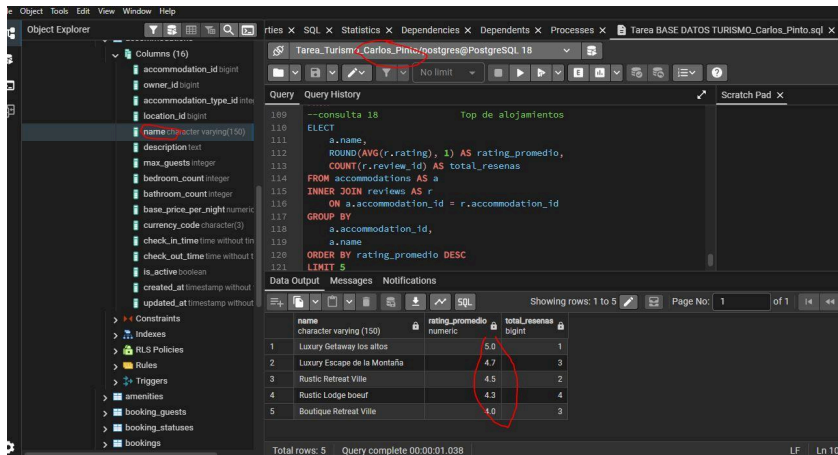15	LEFT JOIN	Sin reservas	Filtrar null	 <pre>--consulta 15 SELECT g.guest_id, g.first_name, g.last_name FROM guests AS g LEFT JOIN bookings AS b ON g.guest_id = b.guest_id WHERE b.booking_id IS NULL</pre> <table><thead><tr><th>guest_id</th><th>first_name</th><th>last_name</th></tr></thead><tbody><tr><td>101</td><td>Carlos</td><td>Comejo</td></tr><tr><td>82</td><td>Louise</td><td>Libre</td></tr><tr><td>17</td><td>Rosario</td><td>Richard</td></tr><tr><td>34</td><td>Renata</td><td>Pozo</td></tr><tr><td>10</td><td>Marcel</td><td>Lejeune</td></tr><tr><td>98</td><td>Philippe</td><td>Franklin</td></tr><tr><td>64</td><td>Thomas</td><td>Hartmann</td></tr><tr><td>71</td><td>Katelin</td><td>Davis</td></tr></tbody></table> Total rows: 39	guest_id	first_name	last_name	101	Carlos	Comejo	82	Louise	Libre	17	Rosario	Richard	34	Renata	Pozo	10	Marcel	Lejeune	98	Philippe	Franklin	64	Thomas	Hartmann	71	Katelin	Davis
guest_id	first_name	last_name																													
101	Carlos	Comejo																													
82	Louise	Libre																													
17	Rosario	Richard																													
34	Renata	Pozo																													
10	Marcel	Lejeune																													
98	Philippe	Franklin																													
64	Thomas	Hartmann																													
71	Katelin	Davis																													
16	AGG	Total ingresos	SUM	 <pre>--CONSULTA 16 SELECT SUM(amount) AS total_ingresos FROM payments</pre> <table><thead><tr><th>total_ingresos</th></tr></thead><tbody><tr><td>133486.53</td></tr></tbody></table>	total_ingresos	133486.53																									
total_ingresos																															
133486.53																															
17	AGG	Promedio rating	AVG	 <pre>--CONSULTA 17 SELECT AVG(rating) AS promedio_ratings FROM reviews</pre> <table><thead><tr><th>promedio_ratings</th></tr></thead><tbody><tr><td>3.1525423728813559</td></tr></tbody></table>	promedio_ratings	3.1525423728813559																									
promedio_ratings																															
3.1525423728813559																															
18	AGG	Top alojamientos	COUNT + LIMIT	 <pre>--consulta 18 SELECT a.name, ROUND(AVG(r.rating), 1) AS rating_promedio, COUNT(r.review_id) AS total_resenas FROM accommodations AS a INNER JOIN reviews AS r ON a.accommodation_id = r.accommodation_id GROUP BY a.accommodation_id, a.name ORDER BY rating_promedio DESC LIMIT 5</pre> <table><thead><tr><th>name</th><th>rating_promedio</th><th>total_resenas</th></tr></thead><tbody><tr><td>Luxury Getaway los altos</td><td>5.0</td><td>1</td></tr><tr><td>Luxury Escape de la Montaña</td><td>4.7</td><td>3</td></tr><tr><td>Rustic Retreat Ville</td><td>4.5</td><td>2</td></tr><tr><td>Rustic Lodge boeuf</td><td>4.3</td><td>4</td></tr><tr><td>Boulique Retreat Ville</td><td>4.0</td><td>3</td></tr></tbody></table> Total rows: 5	name	rating_promedio	total_resenas	Luxury Getaway los altos	5.0	1	Luxury Escape de la Montaña	4.7	3	Rustic Retreat Ville	4.5	2	Rustic Lodge boeuf	4.3	4	Boulique Retreat Ville	4.0	3									
name	rating_promedio	total_resenas																													
Luxury Getaway los altos	5.0	1																													
Luxury Escape de la Montaña	4.7	3																													
Rustic Retreat Ville	4.5	2																													
Rustic Lodge boeuf	4.3	4																													
Boulique Retreat Ville	4.0	3																													

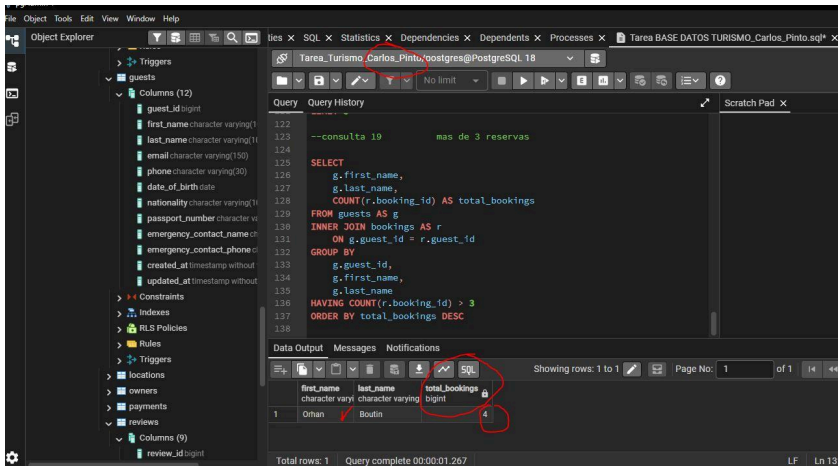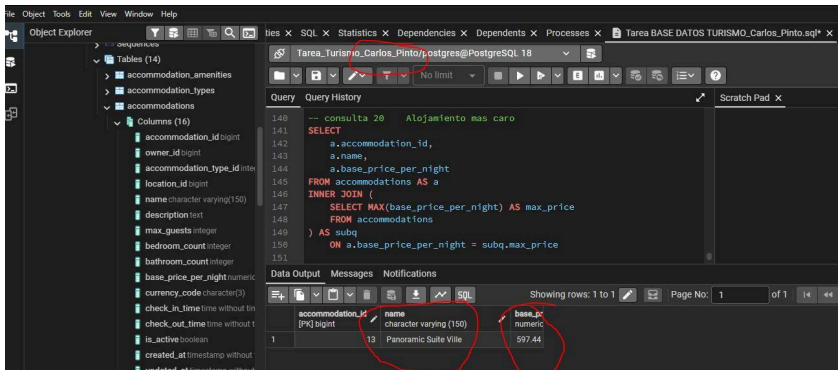19	HAVING	Más de 3 reservas	GROUP BY + HAVING	 <pre>-- consulta 19 mas de 3 reservas SELECT g.first_name, g.last_name, COUNT(r.booking_id) AS total_bookings FROM guests AS g INNER JOIN bookings AS r ON g.guest_id = r.guest_id GROUP BY g.guest_id, g.first_name, g.last_name HAVING COUNT(r.booking_id) > 3 ORDER BY total_bookings DESC</pre> <table><tr><th>first_name</th><th>last_name</th><th>total_bookings</th></tr><tr><td>Orhan</td><td>Boutin</td><td>4</td></tr></table>	first_name	last_name	total_bookings	Orhan	Boutin	4
first_name	last_name	total_bookings								
Orhan	Boutin	4								
20	Subconsulta	Alojamiento más caro	Subquery	 <pre>-- consulta 20 Alojamiento mas caro SELECT a.accommodation_id, a.name, a.base_price_per_night FROM accommodations AS a INNER JOIN (SELECT MAX(base_price_per_night) AS max_price FROM accommodations) AS subq ON a.base_price_per_night = subq.max_price</pre> <table><tr><th>accommodation_id</th><th>name</th><th>base_price_per_night</th></tr><tr><td>13</td><td>Panoramic Suite Villa</td><td>597.44</td></tr></table>	accommodation_id	name	base_price_per_night	13	Panoramic Suite Villa	597.44
accommodation_id	name	base_price_per_night								
13	Panoramic Suite Villa	597.44								