


In this problem we will be considering a game played with four wheels. Digits ranging from 0 to 9 are printed consecutively (clockwise) on the periphery of each wheel. The topmost digits of the wheels form a four-digit integer. For example, in the following figure the wheels form the integer 8056. Each wheel has two buttons associated with it. Pressing the button marked with a *left arrow* rotates the wheel one digit in the clockwise direction and pressing the one marked with the *right arrow* rotates it by one digit in the opposite direction.

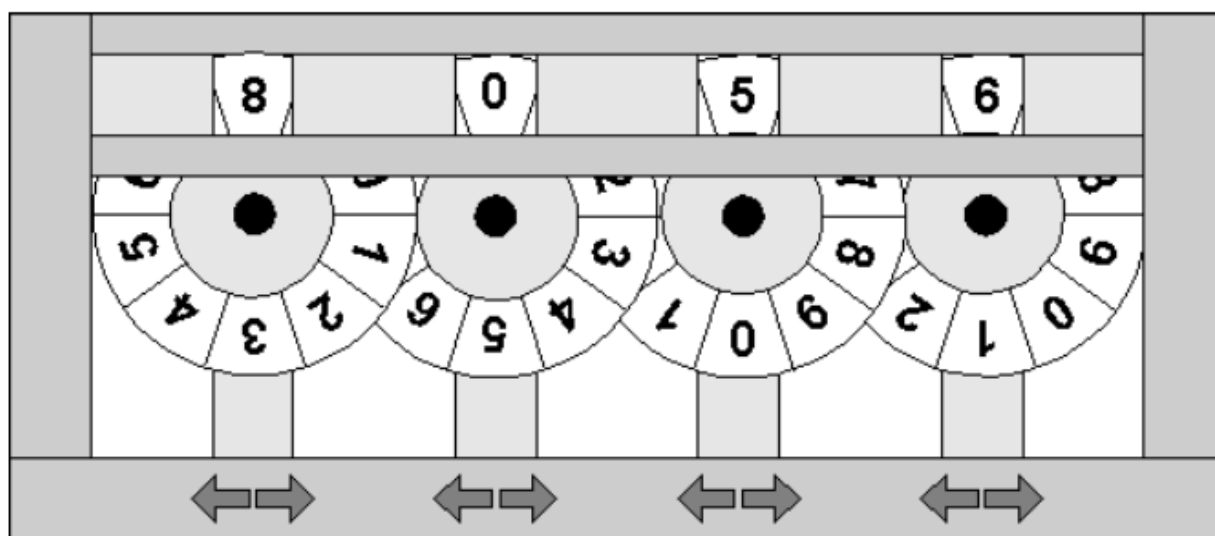

The game starts with an initial configuration of the wheels. Say, in the initial configuration the topmost digits form the integer $S_1S_2S_3S_4$. You will be given some (say, n) forbidden configurations $F_{i_1}F_{i_2}F_{i_3}F_{i_4}$ ($1 \leq i \leq n$) and a target configuration $T_1T_2T_3T_4$. Your job will be to write a program that can calculate the minimum number of button presses required to transform the initial configuration to the target configuration by never passing through a forbidden one.

Input

The first line of the input contains an integer N giving the number of test cases to follow.

The first line of each test case contains the initial configuration of the wheels specified by 4 digits. Two consecutive digits are separated by a space. The next line contains the target configuration. The third line contains an integer n giving the number of forbidden configurations. Each of the following n lines contains a forbidden configuration. There is a blank line between two consecutive input sets.

Output

For each test case in the input print a line containing the minimum number of button presses required. If the target configuration is not reachable then print '-1'.

Sample Input

```
2
8 0 5 6
6 5 0 8
5
8 0 5 7
8 0 4 7
5 5 0 8
7 5 0 8
- - - -
```

6 4 0 8

0 0 0 0

5 3 1 7

8

0 0 0 1

0 0 0 9

0 0 1 0

0 0 9 0

0 1 0 0

0 9 0 0

1 0 0 0

9 0 0 0

Sample Output

14

-1