FamilyNexus test report – run 16

Test plan TP-FN-001 v1.8 @ dddf22d · macOS (G1) + iPhone 17 simulator, iOS 27.0 (G2) · run of 30 October 2026, 17:35–19:25 · date part “1030b” · app 1.2.1 (22) from `main` @ dddf22d

108	6	7	0	2	123
passed	with finding	not run	failed	n/a	steps in plan

Overall verdict: executed in full, with reservations. All sections V to H of plan v1.8 were run with build 1.2.1 (22) on macOS (G1, TestFlight build) and the iPhone 17 simulator (G2), with new accounts (N1 `fnt-1030b-n1`, N2 `fnt-1030b-n12`, I2 `fnt-1030b-i2`) and the two-user steps of section E before deleting in F. No step failed. Only steps that need an action by the device owner or a real person remain open (B-17 system password / device passcode, H-02 Mac container, H-19, G-04, G-06, G-07, D-07). All three throw-away accounts are deleted at the end. The fix for #103 (V-04/A-03: “Willkommen” instead of “Konto erstellen” after an invitation link) is confirmed; #57, #59, #63, #64, #66, #68, #75 (rejection after about 5 s), #76, #77, #98 and #60 passed again. 7 findings / notes (below), none of them an encryption failure.

Platform and system (plan section 2)

Item	G1 (device 1)	G2 (device 2)
Platform	macOS	iOS (iPhone 17 simulator)
Device / simulator	MacBook, app window 800 × 860 pt	iPhone 17 in Device Hub (Xcode 27), UDID B79C8B8B…
Operating system	macOS 27.2 (Darwin 27.2.0)	iOS 27.0
Installation source	TestFlight build, distribution signature “TestFlight Beta Distribution”	Simulator build from main @ dddf22d (debug)
App version target / actual	1.2.1 (22) / 1.2.1 (22)	1.2.1 (22) / 1.2.1 (22)
Device language, screen lock	German / yes (system password, Touch ID)	German / yes (simulator passcode, unknown)
Screenshot method	`screencapture -R` on the app window	`xcrun simctl io <UDID> screenshot`
Tester / start	Claude Code (automated: mouse events, keyboard, `simctl`, `curl`) / 30 Oct 2026, 17:35	same

Deviations: The plan prescribes G1 = iPhone and G2 = Mac for the Apple submission; as requested, the role assignment is G1 = Mac, G2 = iPhone simulator (plan section 2: “all steps apply unchanged”). The simulator is not a real iPhone: screen protection, app lock with device passcode, system notifications and the rejection time (#75) are only of limited significance there. The app’s Mac container is protected by macOS, so the file checks of H-02 to H-04 and H-18 were done on the simulator. Umlauts and “ß” were entered in substitute spelling on the simulator. The screensaver was suppressed for the run with `caffeinate -dimsu`; no system settings were changed. Passwords and emergency keys are masked in the images. UI texts are quoted as shown in the (German-language) app.

Findings and notes

No.	Severity	Step	Description
1	Low	H-18	After “Alle lokalen Daten löschen” (Mac) the keychain entry `fn.key.db.matrix` remains with its old creation date; `fn.key.db.app` is re-created after the restart. The plan’s expectation (both entries deleted) is not met. On the iOS simulator new empty database files are created immediately after deletion.
2	Info	H-12	The family name is stored as the room name (`m.room.name`) in plaintext on the server (also “FamilyNexus” as the name of the private room). The privacy policy does not state this explicitly (only “metadata such as account ID, timestamps, room size, devices”).
3	Info	B-21	The display name “Test N1” is missing in the local log (the plan expects it); the online log contains it.
4	Info	E-16	The “Ungelesene Nachrichten” counter before opening the chat was not measured (#65 open).
5	Info	B-17, B-18, H-02, H-05, H-19	Limits of automation: system password / Touch ID (B-17), simulator passcode (B-17), protected Mac container (H-02), value of the keychain entry (only metadata read), H-19 only by the device owner. Screen protection (B-18) does not exist on Apple devices.
6	Info	F-07	The server rate-limits repeated sign-in attempts (`M_LIMIT_EXCEEDED`); the counter-checks for N2/I2 rely on the earlier 403 responses from F-02 and E-32.

No.	Severity	Step	Description
7	Info	all iOS steps	The simulator was operated only through mouse events and key codes (German layout); text with umlauts and “ß” was entered in substitute spelling (e.g. “Loeschtest 1030”, “Kaese”, “zurueck”); pasting from the clipboard in the simulator worked only partially (Annex D).

Issue re-tests

Issue	Step	Result	Observation
#103	V-04, A-03	passed	After the restart “Willkommen”; “Neue Familie gründen” → “Dein Konto liegt bei matrix.org.” (both devices)
#75	D-02	passed (simulator)	Rejection of the join request after about 5 s (target ≤ 20 s); real iPhone not tested
#57	B-02, B-10	passed	iOS: system dialog “Erlauben”; Mac: reminder arrived (system notification without title/place)
#59, #76, #77, #98, #60	E-07, E-12, E-23, E-18, F-05, E-32	passed	Opening links, “Du bist bereits in einer Familie.”, “Mo–Fr”, direct chat visible at once, “Ehemaliges Mitglied” instead of Matrix ID
#63, #64, #66, #68	B-08, B-05, E-05, E-02/B-14	passed	Time updated immediately after saving, keyboard entry 21, Enter saves in dialogs

Detailed results with screenshots

Preparation

V-01 Determine target version · –

PASSED

Observed: `main` = `origin/main` @ dddf22d; `pubspec.yaml`: 1.2.1+22 (target 1.2.1 (22)).

V-02 Check installed version · G1, G2

PASSED

Observed: G1 `/Applications/FamilyNexus.app`: 1.2.1, CFBundleVersion 22, signature “TestFlight Beta Distribution”; G2 `simctl listapps`: 1.2.1, CFBundleVersion 22 (simulator build from `main`).

V-03 Install latest version · G1, G2


PASSED

Observed: No reinstall needed (actual = target on both devices).


V-04 Clear local data · G1, G2

PASSED

Observed: G1: app quit and restarted → “Willkommen” with three paths and language choice (no remnant of an earlier invitation link; #103 fixed). G2: app restarted → “Willkommen”.

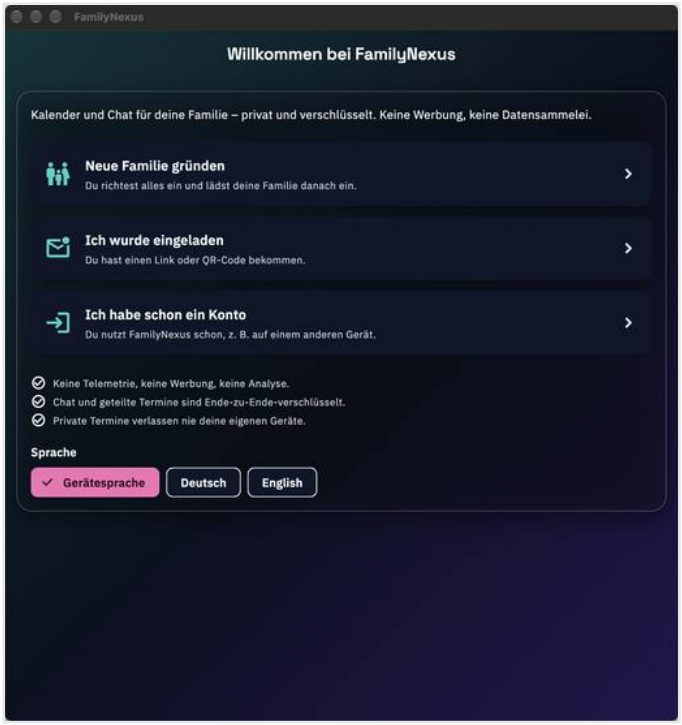

V-04-G1

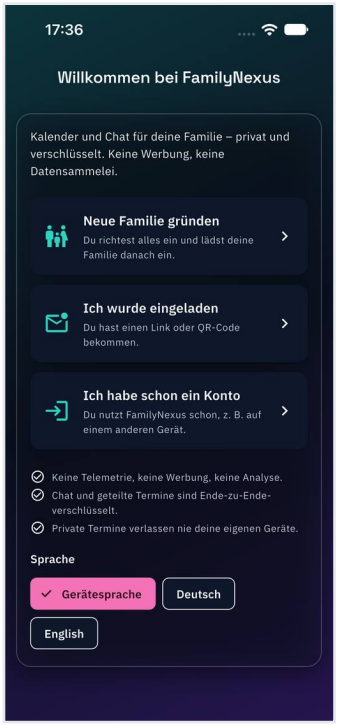

V-04-G2

V-05 Check server · –

PASSED

Observed: `versions` returns JSON; `register` returns `flows` with `m.login.dummy` (registration open).

V-06 Usernames free · –

WITH FINDING

Observed: `fnt-1030-n1/-n12/-i2` were taken by run 14 (`M_USER_IN_USE`); date part `1030b`: all four names free and used.

V-07 Note system settings · G1, G2

PASSED


Observed: Device language German (both). Mac: screen lock present (system password / Touch ID), app notifications already allowed. iOS simulator: device-code prompt present (code unknown to the tester), notifications not allowed beforehand. Screensaver and sleep suppressed with `caffeinate -dimsu` (no system setting changed).

A – Start and account creation


A-01 View start page · G1

PASSED

Observed: Start page of both devices as expected.

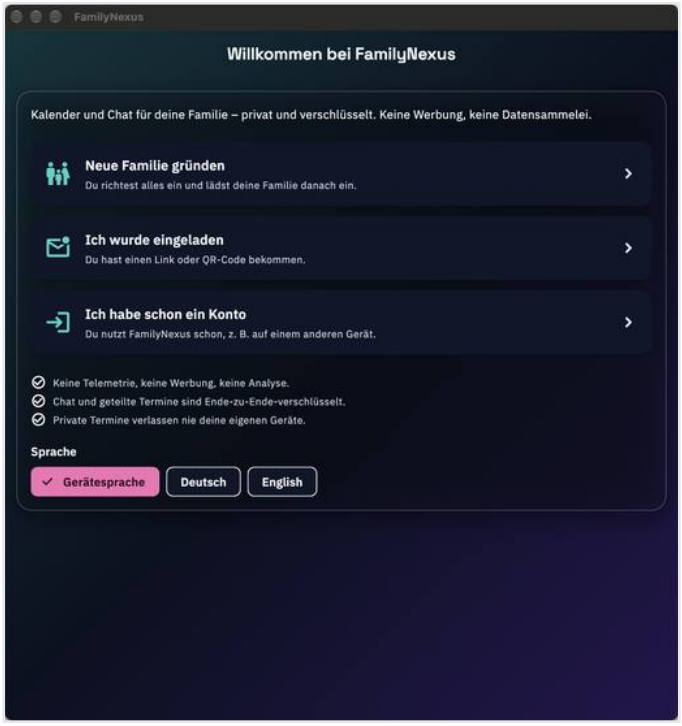

A-01-G1

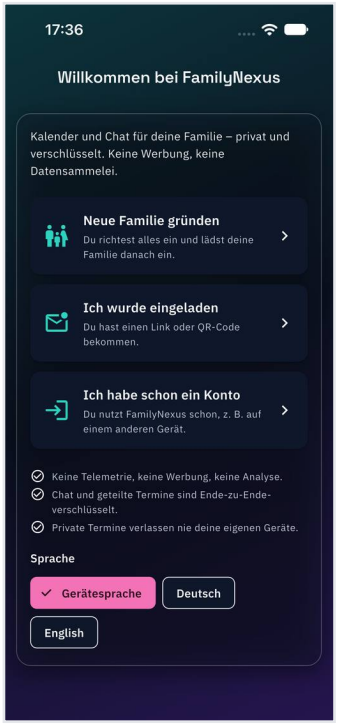


A-01-G2


A-02 Switch language English / German · G1

PASSED


Observed: English/German switch immediately (both).

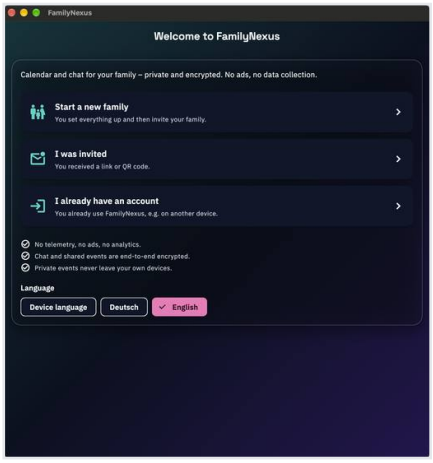


A-02a-G1

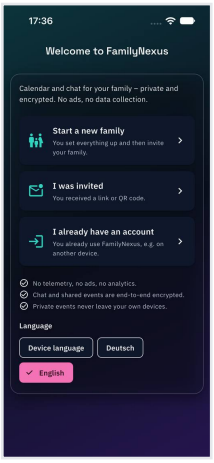

A-02a-G2

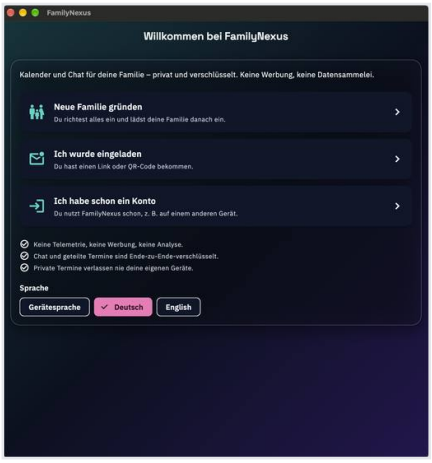

A-02b-G1

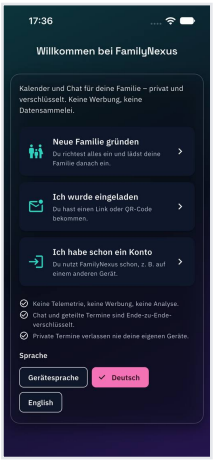


A-02b-G2


A-03 New family, keep provider · G1

PASSED

Observed: “Bei matrix.org legst du dein Konto …”, “Dein Konto liegt bei matrix.org.”; button not tapped (both).

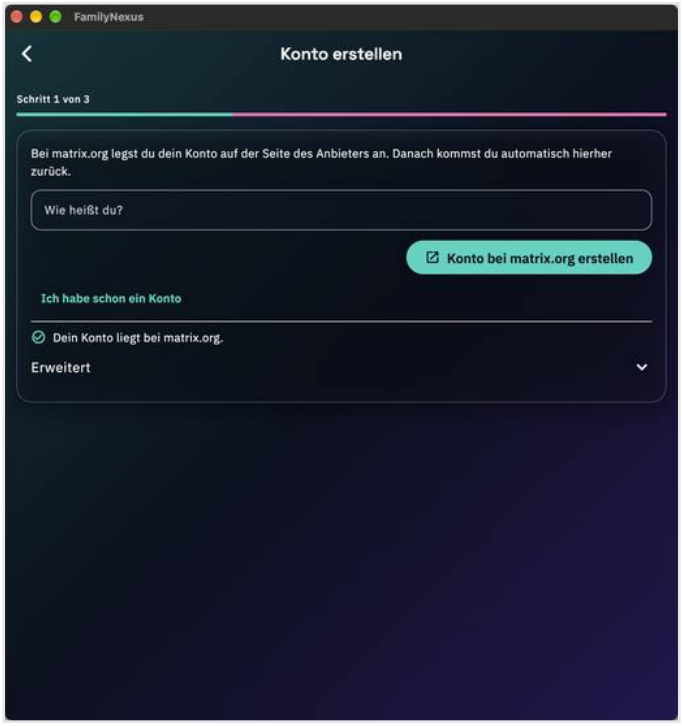

A-03-G1

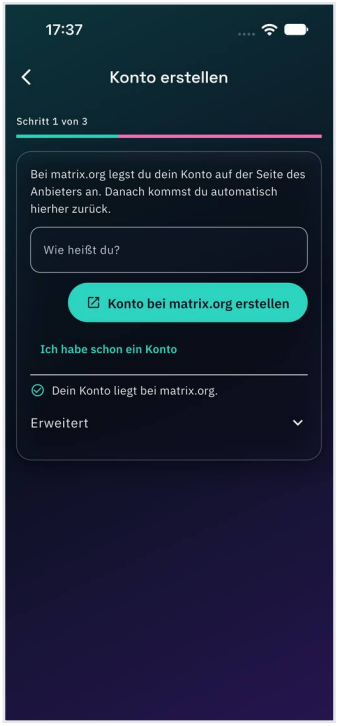


A-03-G2


A-04 Unreachable provider address · G1

PASSED

Observed: “nicht-vorhanden.invalid ist gerade nicht erreichbar. Prüfe deine Internetverbindung.” + “Erneut versuchen” (both); iOS text entry only via key codes (German layout).

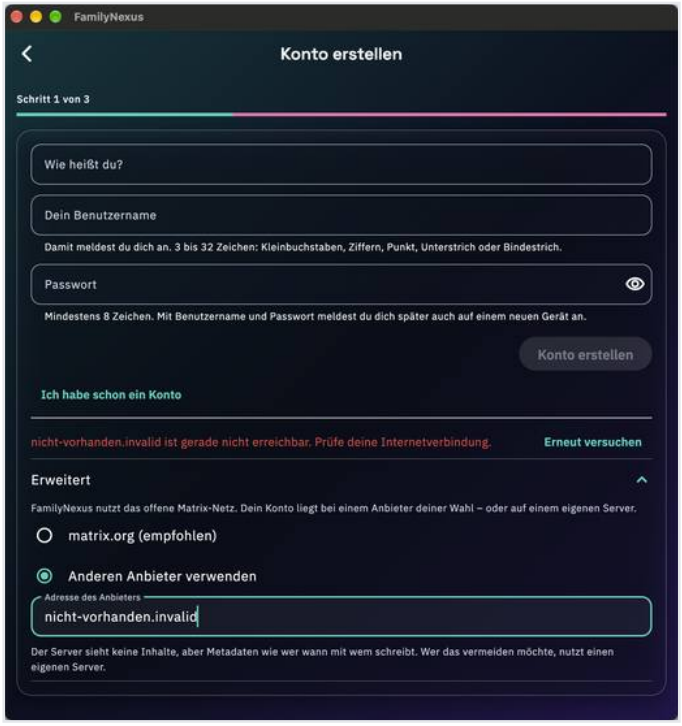

A-04-G1

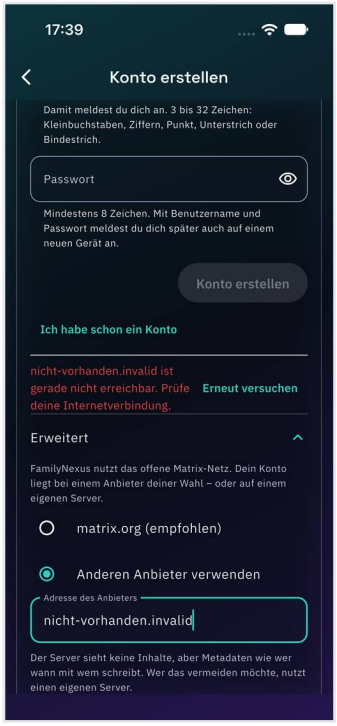


A-04-G2

A-05 Switch to test provider · G1

PASSED

Observed: “Dein Konto liegt bei matrix-synapse-3ues…”, operator/contact, metadata note, fields, “Konto erstellen” greyed out (both).

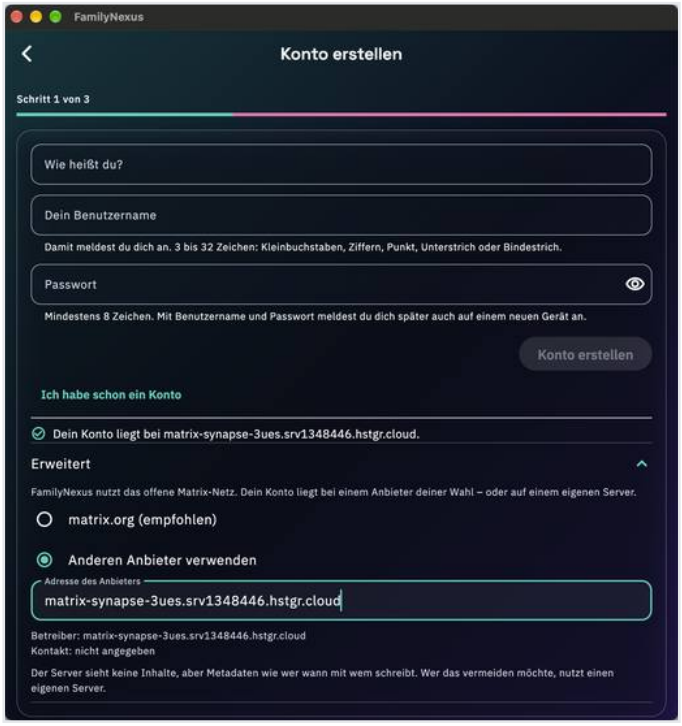

A-05-G1




A-05-G2

A-06 Username suggestion · G1

PASSED

Observed: “Jörg Müßig” → username `joerg.muessig`, after a short pause “Der Benutzername ist frei.” (G1).

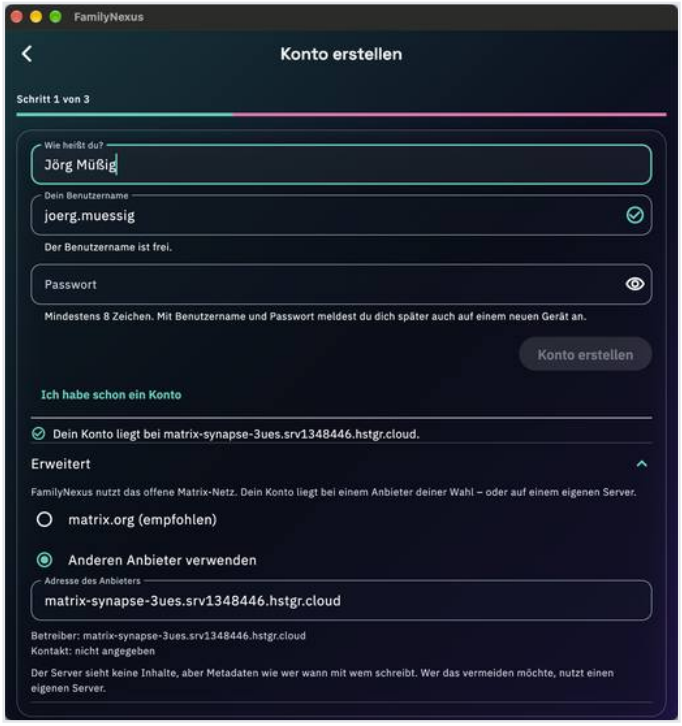


A-06-G1


A-07 Invalid usernames · G1

PASSED


Observed: All six inputs show “Bitte 3 bis 32 Zeichen …”, “Konto erstellen” greyed out (A-07a to f).




A-07a-G1




A-07b-G1




A-07c-G1



A-07d-G1

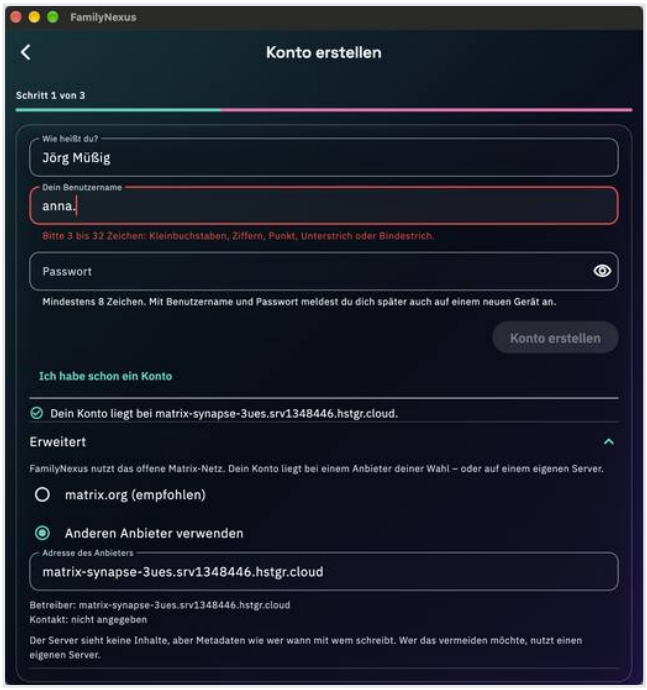

A-07e-G1

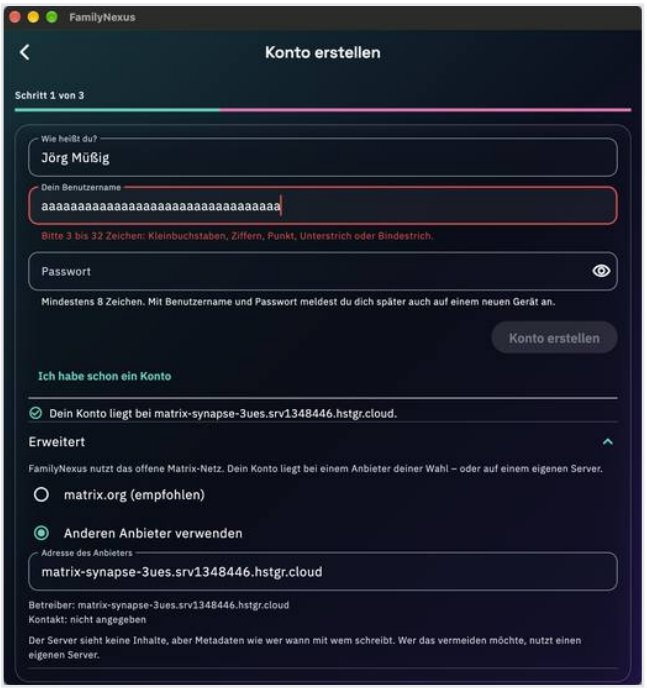


A-07f-G1


A-08 Username, password rules, show password · G1

PASSED


Observed: Username stays `fnt-1030b-n1` (not overwritten); 7 characters greyed out, active from 8; eye icon works; empty name: greyed out. Password masked in the images.




A-08a-G1



A-08b-G1



A-08c-G1




A-08d-G1

A-09 Create N1 · G1

PASSED

Observed: N1 `fnt-1030b-n1` created, no extra step, “Dein Notfall-Schlüssel”, “Schritt 2 von 3”.

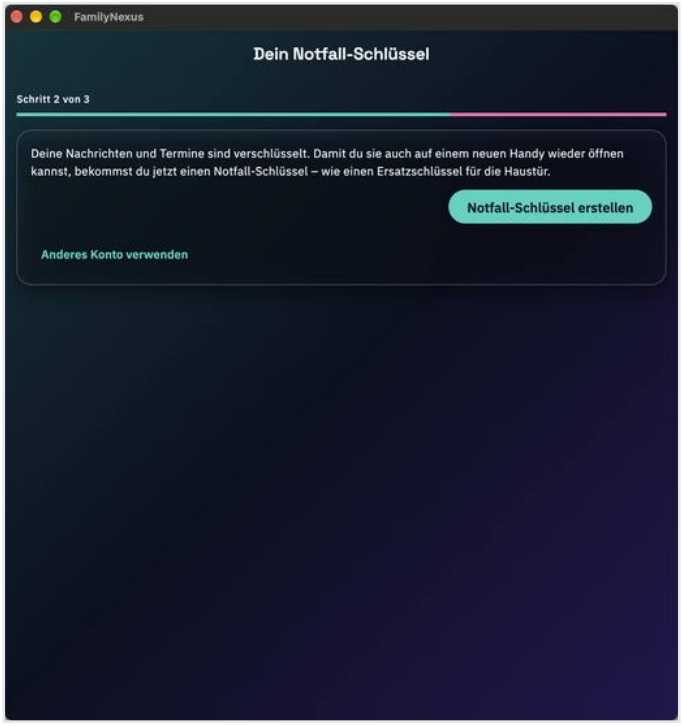


A-09a-G1


A-10 Create emergency key, copy, save as file · G1

PASSED


Observed: Key stays visible after 20 s (#10); copy; “Als Datei speichern” (home folder, file with account, provider, date, key); “Weiter” only active after the checkbox (KN1 stored).




A-10a-G1




A-10b-G1




A-10c-G1



A-10d-G1

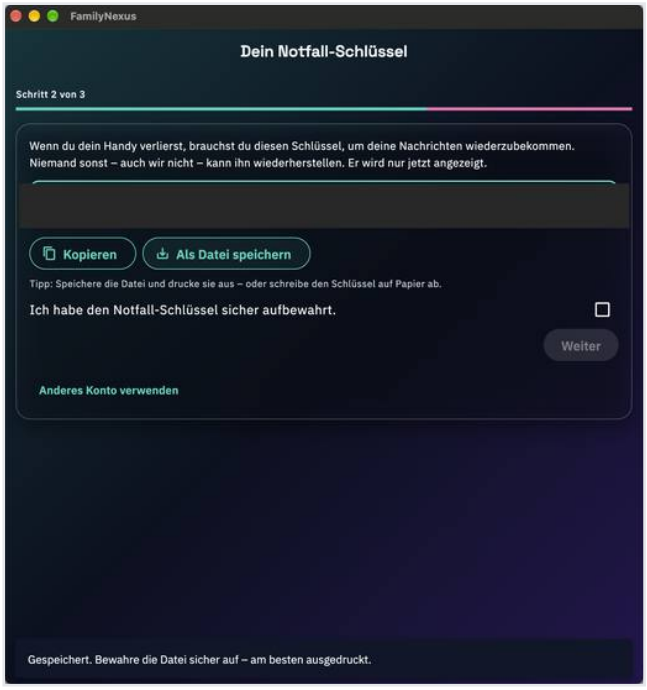

A-10e-G1

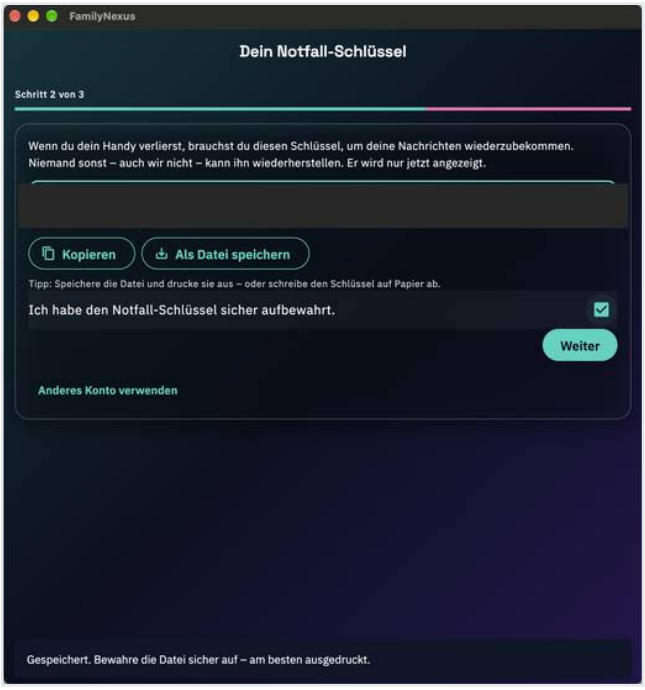


A-10f-G1


A-11 Family name · G1

PASSED

Observed: “Fertig! „Testfamilie 1030“ ist eingerichtet.” with “Später” and “Jetzt einladen”; date part of the accounts: 1030b.

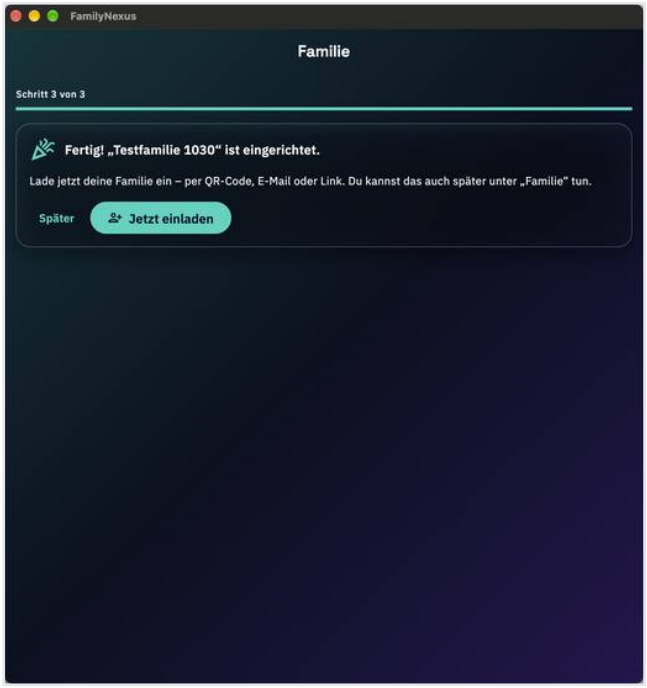

A-11-G1

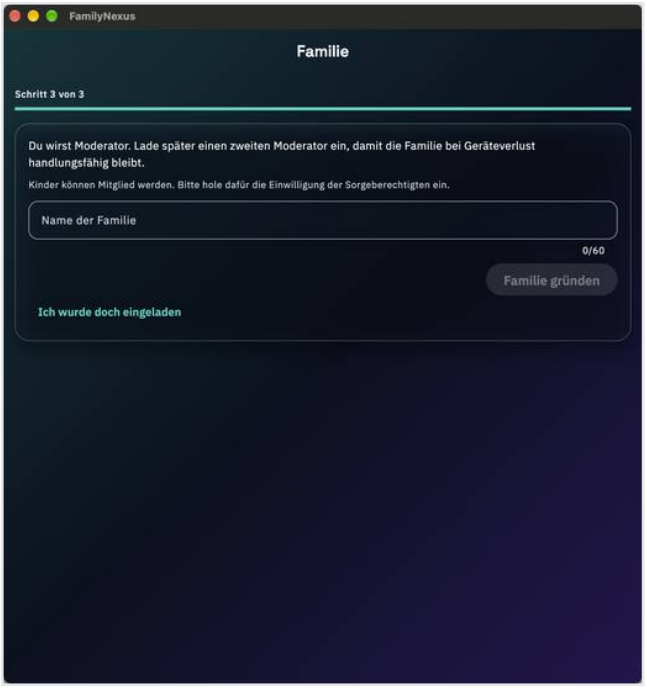


A-11pre-G1

A-12 “Später” (later) · G1

PASSED

Observed: “Später” → main view “Heute”.

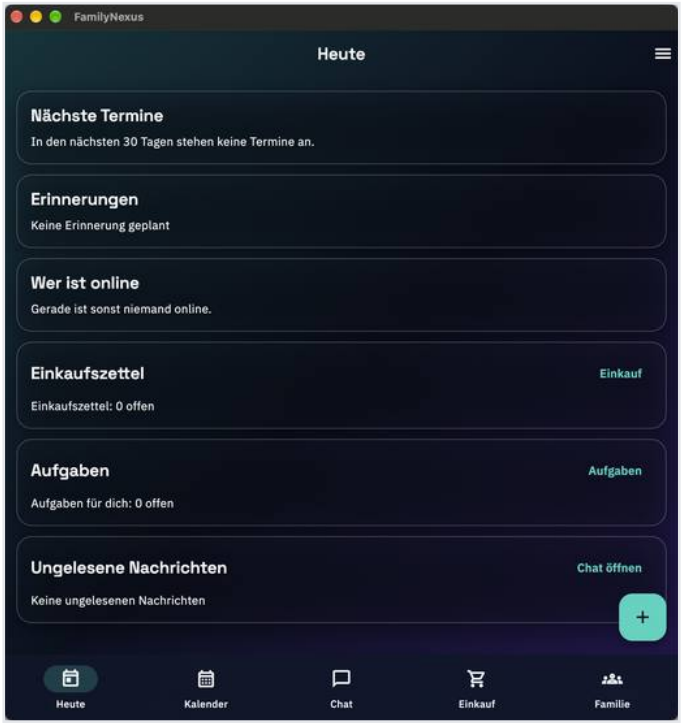


A-12-G1

B – Main functions with one user


B-01 Home view “Heute” · G1

PASSED


Observed: Tiles and navigation as expected (Heute, Kalender, Chat, Einkauf, Familie; menu; new event).

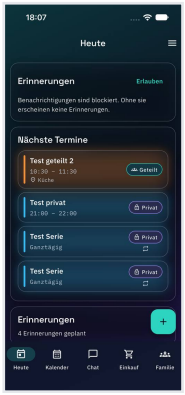


B-01-G2

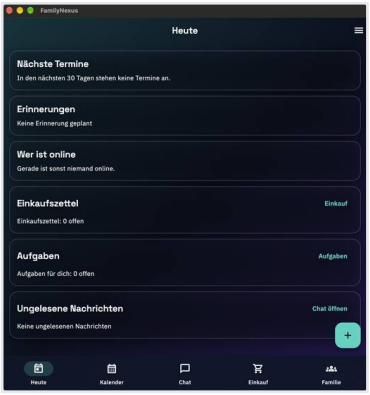

B-01a-G1

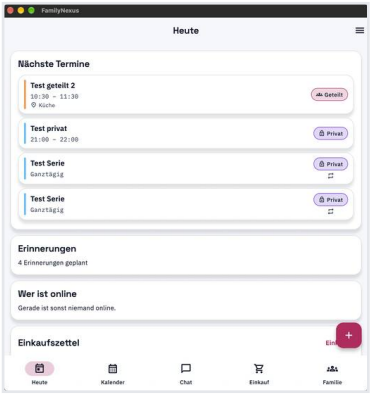

B-01b-G1

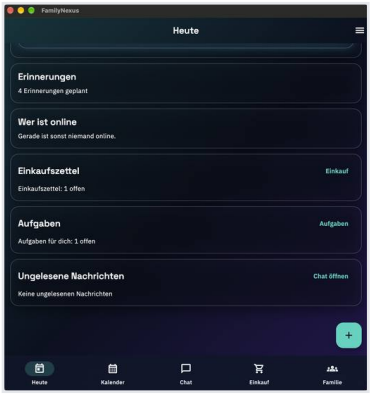


B-01c-G1


B-02 Notification hint and permission · G1

PASSED


Observed: G2 (iOS): hint “Benachrichtigungen sind blockiert. …” → “Erlauben” → system dialog → “Erlauben”; hint gone. G1 (Mac): no hint, permission already granted in an earlier run (reminder arrived, B-10).

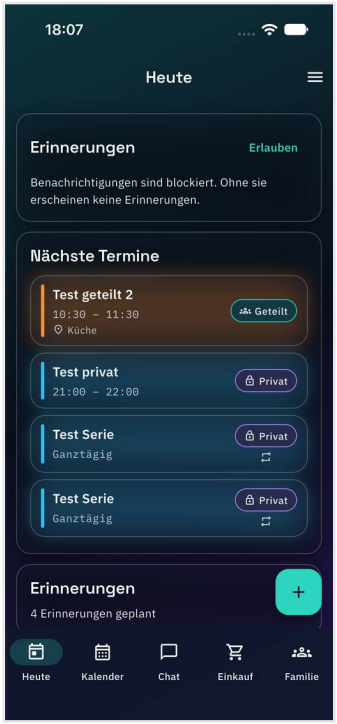

B-02a-G2

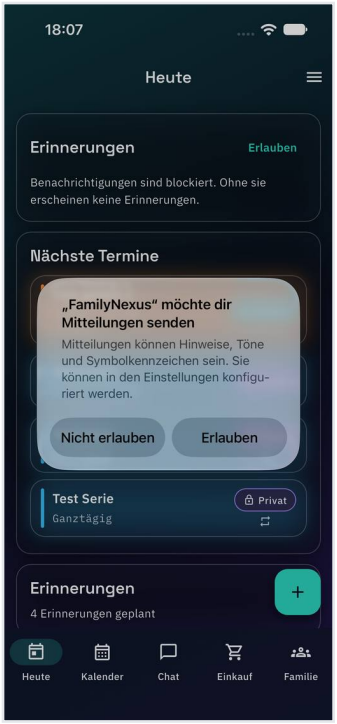

B-02b-G2

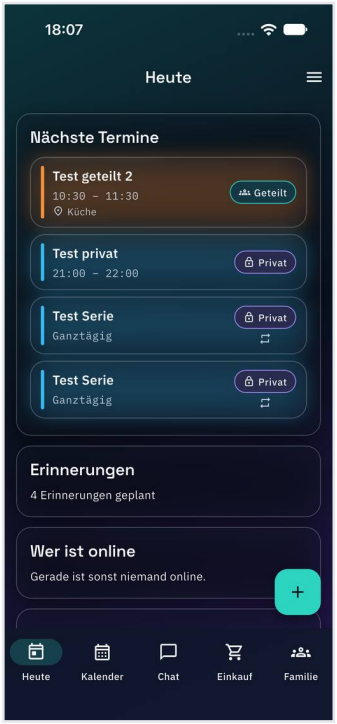


B-02c-G2


B-03 Calendar: shared event · G1

PASSED


Observed: Visibility initially “Privat”; at “Geteilt”: “Verschlüsselt an die Familie gesendet. …”; event 10:00–11:00 with “Geteilt”, place, note, colour orange.

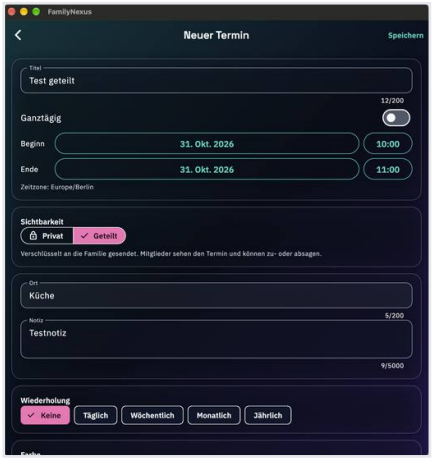

B-03a-G1

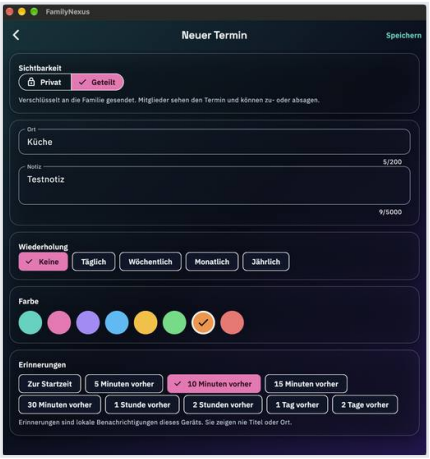

B-03b-G1

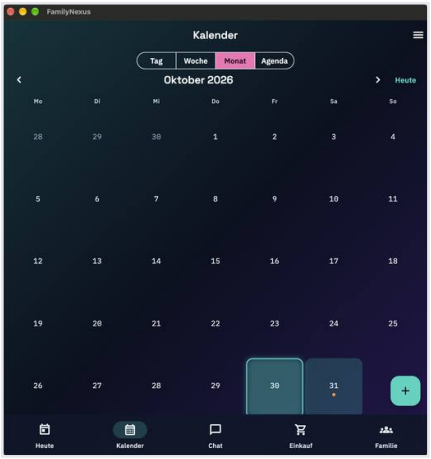


B-03c-G1


B-04 Required fields · G1

PASSED


Observed: “Bitte einen Titel eingeben.”; “Das Ende muss nach dem Beginn liegen.” also when end = start (#56); back without saving: nothing saved.




B-04a-G1



B-04b-G1



B-04c-G1




B-04d-G1

B-05 Private event · G1

PASSED

Observed: Keyboard entry 21 accepted; end moves to 22:00; event “Privat”.

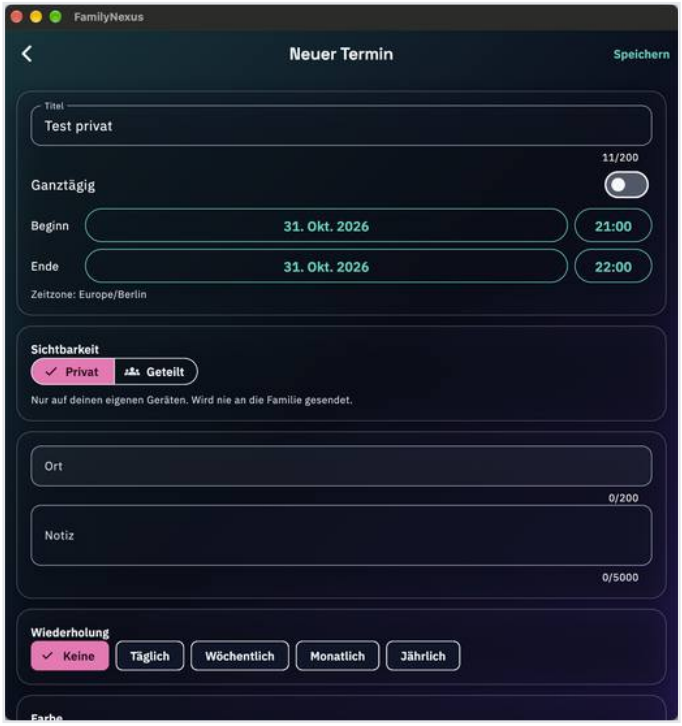


B-05-G1


B-06 All-day event and recurrence · G1

PASSED

Observed: All-day, weekly, ending after 3: three occurrences (1, 8, 15 Nov) marked “Wiederholt” (operator error on the first attempt; series deleted and recreated).

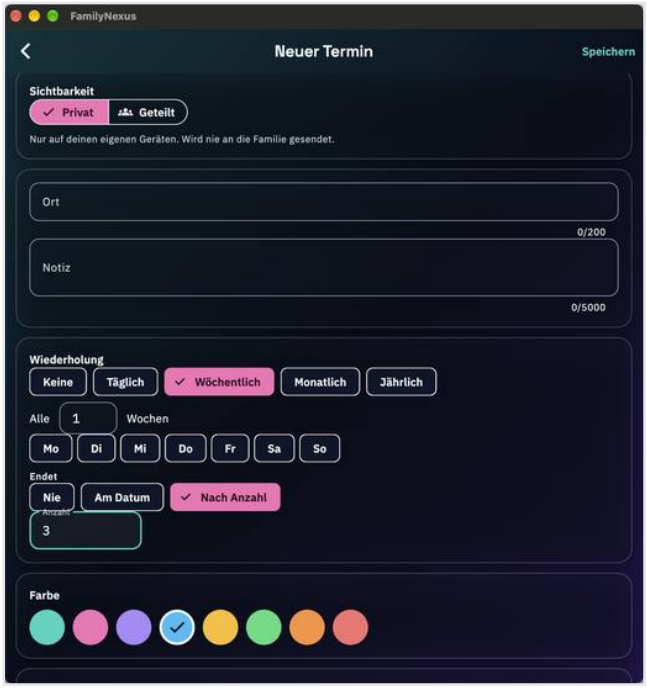

B-06a-G1

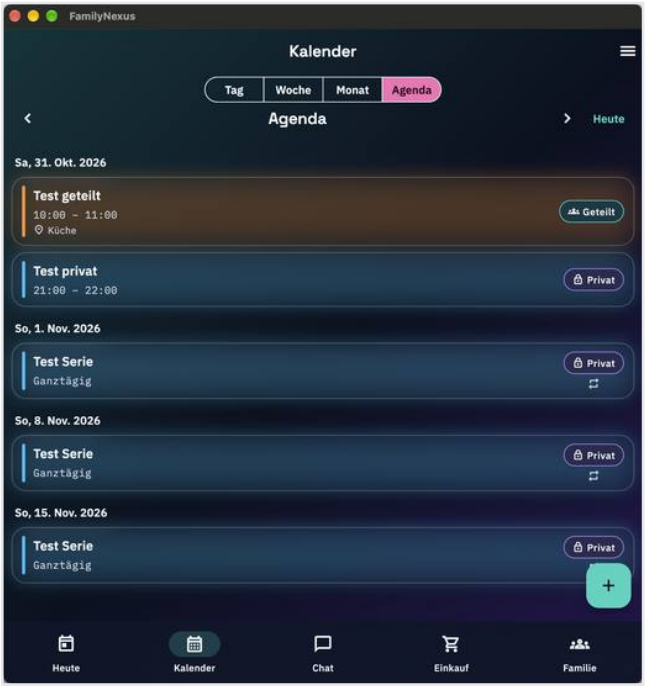


B-06b-G1


B-07 Views and navigation · G1

PASSED


Observed: Day / week / month / agenda, back / forward / today.




B-07a-G1



B-07b-G1



B-07c-G1




B-07d-G1


B-08 View and edit event, history · G1

PASSED


Observed: Detail with “Von dir”, visibility, place, note; after saving immediately “Test geteilt 2” and 10:30 – 11:30 (#63); “Verlauf (1)” shows “Test geteilt – Version 1”.

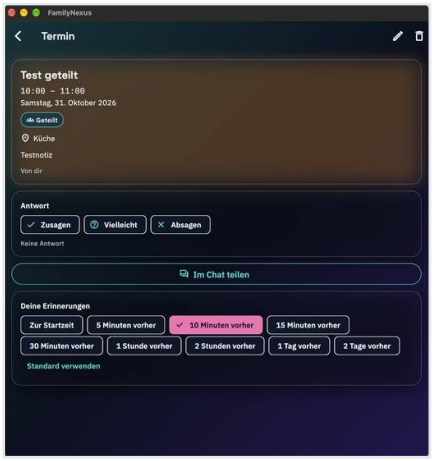

B-08a-G1

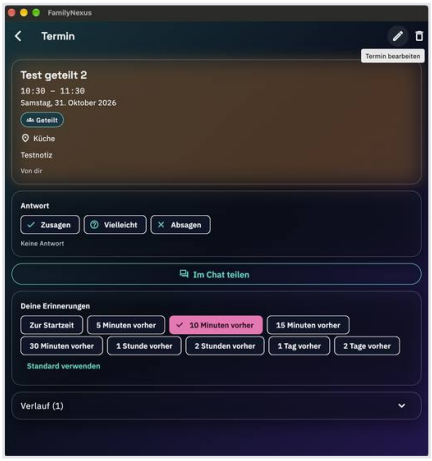

B-08b-G1

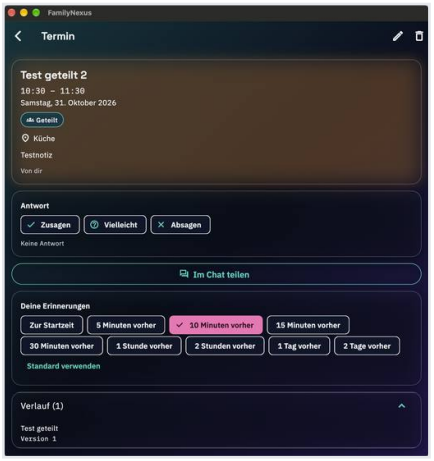


B-08c-G1


B-09 Per-event reminder · G1

PASSED

Observed: 30 minutes selectable, “Standard verwenden” resets.

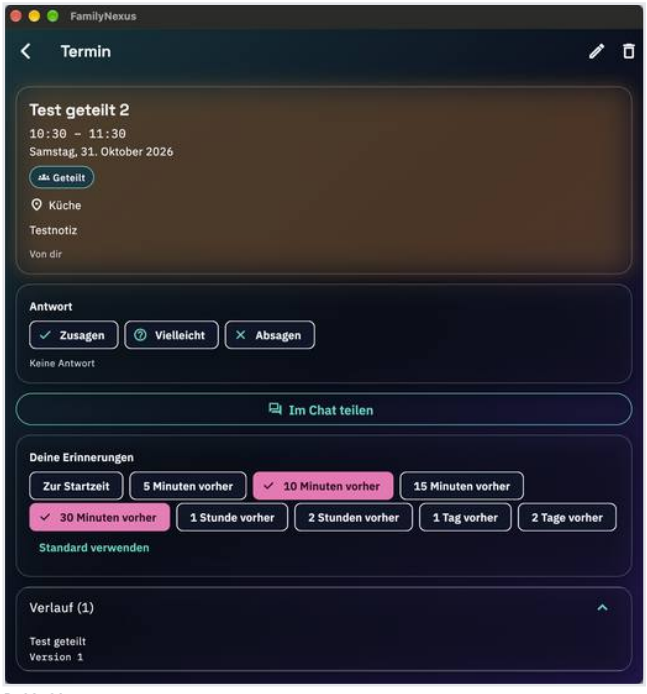

B-09-G1

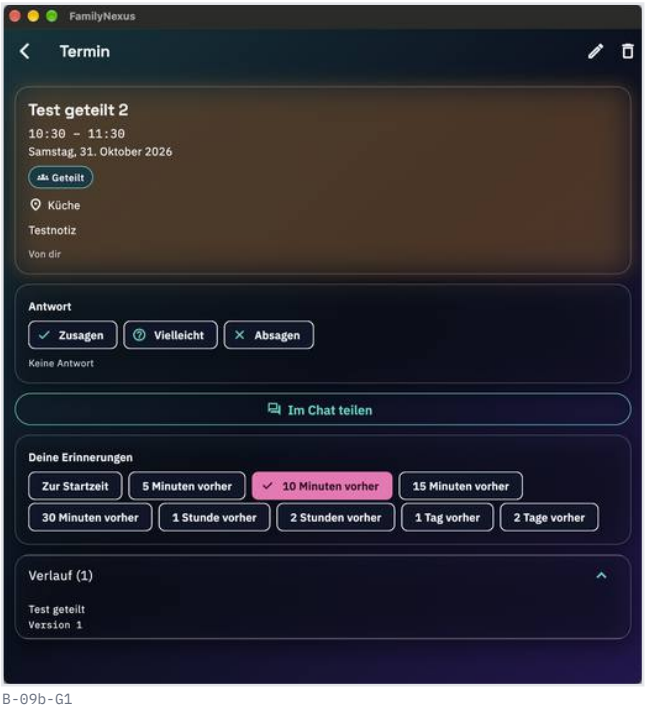


B-09b-G1

B-10 Reminder arrives · G1 (Linux per Skript: G2)

PASSED

Observed: System notification “Erinnerung / Termin in 10 Minuten” (without title/place) after about 2 minutes (17:53).

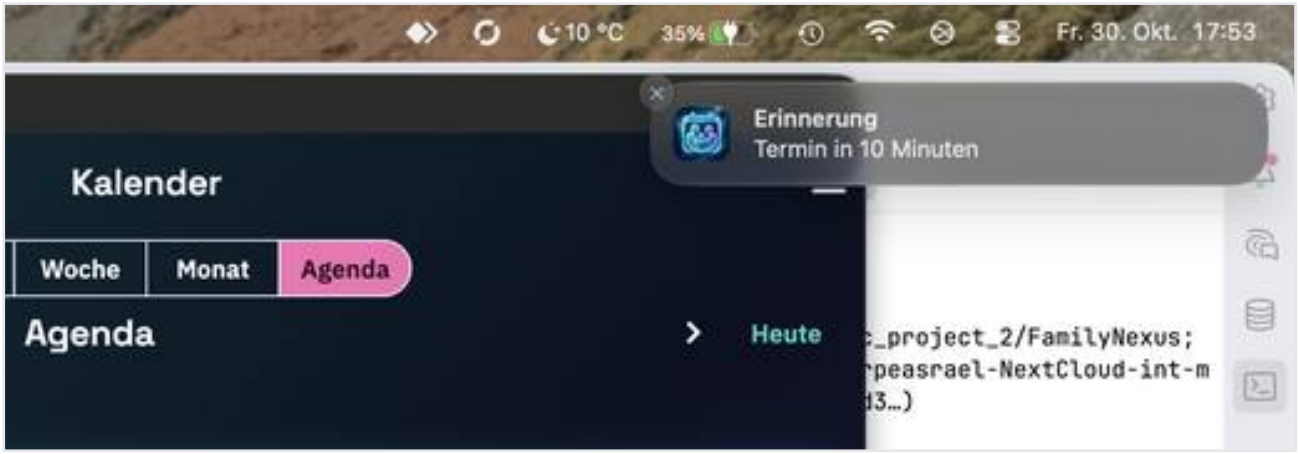


B-10-G1


B-11 Delete event · G1

PASSED


Observed: Dialog “Alle Vorkommen oder nur dieses löschen?”, only 1 Nov disappears; “Diesen Termin wirklich löschen?”, event gone.

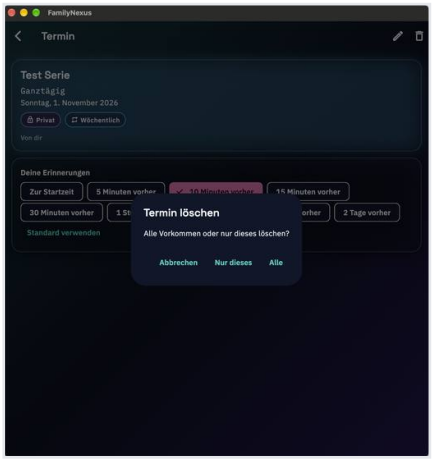

B-11a-G1

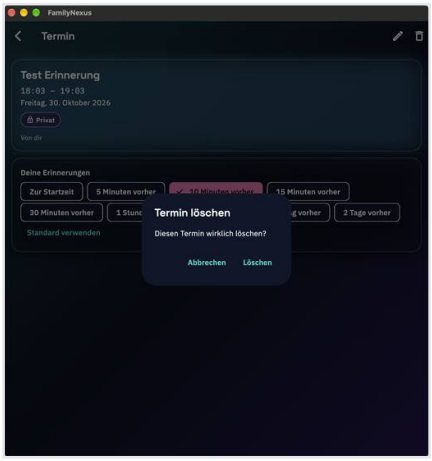

B-11b-G1

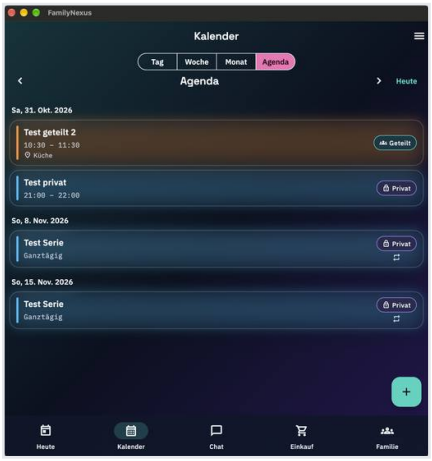


B-11c-G1


B-12 Chat · G1

PASSED

Observed: Shift+Enter = line break, Enter sends; message with time, “Ende-zu-Ende-verschlüsselt”.

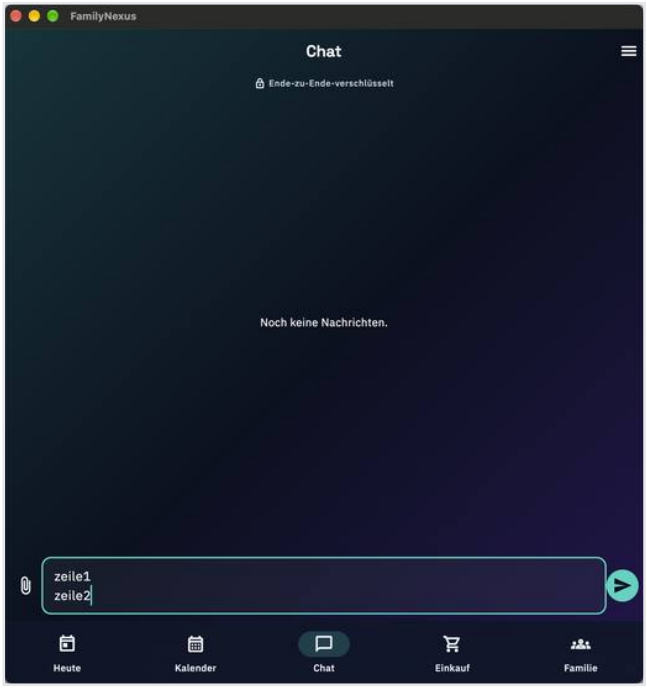

B-12a-G1

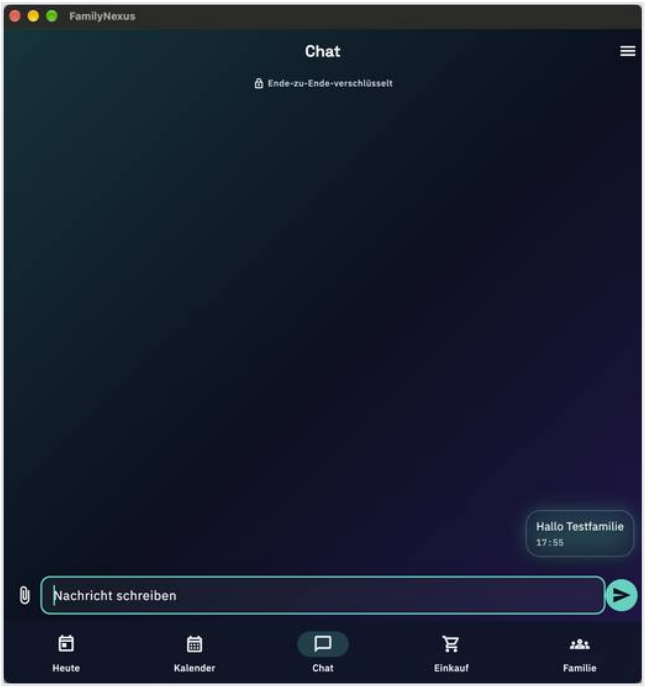


B-12b-G1


B-13 Share event in chat · G1

PASSED

Observed: Card “Termin” in chat with accept / decline buttons.

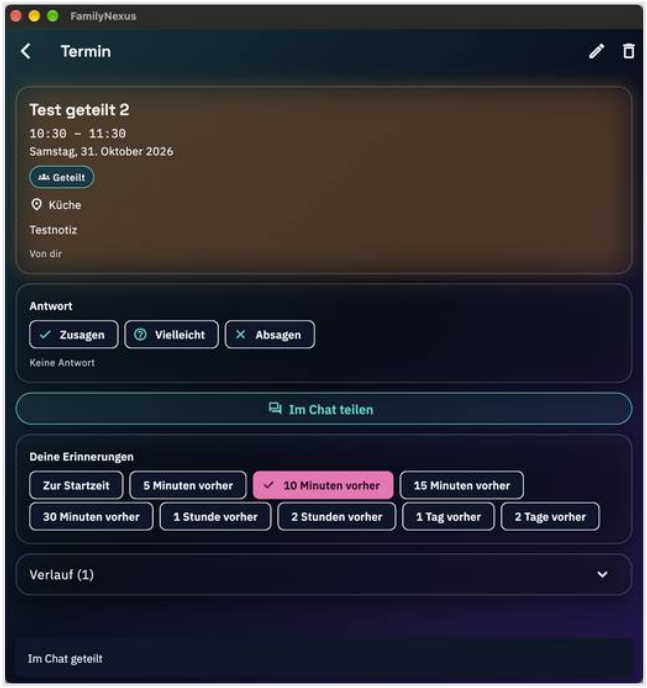

B-13a-G1

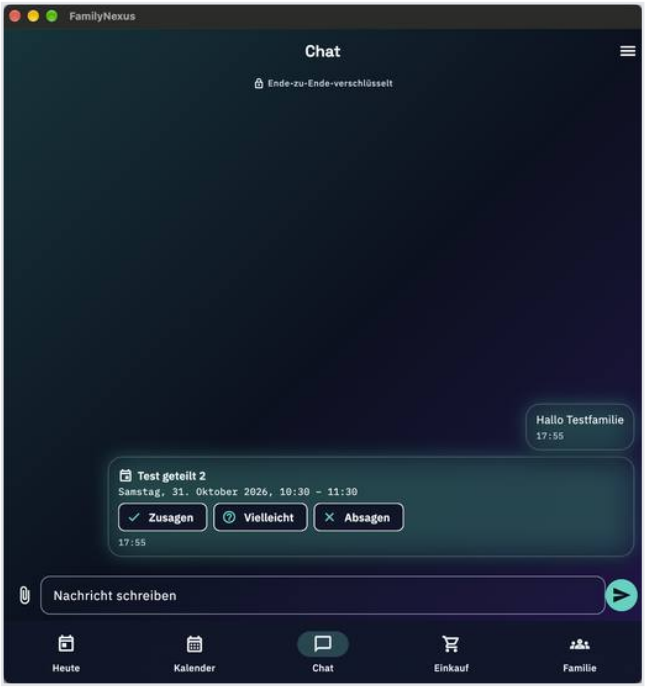


B-13b-G1


B-14 Shopping list · G1

PASSED

Observed: “Zu besorgen (2)”, “Erledigt (1)”; Enter adds; edit → “Vollkornbrot”, Enter saves (#68); adding an empty entry does nothing.

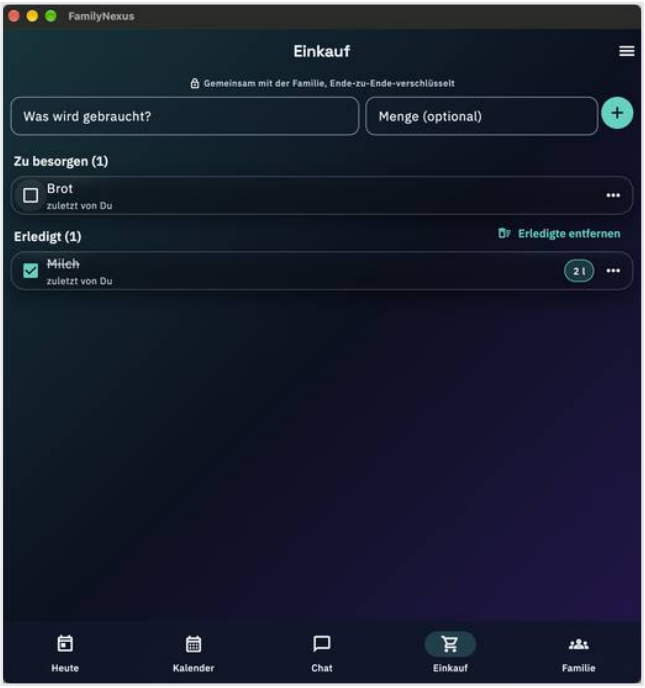

B-14a-G1

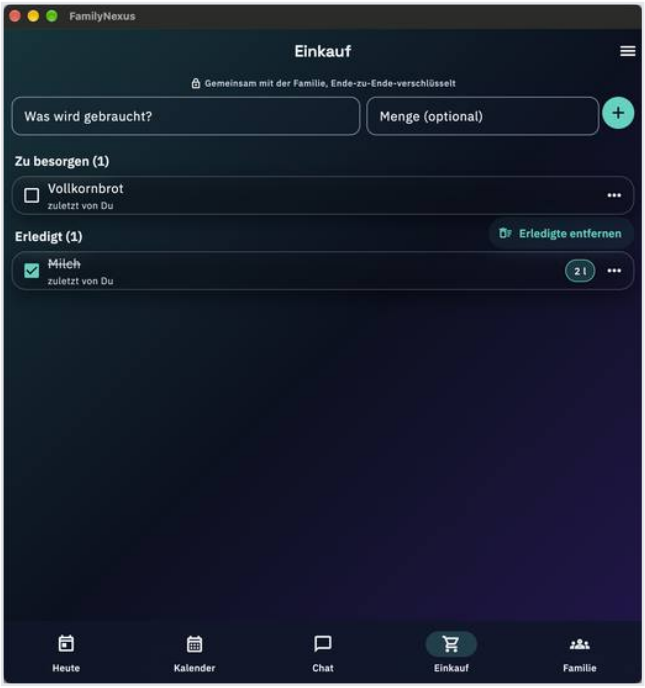


B-14b-G1


B-15 Tasks (moderator) · G1

PASSED


Observed: Hint “Nur Moderatoren legen Listen an”; list under “Mir zugewiesen”, “1 von 2 erledigt”, “Nächster Neustart: Montag, 2. November 2026”; history and “Erledigt am 30.10.2026 um 17:58” (DD.MM.YYYY format, #38); saving empty shows the validation message.

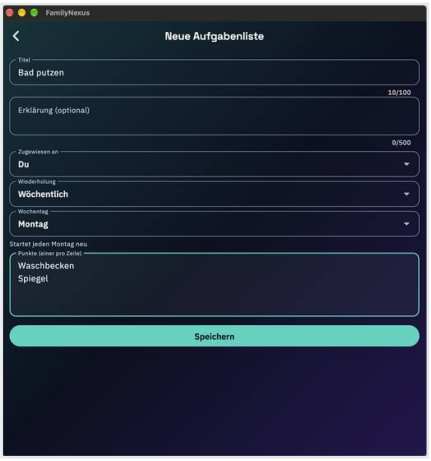

B-15a-G1

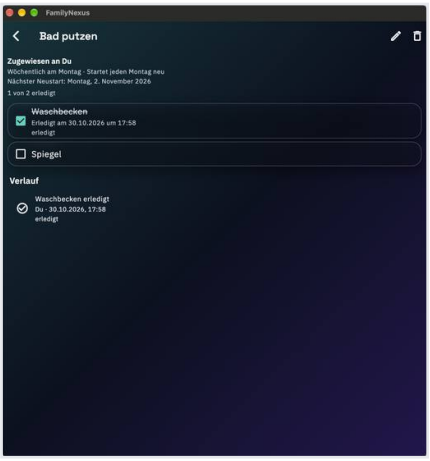

B-15b-G1

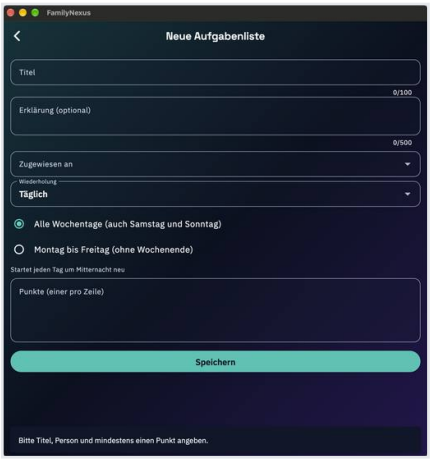


B-15c-G1


B-16 Settings – appearance · G1

PASSED


Observed: Language, design (light/dark), accent colour (magenta/turquoise), “Effekte reduzieren” take effect immediately and survive a restart.

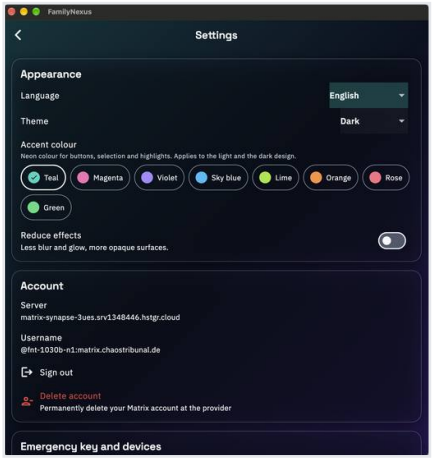

B-16a-G1

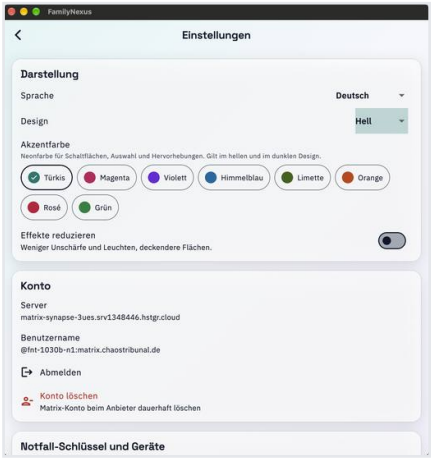

B-16b-G1

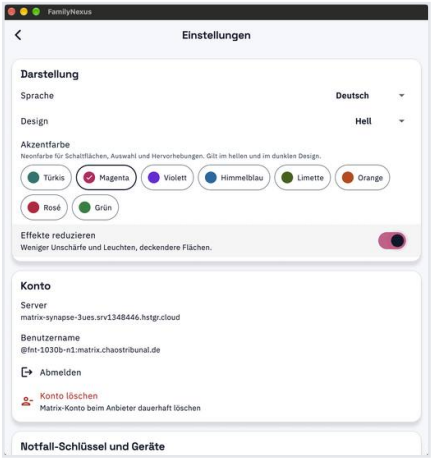


B-16c-G1

B-17 App lock · G1 (Linux: G2)

NOT RUN


Observed: G1 (Mac): switching on asks for Touch ID / system password (#58); cannot be entered in automated runs → “Abbrechen”, message “Die Bestätigung war nicht erfolgreich.”, switch stays off. G2 (iOS simulator): simulator passcode prompt, code unknown, not guessed. To be done manually.

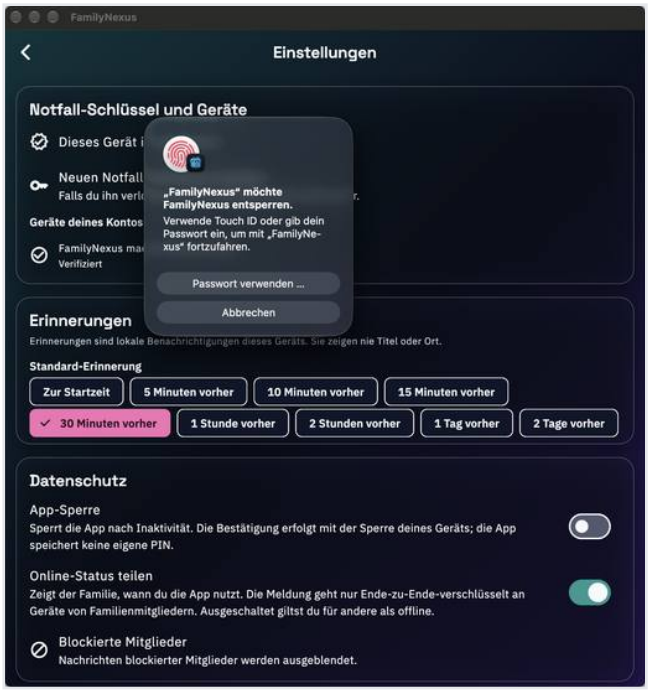

B-17-G1



B-17-G2

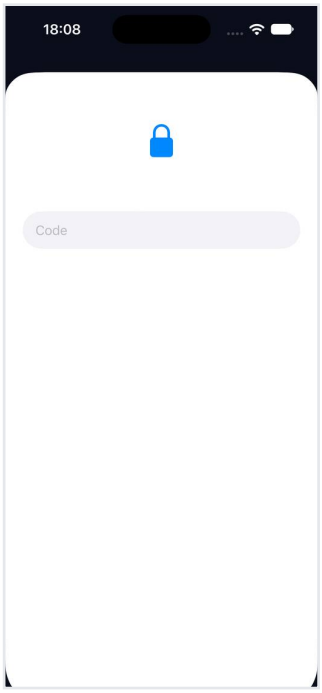

B-17b-G2

B-18 Screen protection · G1 (Linux/Windows/macOS: G2)

N/A

Observed: No “Bildschirmschutz” switch on macOS and iOS (settings: app lock, online status, blocked members); Android only.




B-18-G2


B-19 Privacy · G1

PASSED


Observed: “Online-Status teilen” off/on; “Du hast niemanden blockiert.”; privacy policy complete (sections readable); key store: “sicheren Schlüsselspeicher deines Geräts (Android-Keystore bzw. Apple-Schlüsselbund)” (#78).




B-19a-G1




B-19b-G1




B-19c-G1



B-19d-G1

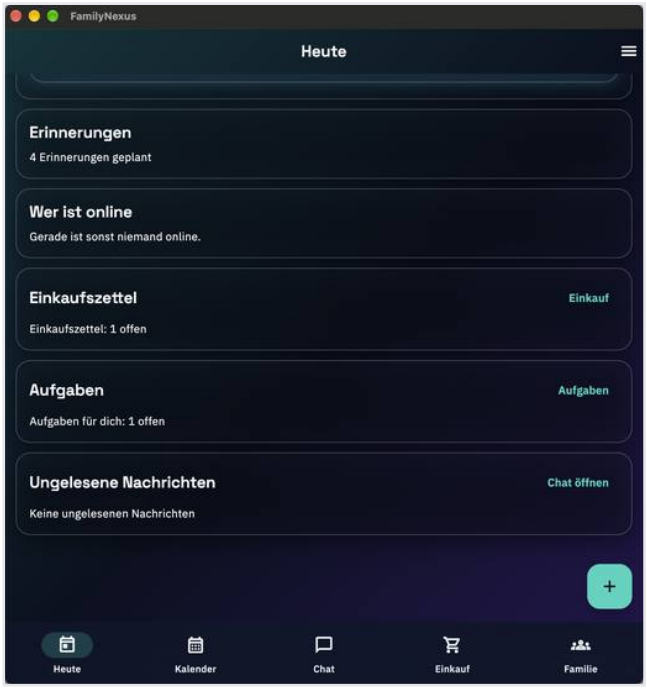

B-19e-G1

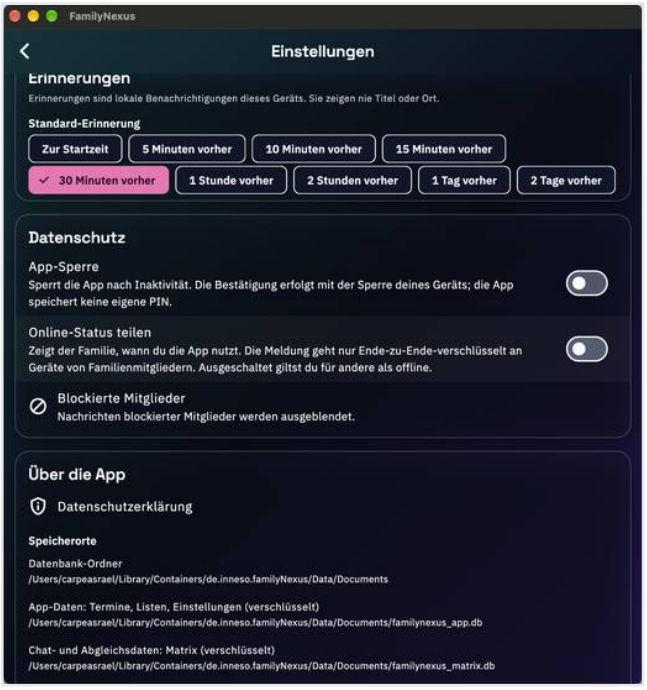


B-19f-G1

B-20 Default reminder · G1

PASSED

Observed: Default reminder: 30 minutes selected, 10 deselected; note “Erinnerungen sind lokale Benachrichtigungen …”.

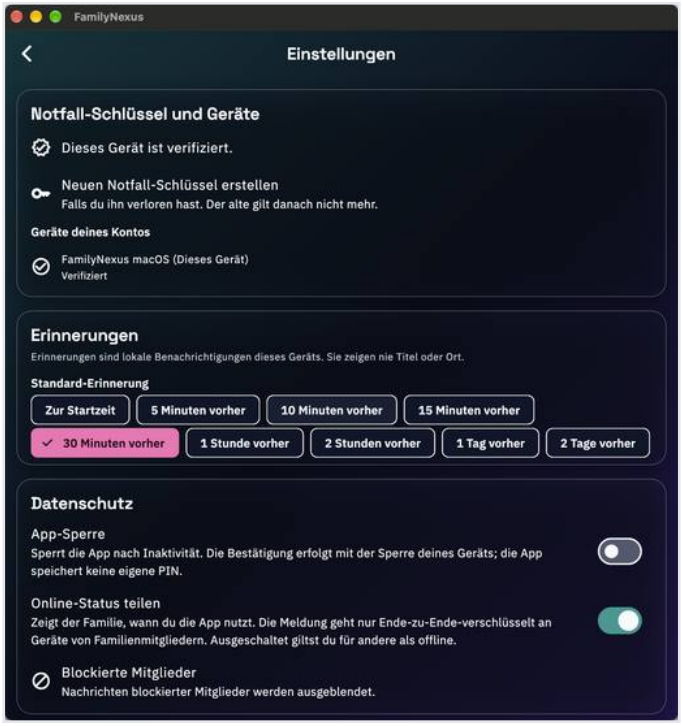


B-20-G1


B-21 About the app · G1

WITH FINDING


Observed: As expected: storage locations (Apple: “Schlüsselbund des Geräts (nicht in iCloud)”), local log with “App-Version 1.2.1 (22)”, events, shopping, tasks, warning, “Protokoll kopiert.”, online log with account, devices, rooms. Deviation (info): the display name “Test N1” is not in the local log (only the username); it is in the online log.




B-21a-G1



B-21b-G1



B-21c-G1




B-21d-G1


B-22 Version and account · G1

PASSED


Observed: Menu and settings “Version 1.2.1 (22)”; account: server = provider address, username `@fnt-1030b-n1:matrix.chaostribunal.de`.

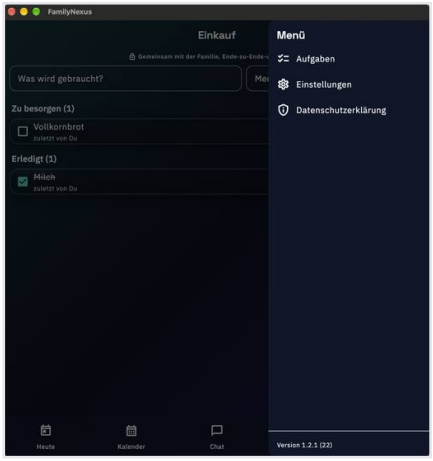


B-22a-G1



B-22a-G2

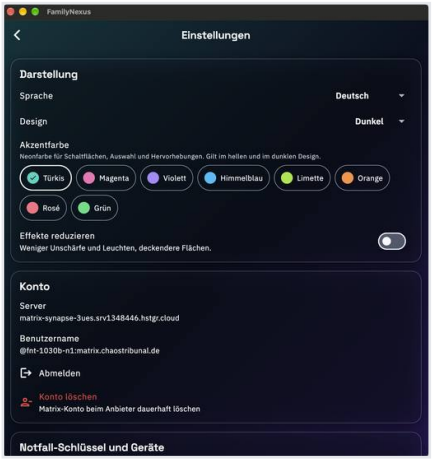

B-22b-G1




B-22b-G2

C – Second device, device check, emergency key

C-01 Sign in with wrong password · G2

PASSED

Observed: G2: wrong password → “Benutzername oder Passwort stimmen nicht.”, not signed in.

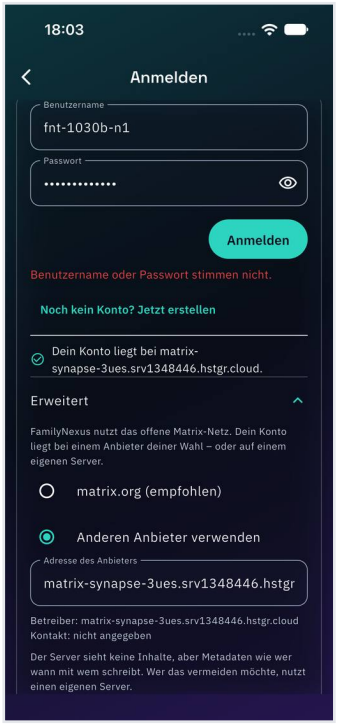

C-01-G2


C-02 Correct password, verify device by symbol comparison · G2, G1

PASSED

Observed: G2 “Mit „FamilyNexus macOS“ bestätigen” (click needed a longer press); G1 “… möchte die Verifizierung starten.” → accept; same symbols (phone, corn, rabbit, Santa, corn, trophy, cake); both “Verifiziert.”; G2 shows the main view with events from B.




C-02a-G2

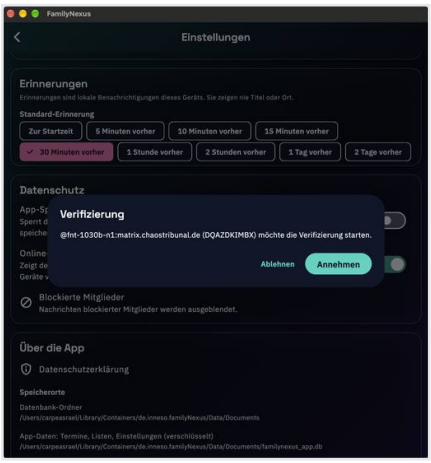

C-02b-G1




C-02b2-G2

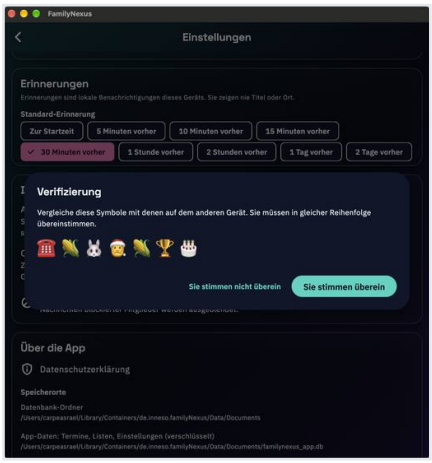

C-02c-G1




C-02c-G2

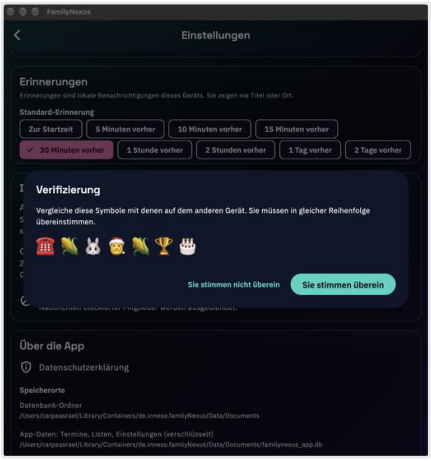

C-02d-G1




C-02d-G2

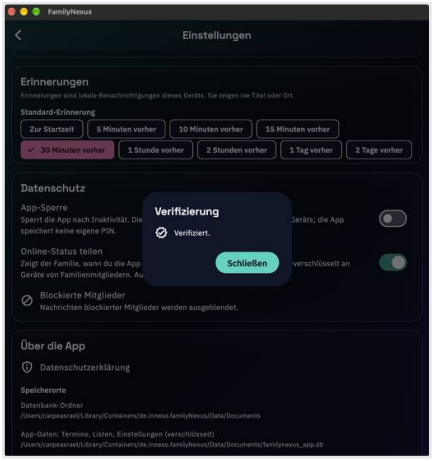

C-02e-G1



C-02e-G2

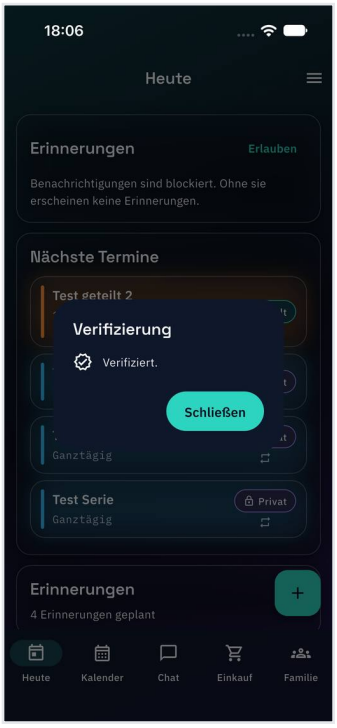


C-02f-G2

C-03 Emergency key and devices · G2

PASSED

Observed: “Dieses Gerät ist verifiziert.”; devices “FamilyNexus macOS” and “FamilyNexus iOS (Dieses Gerät)”, each “Verifiziert”; “Neuen Notfall-Schlüssel erstellen” present.

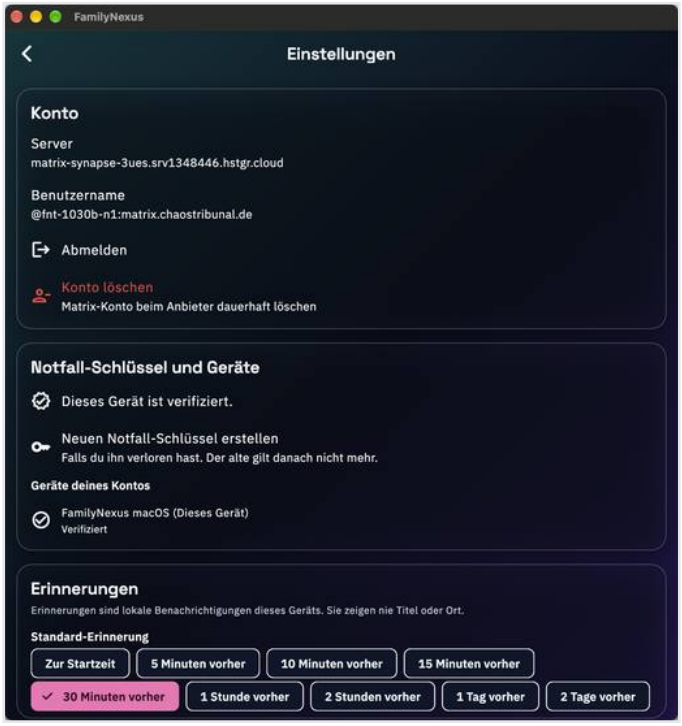

C-03-G1




C-03-G2


C-04 Sign out · G2

PASSED

Observed: Dialog “Abmelden”; then directly “Anmelden” (not “Willkommen”; provider back to matrix.org).

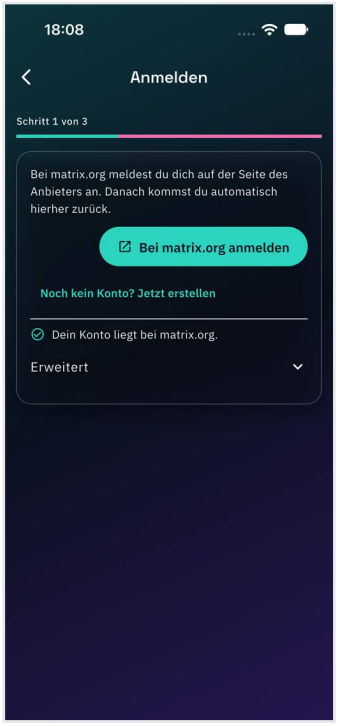

C-04-G2

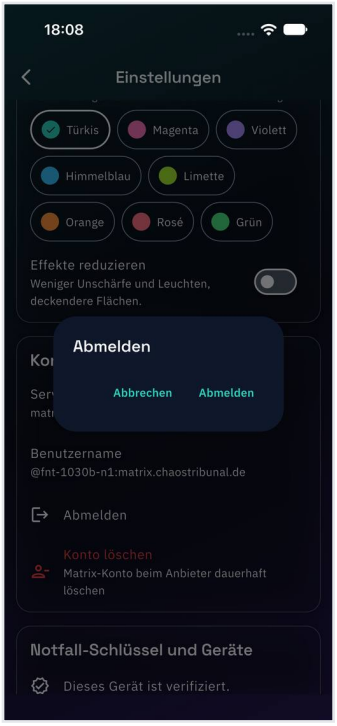


C-04a-G2


C-05 Create new emergency key (#11) · G1

PASSED


Observed: Page “Neuer Notfall-Schlüssel” (“Der alte funktioniert danach nicht mehr …”); new key (KN1b) shown; back arrow and Esc blocked; “Weiter” only after the checkbox; then settings.




C-05a-G1




C-05b-G1



C-05c-G1



C-05d-G1

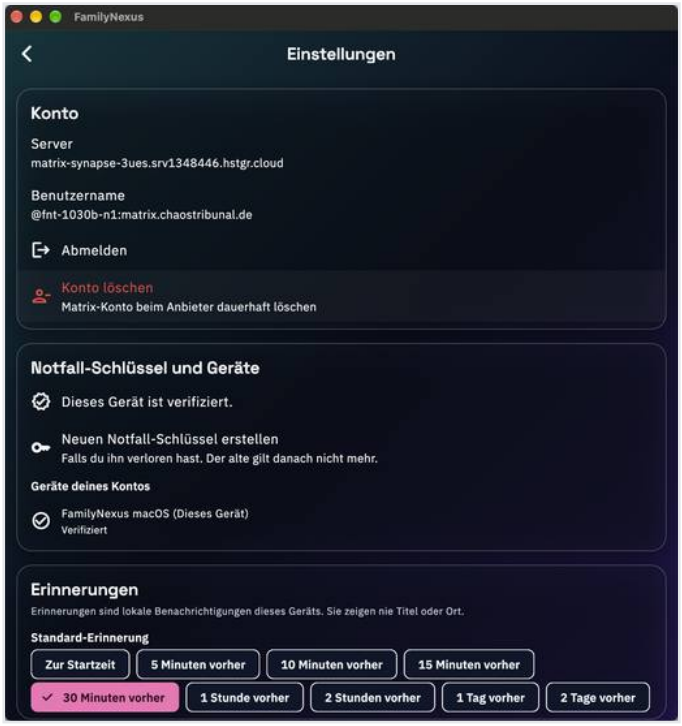


C-05e-G1

C-06 Unlock with old key · G2

PASSED

Observed: Old KN1 → “Der Notfall-Schlüssel passt nicht. Bitte prüfe ihn noch einmal.”, device stays locked (iOS entry via key codes).

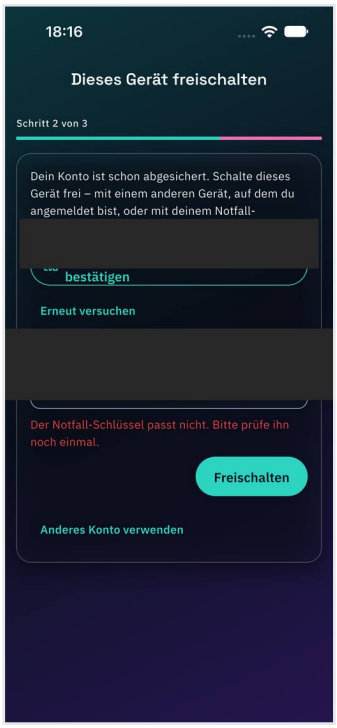


C-06-G2

C-07 Unlock with new key · G2

PASSED

Observed: KN1b → unlocked, main view with F1 and data from B.

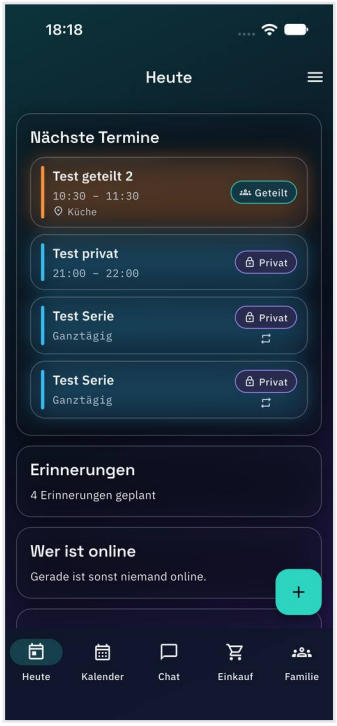


C-07-G2

C-08 Sign out · G2

PASSED

Observed: Sign out as in C-04 → “Anmelden”.

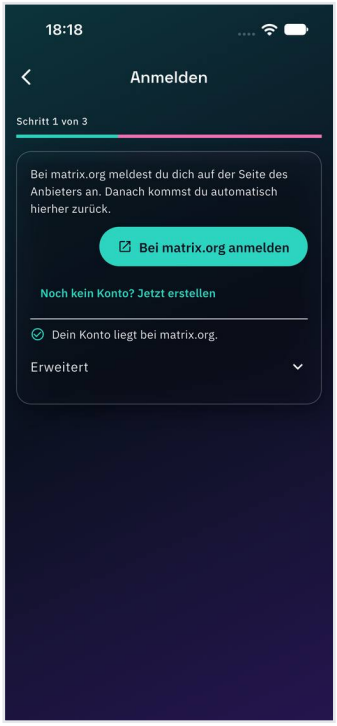


C-08-G2

D – Other ways to create an account, join by code


D-01 Taken name and fallback suggestion · G2

PASSED

Observed: G2: “Schon vergeben – wie wäre es mit „fnt-1030b-n12“?”, chip, “Konto erstellen” greyed out; after the chip “Der Benutzername ist frei.”; account created; key stays visible; KN2 stored; family step “Schritt 3 von 3” with found / join.

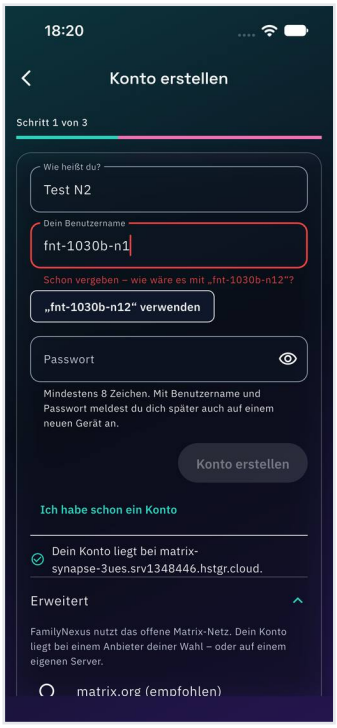

D-01a-G2

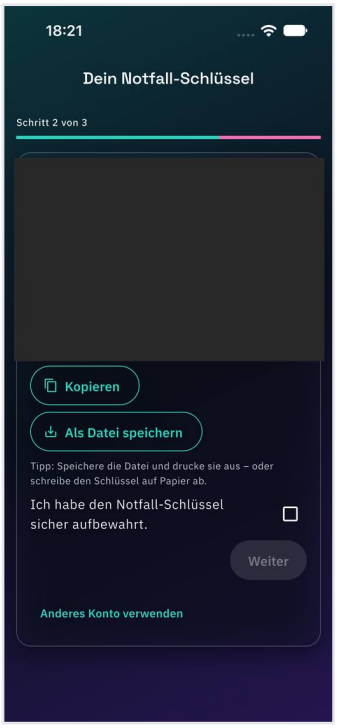


D-01b-G2


D-02 Family code and rejection · G1, G2

PASSED


Observed: G1: “Code kopiert” (code starts with `!`, ends with the server name); G2: `abc` → “Das ist kein gültiger Familien-Code. Er beginnt mit „!“ …”; code → “Fast geschafft! …”; G1: join requests with “Anfrage über den Familien-Code (ohne Link) – nur bestätigen, wenn du … kennst”, “Ablehnen” → disappears; G2: “Deine Anfrage wurde abgelehnt …” after about 5 s (target ≤ 20 s, #43/#75).

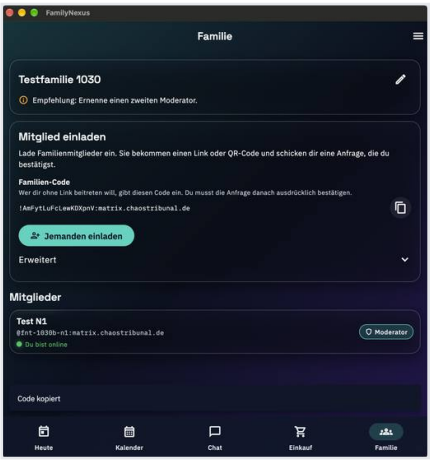


D-02a-G1




D-02b-G2

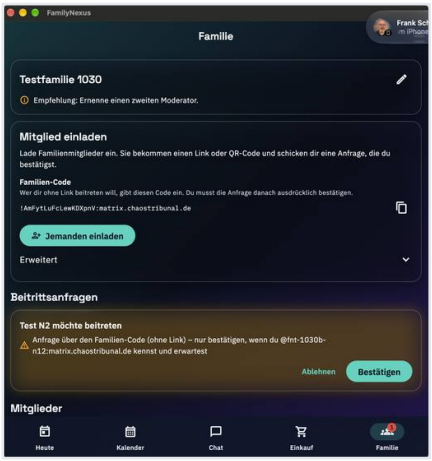


D-02c-G1



D-02c-G2

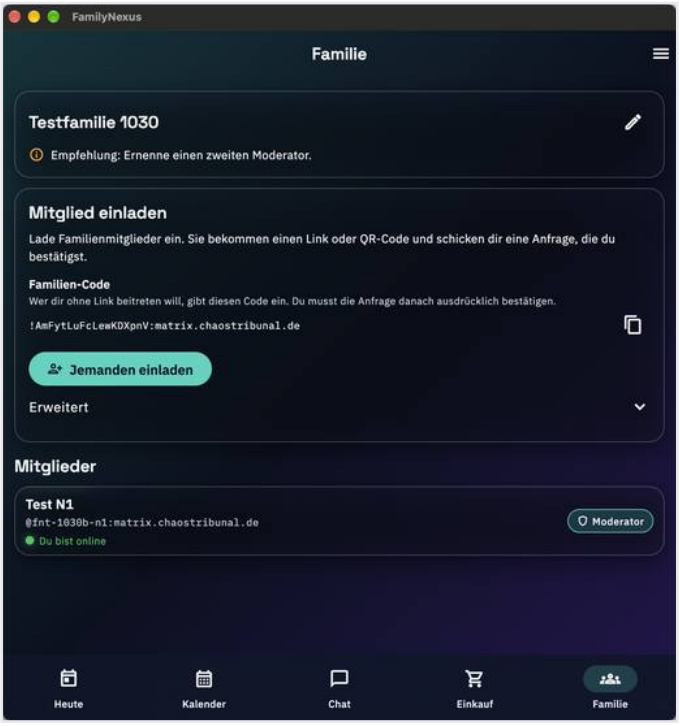

D-02d-G1

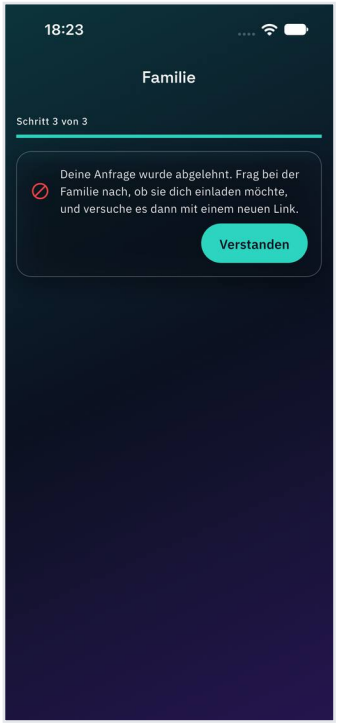


D-02d-G2

D-03 Found a new family instead · G2

PASSED

Observed: Back to “Gründen”, F2 “Loeschtest 1030” (ae for ö, keyboard) created, directly “Heute” without the “Fertig!” intermediate step.

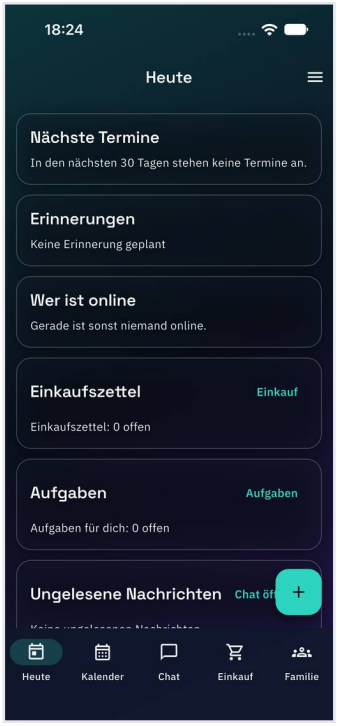


D-03-G2


D-04 Sign out, switch to sign-in with name · G2

PASSED

Observed: Sign out → create account → name `Test`, username `fnt-1030b-n12` (taken hint) → “Ich habe schon ein Konto” → “Anmelden” with prefilled username and retained provider address.

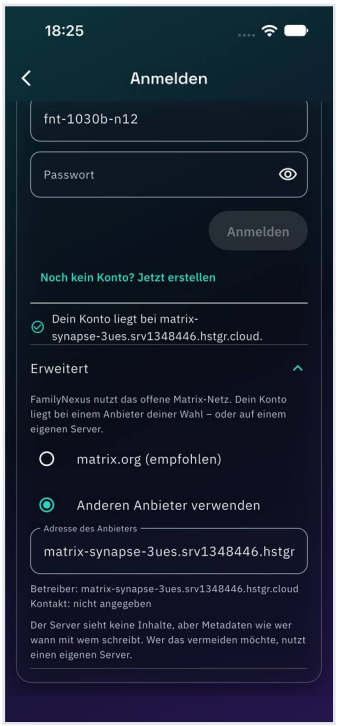

D-04-G2

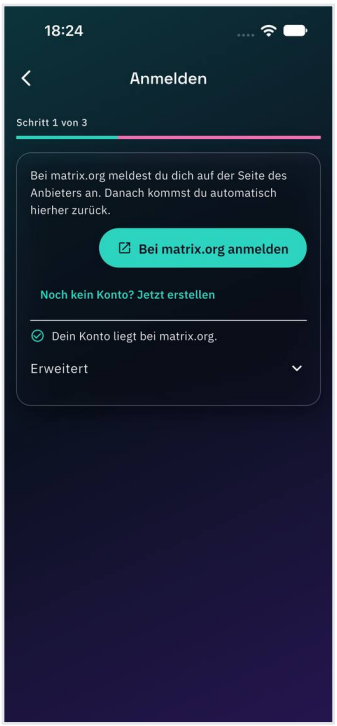


D-04a-G2


D-05 Sign in as N2, unlock with key · G2

PASSED

Observed: Sign-in N2: “Kein anderes Gerät gefunden. Nutze deinen Notfall-Schlüssel.”; unlocked with KN2, F2 recognised (main view, no hang).

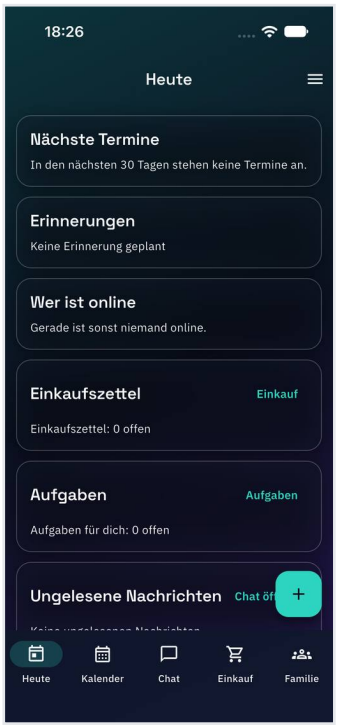

D-05-G2

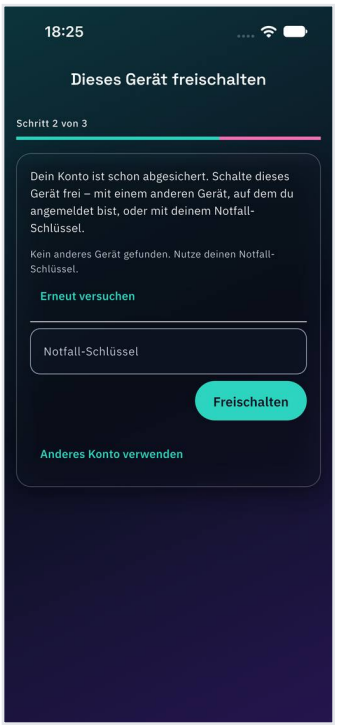


D-05a-G2

D-06 Cancel without creating account · G2

PASSED

Observed: Back arrow without “Konto erstellen” → “Willkommen”; counter-check `register/available?username=fnt-1030b-n9` → `available: true`.

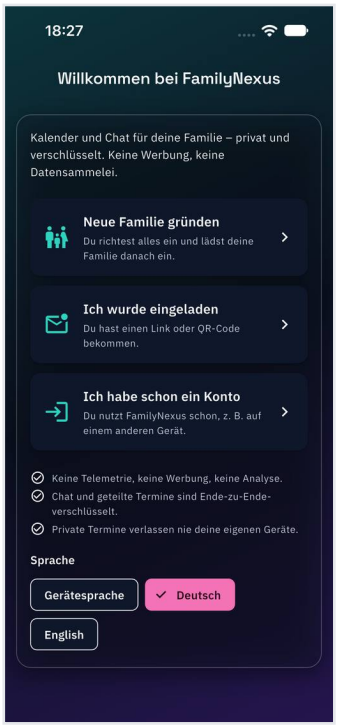

D-06-G2



D-06a-G2

D-07 Registration closed (optional) · G1

NOT RUN


Observed: Optional, no server access (operator step).

E – Invitation and two users together

E-01 Tab “Familie” · G1

PASSED

Observed: “Testfamilie 1030”, “Empfehlung: Ernenne einen zweiten Moderator.”, member only Test N1 (moderator), “Jemanden einladen”, “Familien-Code”.

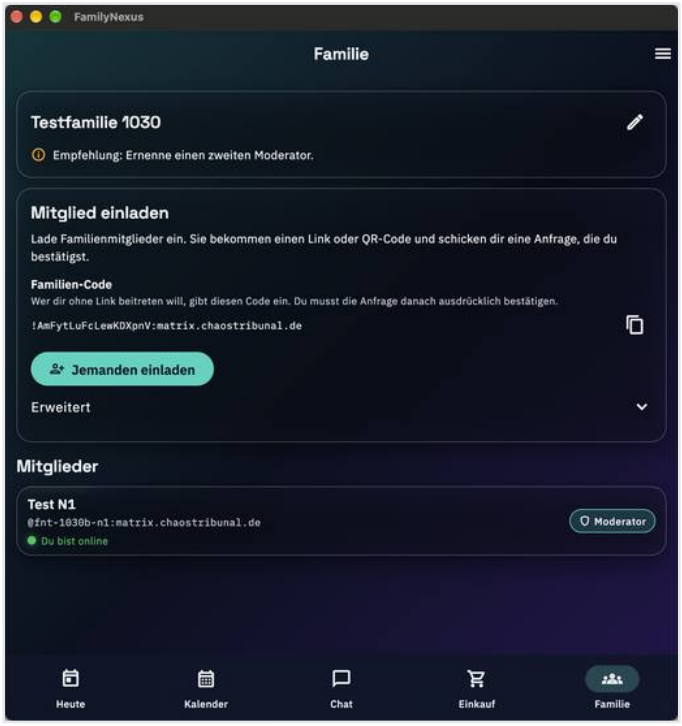


E-01-G1

E-02 Rename family · G1

PASSED

Observed: “Name geändert.”; “Testfamilie 1030 neu” in the family tab; Enter saves in the dialog (#68).

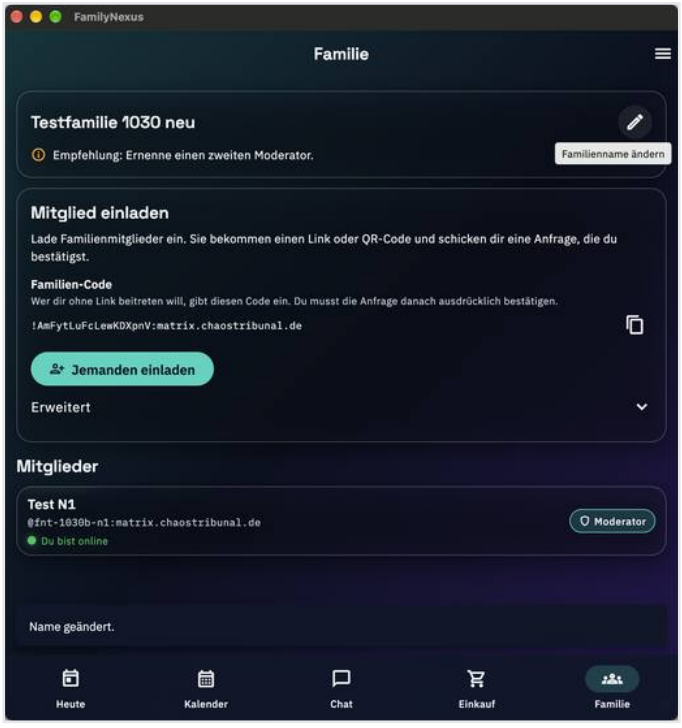


E-02-G1


E-03 Invite by user ID · G1

PASSED


Observed: abc → “Bitte eine gültige Benutzer-ID eingeben, …”; ID → confirmation “… einladen? Eingeladene erhalten bereits vor der Annahme …”; Test N2 “Eingeladen”.




E-03-G1




E-03a-G1



E-03b-G1



E-03c-G1

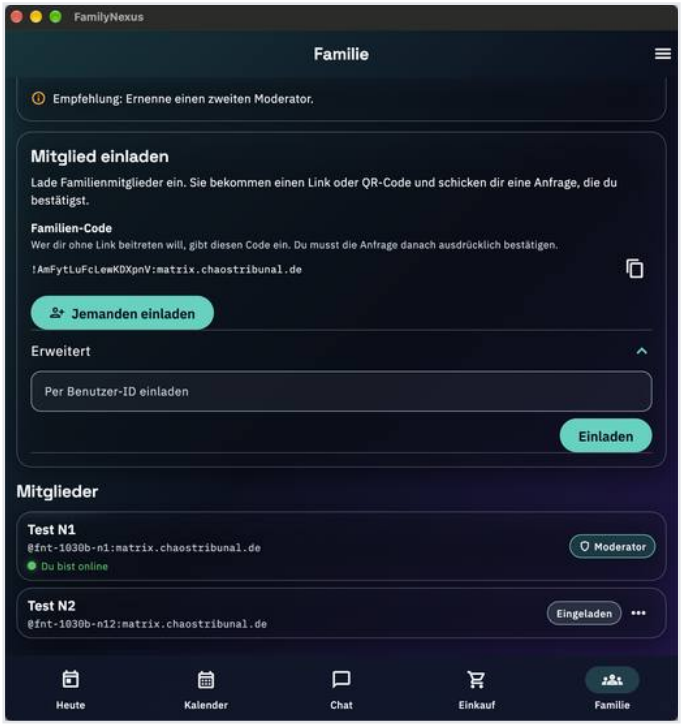


E-03d-G1


E-04 Remove invited member · G1

PASSED

Observed: Confirmation “Test N2 wirklich aus der Familie entfernen? …”; N2 disappears from the list.

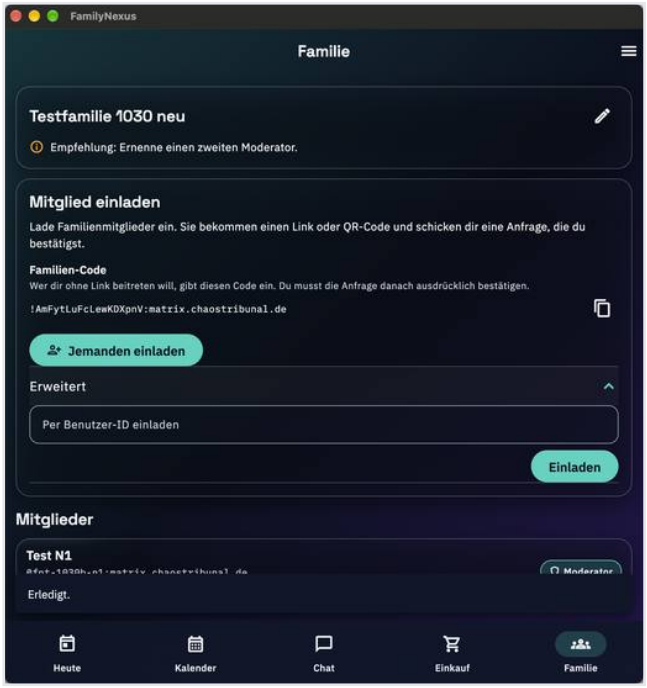

E-04-G1

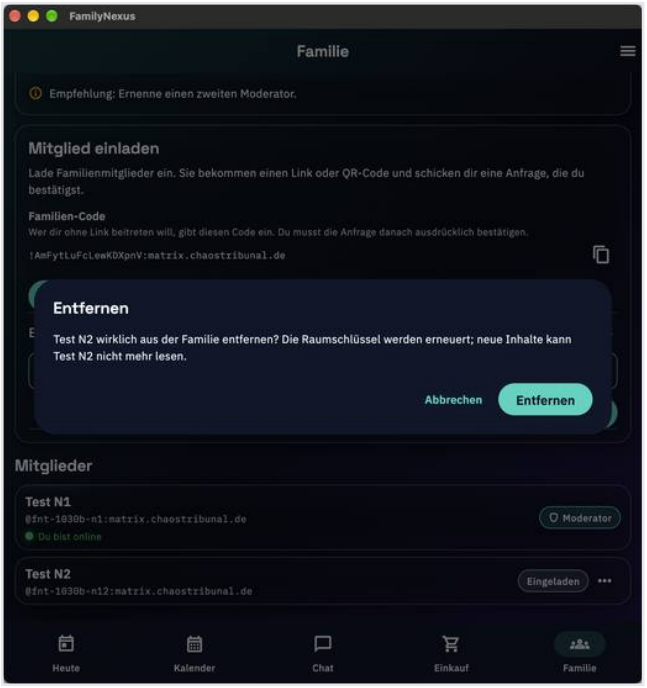


E-04a-G1


E-05 Invitation link · G1

PASSED


Observed: Dialog with QR code, “Gültig für” (3 days), “Erweitert → Konto-Server für Neue” set, “Neuen Link erzeugen”; “Per E-Mail senden” opens a Thunderbird draft “Einladung zu FamilyNexus” with the link (not sent); “Link kopieren” (309 characters, web address `https://carpeasrael.github.io/FamilyNexus/join/#v=3&…`, `srv` = provider address).




E-05a-G1



E-05b-G1



E-05c-G1

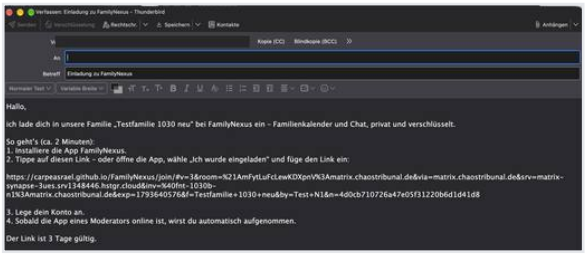


E-05d-G1


E-06 Invalid and truncated link · G2

PASSED

Observed: abc → “Das ist kein Einladungslink. Ein Einladungslink beginnt mit …”; link shortened by 10 characters → “Der Link ist unvollständig oder beschädigt …” (typed via key codes, paste in the simulator had no effect).

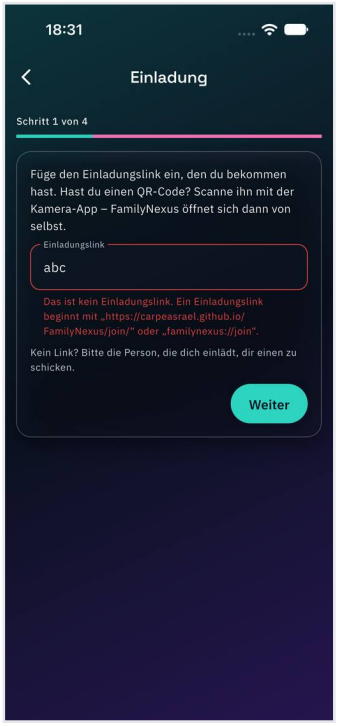

E-06a-G2

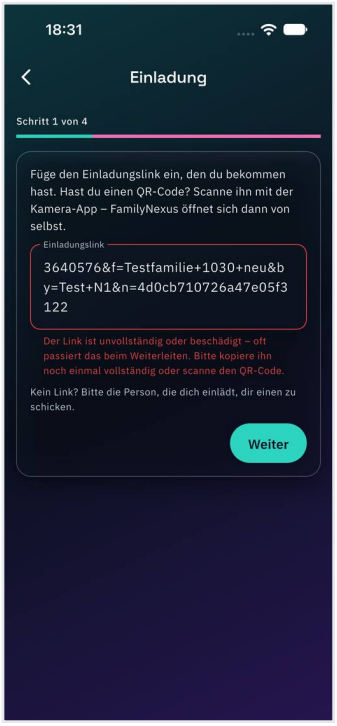

E-06b-G2


E-07 Open full link via system · G2

PASSED

Observed: Web page “Einladung zu FamilyNexus” → “App öffnen” → “In „FamilyNexus“ öffnen?” → open; account creation first, then join card “Du trittst der Familie „Testfamilie 1030 neu“ bei. Eingeladen hat dich Test N1 …”, details with user ID and server, “Verwerfen”.




E-07-G2

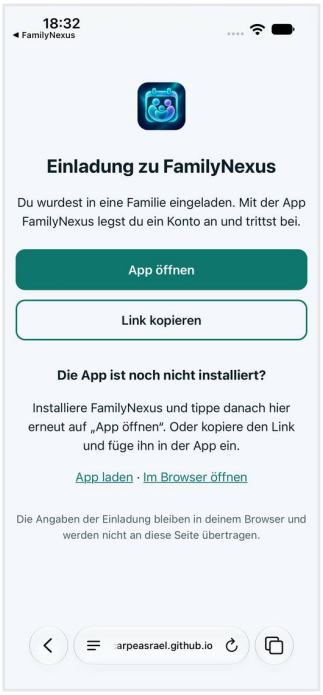

E-07a-G2



E-07b-G2

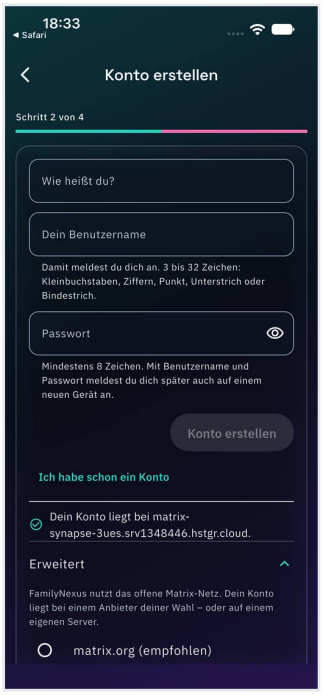


E-07c-G2

E-08 Join → account creation · G2

PASSED

Observed: Provider taken from the link: matrix-synapse-3ues.srv1348446.hstgr.cloud (not matrix.org).

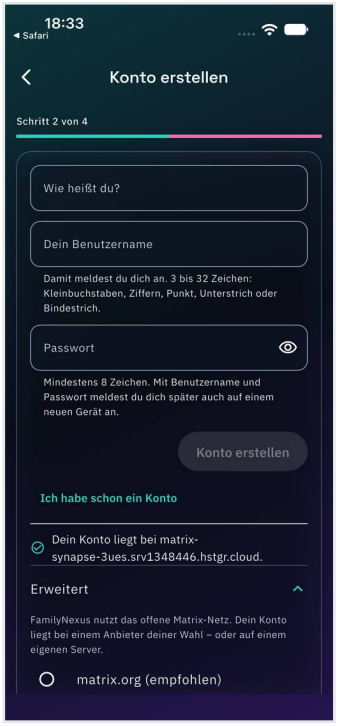


E-08-G2

E-09 Create I2 · G2

PASSED

Observed: I2 `fnt-1030b-i2` created, no extra step, on to the emergency key.

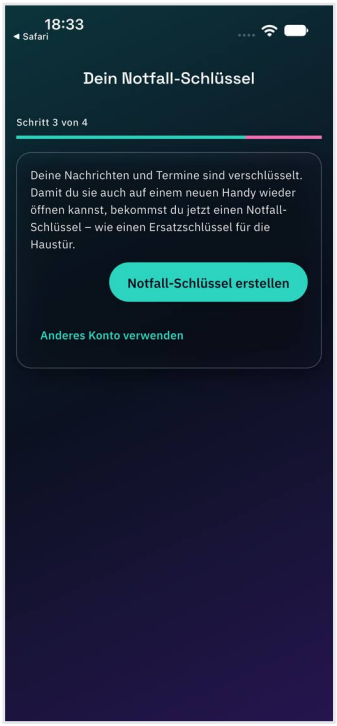


E-09-G2


E-10 Emergency key, request to join · G2

PASSED

Observed: Key stays visible, KI2 stored; join card “Schritt 4 von 4” → “Beitritt anfragen”.

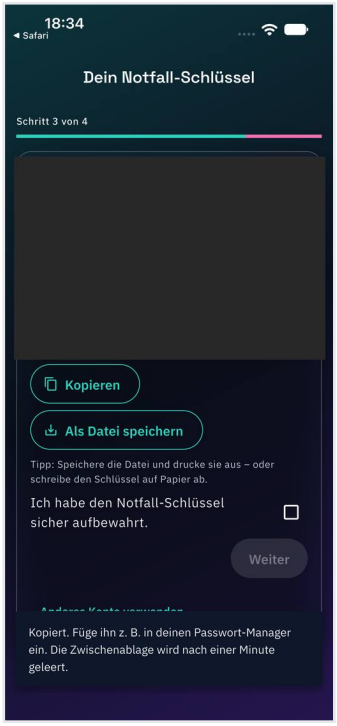

E-10a-G2

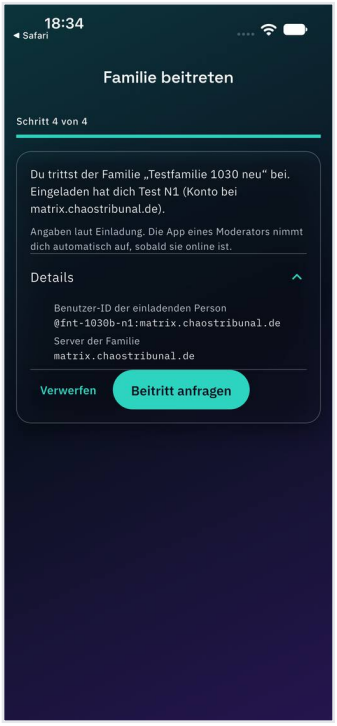

E-10b-G2




E-10c-G2

E-11 Wait for admission · G1, G2

PASSED

Observed: Automatic admission within about 3 s; G2 shows “Heute”.

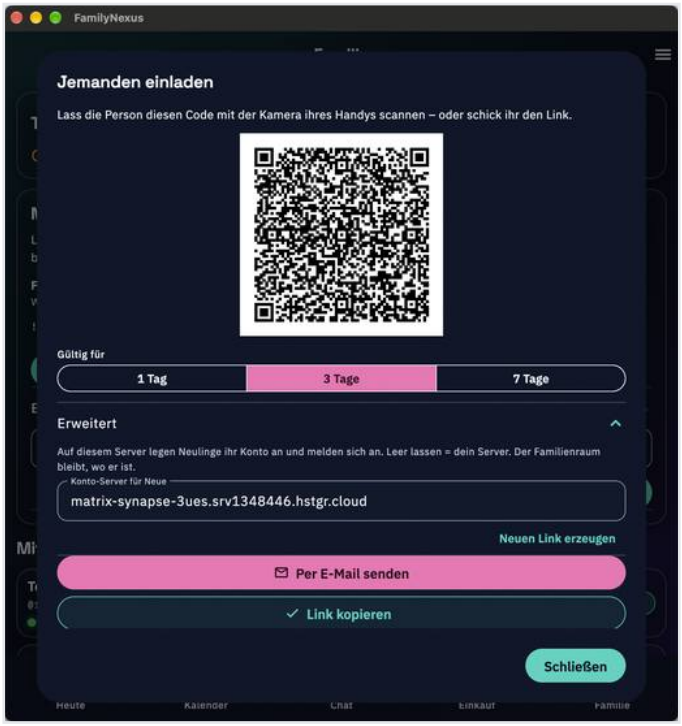

E-11-G1



E-11-G2

E-12 Open used link via system · G2

PASSED

Observed: Used link via `simctl openurl` → “Du bist bereits in einer Familie.” (short hint at the bottom), nothing changes, no crash.




E-12-G2


E-13 Tab “Familie” on both · G1, G2

PASSED

Observed: Both members: Test N1 (moderator), Test Nutzer 2 (member, “Nicht persönlich geprüft”); family name “Testfamilie 1030 neu” also at I2.

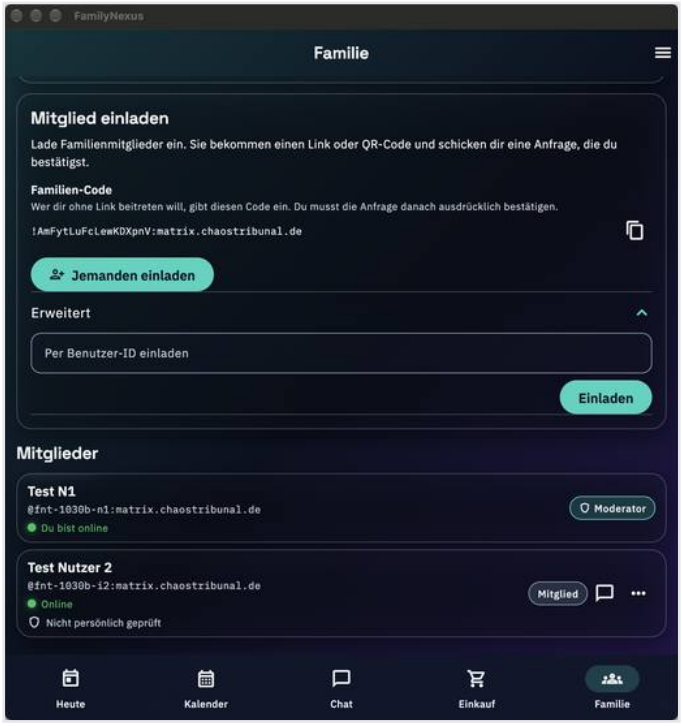

E-13-G1

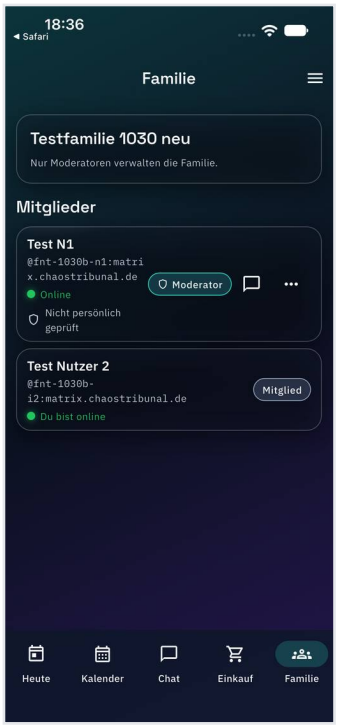


E-13-G2


E-14 I2: no management actions · G2

PASSED

Observed: I2: “Nur Moderatoren verwalten die Familie.”, no rename/invite/code; member menu only “Verifizieren” and “Test N1 blockieren”; tasks: “Nur Moderatoren legen Listen an …”, no “Neue Aufgabenliste” button.

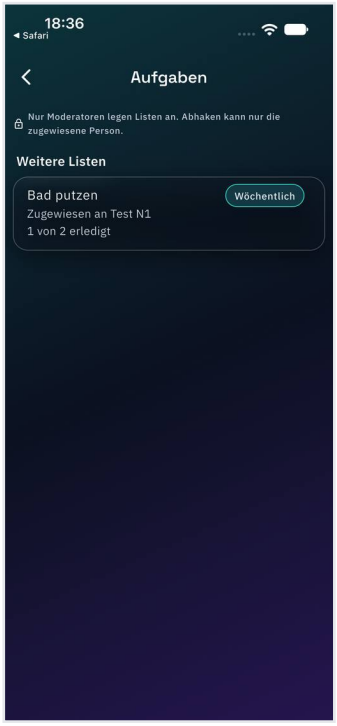

E-14-G2

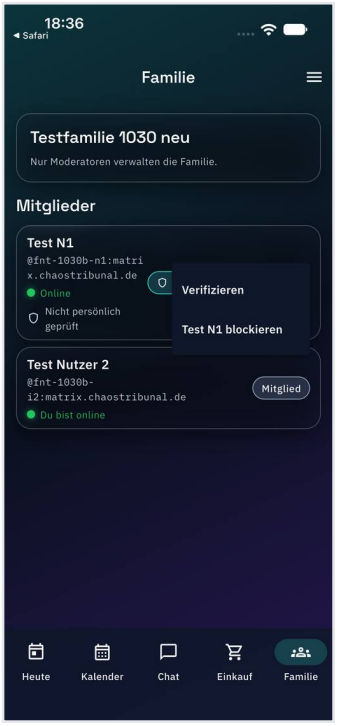


E-14a-G2


E-15 Online status · G1, G2

PASSED

Observed: On: G2 “Test N1 – Online”, G1 “Du bist online”. Off: G2 “Gerade ist sonst niemand online.” and at Test N1 “Zuletzt online gerade eben”; G1 “Dein Status wird nicht geteilt”. On again: G2 shows N1 “Online” again.

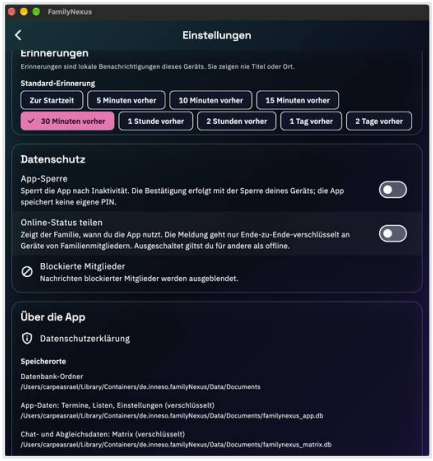


E-15a-G1



E-15b-G2




E-15c-G2

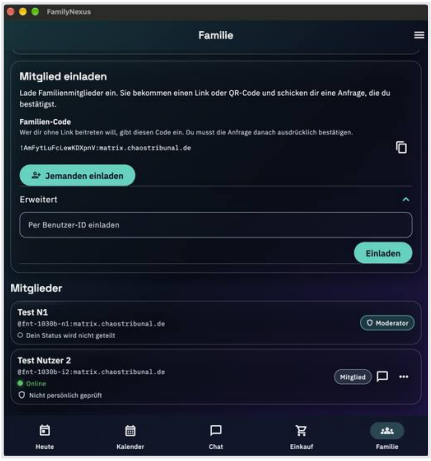


E-15d-G1



E-15e-G2

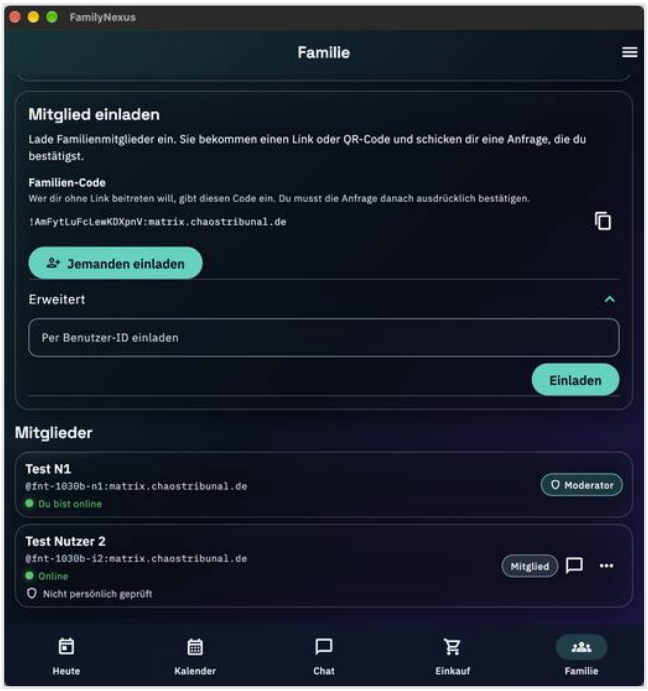

E-15f-G1

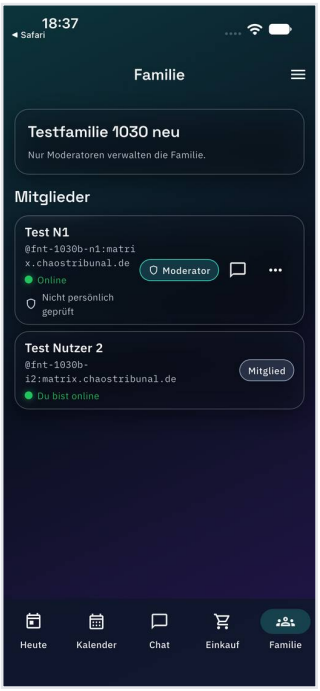


E-15pre-G2


E-16 Chat: reply, reaction · G1, G2

WITH FINDING

Observed: G1 sends “Hallo von Nutzer 1”; G2: a single note “Ältere Nachrichten …” (#35), reply with reference, reaction on both. The “Ungelesene Nachrichten” counter before opening the chat was not measured (statement on #65 open); other expectations met.

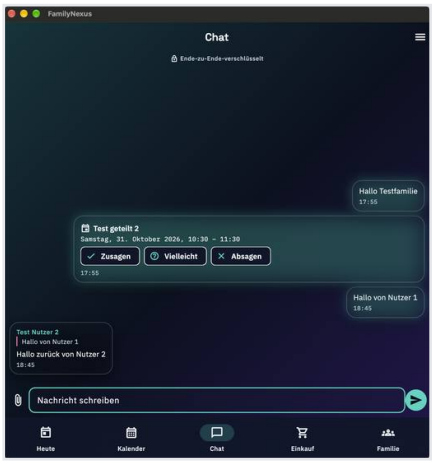

E-16a-G1

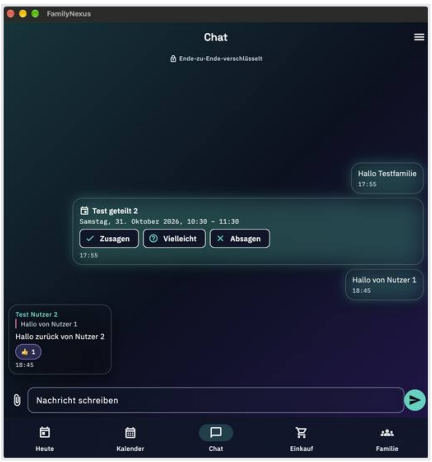

E-16b-G1



E-16b-G2




E-16c-G2


E-17 Attachments · G1, G2

PASSED


Observed: G1 sends image, text file (accidentally twice) and a file with special characters; G2: “Anhang laden” shows the image, “Speichern” below it (#40); warning “Die Datei wird entschlüsselt und unverschlüsselt im gewählten Ordner gespeichert. … Sie bleibt dort auch nach dem Abmelden oder Löschen der App-Daten erhalten.”; file in the folder “Auf meinem iPhone”.

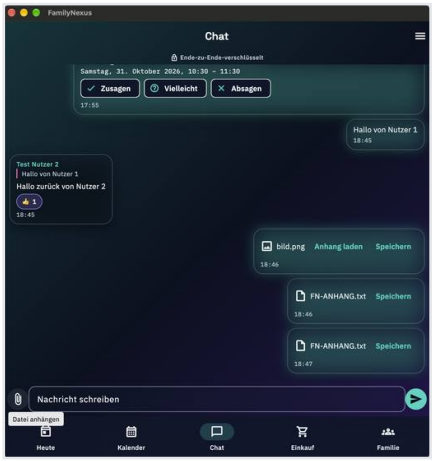


E-17a-G1




E-17a-G2

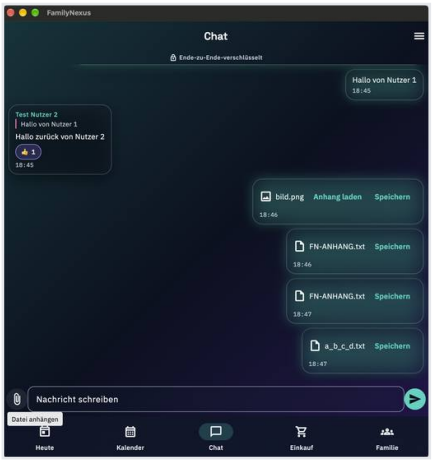


E-17b-G1



E-17b-G2

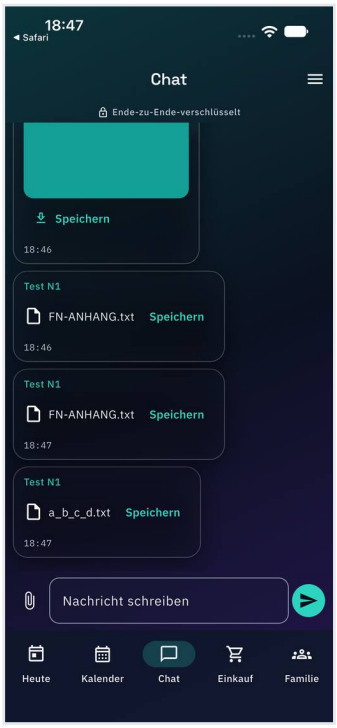

E-17c-G2

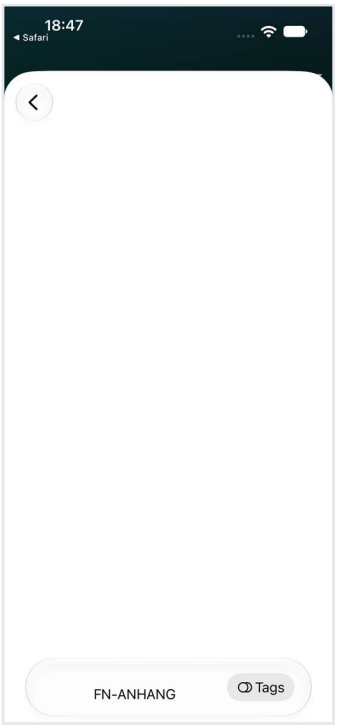


E-17d-G2


E-18 Direct chat · G1, G2

PASSED


Observed: G1: direct chat “Nur zwischen dir und Test Nutzer 2, Ende-zu-Ende-verschlüsselt” (captured before sending), sends “Nur für dich”; G2: chat badge “1”, tab “Test N1” with “Nur zwischen dir und Test N1 …”, message there immediately (no tab switch needed, #77), not in the family chat; no raw text “Attempting verification request”.

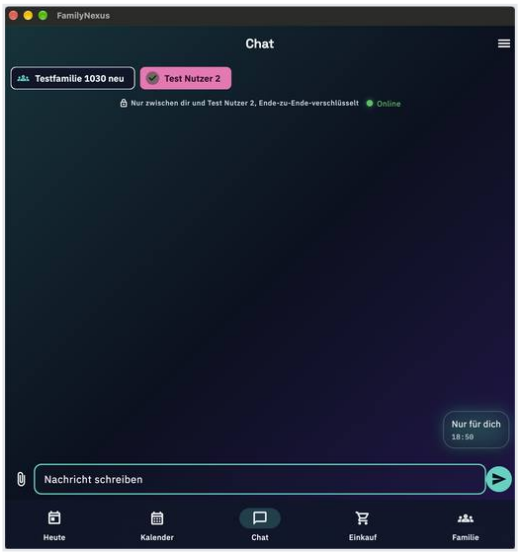

E-18a-G1

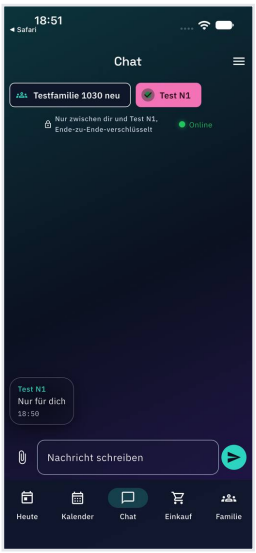

E-18b-G2

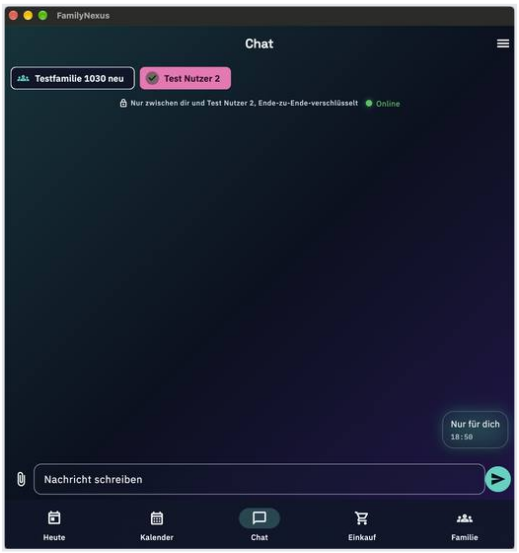


E-18c-G1


E-19 Events and person filter · G1, G2

PASSED


Observed: I2: agenda shows only “Test geteilt 2” (private “Test privat”/“Test Serie” not visible); filter “Test Nutzer 2”: “Keine Termine”; “Alle” resets.

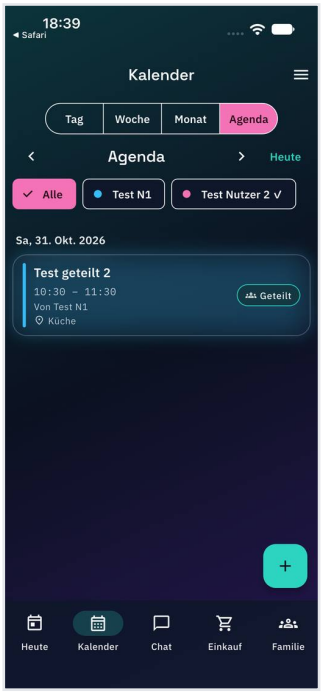


E-19-G2

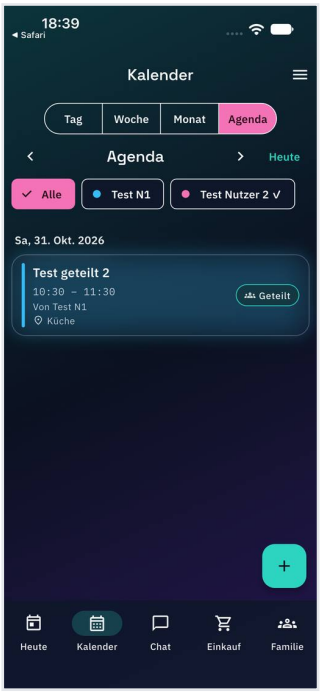

E-19a-G2

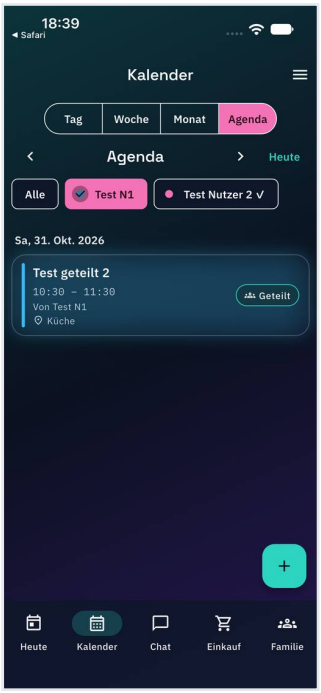

E-19b-G2

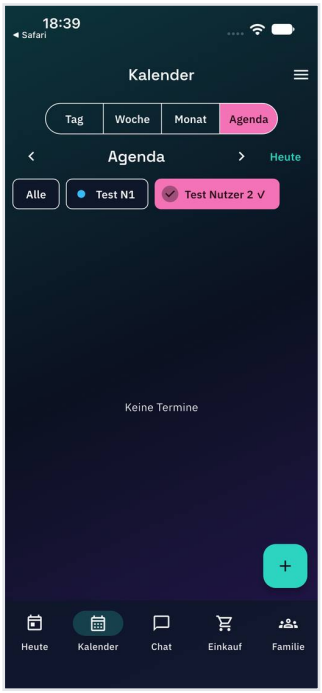

E-19c-G2


E-20 Accept / decline · G2, G1

PASSED

Observed: G2: “Nur der Ersteller kann diesen Termin ändern.” (no edit), answer buttons, before “Keine Antwort”; after “Zusagen” “Du – Zugesagt”. G1: “Test Nutzer 2 – Zugesagt”; “Im Chat teilen” only for the creator.



E-20a-G2

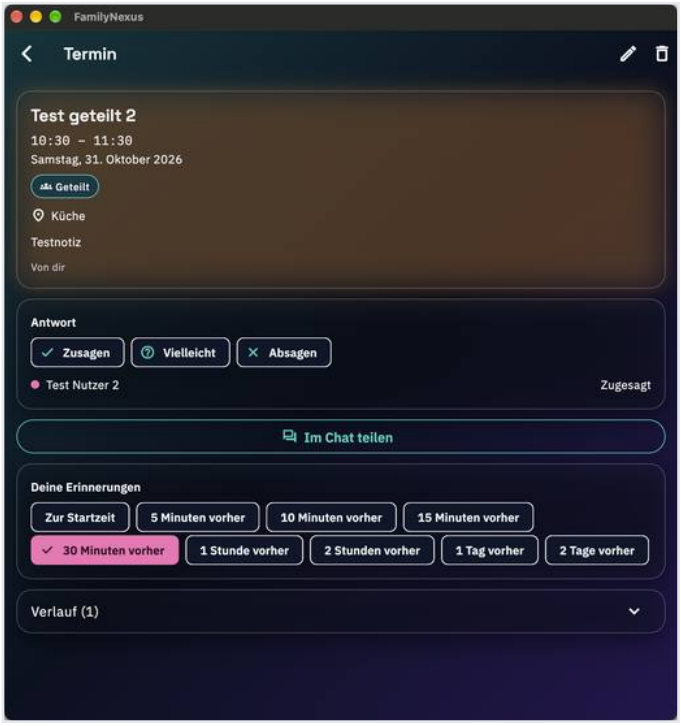


E-20b-G1


E-21 I2’s own event · G2, G1

PASSED

Observed: I2 creates “Termin I2” as shared; G1 sees it “Von Test Nutzer 2”; changing to “Privat” shows “Bereits an die Familie gesendete Inhalte bleiben auf deren Geräten, auch wenn du den Termin später privat machst.”

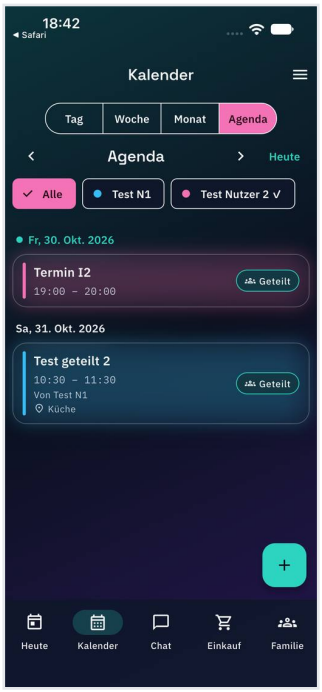

E-21a-G2

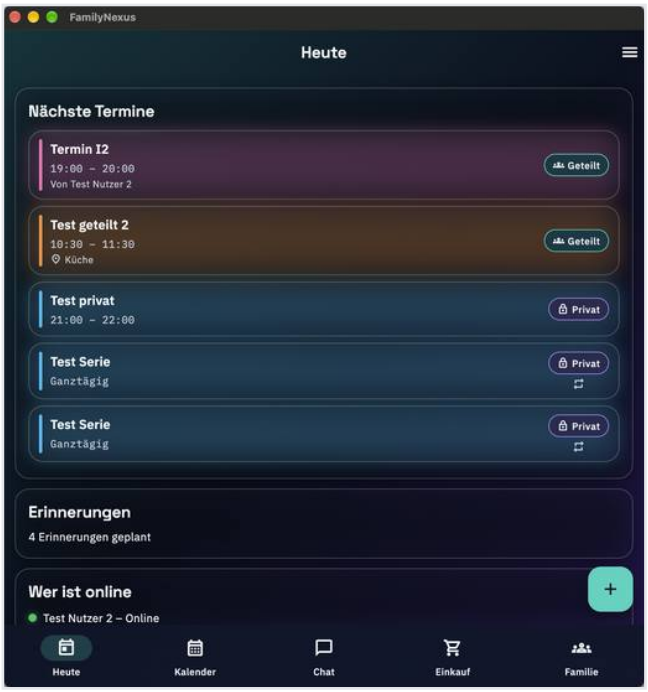

E-21b-G1




E-21c-G2


E-22 Shared shopping list · G2, G1

PASSED


Observed: G2 sees “Milch”/“Vollkornbrot” (“zuletzt von …”), adds “Käse” (typed as “Kaese”); G1 ticks “Käse”; “2 erledigte Einträge für die ganze Familie entfernen?” → removed; G2 deletes “Vollkornbrot”, list empty.




E-22a-G2

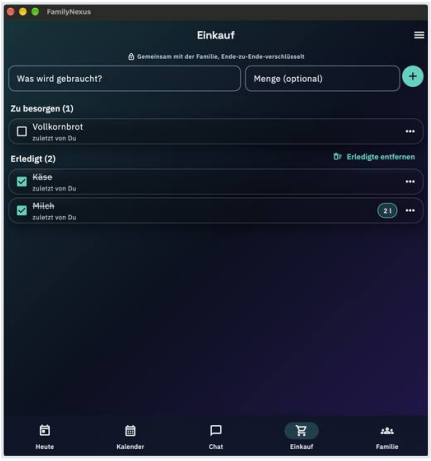


E-22b-G1




E-22b-G2

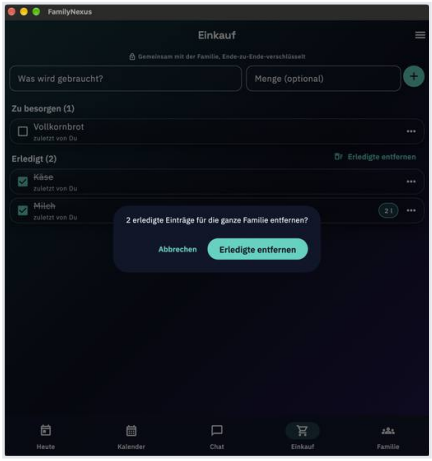

E-22c-G1

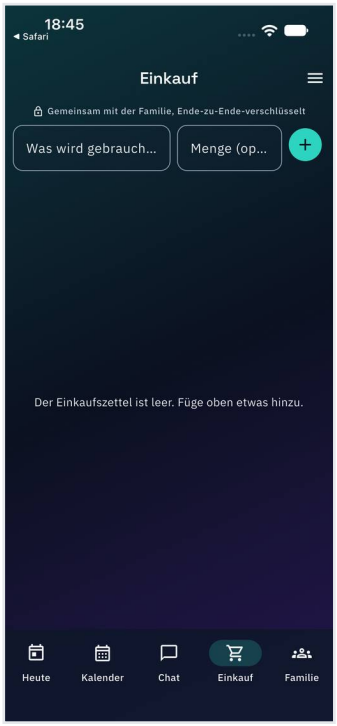

E-22c-G2

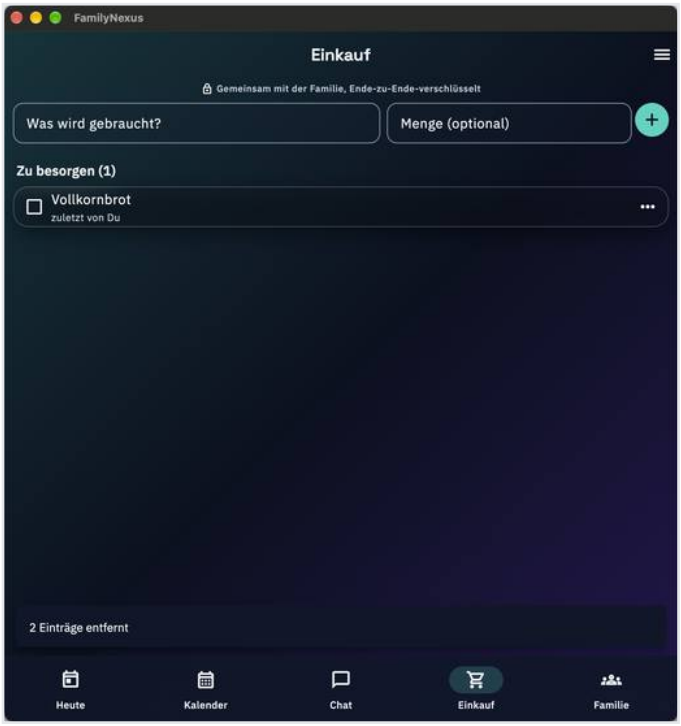


E-22d-G1


E-23 Task for I2 · G1, G2

PASSED

Observed: G1: assigned to Test Nutzer 2, “Montag bis Freitag” chosen (E-23a); list shows the short form “Mo–Fr” and rule “Montag bis Freitag · Startet montags bis freitags neu, nicht am Wochenende” (#76); G2: list under “Mir zugewiesen”, ticking with comment, “Tonne raus erledigt”, date DD.MM.YYYY and time (#38); G1: history “Tonne raus erledigt – Test Nutzer 2 · 30.10.2026, 18:52”; list “Bad putzen” deleted (“Liste „Bad putzen“ löschen?”). Not captured separately: “Aufgaben für dich: 1 offen” on G2 before ticking.

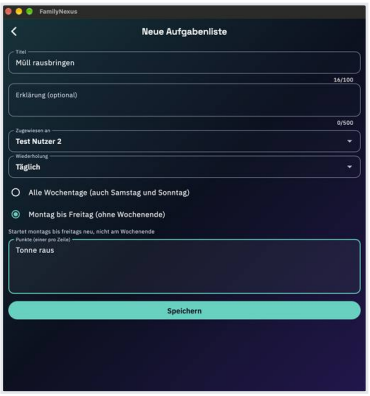


E-23a-G1

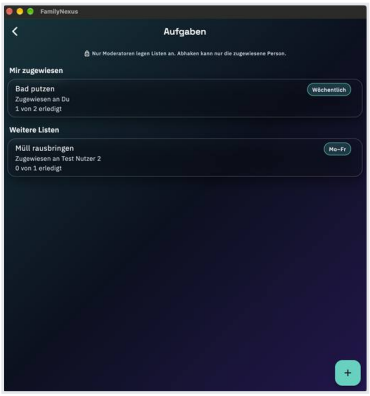


E-23b-G1




E-23b-G2

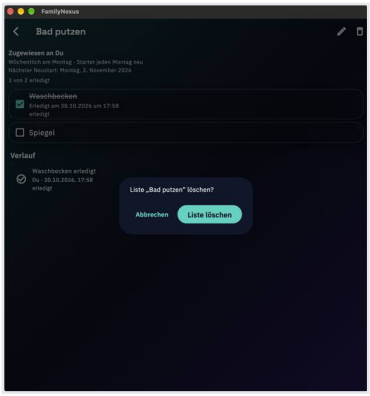

E-23c-G1

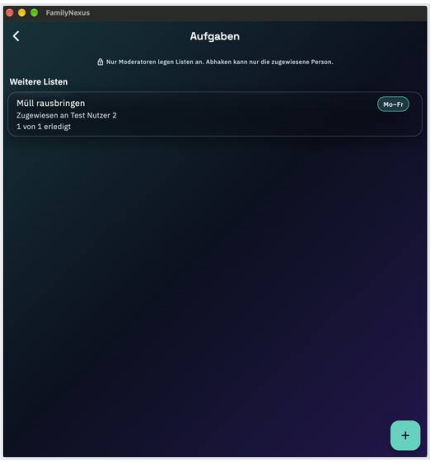


E-23d-G1



E-23d-G2



E-23e-G2

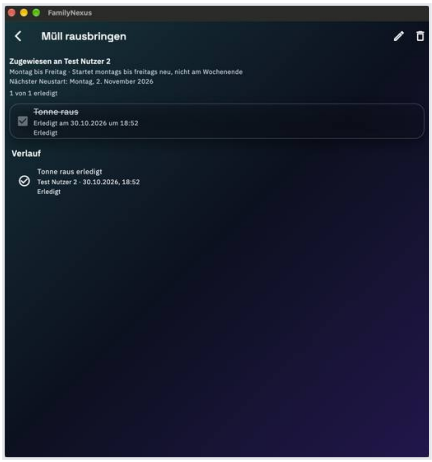


E-23f-G1

E-24 Verify person · G1, G2

PASSED


Observed: Both devices show the same symbols (mushroom, rooster, top hat, panda, trumpet, thumbs-up, paperclip), “Verifiziert.”; member list shows “Verifiziert” at Test Nutzer 2.

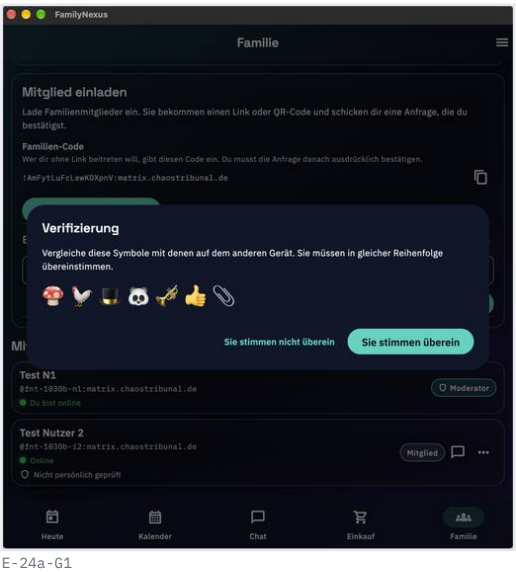

E-24a-G1



E-24b-G2

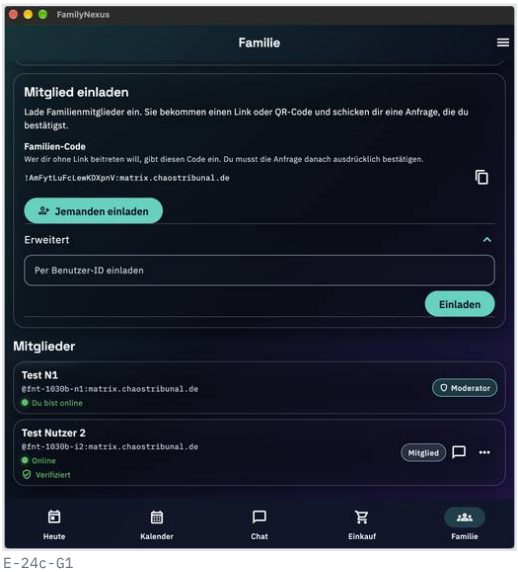


E-24c-G1


E-25 Report message · G1

PASSED


Observed: “Nachricht melden” with a note about the operator and four reasons (spam, harassment, inappropriate content, other); “Meldung gesendet.” with “Absender blockieren”; disappears after about 8 s (#45). Legibility in the light design (#62) not re-checked.

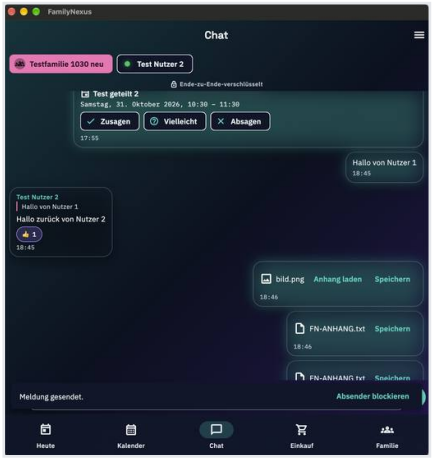

E-25-G1

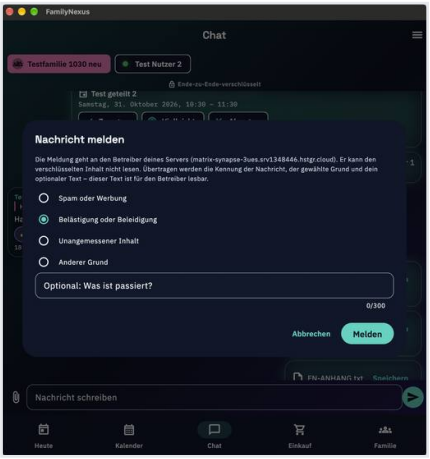

E-25a-G1

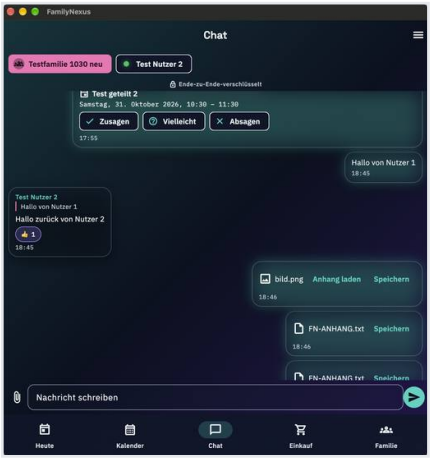


E-25b-G1


E-26 Block member · G1, G2

PASSED


Observed: Confirmation “Test Nutzer 2 blockieren?” with explanation; “Test Nutzer 2 ist blockiert.”; messages from I2 hidden on G1; G2 sends “Noch da?” without an error message. The “Blockiert” label on the member was not captured separately.

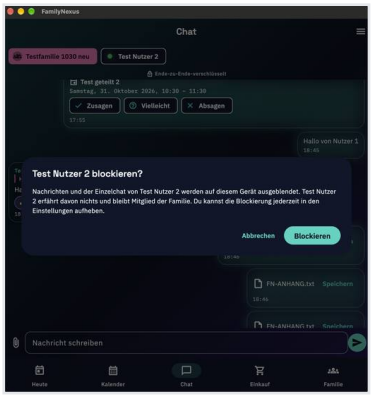


E-26a-G1

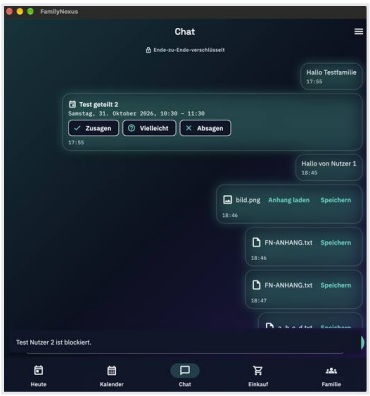


E-26b-G1

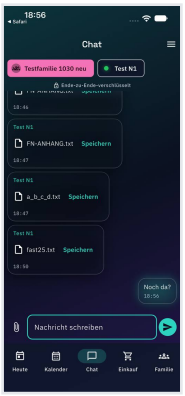

E-26b-G2

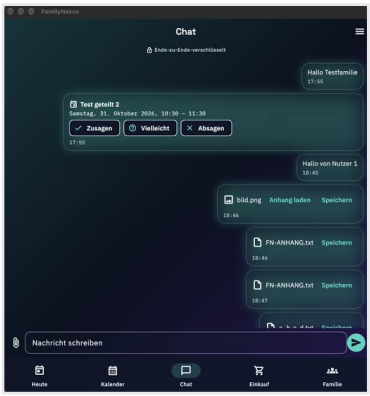

E-26c-G1

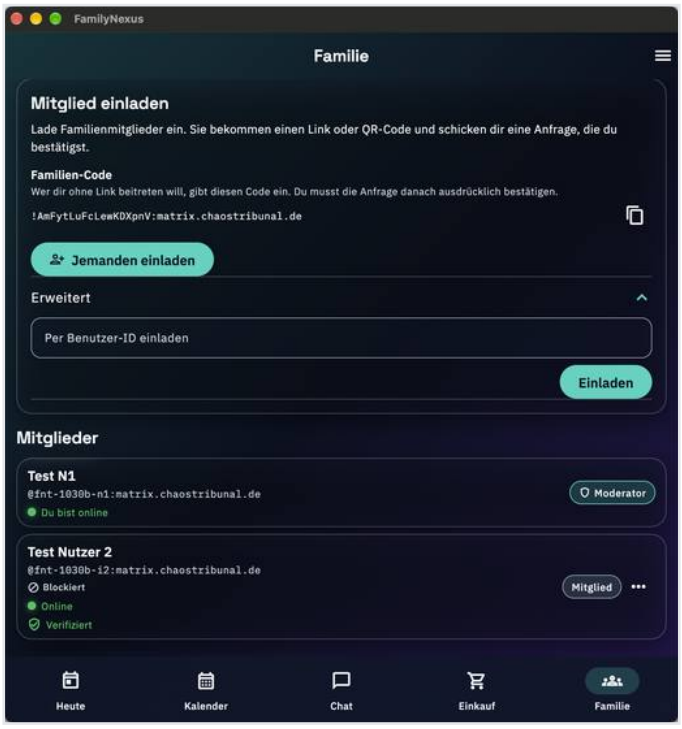


E-26d-G1


E-27 Unblock · G1

PASSED


Observed: “Blockierte Mitglieder” lists Test Nutzer 2; “Blockierung aufheben” → messages from I2 visible again (family chat).

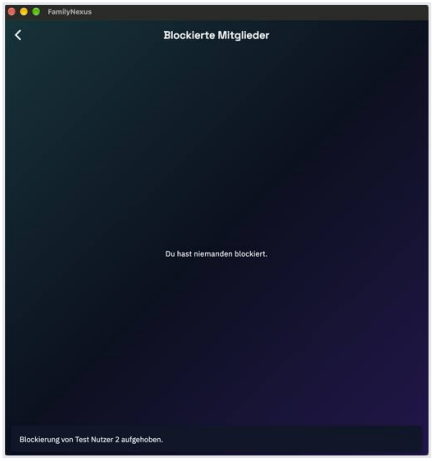

E-27-G1

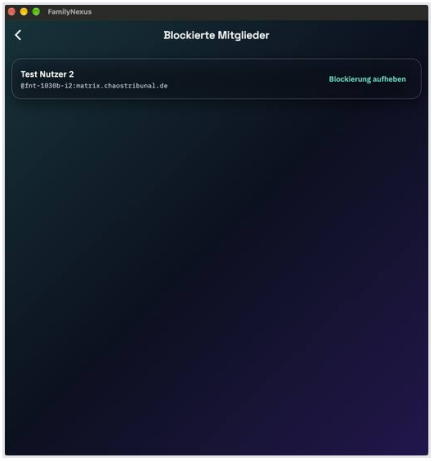

E-27a-G1

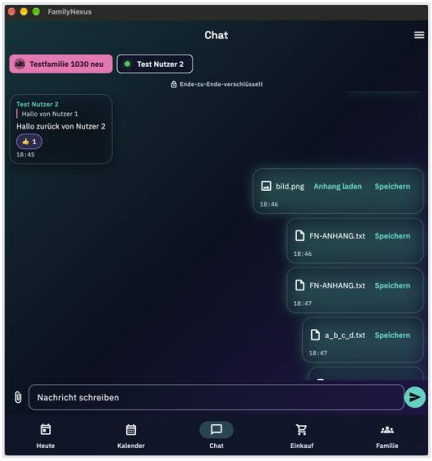


E-27b-G1


E-28 Version · G1, G2

PASSED

Observed: G1 and G2 (menu and settings): “Version 1.2.1 (22)” (G1 evidence B-22a).

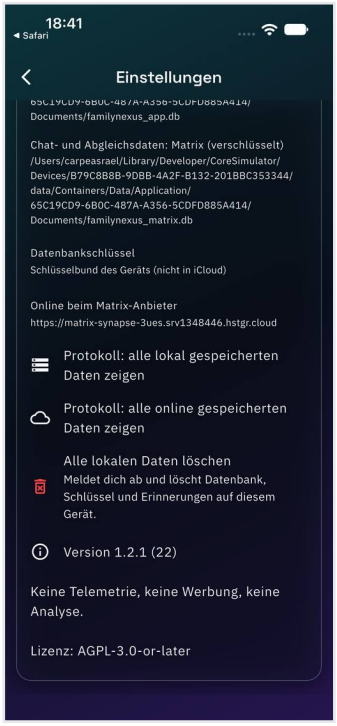

E-28-G2

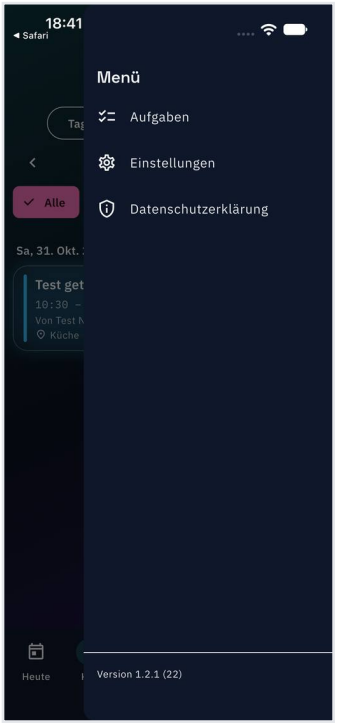


E-28a-G2

E-29 Sole moderator · G1

PASSED

Observed: “Konto löschen?” with “Du bist der einzige Moderator der Familie. Ernenne vorher ein anderes Mitglied zum Moderator …” (#12); “Konto endgültig löschen” inactive without password; unchanged after “Abbrechen”.

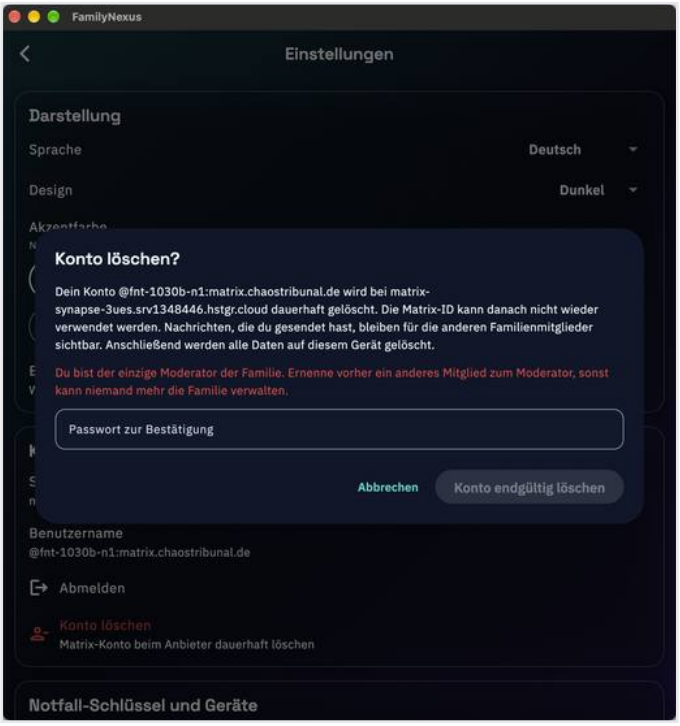


E-29-G1


E-30 Promote to moderator · G1, G2

PASSED


Observed: Confirmation “Test Nutzer 2 zum Moderator ernennen? Moderatoren können einladen, ernennen und entfernen.”; both devices show Test Nutzer 2 as moderator; the “second moderator” recommendation disappears.

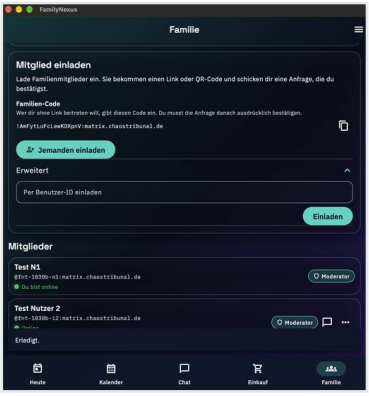


E-30-G1

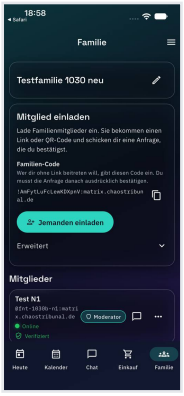

E-30-G2

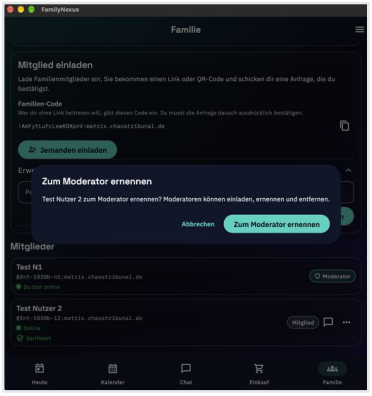

E-30a-G1

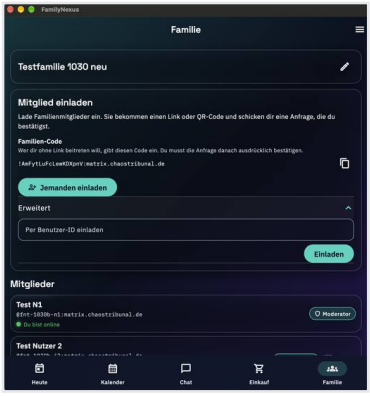


E-30b-G1

E-31 Delete-account dialog · G1

PASSED

Observed: Dialog “Konto löschen?” without the “sole moderator” note; cancel.

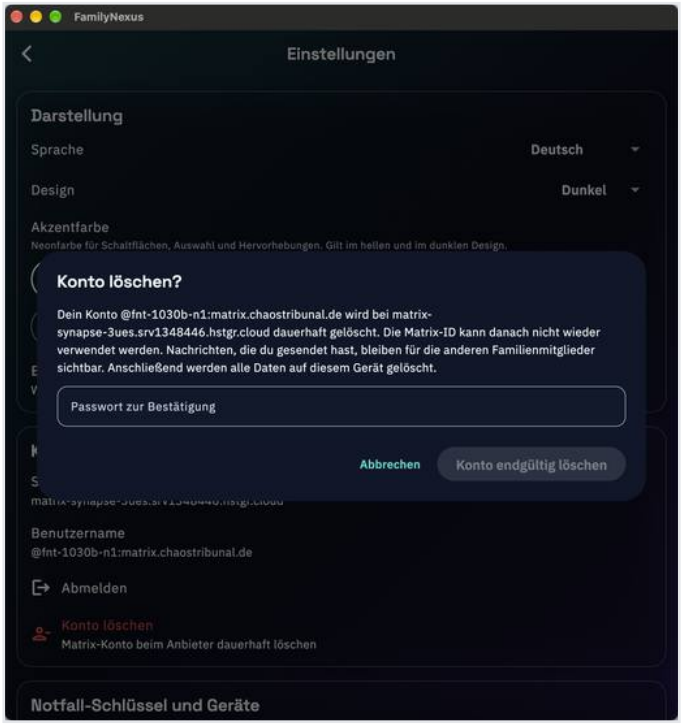

E-31-G1


E-32 Member deletes own account · G2, G1

PASSED


Observed: G2: password dialog without moderator note, then “Willkommen” (not “Anmelden”); counter-check: sign-in as I2 → 403 M_FORBIDDEN. G1: Test Nutzer 2 no longer in the member list, “second moderator” recommendation back; earlier messages visible with the name “Test Nutzer 2”, never with the Matrix ID (#60).



E-32a-G2

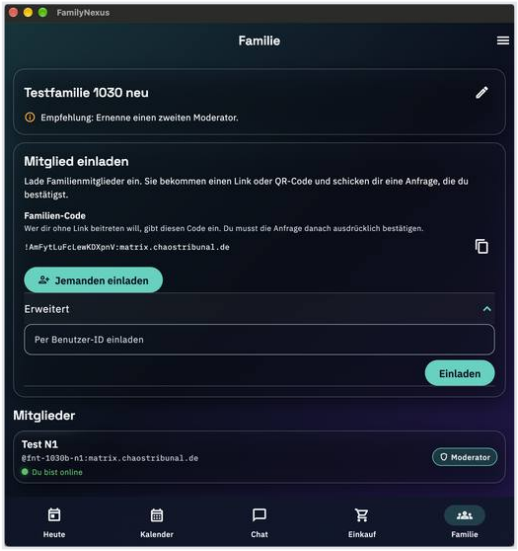

E-32b-G1

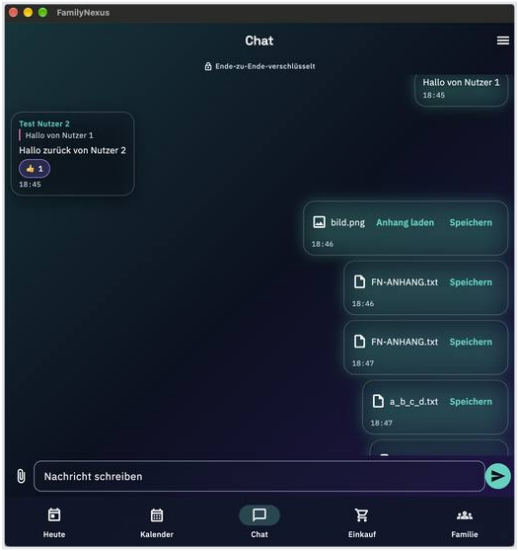


E-32c-G1


F – Local data, deleting, cleaning up

F-01 Account deletion, wrong and correct password (N2) · G2 PASSED

Observed: N2 signed in + unlocked with KN2; wrong password: “Das Passwort stimmt nicht.”, dialog stays; correct password: all local data deleted, “Willkommen”; the dialog named `@fnt-1030b-n12:matrix.chaostribunal.de` and the server, no moderator note.

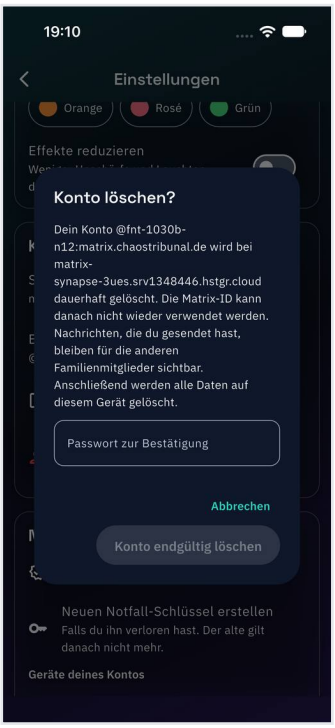

F-01a-G2

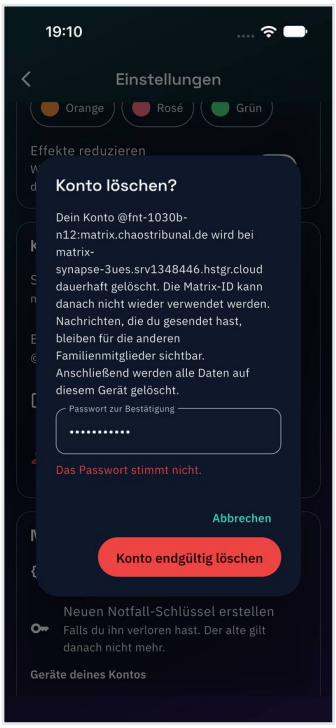

F-01b-G2




F-01c-G2

F-02 Counter-check N2 · – PASSED


Observed: Sign-in N2 → `403 M_FORBIDDEN` (“Invalid username or password”).

F-03 Delete all local data (N1) · G1 PASSED

Observed: Confirmation “Alle lokalen Daten löschen?” (“… Dein Konto beim Server bleibt bestehen …”); then “Willkommen”; the account still exists.

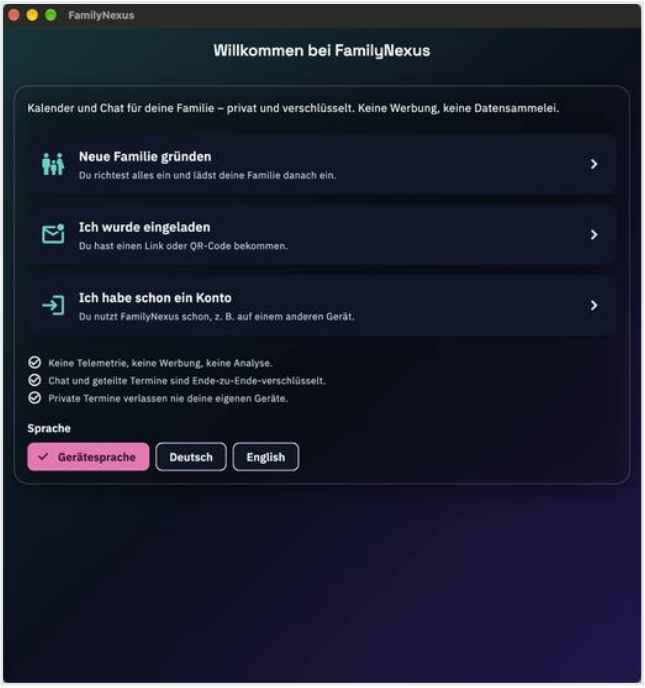

F-03-G1

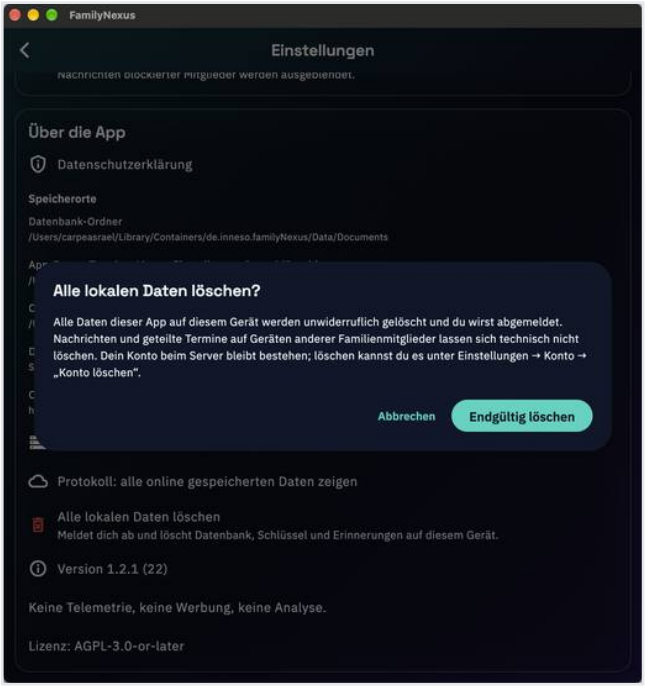


F-03a-G1

F-04 Quit and restart · G1

PASSED

Observed: App quit and restarted → “Willkommen” (settings and data gone).

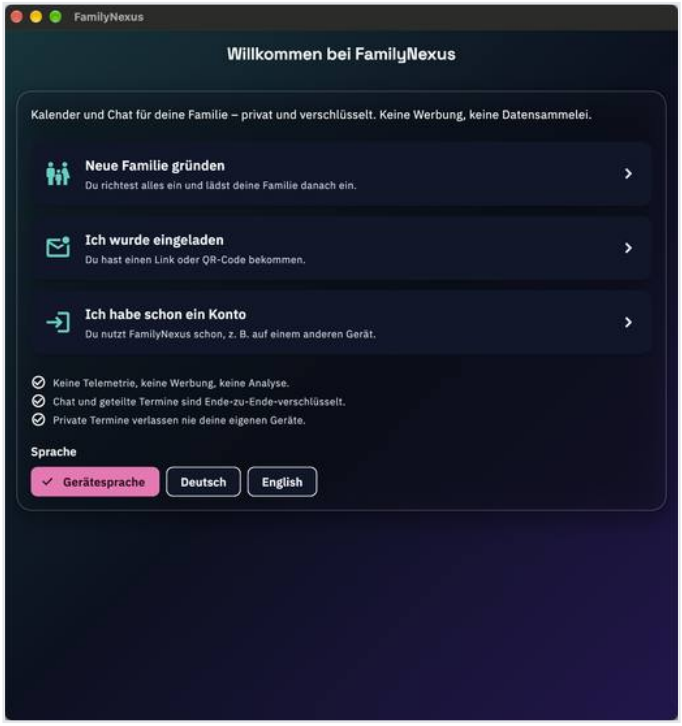


F-04-G1


F-05 Sign in and unlock with KN1b · G1

PASSED


Observed: Sign-in N1 + KN1b → unlocked (after deletion matrix.org is shown again, provider set manually); events (also private), chat, shopping, tasks restored; message from I2 shown as “Ehemaliges Mitglied”, not with the Matrix ID (#60).

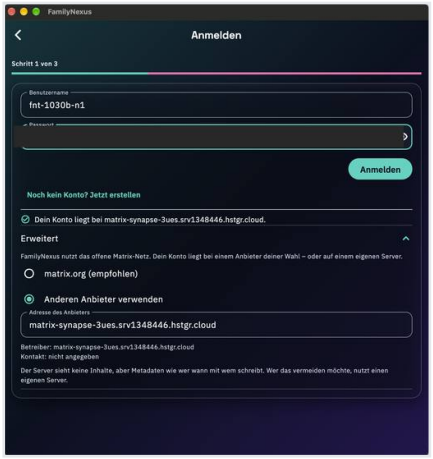

F-05a-G1

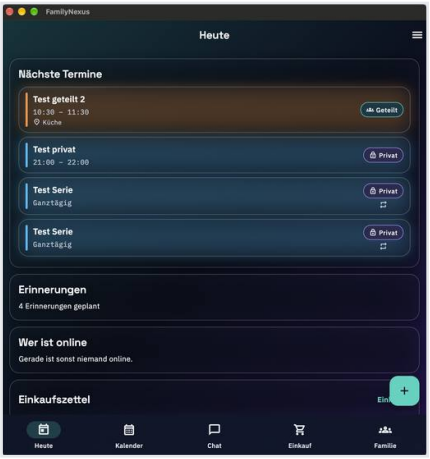


F-05b-G1

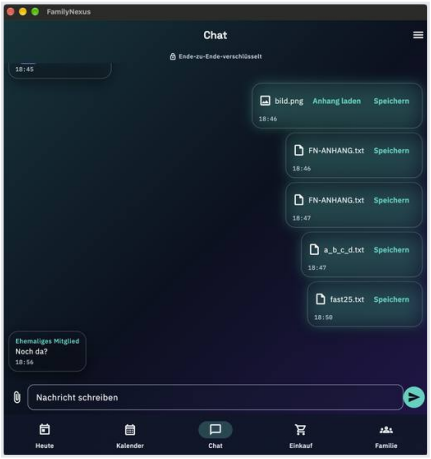


F-05c-G1

F-06 Delete N1 · G1 PASSED

Observed: Dialog without moderator note; wrong click target at first corrected (operator error); with password “Konto endgültig löschen” → “Willkommen”.

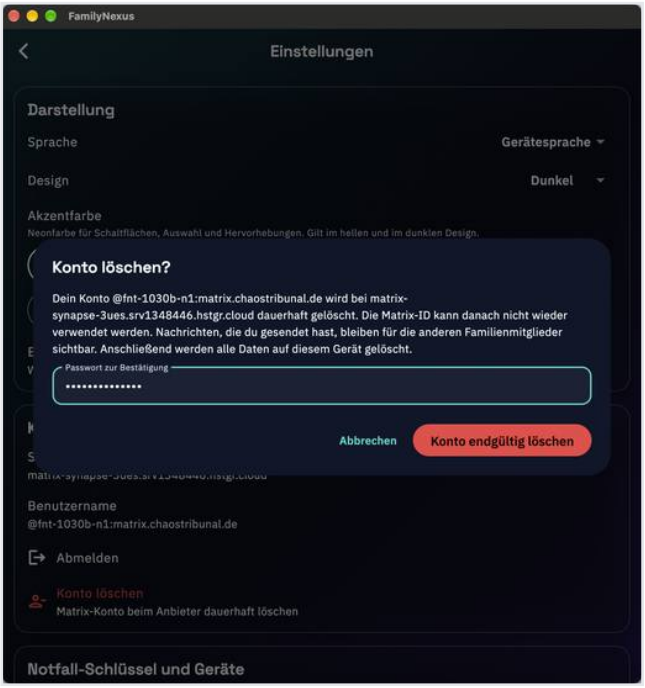

F-06a-G1

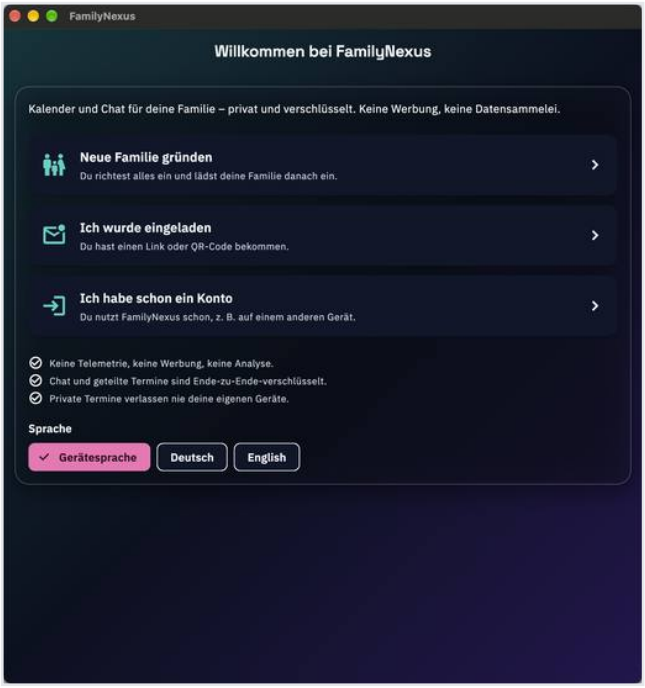

F-06b-G1

F-07 Counter-check N1 and I2 · – PASSED

Observed: N1: 403 `M_FORBIDDEN` (sign-in after deletion); I2: 403 (E-32 counter-check); N2: 403 (F-02). Further counter-checks not repeated because of the server rate limit (`M_LIMIT_EXCEEDED`).

F-08 State at the end · – PASSED

Observed: State at the end: fnt-1030b-n1, -n12, -i2 deleted (`M_USER_IN_USE`, sign-in refused); fnt-1030b-n9 never created (free). Registration left open. Test devices “Testwerkzeug” removed via the API.

G – Automated tests and special cases

G-01 flutter analyze · – PASSED

Observed: `flutter analyze`: “No issues found!” (logs/G-01_analyze.txt).

G-02 flutter test · – PASSED

Observed: `flutter test`: 786 passed, 49 skipped, “All tests passed!” (logs/G-02_flutter_test.txt).

G-03 Review notes test · – PASSED

Observed: `flutter test test/store/review_notes_test.dart`: 4 passed (logs/G-03_review_notes.txt).

G-04 E2E tests (optional) · – NOT RUN

Observed: Optional (local Synapse); not run.

G-05 Covered by tests · – PASSED

Observed: Covered by G-02 (786 tests green).

G-06 Review notes, manual · G1 — NOT RUN

Observed: Review notes not traced step by step manually (checked automatically by G-03).

G-07 Walkthrough with a person without prior knowledge · G1 — NOT RUN

Observed: Walkthrough with a person without prior knowledge: not possible in an automated run.


G-08 Web only · Web — N/A

Observed: Web platform only.

H – On-device encryption and data exchange

H-01 Storage locations · G1 — PASSED

Observed: G1 and G2: “Speicherorte” with database folder, “App-Daten: Termine, Listen, Einstellungen (verschlüsselt)”, “Chat- und Abgleichsdaten: Matrix (verschlüsselt)”, “Datenbankschlüssel: Schlüsselbund des Geräts (nicht in iCloud)”, “Online beim Matrix-Anbieter”.

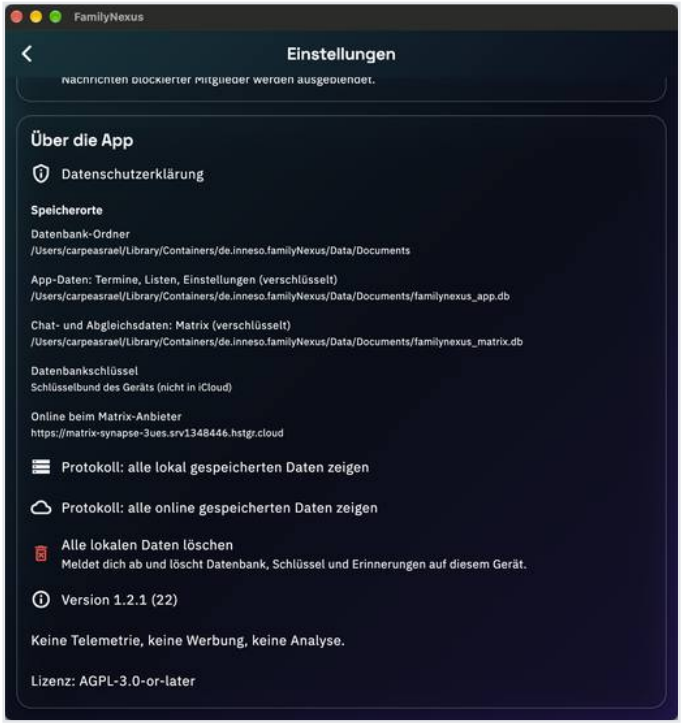

H-01-G1

H-02 Quit app, list database files · G1 — NOT RUN

Observed: G1 (Mac): container protected by macOS (“Operation not permitted”; terminal without full access). Substitute G2 (iOS simulator, account I2): exactly two files `familynexus_app.db` (81,920 bytes) and `familynexus_matrix.db` (516,096 bytes); no further data files except the deliberately saved attachments in `tmp/`.

H-03 Check copies · G1 — PASSED

Observed: G2 (copies with app quit): header of both files is random bytes (no “SQLite format 3”), `file` = data, `sqlite3`: “file is not a database”. G1 see H-02.

H-04 No plaintext remains · G1 — PASSED

Observed: G2: 0 hits for all search terms in both databases; in the rest of the app data folder only the deliberately saved attachments in `tmp/` (term FN-ANHANG, expected, H-08c); counter-check: the saved local log does find the terms (>0).

H-05 Keys in the key store · G1 PASSED


Observed: G1: entries `fn.key.db.app` and `fn.key.db.matrix` (service `flutter_secure_storage_service`) in the “login” keychain, without sync attribute (not in iCloud keychain); value not read. Note: creation date of the entries predates this run (earlier installation; the key was reused).

H-06 No backup of data · G1 PASSED

Observed: Apple: key only in the local “login” keychain, no iCloud entry (H-05); Android part n/a.

H-07 Clipboard · G1 PASSED

Observed: Run 1: after “Kopieren” 59 characters, after about 65 s 0 characters. Run 2: copy (59), then `abc` copied: after 66 s `abc` (3 characters) is unchanged.

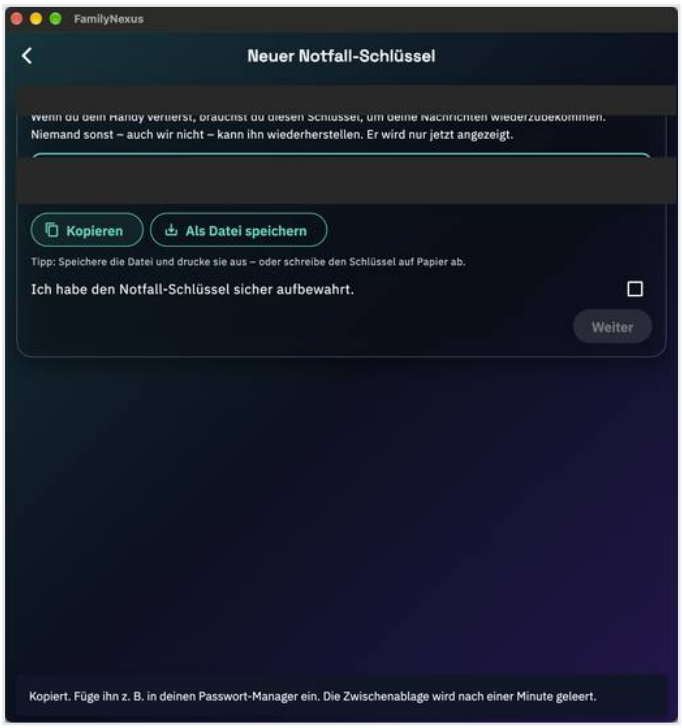


H-07a-G1


H-08 Files the app deliberately stores in plaintext · G1

WITH FINDING

Observed: (a) emergency-key file contains account, provider, date, key (A-10); (b) log: warning “Das Protokoll zeigt deine Daten im Klartext. Beim Kopieren oder Speichern verlassen sie den verschlüsselten Speicher der App.”, “Protokoll gespeichert” (Mac only, file not captured as an image); (c) attachment: warning on G2 (E-17). Files (a) and (b) deleted afterwards, trash not emptied; privacy-policy note on (a) not re-checked.

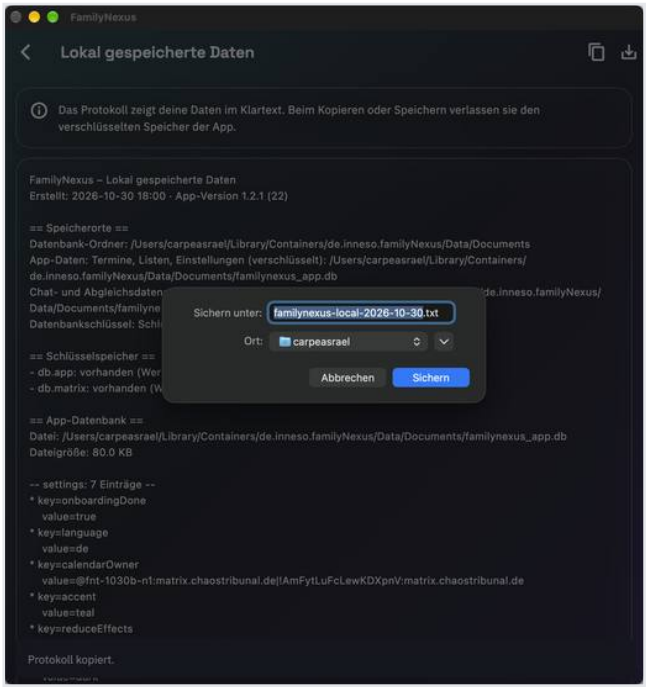

H-08b-G1

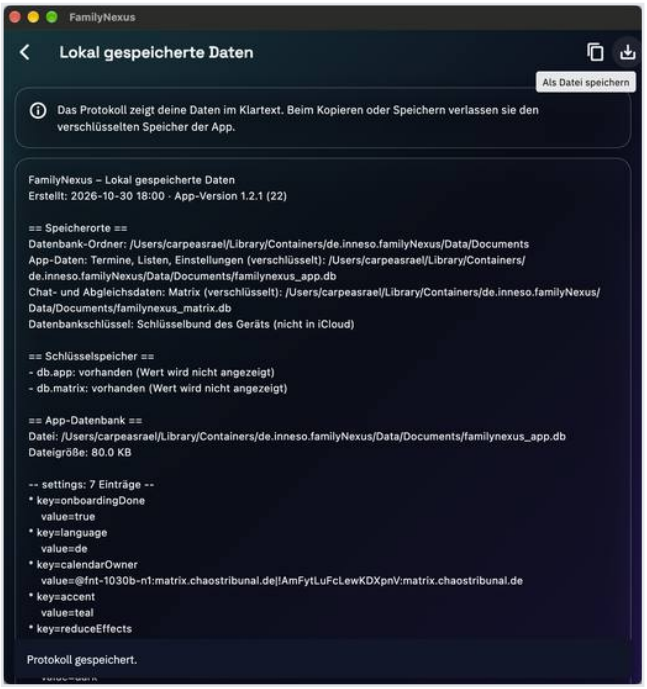

H-08b2-G1

H-09 Log without secrets · G1


PASSED

Observed: Log (G1, saved): 0 hits for password, KN1, KN1b, token patterns; sentences “Außerdem gespeichert, aber aus Sicherheitsgründen nicht angezeigt: …”, “Nie gespeichert, nur im Arbeitsspeicher: Online-Status …”, “Geplante Erinnerungen liegen zusätzlich beim Betriebssystem.” present (note: title/time of reminders are plaintext at the operating system).


H-10 Online log: encryption and rooms · G1, G2

PASSED


Observed: Online log G1 and G2: family room, “Einzelchat” and “Privater Raum (Abgleich privater Termine)” each “Ende-zu-Ende-verschlüsselt: ja”, no “Sonstiger Raum”; cross-signing and key backup “eingerichtet”; private room “1 beigetreten, 0 eingeladen”; family room 2 joined; G2 sees only its own private room.

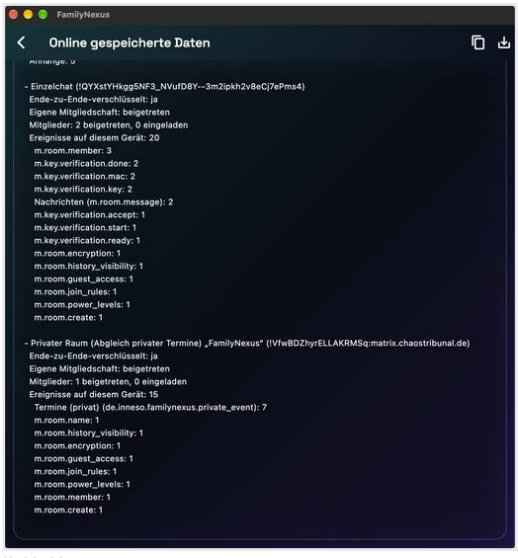

H-10-G1

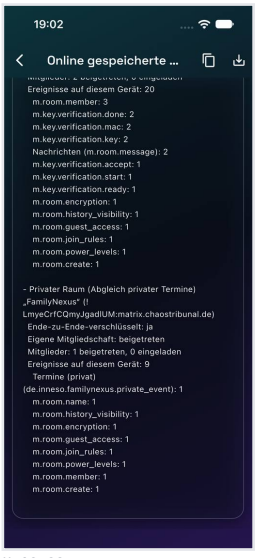

H-10-G2

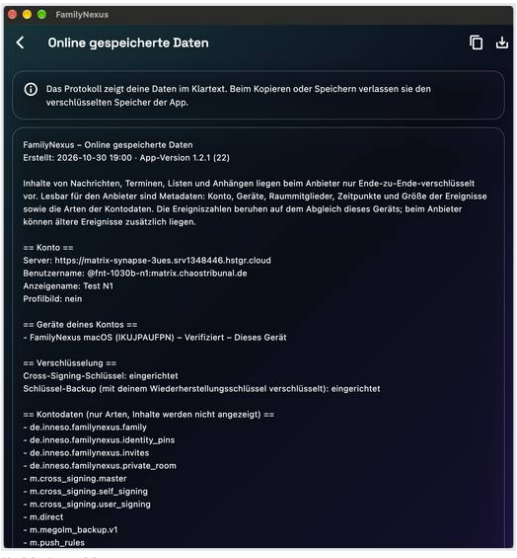

H-10-top-G1

H-11 Server sees only ciphertext (N1) · –

PASSED

Observed: curl as N1 (new device “Testwerkzeug”, signed out afterwards): 3 rooms; only `m.room.encrypted` (`m.megolm.v1.aes-sha2`), 0 plaintext `m.room.message` events; 0 hits for all search terms (Hallo von Nutzer 1, Nur für dich, FN-ANHANG-..., Test geteilt 2, Milch ...). Cleanup: a second test device from a failed attempt was additionally removed by password.

H-12 Metadata (from H-11) · –

WITH FINDING

Observed: Readable in plaintext: room name of the family room = family name “Testfamilie 1030 neu” (and name of the private room “FamilyNexus”), members, join_rule `knock/invite`, timestamps, size, device list. The family name as room name is not mentioned in the privacy policy / serverMetadataNote → note (not an encryption failure). Contents not readable.

H-13 Private room · –

PASSED

Observed: Private room: 1 member (N1), join_rule `invite`, only `m.room.encrypted`; “Test privat” at I2 neither in calendar nor chat (E-19).

H-14 Invitation link contains no secrets · G1


PASSED

Observed: Parameters only v, room, via, srv, inv, exp (≈3 days), f, by, n (32 hex characters); no password, key, token, device ID; length 309 ≤ 1024; web link carries the data after `#`. Note: family and inviter names are in plaintext in the link.

H-15 Attachment unchanged and safely named · G1, G2

PASSED

Observed: SHA-256 of the saved FN-ANHANG.txt = original; file name `a<b>c"d.txt` becomes `a_b_c_d.txt` (special characters → _), no automatic opening.

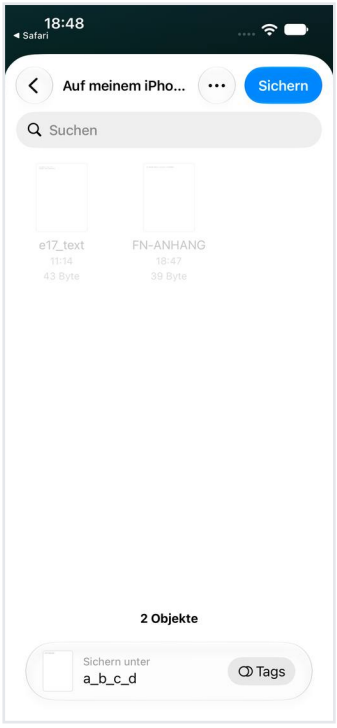


H-15-G2


H-16 Disallowed attachments · G1

PASSED


Observed: (a) test.zip, (b) test.sh, (c) test.exe, (d) 26 MiB txt: each “Dieser Anhang ist nicht erlaubt (Typ oder Größe).”, nothing sent; (e) 25 MiB − 1 byte is sent and arrives at G2.

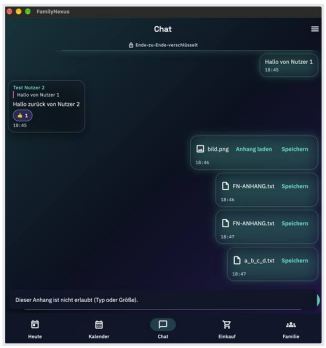


H-16b-G1

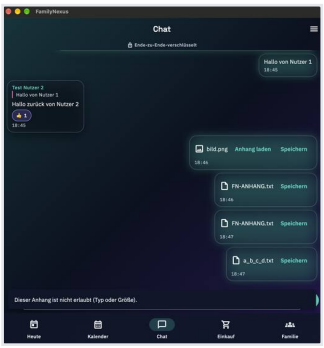


H-16c-G1

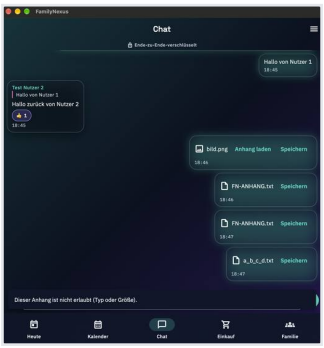


H-16d-G1



H-16e-G1

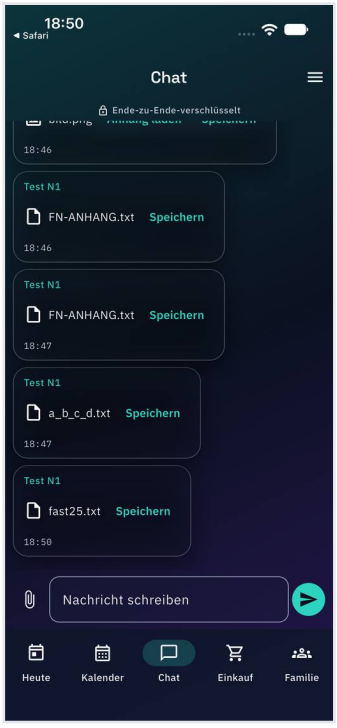

H-16e-G2

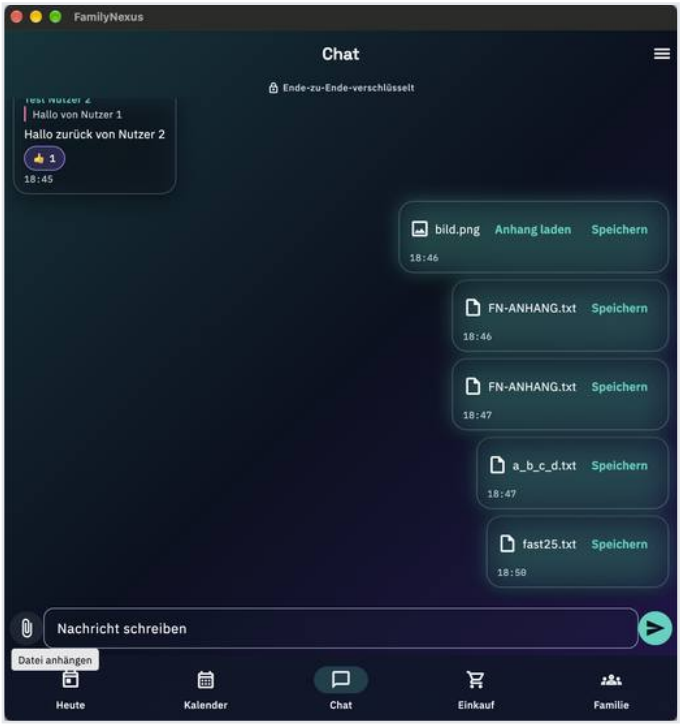

H-16f-G1

H-17 Transport · –

PASSED

Observed: (a) TLS 1.3, `Verify return code: 0 (ok)`, certificate for the provider (Let’s Encrypt); (b) the Mac app’s only internet connection: 443 to 76.13.153.15 = provider address; no advertising / analytics / crash services. Network request of the landing page not captured (fragment after # is not sent by design).

H-18 After F-04: files and keys gone · G1

WITH FINDING

Observed: G2 (simulator, after F-01): old databases gone (checksums/header changed, 0 hits for all search terms in the folder); the app immediately creates new empty encrypted `familynexus_app.db/familynexus_matrix.db`. Deliberately saved attachments in `tmp/` remain (announced in the dialog). G1 (Mac, after F-04): container not readable (files). Keychain: `fn.key.db.app` was re-created at restart (creation date 19:12), `fn.key.db.matrix` kept its old date (10:45) – expectation “both entries deleted” not met (value not read).

H-19 Key lost (owner only, optional) · G1

NOT RUN

Observed: Optional, owner of the device only (deleting the `fn.key.db.app` entry by hand); not executed.

Console output (excerpts)

logs/D-06_gegenprobe.txt

```
{"available":true}
```

logs/F-02_login_n12.txt

```
{"errcode":"M_FORBIDDEN","error":"Invalid username or password"}
```

logs/F-07_gegenprobe.txt

```
fnt-1030b-n1: {"errcode":"M_FORBIDDEN","error":"Invalid username or password"}
fnt-1030b-i2: {"errcode":"M_LIMIT_EXCEEDED","error":"Too Many Requests","retry_after_ms":30500
fnt-1030b-n12: {"errcode":"M_LIMIT_EXCEEDED","error":"Too Many Requests","retry_after_ms":25433
fnt-1030b-i2: {"errcode":"M_LIMIT_EXCEEDED","error":"Too Many Requests","retry_after_ms":15327
fnt-1030b-n12: {"errcode":"M_LIMIT_EXCEEDED","error":"Too Many Requests","retry_after_ms":11257
```

logs/F-07_login_i2.txt

```
{"errcode":"M_FORBIDDEN","error":"Invalid username or password"}
```

logs/F-08_zustand.txt

```
fnt-1030b-n1: {"errcode":"M_USER_IN_USE","error":"User ID already taken."}
fnt-1030b-n12: {"errcode":"M_USER_IN_USE","error":"User ID already taken."}
fnt-1030b-i2: {"errcode":"M_USER_IN_USE","error":"User ID already taken."}
fnt-1030b-n9: {"available":true}
```

logs/G-01_analyze.txt

```
Got dependencies!
23 packages have newer versions incompatible with dependency constraints.
Try `flutter pub outdated` for more information.
Analyzing FamilyNexus...
No issues found! (ran in 3.9s)
```

logs/G-02_flutter_test.txt

```
00:24 +783 ~49: /Users/carpeasrael/NextCloud_int/mac_project_2/FamilyNexus/test/architecture_test.dart: keine print/debugPrint-Aufru
fe in lib/
00:24 +784 ~49: /Users/carpeasrael/NextCloud_int/mac_project_2/FamilyNexus/test/architecture_test.dart: keine print/debugPrint-Aufru
fe in lib/
00:24 +785 ~49: /Users/carpeasrael/NextCloud_int/mac_project_2/FamilyNexus/test/architecture_test.dart: Android-spezifische Dart-Brü
cken liegen nur in data/platform
00:24 +786 ~49: All tests passed!
```

logs/G-03_review_notes.txt

```
00:00 +2: Review-Notizen macos: zitierte Beschriftungen stehen so in der App
00:00 +3: Review-Notizen macos: keine überholten Aussagen, Grenze von App Store Connect
00:00 +4: All tests passed!
```

logs/H-02_dateien_G2.txt

```
81920 familynexus_app.db
516096 familynexus_matrix.db
```

logs/H-03_verschluesselung_G2.txt

```
== familynexus_app.db
00000000: 4c26 58f6 2f7f d61e dbdd 6457 c83f 46d6  L&X./.....dW.?F.
familynexus_app.db: data
Error: in prepare, file is not a database (26)
== familynexus_matrix.db
00000000: 6c7d 048c a93f b0a9 3413 053a c17c 7cc2  l}...?..4..:.||.
familynexus_matrix.db: data
Error: in prepare, file is not a database (26)
```

logs/H-04_gegenprobe_protokoll.txt

```
Testfamilie 1030: 1
Test geteilt 2: 1
Test N1: 0
```

logs/H-04_suche_db_G2.txt

```
familynexus_app.db | Testfamilie 1030: 0
familynexus_app.db | Test geteilt 2: 0
familynexus_app.db | Hallo von Nutzer 1: 0
familynexus_app.db | Nur für dich: 0
familynexus_app.db | Test N1: 0
familynexus_app.db | FN-ANHANG-358768: 0
familynexus_matrix.db | Testfamilie 1030: 0
familynexus_matrix.db | Test geteilt 2: 0
familynexus_matrix.db | Hallo von Nutzer 1: 0
familynexus_matrix.db | Nur für dich: 0
familynexus_matrix.db | Test N1: 0
familynexus_matrix.db | FN-ANHANG-358768: 0
```

logs/H-04_suche_ordner_G2.txt

```
Testfamilie 1030 ->
Hallo von Nutzer 1 ->
Nur für dich ->
FN-ANHANG-358768 -> tmp/a_b_c_d.txt tmp/FN-ANHANG.txt
Test N1 ->
```

logs/H-05_schluesselbund_metadaten_G1.txt

```
keychain: "/Users/carpeasrael/Library/Keychains/login.keychain-db"
    "acct"<blob>="fn.key.db.app"
    "cdat"<timedate>=0x323032363130333031303433333385A00  "20261030104338Z\000"
    "svce"<blob>="flutter_secure_storage_service"
    "acct"<blob>="fn.key.db.matrix"
    "cdat"<timedate>=0x323032363130333031303435535385A00  "20261030104558Z\000"
    "svce"<blob>="flutter_secure_storage_service"
```

logs/H-09_protokoll_geheimnisse.txt

```
Protokoll (H-08b): Passwort N1: 0; KN1: 0; KN1b: 0; Token-Muster: 0
```

logs/H-11_server_chiffretext.txt

```
Raum 1 | Mitglieder beigetreten: 2 | Ereignisse: {'m.room.power_levels': 1, 'm.room.encrypted': 38, 'm.reaction': 1, 'm.room.member'
: 7, 'm.room.name': 2, 'm.room.join_rules': 1} | algorithm: {'m.megolm.v1.aes-sha2'} | m.room.message im Klartext: 0 | m.room.encryp
tion: ['m.megolm.v1.aes-sha2'] | join_rule: ['knock'] | m.room.name vorhanden: True
Raum 2 | Mitglieder beigetreten: 1 | Ereignisse: {'m.room.encrypted': 7, 'm.room.name': 1, 'm.room.history_visibility': 1, 'm.room.e
ncryption': 1, 'm.room.guest_access': 1, 'm.room.join_rules': 1, 'm.room.power_levels': 1, 'm.room.member': 1, 'm.room.create': 1} |
 algorithm: {'m.megolm.v1.aes-sha2'} | m.room.message im Klartext: 0 | m.room.encryption: ['m.megolm.v1.aes-sha2'] | join_rule: ['in
vite'] | m.room.name vorhanden: True
Raum 3 | Mitglieder beigetreten: 2 | Ereignisse: {'m.room.encrypted': 11, 'm.room.member': 3, 'm.room.encryption': 1, 'm.room.histor
y_visibility': 1, 'm.room.guest_access': 1, 'm.room.join_rules': 1, 'm.room.power_levels': 1, 'm.room.create': 1} | algorithm: {'m.m
egolm.v1.aes-sha2'} | m.room.message im Klartext: 0 | m.room.encryption: ['m.megolm.v1.aes-sha2'] | join_rule: ['invite'] | m.room.n
ame vorhanden: False
Treffer Suchbegriffe in allen Verläufen und Zuständen:
  Hallo von Nutzer 1: 0
  Nur für dich: 0
  FN-ANHANG-358768: 0
  Test geteilt 2: 0
  Noch da: 0
  Hallo Testfamilie: 0
  Milch: 0
  Bad putzen: 0
  Test privat: 0
Geräte des Kontos: ['Testwerkzeug', 'FamilyNexus macOS', 'Testwerkzeug']
```

logs/H-14_link_parameter.txt

```
Web-Link: Basis https://carpeasrael.github.io/FamilyNexus/join/ | Länge 309 | Parameter: ['by', 'exp', 'f', 'inv', 'n', 'room', 'srv
', 'v', 'via']
exp Tage ab jetzt: 2.98 | n-Länge: 32 hex: True
Passwort/Schlüssel/Token/Gerät im Link: False
```

logs/H-17a_tls.txt

```
TLS:
subject=/CN=matrix-synapse-3ues.srv1348446.hstgr.cloud
issuer=/C=US/O=Let's Encrypt/CN=YR1
New, TLSv1/SSLv3, Cipher is AEAD-CHACHA20-POLY1305-SHA256
    Protocol  : TLSv1.3
    Verify return code: 0 (ok)
```

logs/H-17b_verbindungen_G1.txt

```
1 TCP 192.172.10.137:61571 -> 76.13.153.15:443 (ESTABLISHED)
```

logs/H-18_nach_loeschen_G2.txt

```
Documents nach Löschen (F-01) und Beenden:
128 .
224 ..
81920 familynexus_app.db
217088 familynexus_matrix.db
Treffer FN-ANHANG im App-Datenordner (tmp/):
tmp/FN-ANHANG.txt
tmp/a_b_c_d.txt
Suchbegriffe sonst:
Testfamilie 1030: 0
Hallo von Nutzer 1: 0
Test N1: 0
00000000: 1ab6 8340 500e 51c7 c3cf cb0a 90dc fb4e  ...@P.Q........N
Error: in prepare, file is not a database (26)
00000000: dff8 2e94 83bf 577d 6e78 1179 0e1a 2d6c  ......W}nx.y..-l
Error: in prepare, file is not a database (26)
```

logs/H-18_schluesselbund_G1.txt

```
Schlüsselbund nach F-04 (G1):
fn.key.db.app:     "cdat"<timedate>=0x323032363130333031383132343325A00  "20261030181242Z"
fn.key.db.matrix:     "cdat"<timedate>=0x323032363130333031303435535385A00  "20261030104558Z"
```