FamilyNexus test report – run 17

Test plan TP-FN-001 v1.8 @ dddf22d · iPhone 17 simulator, iOS 27.0 (G1) + macOS (G2) · run of 30 October 2026, 20:40–22:35 · date part “1030c” · app 1.2.1 (22) from `main` @ dddf22d

107	7	7	1	1	123
passed	with finding	not run	failed	n/a	steps in plan

Overall verdict: executed in full, not accepted. All sections V to H of plan v1.8 were run with build 1.2.1 (22) on the iPhone 17 simulator (G1, roles swapped compared with run 16) and macOS (G2, TestFlight build), with new accounts (N1 `fnt-1030c-n1`, N2 `fnt-1030c-n12`, I2 `fnt-1030c-i2`). One step failed: D-02 – the rejection of a join request made with the family code did not reach the Mac even after 6 minutes and an app restart (target ≤ 20 s; about 5 s in the simulator in run 16). Only steps that need an action by the device owner or a real person remain open (B-17, H-19, G-04, G-06, G-07, D-07). All three throw-away accounts are deleted at the end. Confirmed without finding: #103, #56, #57, #63, #64, #65, #66, #68, #76, #77, #60, #78. 7 findings / notes (below), none of them an encryption failure.

Platform and system (plan section 2)

Item	G1 (device 1)	G2 (device 2)
Platform	iOS (iPhone 17 simulator)	macOS
Device / simulator	iPhone 17 in Device Hub (Xcode 27), UDID B79C8B8B…	MacBook, app window 800 × 860 pt
Operating system	iOS 27.0	macOS 27.2 (Darwin 27.2.0)
Installation source	Simulator build from main @ dddf22d (debug)	TestFlight build, signature “TestFlight Beta Distribution”
App version target / actual	1.2.1 (22) / 1.2.1 (22)	1.2.1 (22) / 1.2.1 (22)
Device language, screen lock	German / yes (simulator passcode, unknown)	German / yes (system password, Touch ID)
Screenshot method	`xcrun simctl io <UDID> screenshot`	`screencapture -R` on the app window
Tester / start	Claude Code (automated: mouse events, keyboard, `simctl`, `curl`) / 30 Oct 2026, 20:40	same

Deviations: The plan prescribes G1 = iPhone and G2 = Mac for the Apple submission; as requested, the role assignment is G1 = iPhone simulator, G2 = Mac (reversed compared with run 16; plan section 2: “all steps apply unchanged”). The simulator is not a real iPhone: screen protection, app lock with device passcode, system notifications and the rejection time (#75) are only of limited significance there. The app’s Mac container is protected by macOS, so the file checks of H-02 to H-04 and H-18 were done on the simulator. Umlauts and “ß” were entered in substitute spelling on the simulator. The screensaver was suppressed for the run with `caffeinate -dimsu`; no system settings were changed. Passwords and emergency keys are masked in the images. UI texts are quoted as shown in the (German-language) app.

Findings and notes

No.	Severity	Step	Description
1	High	D-02	The rejection of a join request made with the family code (G1 “Ablehnen”) is not shown on the Mac (G2): after about 6 minutes and after an app restart it still shows “Fast geschafft! …” (target ≤ 20 s, #43/#75). In run 16 the same message appeared on the simulator after about 5 s. macOS finding related to #75.
2	Medium	A-09	On the iPhone simulator (G1) the first tap on “Konto erstellen” ended with “Unbekannter Fehler.” (account not created, `register/available` = free); the second try worked. Probably an operating artefact or server rate limiting, not reproduced.
3	Low	H-18	After “Alle lokalen Daten löschen” the app immediately creates new empty database files (iOS simulator); the old files are replaced. Keychain on the Mac not re-checked after F-04 (in run 16 `fn.key.db.matrix` remained).
4	Info	H-12	The family name is stored as the room name (`m.room.name`) in plaintext on the server (also “FamilyNexus” as the name of the private room); the privacy policy does not state this explicitly.

No.	Severity	Step	Description
5	Info	B-17, B-18, H-02, H-07, H-10, H-19	Limits of automation: app lock needs Touch ID / system password or the simulator passcode (B-17); the Mac container is protected by macOS (H-02); the copy button does not write to the `simctl` pasteboard in the simulator (H-07/H-10 on G1); screen protection (B-18) exists on iOS and is on by default, its effect cannot be checked in the simulator; H-19 only by the device owner.
6	Info	V-06	The names `fnt-1030-…` were taken by run 14; `1030b` by run 16. `1030c` was used.
7	Info	all iOS steps	The simulator was operated only through mouse events and key codes (German layout); umlauts and “ß” in substitute spelling (e.g. “Kaese”, “fuer”); selecting files in the iOS file dialog worked only with short taps.

Issue re-tests

Issue	Step	Result	Observation
#75 / #43	D-02	failed (Mac)	Rejection of the join request does not arrive on macOS (6 minutes, also after restart); about 5 s in the simulator in run 16
#65	E-16	passed	“1 ungelesene Nachricht” measured before opening the chat (open in run 16)
#57	B-02, B-10	passed	iOS: system dialog “Erlauben” (run 16) / notification “Erinnerung / Termin in 10 Minuten” without title/place
#59, #76, #77, #60	E-07, E-12, E-23, E-18, E-32, F-05	passed	Opening links, “Du bist bereits in einer Familie.”, “Mo–Fr”, direct chat visible at once, “Ehemaliges Mitglied” instead of Matrix ID
#56, #63, #64, #66, #68, #78	B-04, B-08, B-05, E-05, B-14, B-19	passed	End-time message also for end = start, time updated immediately, keyboard entry 21, “Link kopiert.” in the dialog, Enter saves, platform-neutral key store

Detailed results with screenshots

Preparation

V-01 Determine target version · –

PASSED

Observed: `main` = `origin/main` @ dddf22d; `pubspec.yaml`: 1.2.1+22.

V-02 Check installed version · G1, G2

PASSED

Observed: G1 (iOS simulator): `simctl listapps` CFBundleVersion 22; G2 (Mac): 1.2.1, CFBundleVersion 22, signature “TestFlight Beta Distribution”.

V-03 Install latest version · G1, G2


PASSED

Observed: No reinstall needed.


V-04 Clear local data · G1, G2

PASSED

Observed: G1 (iOS): app restarted → “Willkommen”; G2 (Mac): app restarted → “Willkommen”.

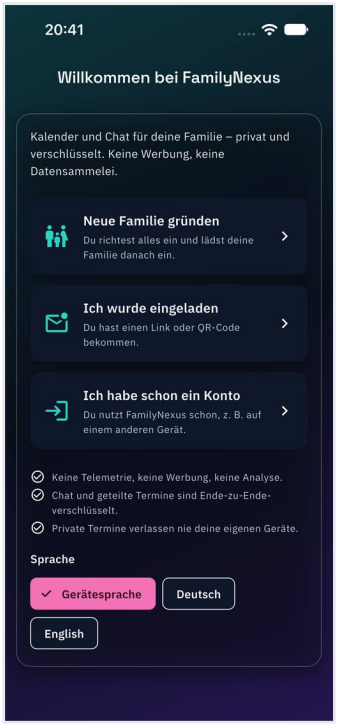

V-04-G1

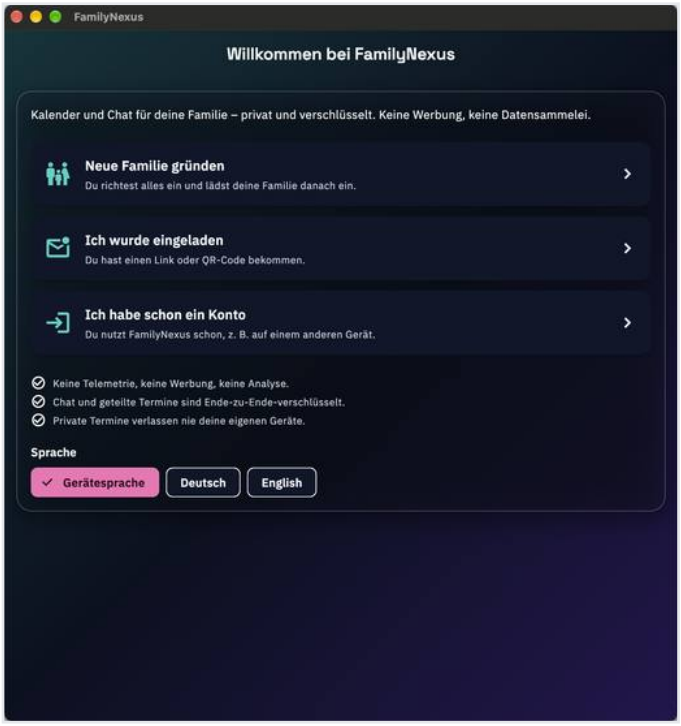

V-04-G2

V-05 Check server · –

PASSED

Observed: `versions` returns JSON; `register` returns `flows` with `m.login.dummy` (registration open).

V-06 Usernames free · –

PASSED

Observed: `fnt-1030c-n1/-n12/-i2/-n9` and `fnt-1030d-…` are free (run 16 used `1030b`); date part `1030c` used.

V-07 Note system settings · G1, G2

PASSED


Observed: Device language German (both). Mac: screen lock present (system password / Touch ID), notifications already allowed. iOS simulator: passcode prompt present (code unknown), notifications already granted (earlier run). Screensaver and sleep suppressed with `caffeinate -dimsu` (no system setting changed).

A – Start and account creation

A-01 View start page · G1

PASSED

Observed: Start page of G1 as expected.

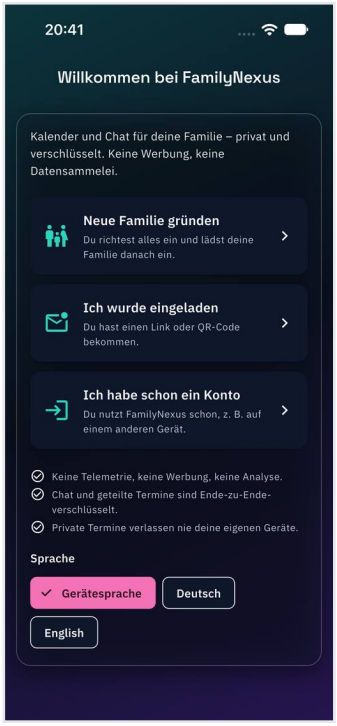


A-01-G1

A-02 Switch language English / German · G1

PASSED

Observed: English/Deutsch switch immediately (G1).

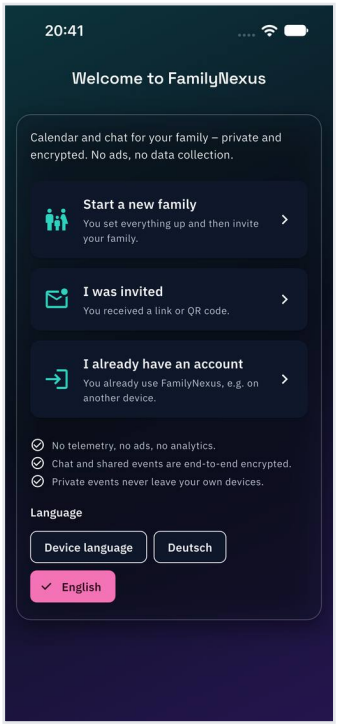

A-02a-G1




A-02b-G1

A-03 New family, keep provider · G1

PASSED

Observed: “Bei matrix.org …” / “Dein Konto liegt bei matrix.org.” (G1).

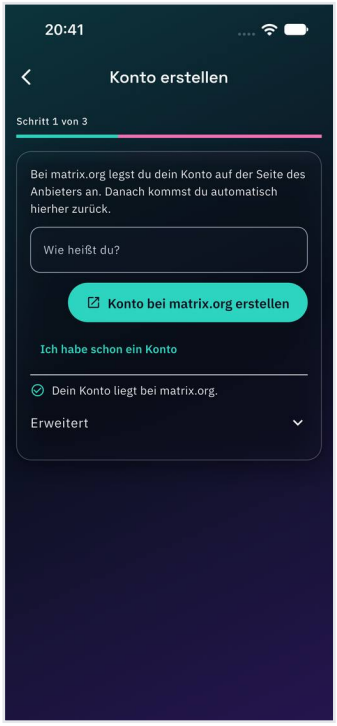


A-03-G1

A-04 Unreachable provider address · G1

PASSED

Observed: Address nicht-vorhanden.invalid: error message, “Konto erstellen” not usable (G1).

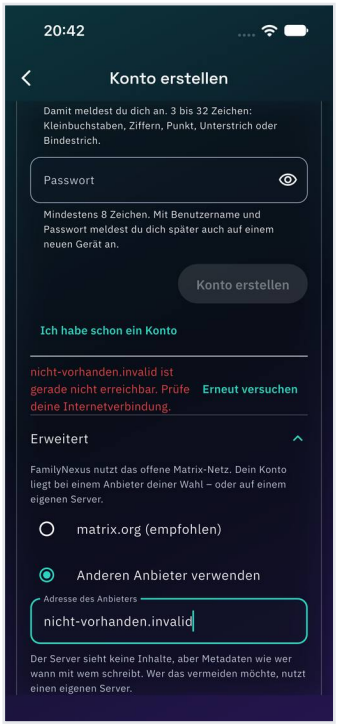


A-04-G1

A-05 Switch to test provider · G1

PASSED

Observed: “Dein Konto liegt bei matrix-synapse-3ues…”, operator/contact, note on metadata, fields, “Konto erstellen” greyed out (G1).

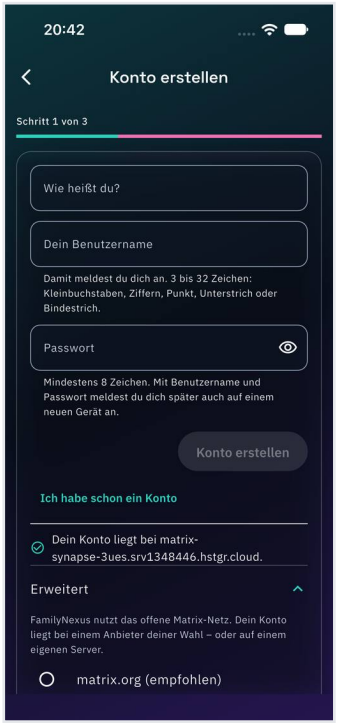

A-05-G1

A-06 Username suggestion · G1

PASSED

Observed: Name “Joerg Muessig” (umlauts cannot be entered via key codes → substitute spelling) → username `joerg.muessig`, “Der Benutzername ist frei.”




A-06-G1


A-07 Invalid usernames · G1

PASSED


Observed: All six inputs (ab, Anna, anna mueller, .anna, anna., 33 × a) show “Bitte 3 bis 32 Zeichen …”.

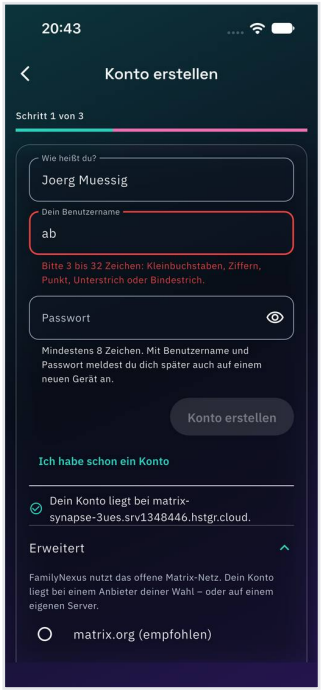


A-07a-G1

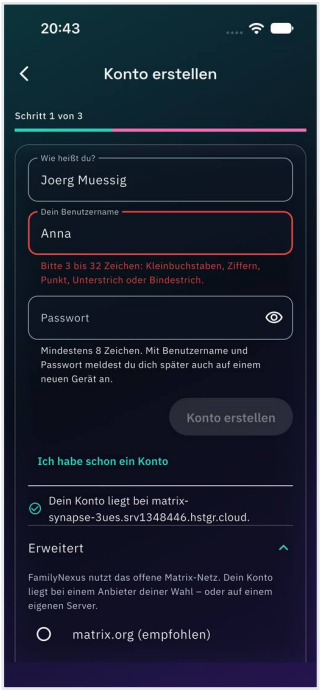


A-07b-G1

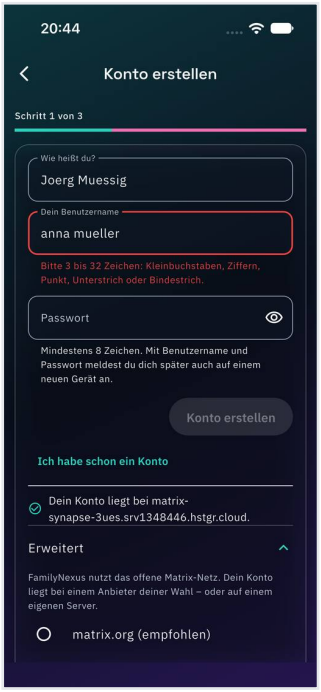


A-07c-G1

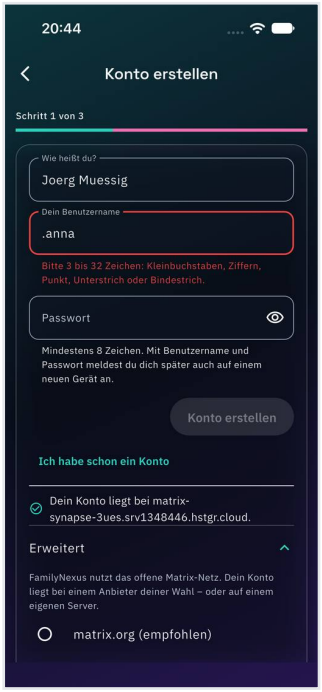

A-07d-G1

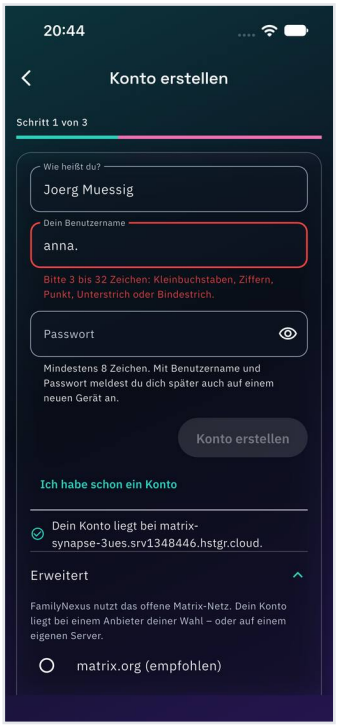

A-07e-G1

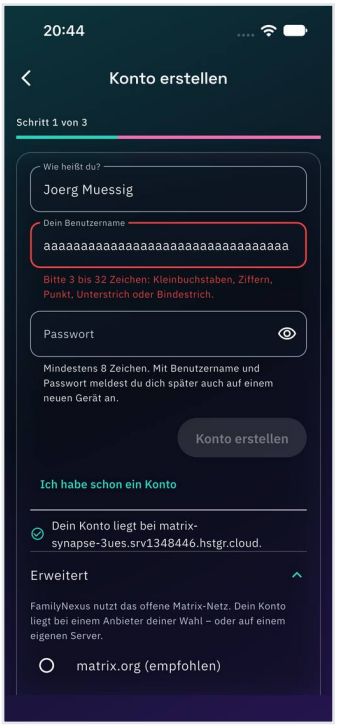

A-07f-G1

A-08 Username, password rules, show password · G1

PASSED

Observed: Username stays fnt-1030c-n1; name Test N1; password of 7 characters greyed out, active from 8; eye icon works; empty name shows placeholder, “Konto erstellen” greyed out. Password masked.



A-08a-G1



A-08b-G1




A-08c-G1


A-09 Create N1 · G1

WITH FINDING


Observed: First tap on “Konto erstellen”: “Unbekannter Fehler.”, account not created (`register/available` = free, A-09err). Second try: N1 created, no extra step, “Dein Notfall-Schlüssel”, “Schritt 2 von 3”.

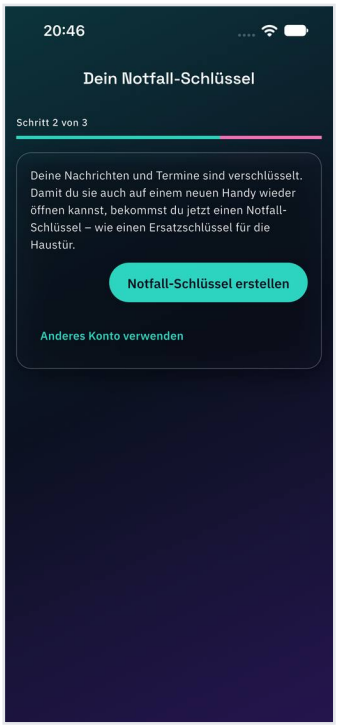

A-09a-G1

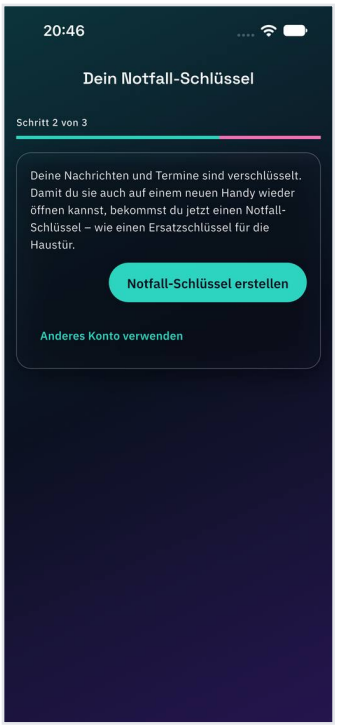

A-09b-G1

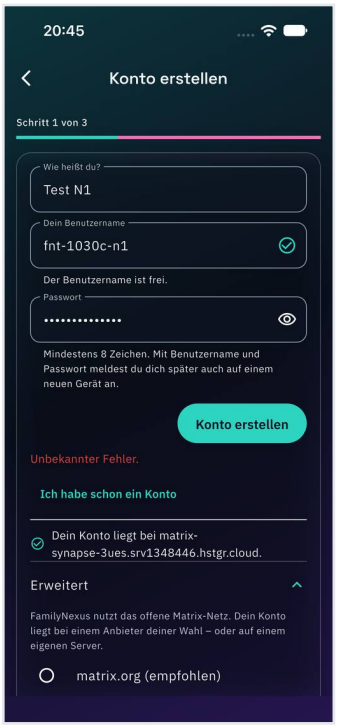


A-09err-G1


A-10 Create emergency key, copy, save as file · G1

PASSED


Observed: Key stays on screen after 20 s (#10); copy (59 characters on the clipboard); “Als Datei speichern” → file picker “Auf meinem iPhone” → “Gespeichert. …”, file with account, provider, date, key; “Weiter” active only after the checkbox (KN1 stored).

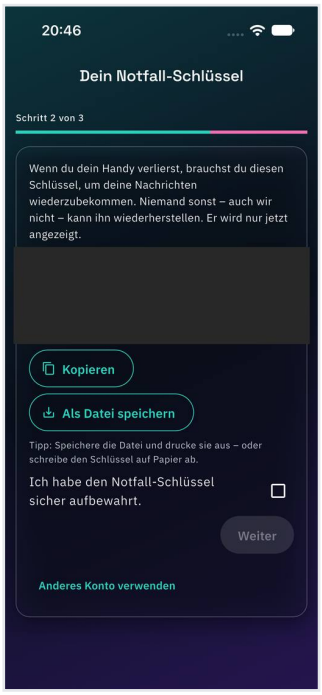

A-10a-G1

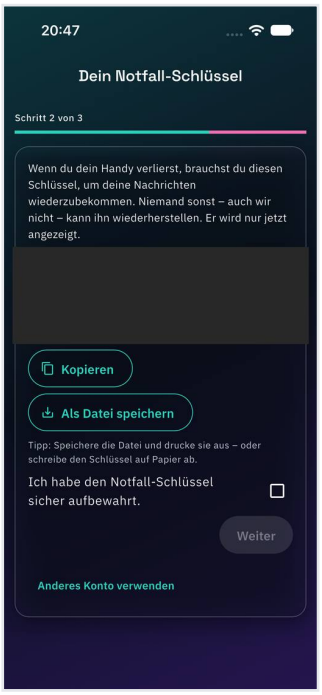


A-10b-G1

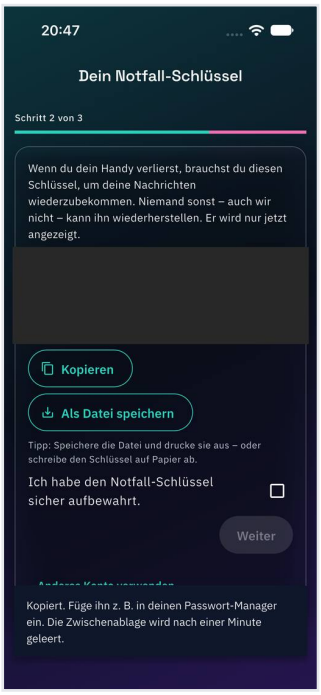

A-10c-G1



A-10d-G1

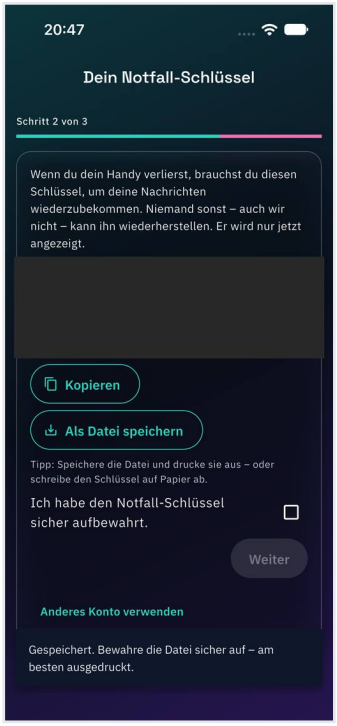


A-10e-G1

A-11 Family name · G1

PASSED

Observed: “Fertig! „Testfamilie 1030c“ ist eingerichtet.” with “Später” and “Jetzt einladen”.

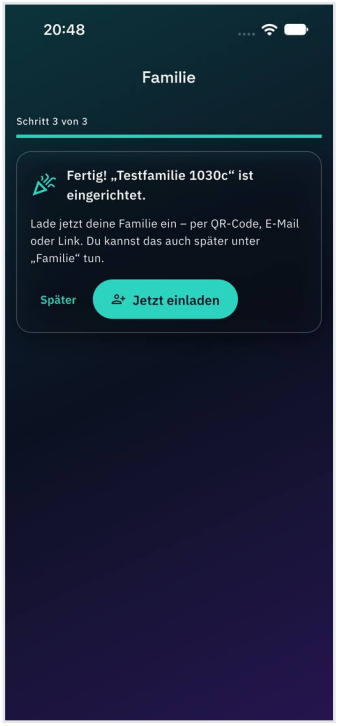


A-11-G1

A-12 “Später” (later) · G1

PASSED

Observed: “Später” → main view “Heute”.

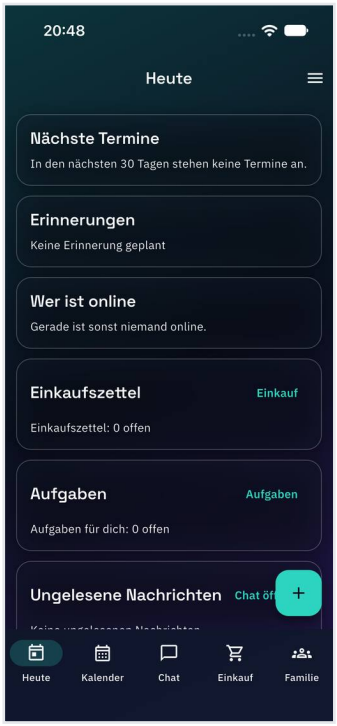


A-12-G1

B – Main functions with one user


B-01 Home view “Heute” · G1

PASSED

Observed: Tiles Nächste Termine, Erinnerungen, Wer ist online, Einkaufszettel, Aufgaben, Ungelesene Nachrichten; bottom navigation; menu; New event (+).

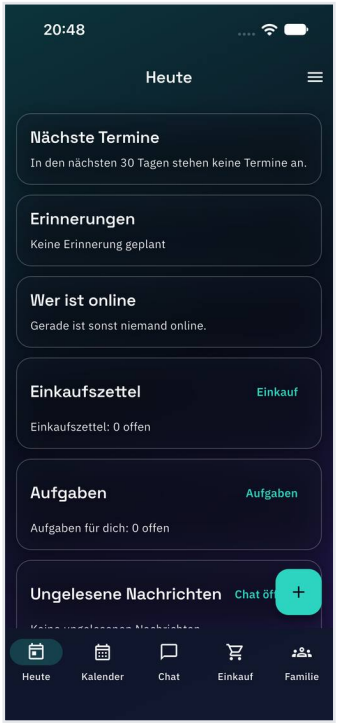

B-01-G1

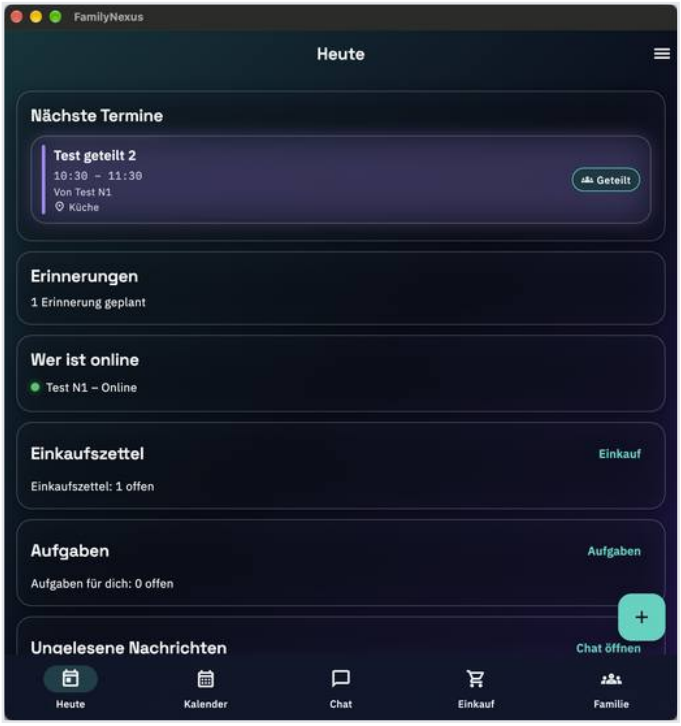

B-01-G2

B-02 Notification hint and permission · G1

NOT RUN

Observed: G1 (iOS): no “Benachrichtigungen sind blockiert” notice (permission from an earlier run still granted in the simulator); G2 (Mac): see below.

B-03 Calendar: shared event · G1

PASSED


Observed: Visibility first “Privat” (set to “Geteilt” at once on G1), “Verschlüsselt an die Familie gesendet. …”; event 31 Oct 10:00–11:00 “Geteilt” with place “Küche” (entered “Kueche”, autocorrect), note, different colour.



B-03a-G1



B-03b-G1

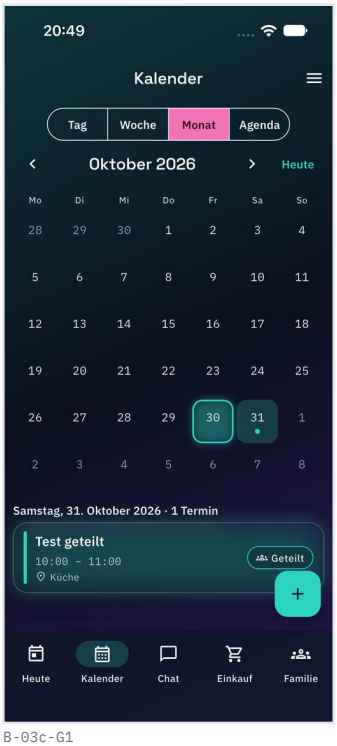

B-03c-G1

B-04 Required fields · G1

PASSED

Observed: “Bitte einen Titel eingeben.”; “Das Ende muss nach dem Beginn liegen.” for end before start and for end = start (#56), directly below the fields; back without saving: nothing saved.



B-04a-G1



B-04b-G1



B-04c-G1

B-05 Private event · G1

PASSED

Observed: Keyboard entry 21 (time-picker keyboard) accepted; end is set to 22:00; event “Privat”.




B-05-G1


B-06 All-day event and recurrence · G1

PASSED

Observed: “Test Serie” all-day, weekly, after 3 occurrences: three occurrences 1, 8, 15 Nov with repeat icon.

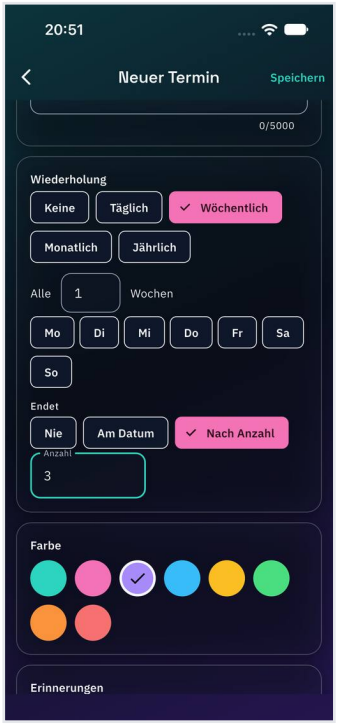

B-06a-G1

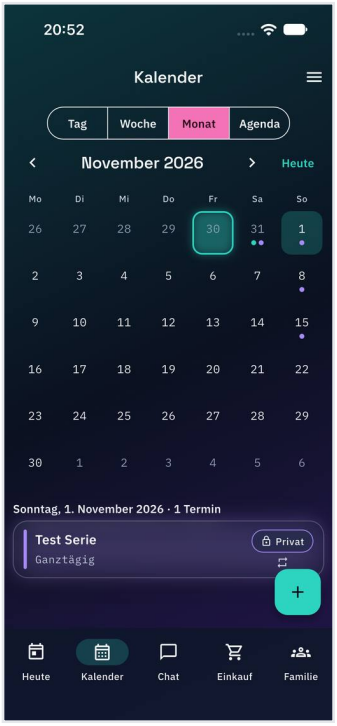


B-06b-G1


B-07 Views and navigation · G1

PASSED


Observed: Day, week, month, agenda; back/forward/today.

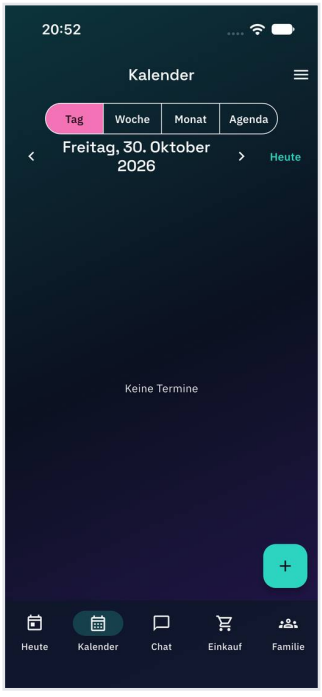


B-07a-G1

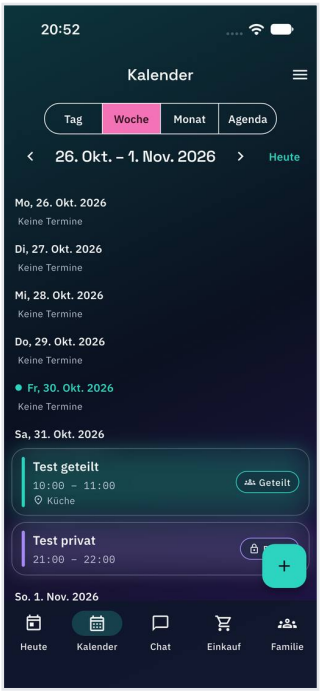

B-07b-G1

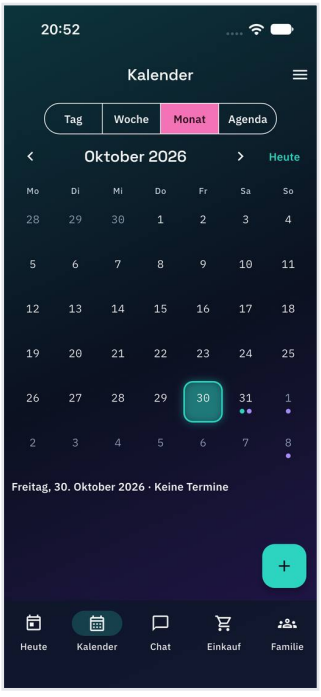

B-07c-G1

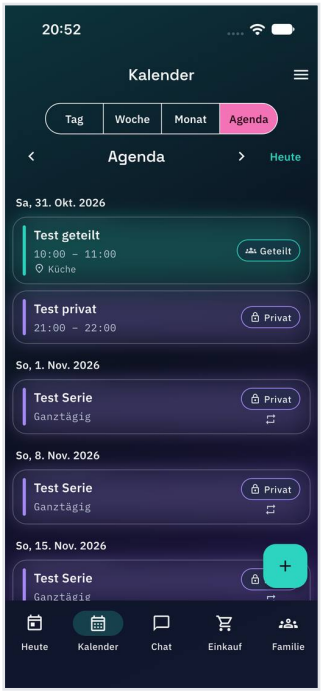

B-07d-G1

B-08 View and edit event, history · G1

PASSED


Observed: Detail with “Von dir”, visibility, place, note; after saving immediately “Test geteilt 2” and 10:30 – 11:30 (#63); “Verlauf (1)” shows “Test geteilt – Version 1”.



B-08a-G1



B-08b-G1

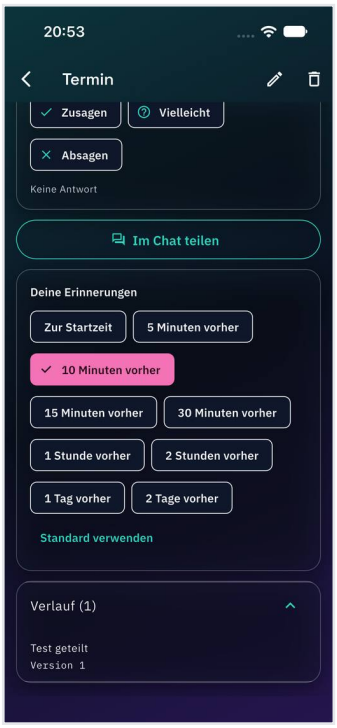

B-08c-G1


B-09 Per-event reminder · G1

PASSED

Observed: Reminders selectable (30 minutes / 2 days in the capture), “Standard verwenden” resets to “10 Minuten vorher”.



B-09-G1

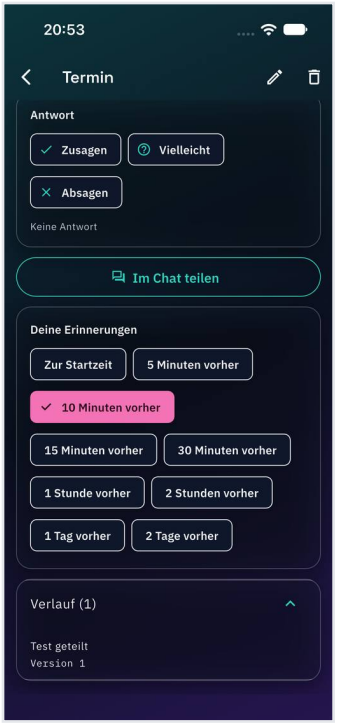


B-09b-G1

B-10 Reminder arrives · G1 (Linux per Skript: G2)

PASSED

Observed: Event notification “Erinnerung / Termin in 10 Minuten” (no title/place) at 20:56 for an event at 21:06 (app in background, iOS simulator).

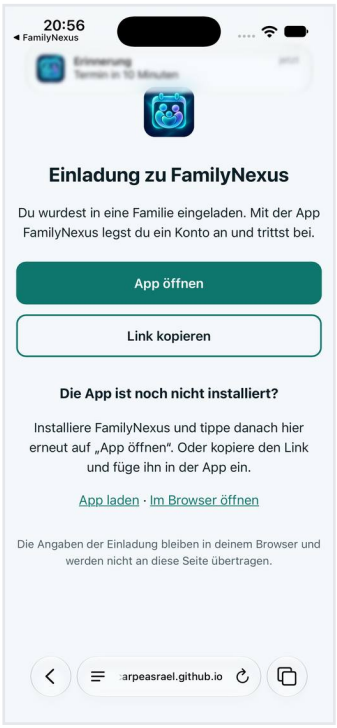


B-10-G1

B-11 Delete event · G1

PASSED


Observed: Dialog “Alle Vorkommen oder nur dieses löschen?” → “Nur dieses”: only 1 Nov disappears; “Diesen Termin wirklich löschen?” → “Löschen”, event gone.

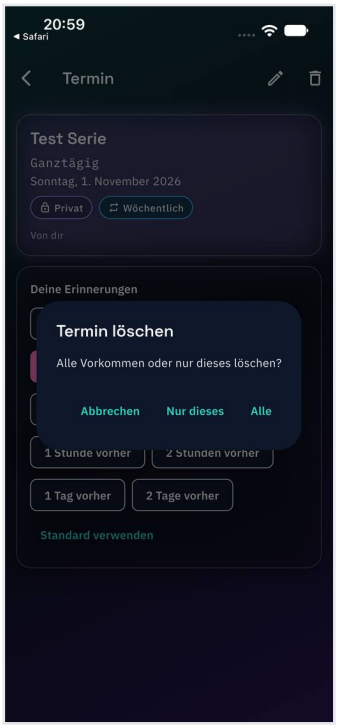

B-11a-G1



B-11b-G1

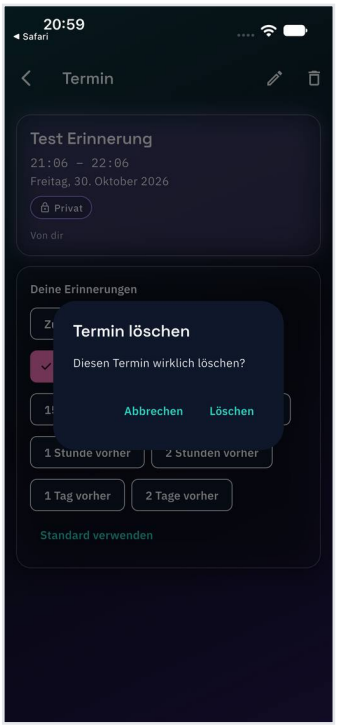

B-11c-G1

B-12 Chat · G1

PASSED

Observed: Message “Hallo Testfamilie” with time, “Ende-zu-Ende-verschlüsselt” (send button).




B-12-G1

B-13 Share event in chat · G1

PASSED

Observed: “Im Chat teilen” → card “Termin” with the event (Zusagen/Vielleicht/Absagen) in the chat.

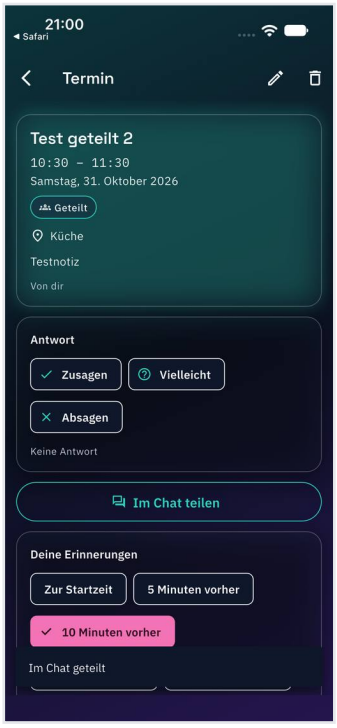

B-13a-G1




B-13b-G1


B-14 Shopping list · G1

PASSED

Observed: “Zu besorgen (2)”; milk ticked under “Erledigt (1)”; bread → menu “Bearbeiten” → “Vollkornbrot” → “Speichern”; empty entry: “Hinzufügen” does nothing (an accidental “Erledigte entfernen” was cancelled).

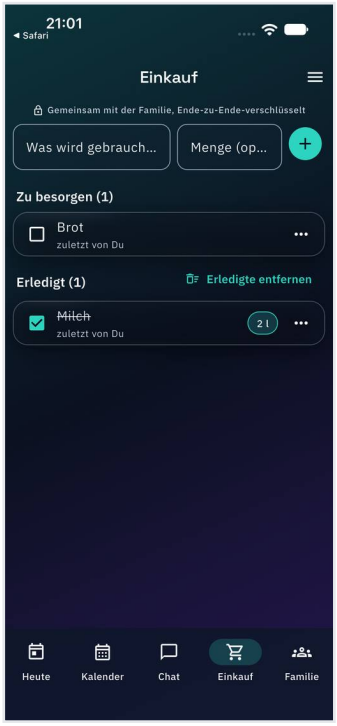

B-14a-G1

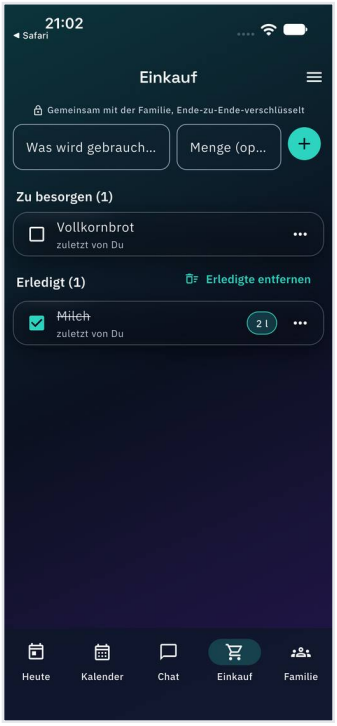

B-14b-G1

B-15 Tasks (moderator) · G1

PASSED

Observed: Notice “Nur Moderatoren legen Listen an. …”; list “Bad putzen” (weekly Monday) under “Mir zugewiesen”, “0 von 2 erledigt”, “Nächster Neustart: Montag, 2. November 2026”; ticking with comment → “1 von 2 erledigt”, “Erledigt am 30.10.2026 um 21:04” (format DD.MM.YYYY, #38); history “Waschbecken erledigt · Du · 30.10.2026, 21:04”.



B-15a-G1



B-15b-G1




B-15e-G1


B-16 Settings – appearance · G1

PASSED


Observed: Language (Deutsch↔English), design (dark/light), accent colour (magenta, back to turquoise), “Effekte reduzieren” take effect at once; after an app restart English/light/effects persist; everything reset afterwards.

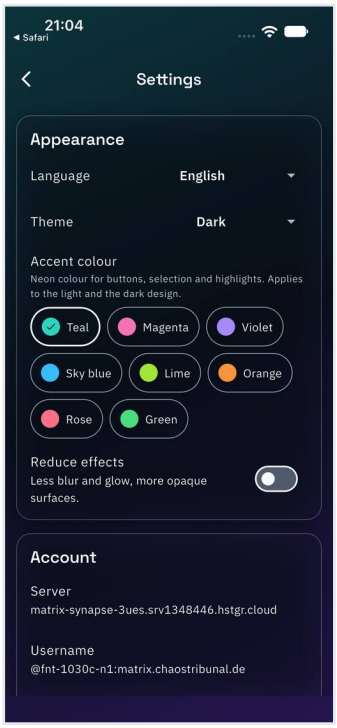

B-16a-G1

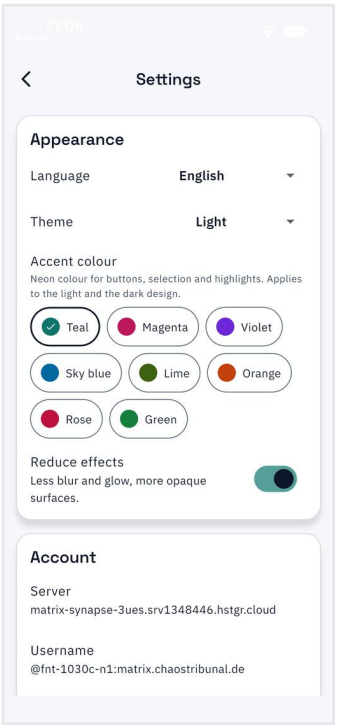

B-16b-G1

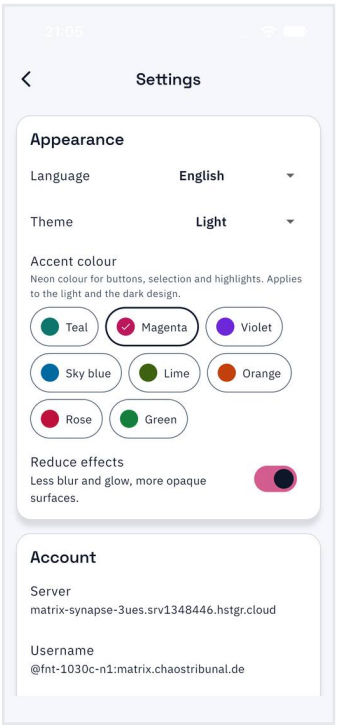


B-16c-G1

B-17 App lock · G1 (Linux: G2)

NOT RUN


Observed: G2 (Mac): turning on app lock → system dialog “Touch ID/Passwort” (#58) appears; cannot be entered → “Abbrechen”, switch stays off. G1 (iOS simulator): turning on app lock → simulator passcode prompt (“iPhone-Code für „FamilyNexus“ eingeben”), code unknown to the tester, not guessed → cancelled: “Die Bestätigung war nicht erfolgreich.”, switch stays off. To be done manually.

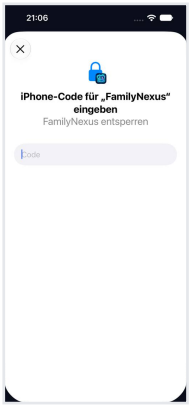

B-17-G1



B-17-G2

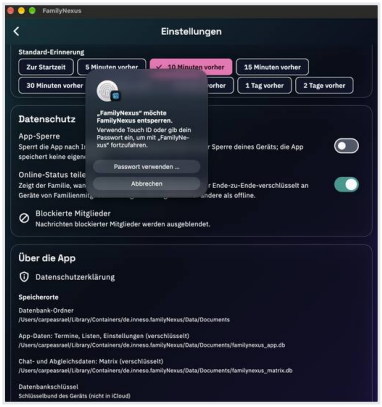


B-17b-G2


B-18 Screen protection · G1 (Linux/Windows/macOS: G2)

WITH FINDING


Observed: G1 (iOS): switch “Bildschirmschutz” present (“Blockiert Screenshots und verbirgt die App in der Übersicht.”), on by default; can be switched off/on. Effect (screenshot blocked, content hidden in the app switcher) cannot be checked in the simulator: the `simctl` screenshot is unaffected → check on a real iPhone open.

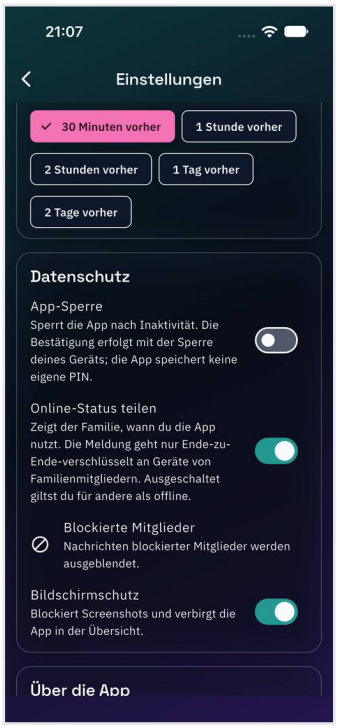

B-18a-G1

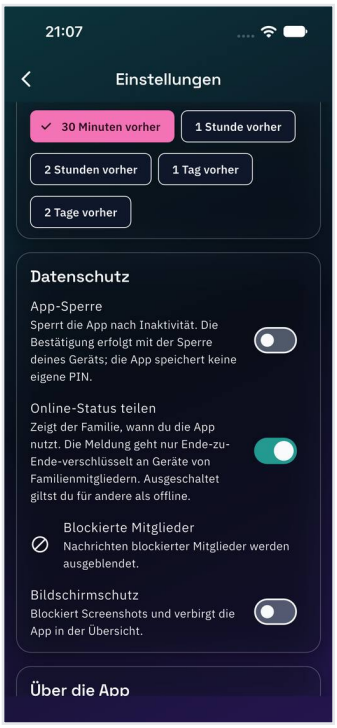

B-18b-G1

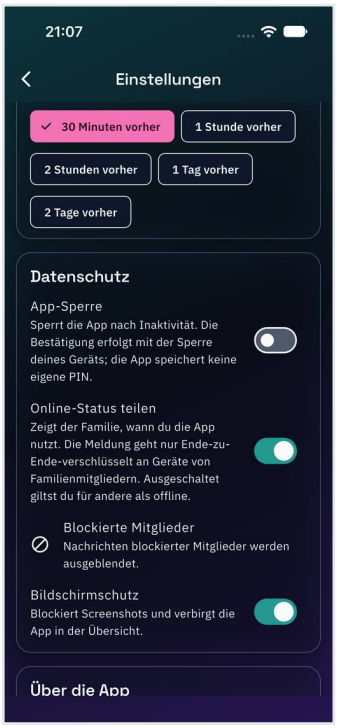


B-18c-G1


B-19 Privacy · G1

PASSED


Observed: “Online-Status teilen” off/on; “Blockierte Mitglieder”: “Du hast niemanden blockiert.”; privacy policy complete, storage section: “sicheren Schlüsselspeicher deines Geräts (Android-Keystore bzw. Apple-Schlüsselbund)” (#78).

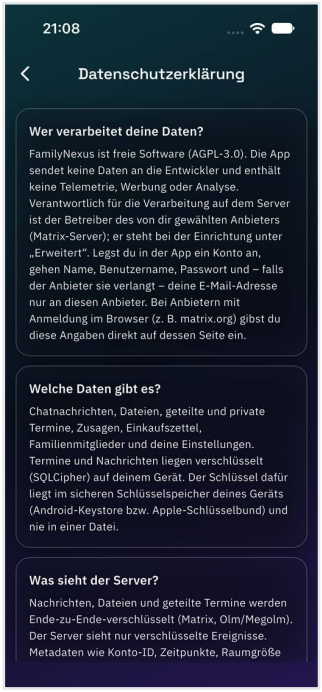

B-19a-G1

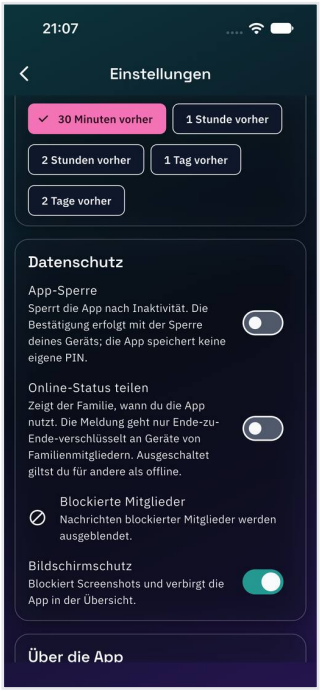


B-19b-G1

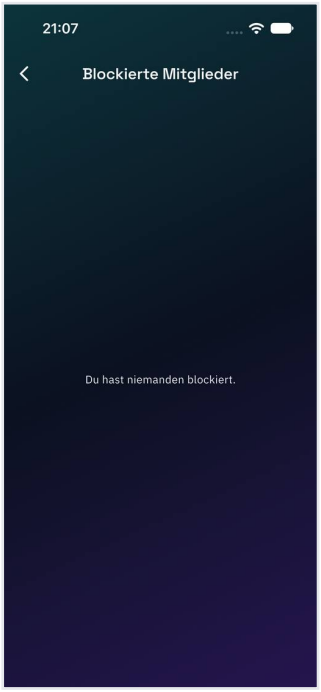

B-19c-G1



B-19d-G1

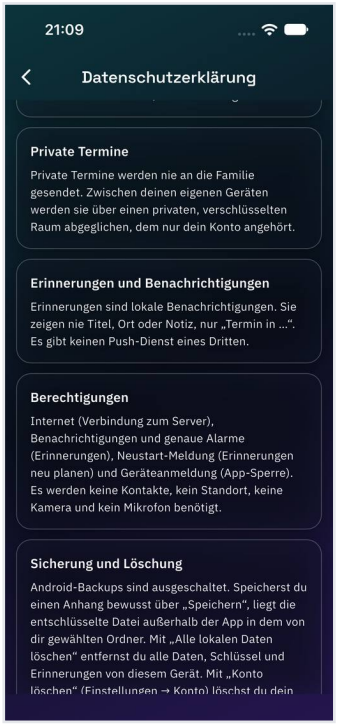

B-19e-G1

B-20 Default reminder · G1

PASSED

Observed: Default reminder: multiple selection, 30 minutes selected, 10 deselected; note “Erinnerungen sind lokale Benachrichtigungen dieses Geräts. Sie zeigen nie Titel oder Ort.”




B-20-G1

B-21 About the app · G1

PASSED

Observed: Storage locations (database key: “Schlüsselbund des Geräts (nicht in iCloud)”), local log with “App-Version 1.2.1 (22)”, plaintext warning, copy (clipboard), online log with account, display name “Test N1”, devices, encryption.

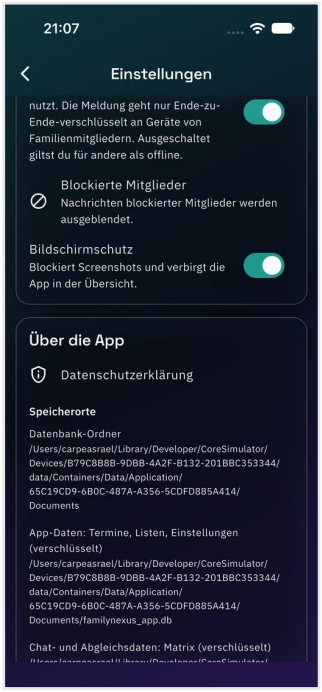


B-21a-G1




B-21b-G1



B-21c-G1

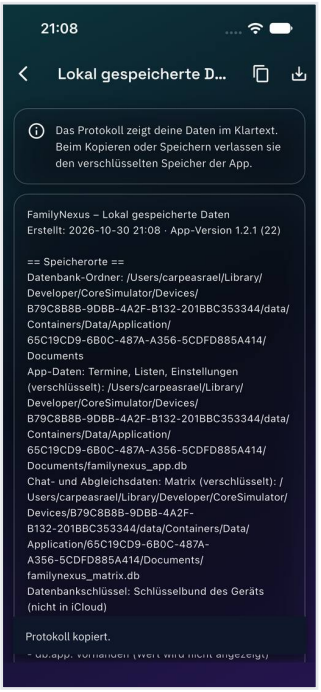

B-21d-G1

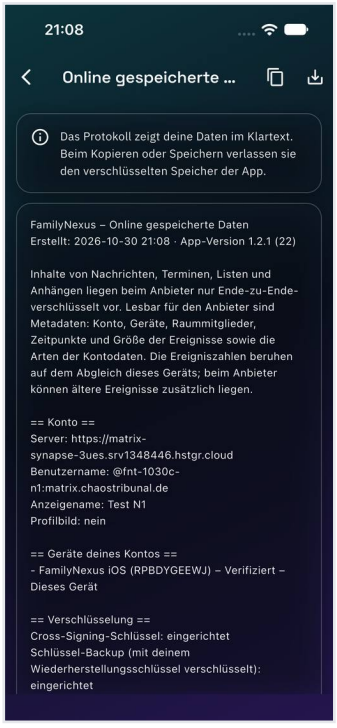


B-21e-G1


B-22 Version and account · G1

PASSED

Observed: Bottom menu and settings “Version 1.2.1 (22)”; account: server = provider address, username `@fnt-1030c-n1:matrix.chaostribunal.de`.

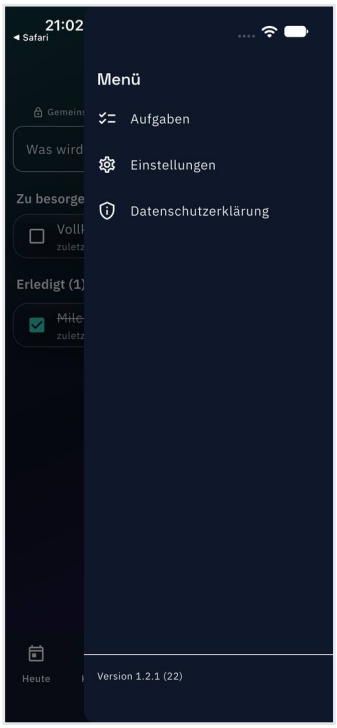

B-22a-G1

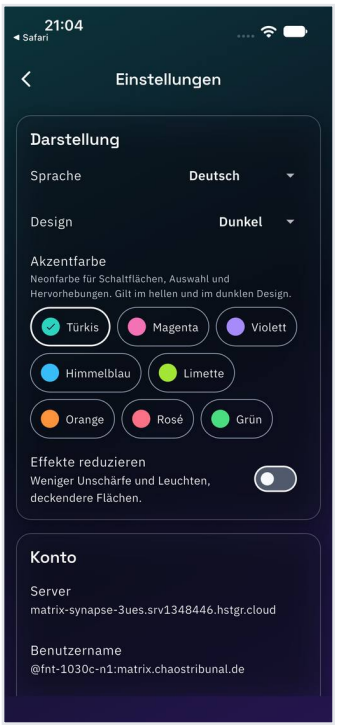


B-22b-G1

C – Second device, device check, emergency key

C-01 Sign in with wrong password · G2

PASSED

Observed: G2 (Mac): wrong password → “Benutzername oder Passwort stimmen nicht.”, no sign-in.

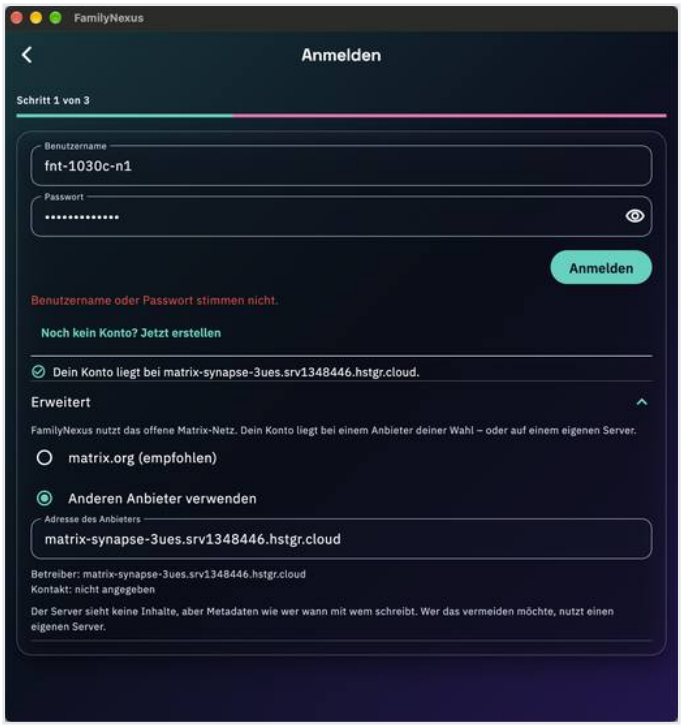


C-01-G2


C-02 Correct password, verify device by symbol comparison · G2, G1

PASSED

Observed: G2 (Mac): “Mit „FamilyNexus iOS“ bestätigen”; G1: “… möchte die Verifizierung starten.” → accept; same symbols in the same order (thumbs up, fire, Santa, strawberry, chequered flag, top hat, tulip); both “Verifiziert.”; G2 opens the main view with the events from B.

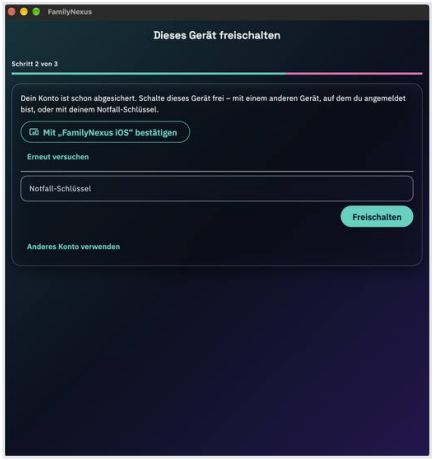


C-02a-G2

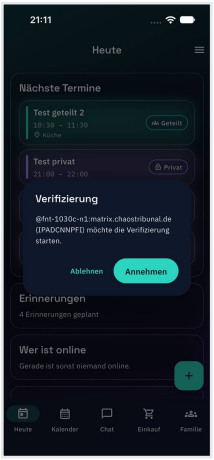

C-02b-G1




C-02c-G1

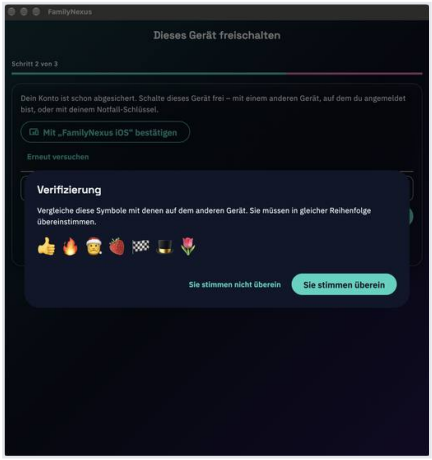

C-02c-G2



C-02d-G1

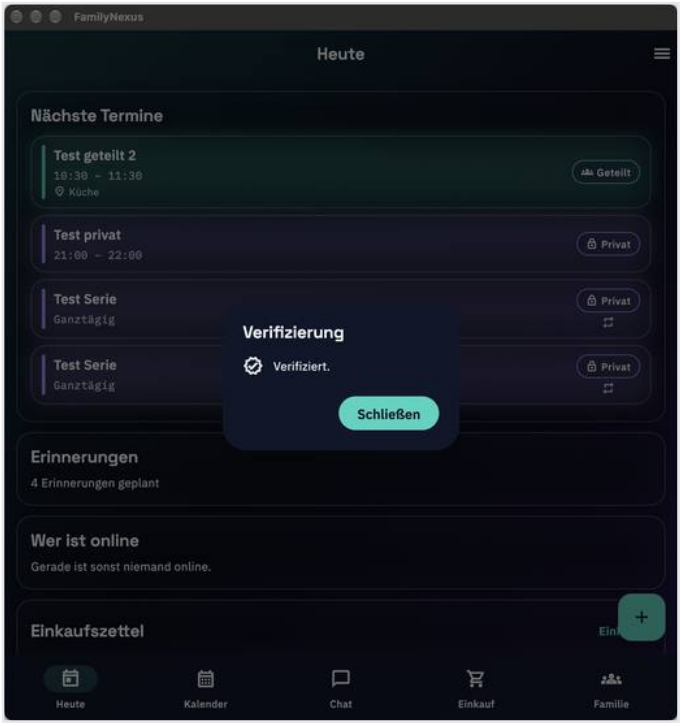


C-02d-G2

C-03 Emergency key and devices · G2

PASSED

Observed: G2 (Mac): “Dieses Gerät ist verifiziert.”; devices of your account: “FamilyNexus iOS” and “FamilyNexus macOS (Dieses Gerät)”, both “Verifiziert”; “Neuen Notfall-Schlüssel erstellen” present.

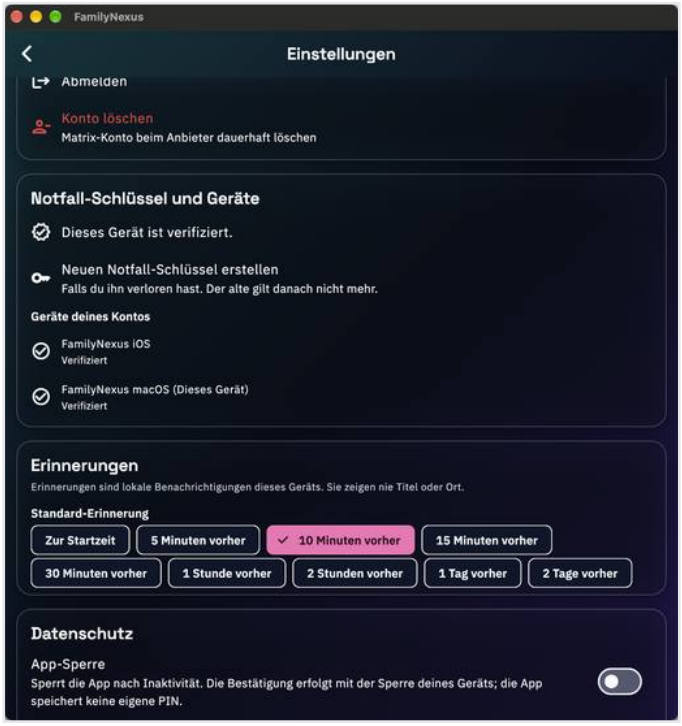


C-03-G2


C-04 Sign out · G2

PASSED

Observed: G2 (Mac): dialog “Abmelden” → directly “Anmelden” (not “Willkommen”).

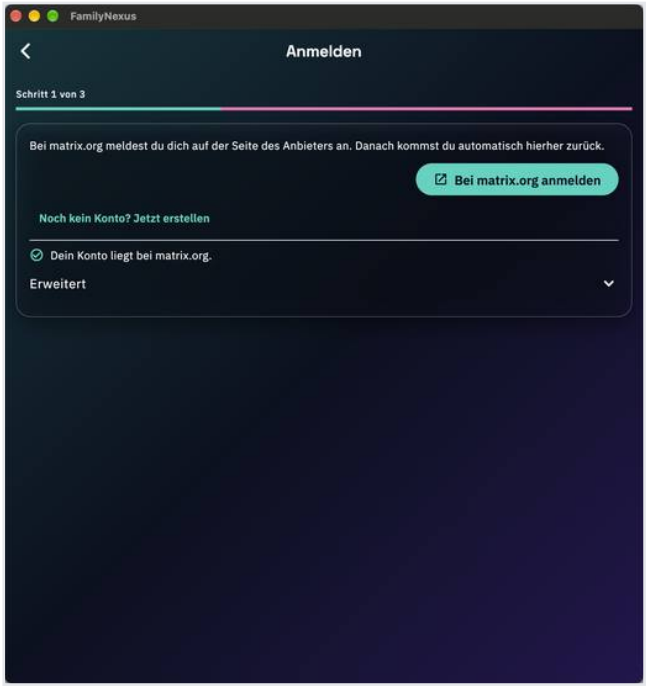

C-04-G2

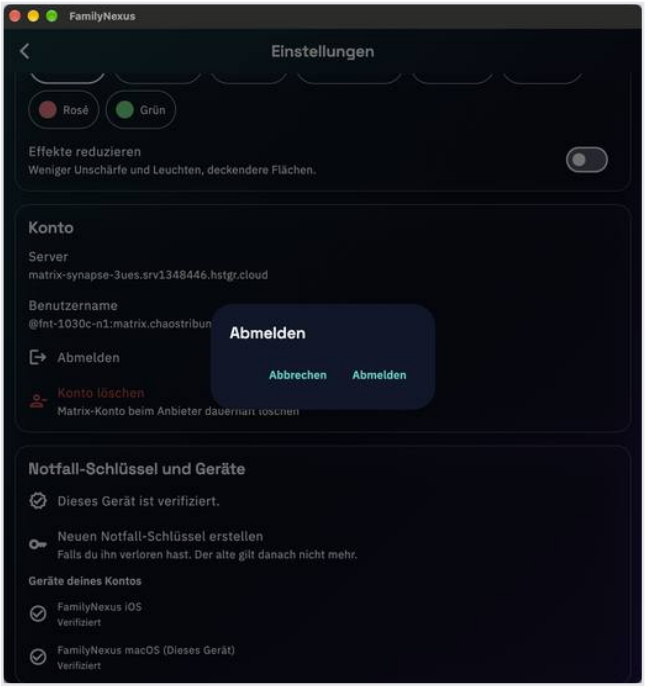


C-04a-G2

C-05 Create new emergency key (#11) · G1

PASSED


Observed: G1 (iOS): page “Neuer Notfall-Schlüssel” (“Der alte funktioniert danach nicht mehr …”); new key (KN1b, read from the screen) shown; back arrow and Esc have no effect; “Weiter” only after the checkbox; then settings.

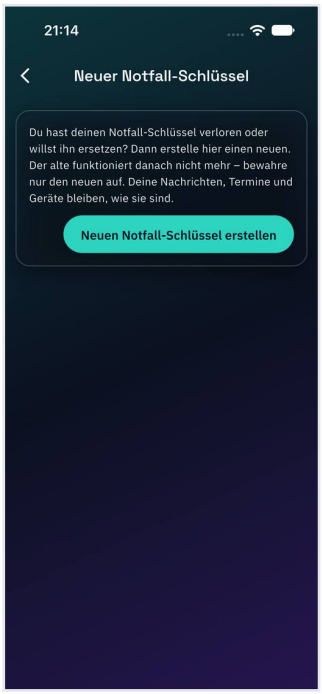


C-05a-G1



C-05b-G1

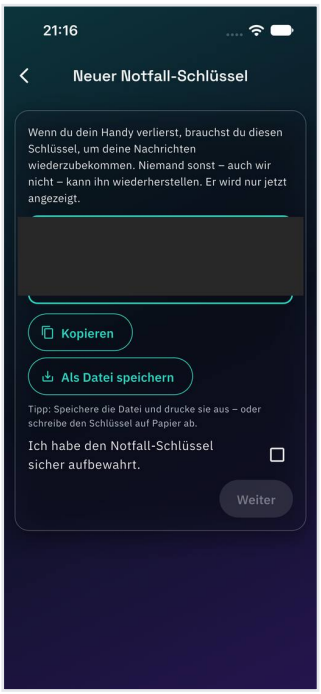

C-05c-G1

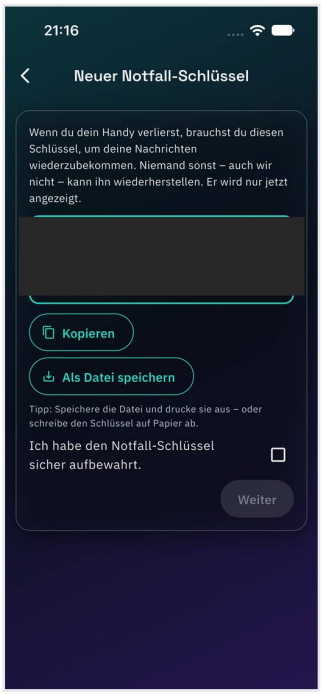

C-05d-G1




C-05e-G1

C-06 Unlock with old key · G2

PASSED

Observed: G2 (Mac): old KN1 → “Der Notfall-Schlüssel passt nicht. Bitte prüfe ihn noch einmal.”, device stays locked.

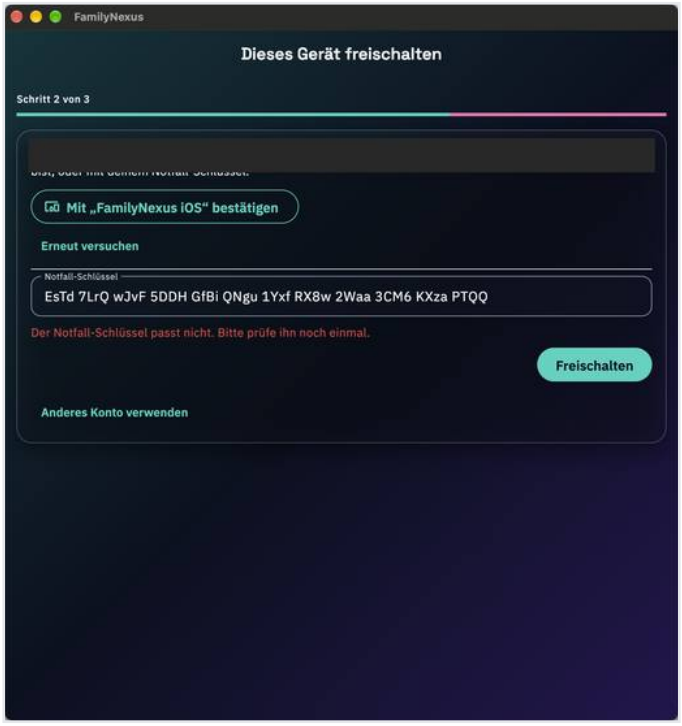


C-06-G2

C-07 Unlock with new key · G2

PASSED

Observed: G2 (Mac): KN1b → unlocked, main view with F1 and data from B.

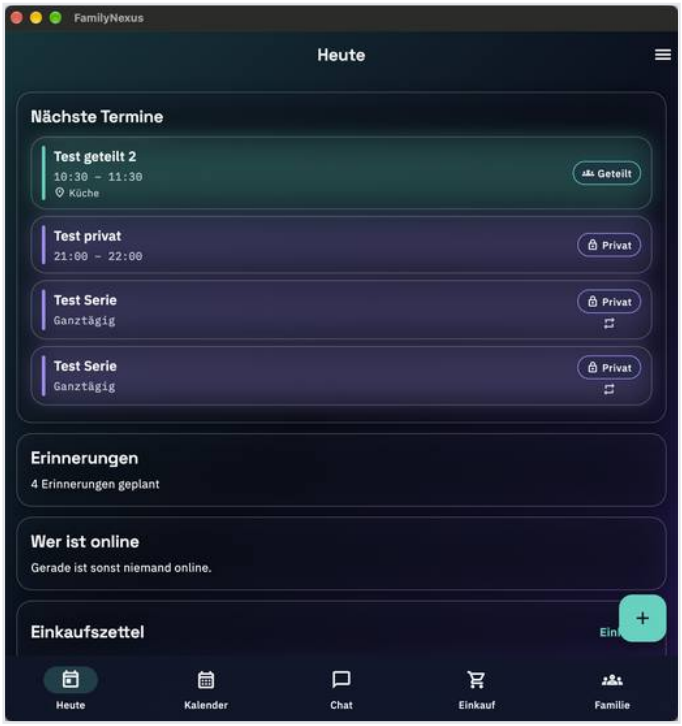


C-07-G2

C-08 Sign out · G2

PASSED

Observed: G2 (Mac): sign out → “Anmelden”.

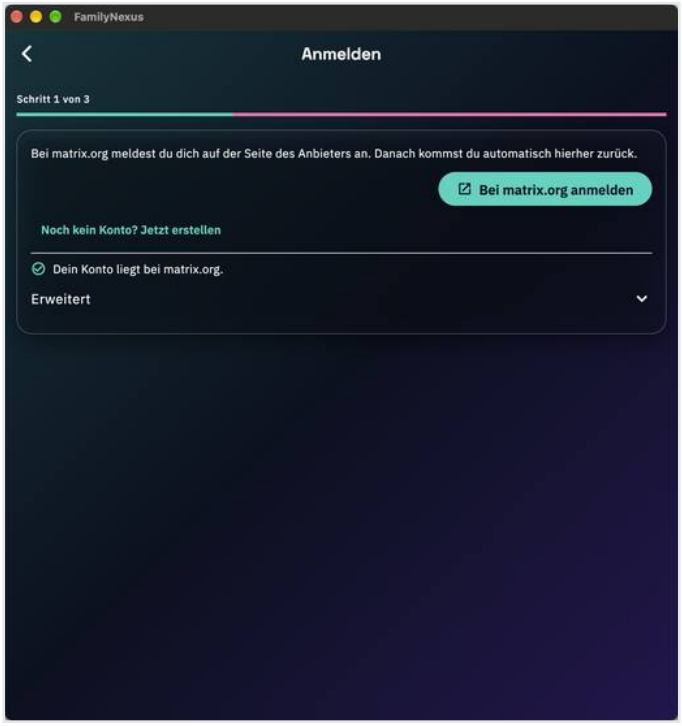


C-08-G2

D – Other ways to create an account, join by code


D-01 Taken name and fallback suggestion · G2

PASSED


Observed: G2 (Mac): “Schon vergeben – wie wäre es mit „fnt-1030c-n12“?”, chip “„fnt-1030c-n12“ verwenden”, “Konto erstellen” greyed out; after the chip “Der Benutzername ist frei.”; account created; key stays; KN2 stored; family step “Schritt 3 von 3” with switch found/join.

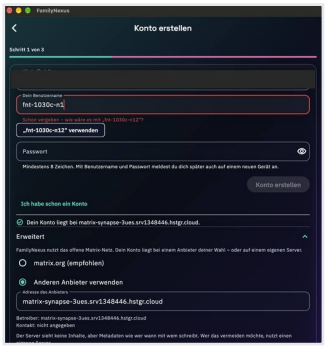


D-01a-G2

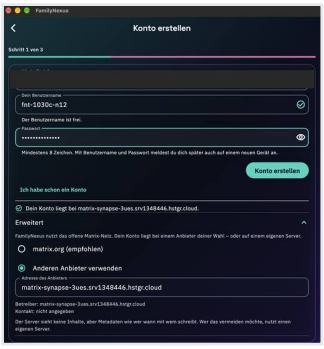

D-01a2-G2

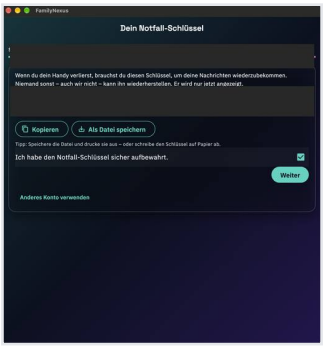

D-01b-G2

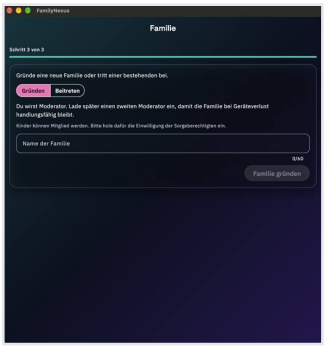

D-01d-G2

D-02 Family code and rejection · G1, G2

FAILED


Observed: G2 (Mac): `abc` → “Das ist kein gültiger Familien-Code. Er beginnt mit „!“ …”; code → “Fast geschafft! …”. G1 (iOS): tab Familie “Beitrittsanfragen”, “Test N2 möchte beitreten” with “Anfrage über den Familien-Code (ohne Link) – nur bestätigen, wenn du … kennst”, “Ablehnen” → request disappears. G2: **the message “Deine Anfrage wurde abgelehnt …” does not appear**: after about 6 minutes and also after an app restart it still shows “Fast geschafft! …” (target ≤ 20 s; reproduced on macOS, about 5 s in the simulator in run 16). Finding similar to #75, on macOS.




D-02a-G1




D-02b-G1

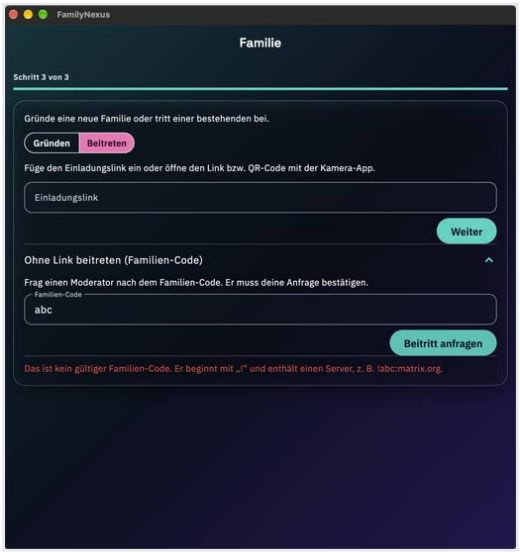

D-02b-G2

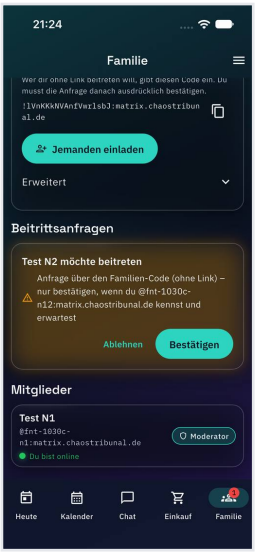


D-02c-G1

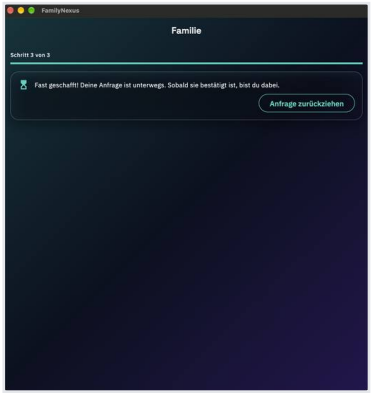


D-02c-G2



D-02d-G1

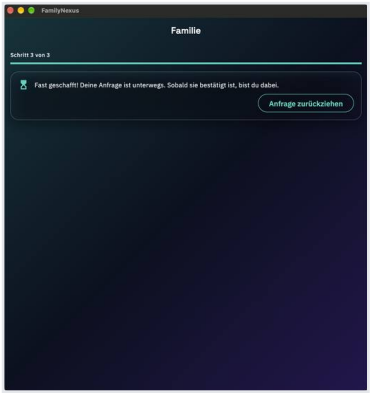

D-02e-G2

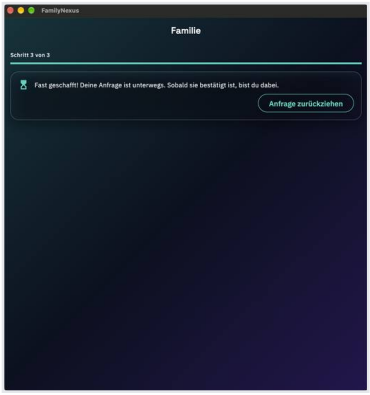


D-02f-G2

D-03 Found a new family instead · G2

PASSED

Observed: G2 (Mac): “Gründen” → F2 “Loeschtest 1030c” created, straight to “Heute” without a “Fertig!” intermediate step.

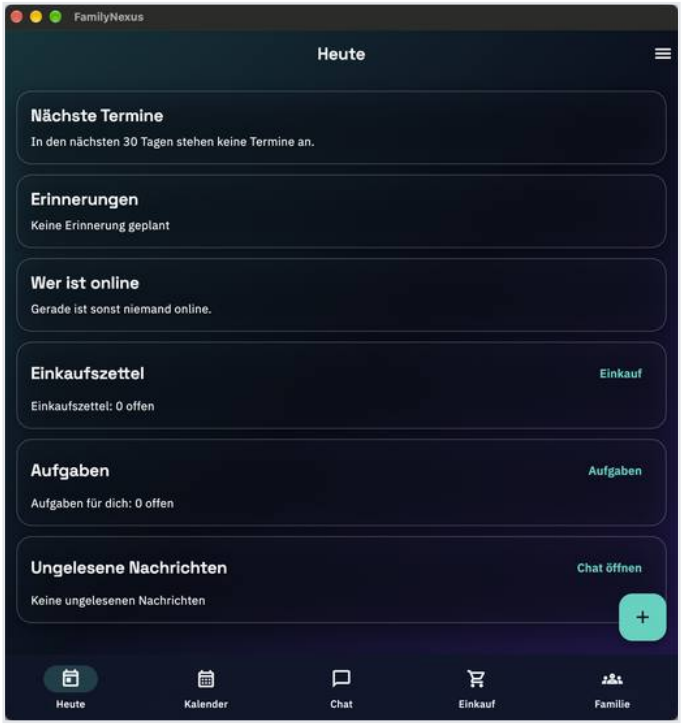


D-03-G2

D-04 Sign out, switch to sign-in with name · G2

PASSED

Observed: G2 (Mac): sign out → create account → name `Test`, username `fnt-1030c-n12` (already-taken hint) → “Ich habe schon ein Konto” → “Anmelden” with the username pre-filled and the provider address retained.

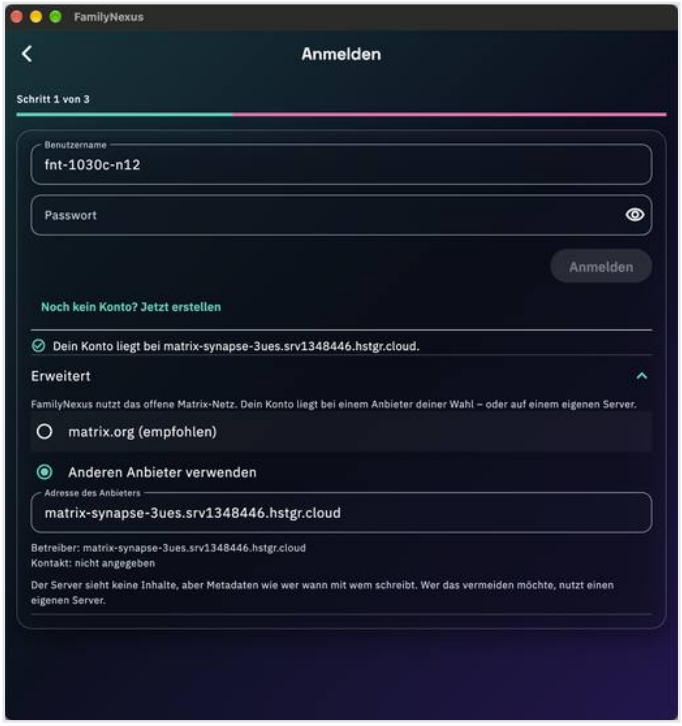


D-04-G2


D-05 Sign in as N2, unlock with key · G2

PASSED

Observed: G2 (Mac): “Kein anderes Gerät gefunden. Nutze deinen Notfall-Schlüssel.”; unlocked with KN2, F2 recognised (main view, no hang).

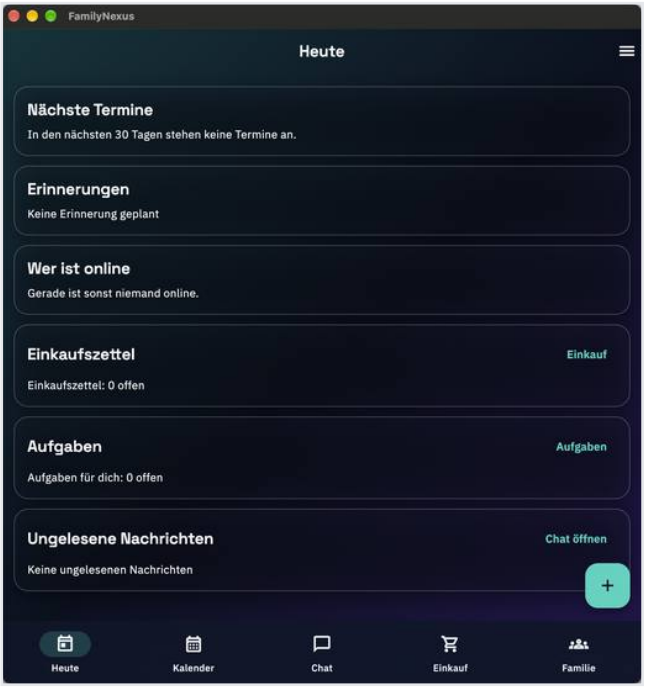

D-05-G2

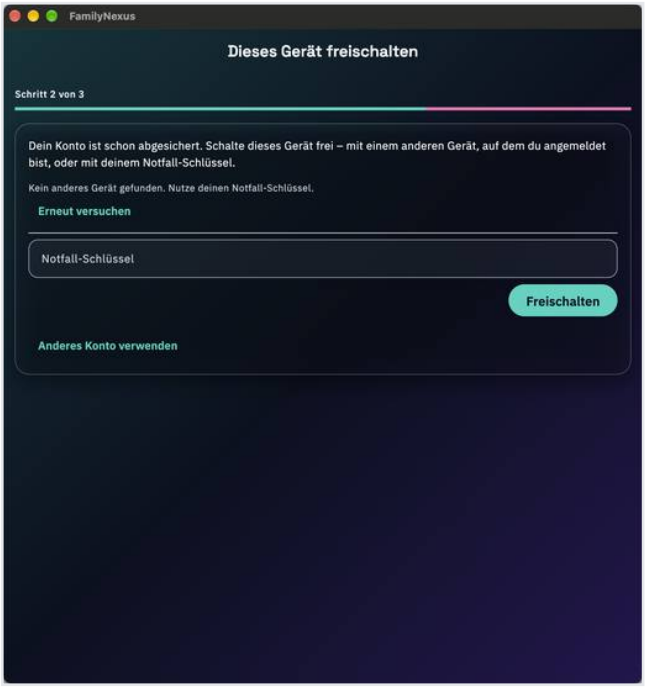


D-05a-G2


D-06 Cancel without creating account · G2

PASSED

Observed: G2 (Mac): back arrow without “Konto erstellen” → “Willkommen”; counter-check `register/available?username=fnt-1030c-n9` → `available: true`.

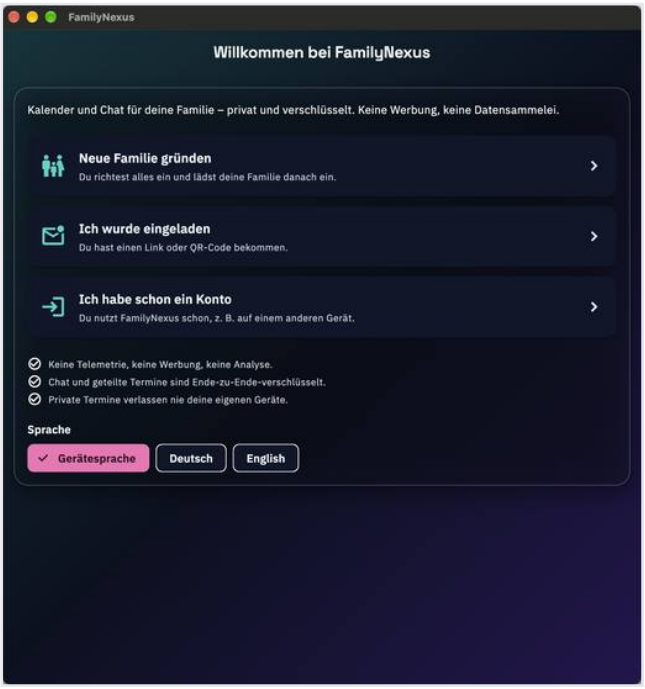

D-06-G2

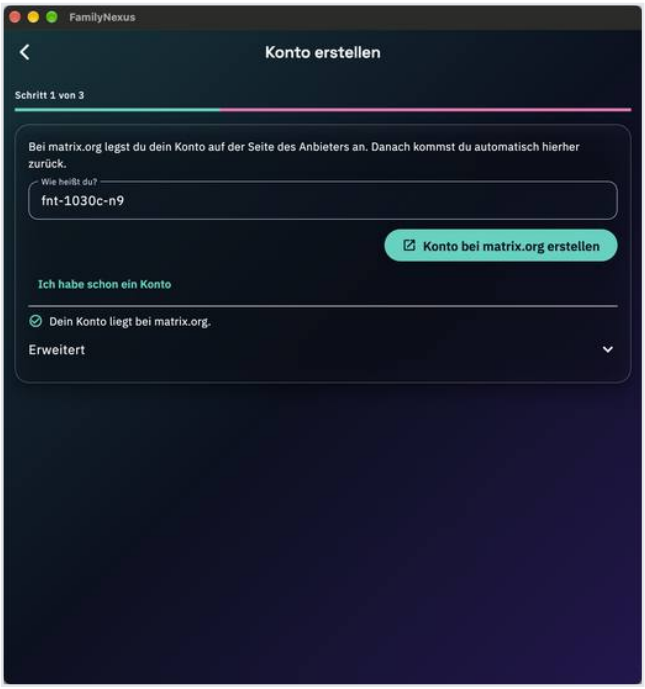

D-06a-G2

D-07 Registration closed (optional) · G1

NOT RUN

Observed: Optional, no server access (operator step).

E – Invitation and two users together

E-01 Tab “Familie” · G1

PASSED

Observed: “Testfamilie 1030c”, “Empfehlung: Ernenne einen zweiten Moderator.”, only member Test N1 (moderator), “Jemanden einladen”, “Familien-Code” (G1 iOS).




E-01-G1

E-02 Rename family · G1

PASSED

Observed: “Name geändert.”; “Testfamilie 1030c neu” in the Familie tab (G1 iOS).

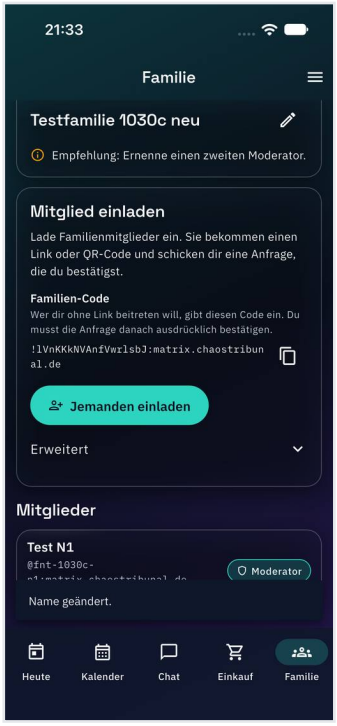

E-02-G1


E-03 Invite by user ID · G1

PASSED


Observed: abc → “Bitte eine gültige Benutzer-ID eingeben, z. B. @an…”; ID → confirmation “… einladen? Eingeladene erhalten bereits vor der Annahme die Nachrichtenschlüssel der Familie …”; “Test N2” with “Eingeladen” in the list.



E-03-G1

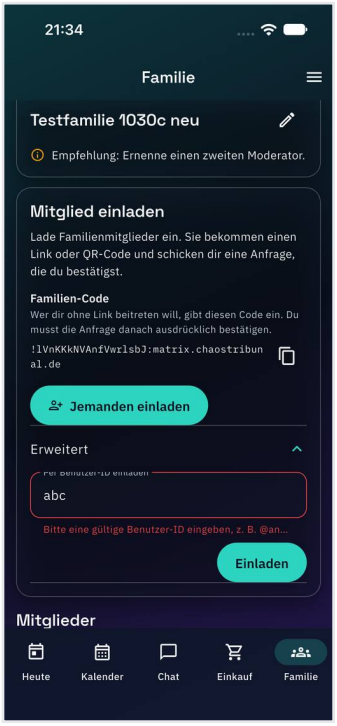

E-03a-G1

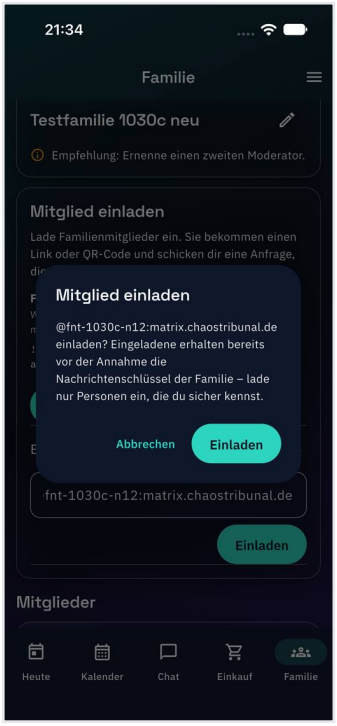


E-03b-G1


E-04 Remove invited member · G1

PASSED

Observed: Confirmation “Test N2 wirklich aus der Familie entfernen? Die Raumschlüssel werden erneuert …”; N2 disappears from the list (“Erledigt.”).

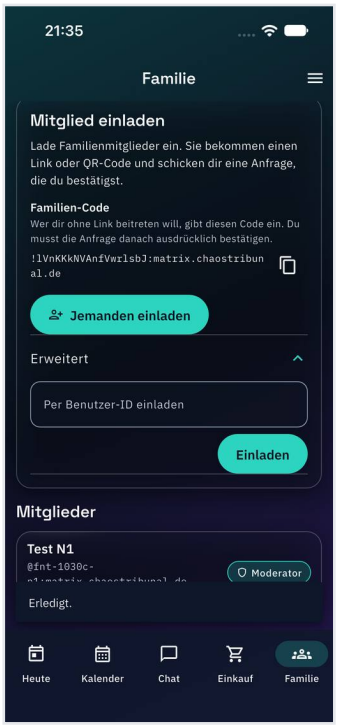

E-04-G1

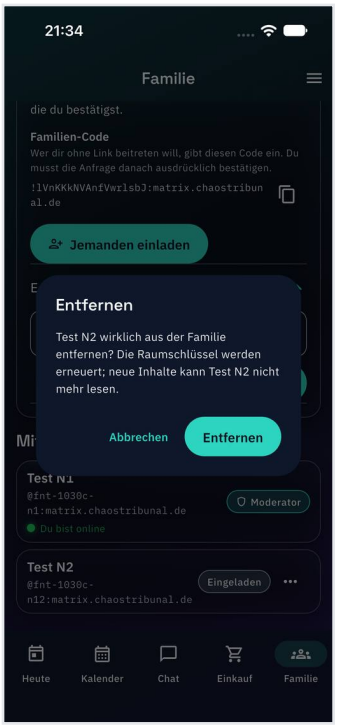


E-04a-G1


E-05 Invitation link · G1

PASSED


Observed: QR code, “Gültig für” (3 days), “Erweitert → Konto-Server für Neue” = provider address, “Neuen Link erzeugen”; “Per E-Mail senden” → “Kein Mailprogramm gefunden. Der Link wurde stattdessen kopiert.”; “Link kopieren” → “Link kopiert.” in the dialog (#66); link `https://carpeasrael.github.io/FamilyNexus/join/#v=3&…` (310 characters, `srv` = provider address).

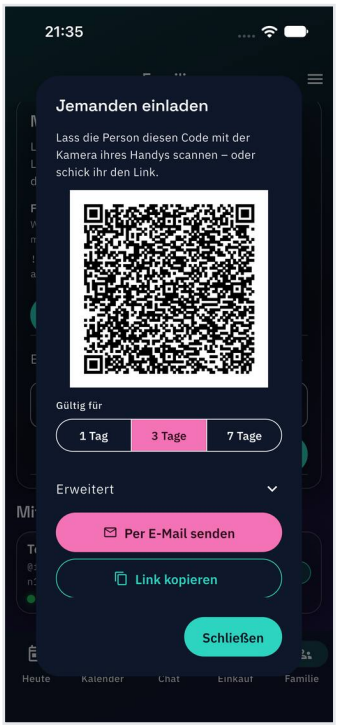

E-05a-G1

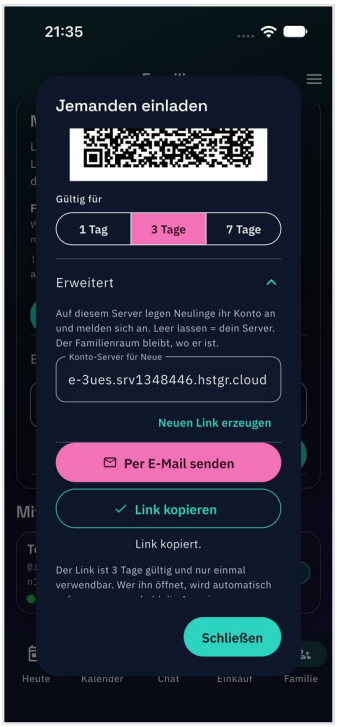

E-05b-G1

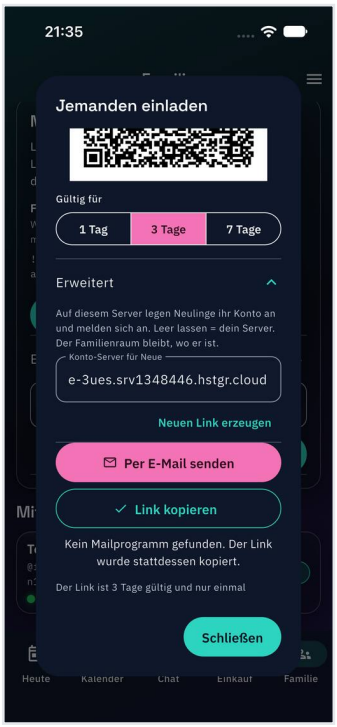


E-05c-G1


E-06 Invalid and truncated link · G2

PASSED

Observed: G2 (Mac): `abc` → “Das ist kein Einladungslink. Ein Einladungslink beginnt mit „https://carpeasrael.github.io/FamilyNexus/join/“ oder „familynexus://join“.”; link shortened by 10 characters → “Der Link ist unvollständig oder beschädigt – oft passiert das beim Weiterleiten. Bitte noch einmal vollständig einfügen …”.

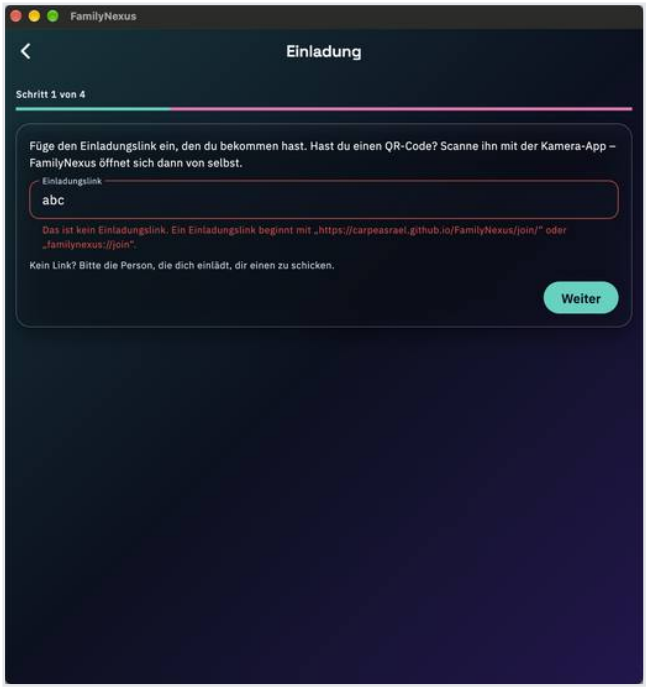

E-06a-G2

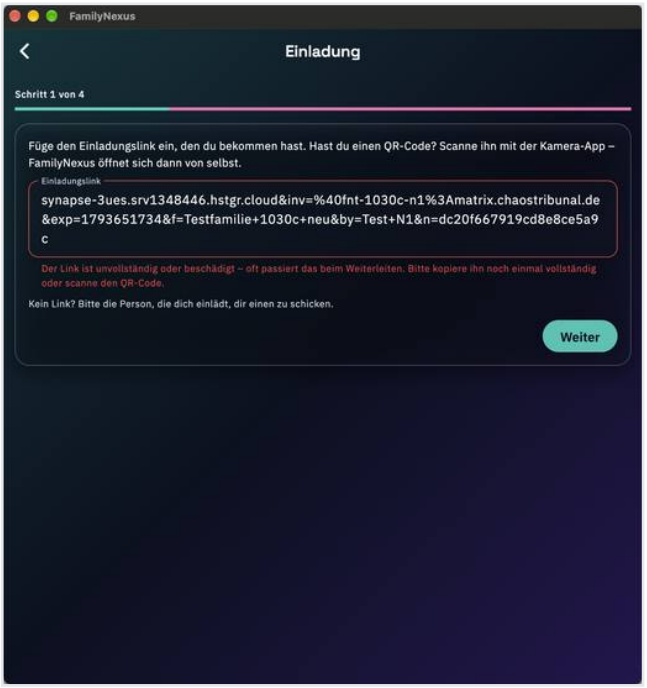


E-06b-G2


E-07 Open full link via system · G2

PASSED


Observed: G2 (Mac): `open <link>` → Safari page “Einladung zu FamilyNexus” → “App öffnen” → “Darf diese Website „FamilyNexus.app“ öffnen?” → Allow → account creation first; after the key, join card “Du trittst der Familie „Testfamilie 1030c neu“ bei. Eingeladen hat dich Test N1 (Konto bei …).”, details with user ID `@fnt-1030c-n1:…` and server, “Verwerfen”.



E-07-G2

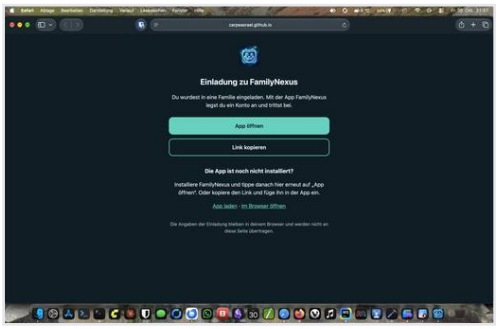

E-07a-G2

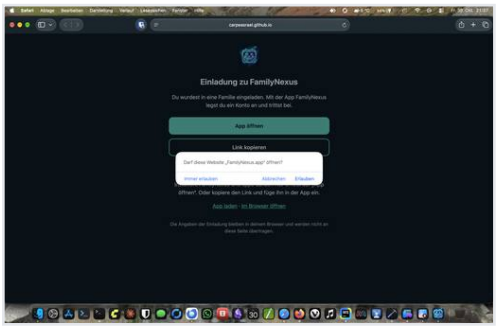


E-07b-G2

E-08 Join → account creation · G2

PASSED

Observed: Provider taken from the link: matrix-synapse-3ues.srv1348446.hstgr.cloud (not matrix.org).

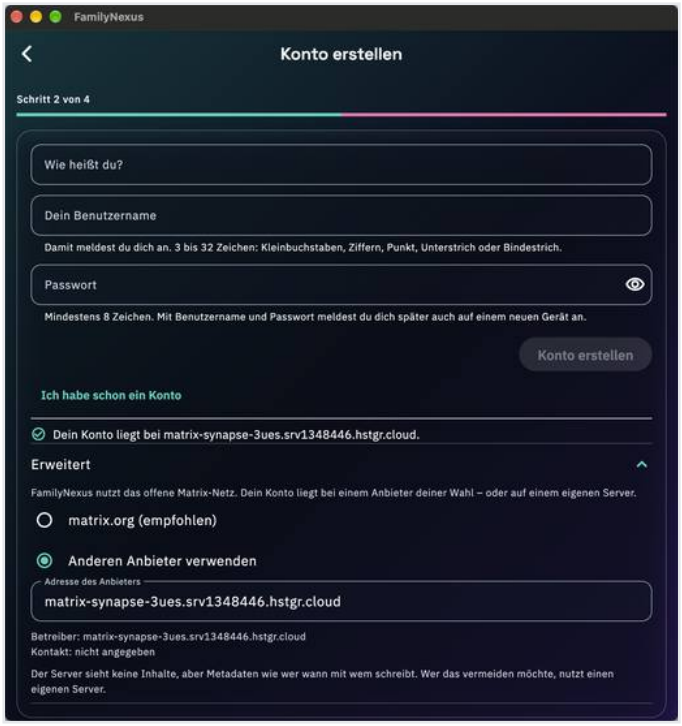


E-08-G2


E-09 Create I2 · G2

PASSED

Observed: I2 `fnt-1030c-i2` (“Test Nutzer 2”) created without extra step, on to the emergency key.

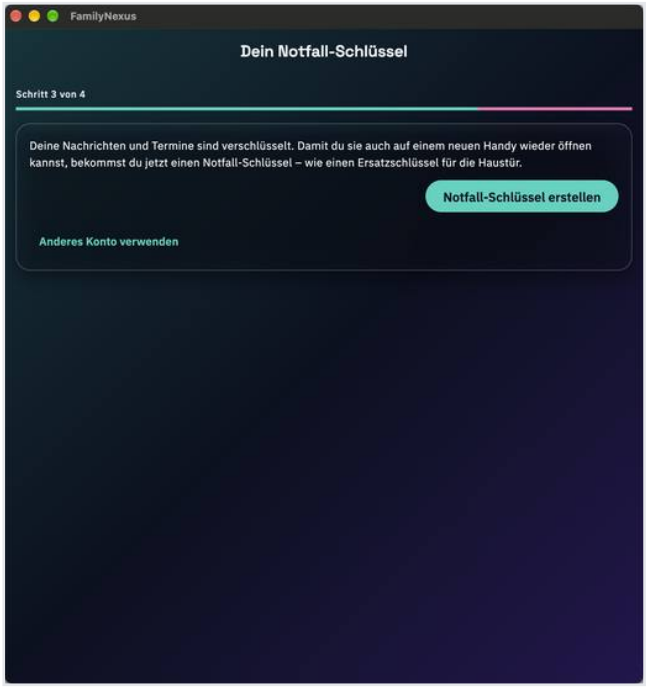

E-09-G2

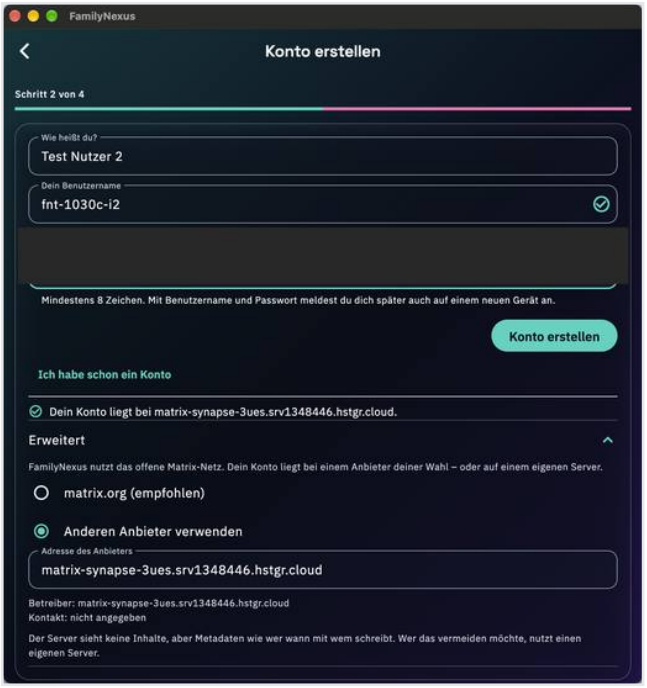


E-09a-G2


E-10 Emergency key, request to join · G2

PASSED


Observed: Key stays on screen (#10), KI2 stored; checkbox → Weiter → join card “Schritt 4 von 4” → “Beitritt anfragen”.




E-10-G2



E-10a-G2



E-10b-G2




E-10c-G2


E-11 Wait for admission · G1, G2

PASSED


Observed: I2 admitted automatically (within about 10 s); G2 shows “Heute” with “Test geteilt 2” and “Test N1 – Online”; G1 shows no open request.

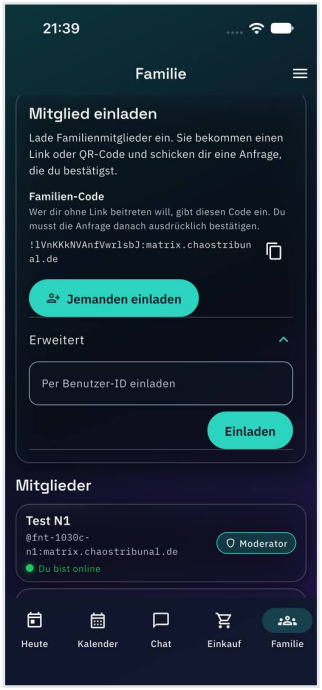

E-11-G1

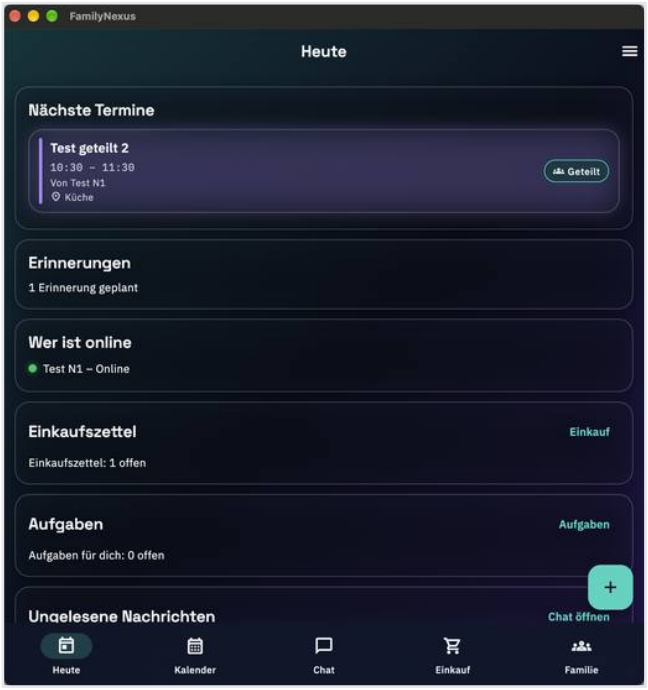

E-11-G2

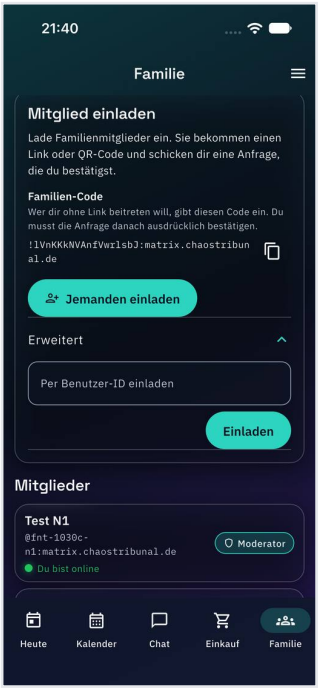


E-11b-G1

E-12 Open used link via system · G2

PASSED

Observed: G2 (Mac): used-up link via open → web page → “App öffnen” → “Du bist bereits in einer Familie.” (short message at the bottom), nothing changes, no crash.

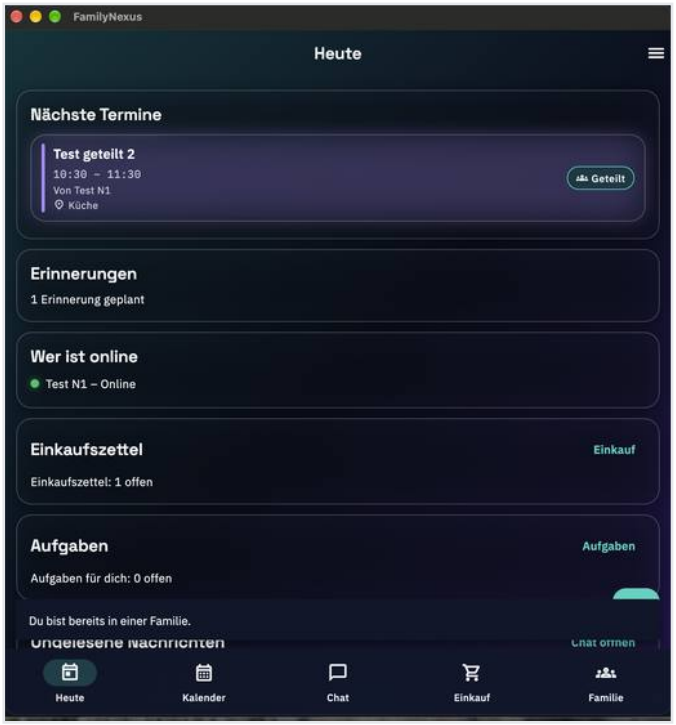


E-12-G2


E-13 Tab “Familie” on both · G1, G2

PASSED

Observed: Both members: Test N1 (moderator), Test Nutzer 2 (member, “Nicht persönlich geprüft”); family name “Testfamilie 1030c neu” also at I2 (G2).

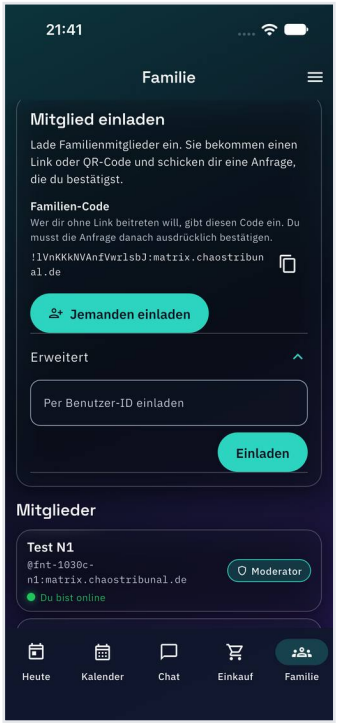

E-13-G1

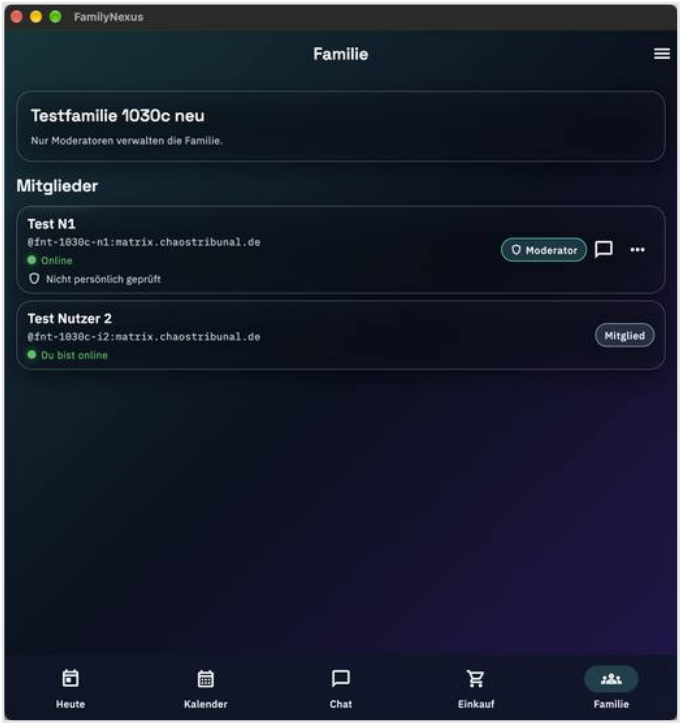


E-13-G2


E-14 I2: no management actions · G2

PASSED

Observed: I2 (Mac): Familie tab “Nur Moderatoren verwalten die Familie.”, no rename/invite/code, menu only verify/block; tasks: “Nur Moderatoren legen Listen an. Abhaken kann nur die zugewiesene Person.”, no “Neue Aufgabenliste” button.

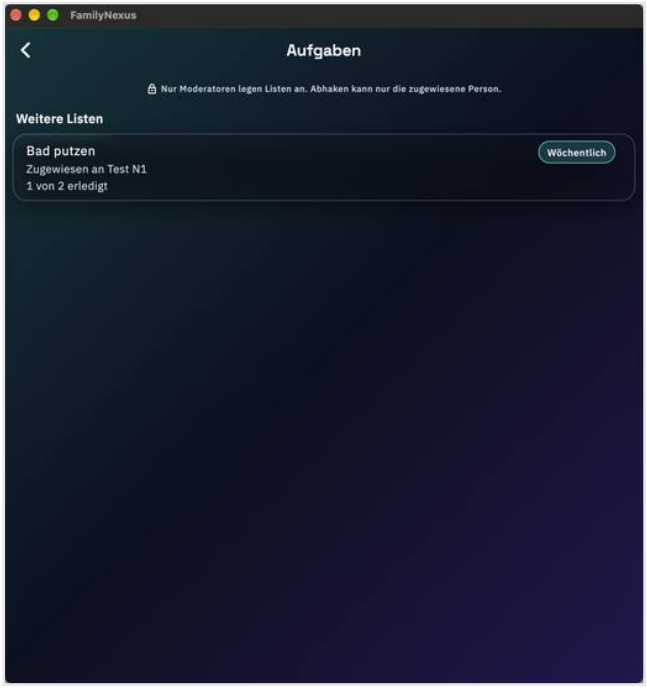

E-14-G2

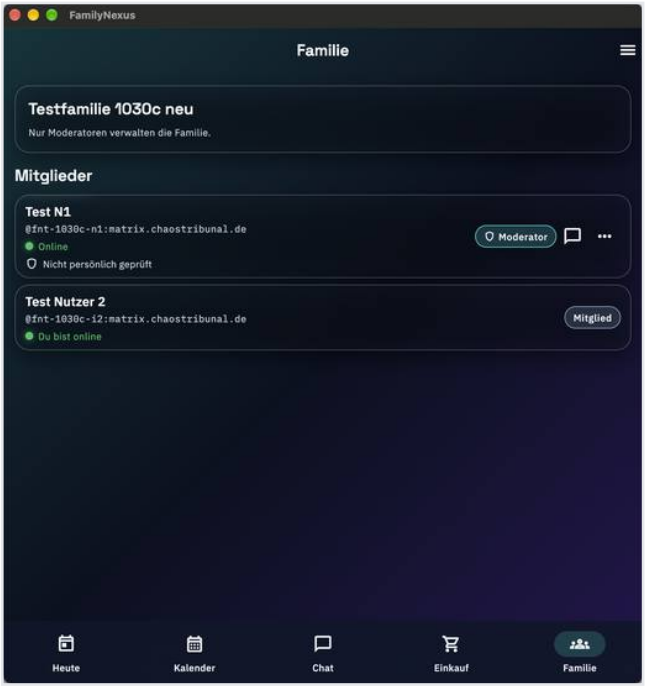


E-14a-G2


E-15 Online status · G1, G2

PASSED


Observed: On: G2 “Test N1 – Online”. Off (G1): G1 “Dein Status wird nicht geteilt”; G2 “Gerade ist sonst niemand online.” and for Test N1 “Zuletzt online gerade eben”. On again: G2 shows N1 “Online” again.

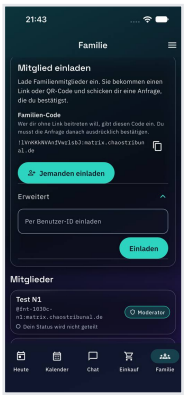


E-15a-G1

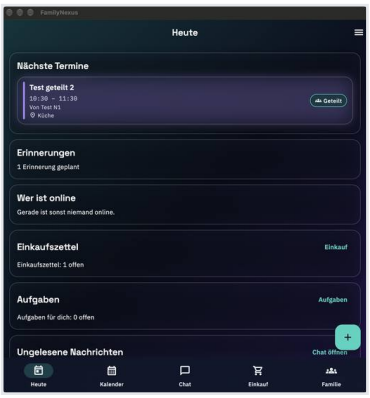


E-15b-G2

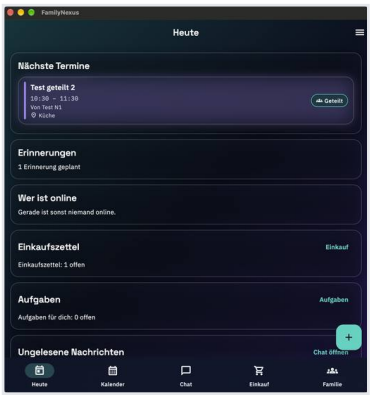


E-15c-G2

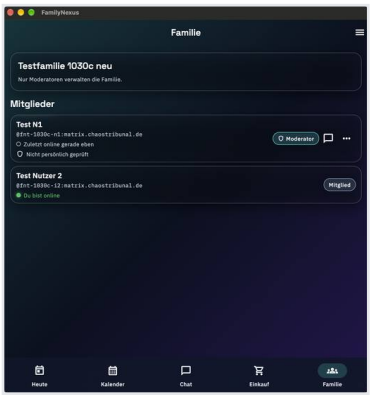


E-15d-G2

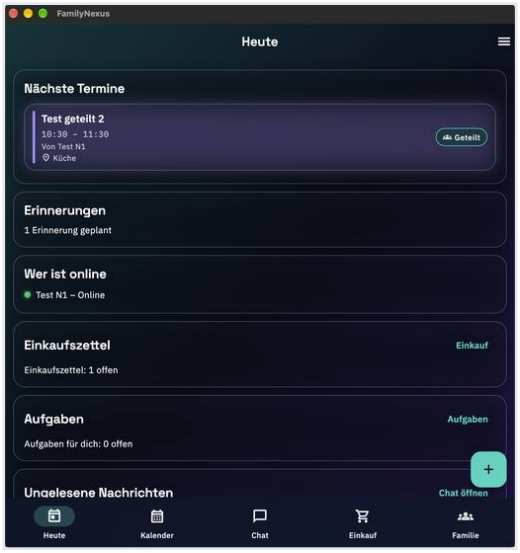

E-15e-G2

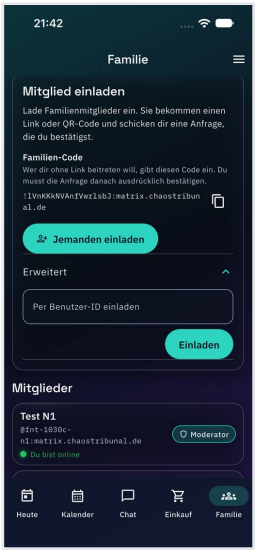

E-15pre-G1

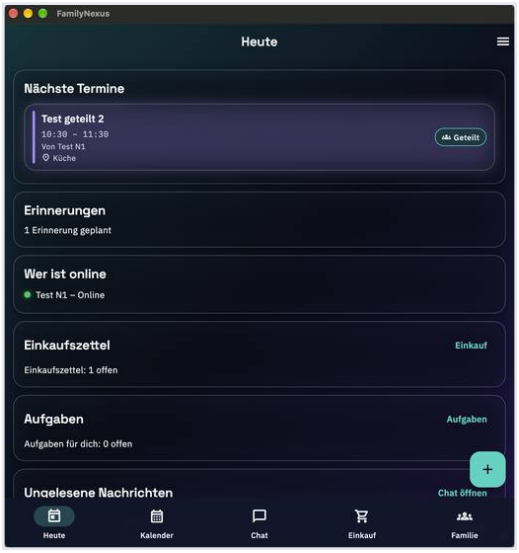

E-15pre-G2

E-16 Chat: reply, reaction · G1, G2

PASSED


Observed: G1 sends “Hallo von Nutzer 1”; G2 (before opening): “1 ungelesene Nachricht” on “Heute”, chat badge 1 (#65); in the chat a single notice “Ältere Nachrichten aus der Zeit vor deinem Beitritt sind nicht lesbar.” (#35); G2 replies via “Antworten” (“Antwort an Test N1”), reply with reference at G1; reaction (long press) on both.



E-16a-G1




E-16b-G1

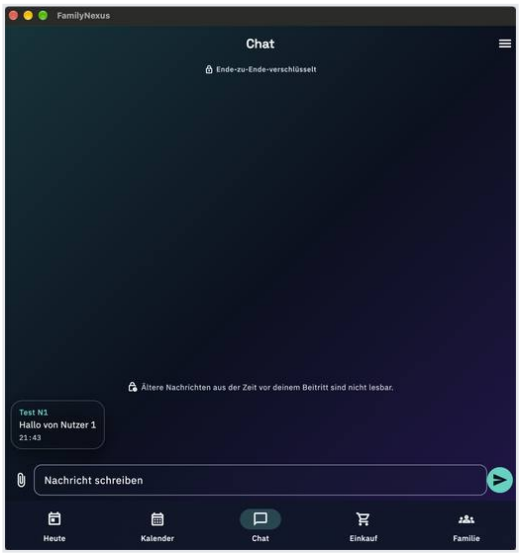


E-16b-G2




E-16c-G1




E-16c-G2



E-16d-G2



E-16e-G2



E-16pre-G2


E-17 Attachments · G1, G2

PASSED

Observed: G1 sends image (bild.png), text file FN-ANHANG.txt and file `a<b>c"d.txt` (name becomes `a_b_c_d.txt` when sending); G2 (Mac): “Anhang laden” shows the image, “Speichern” below (#40); warning “Die Datei wird entschlüsselt und unverschlüsselt im gewählten Ordner gespeichert. … Sie bleibt dort auch nach dem Abmelden oder Löschen der App-Daten erhalten. Fortfahren?”; save dialog; files in the chosen folder.




E-17a-G1

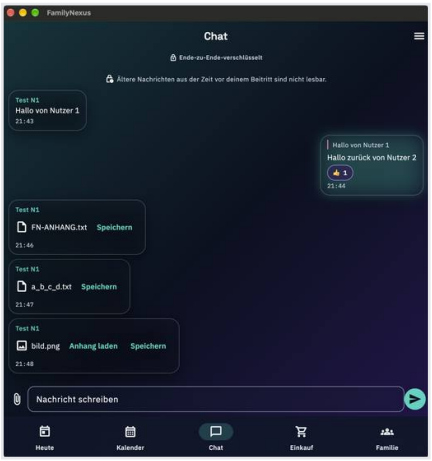


E-17a-G2




E-17b-G1

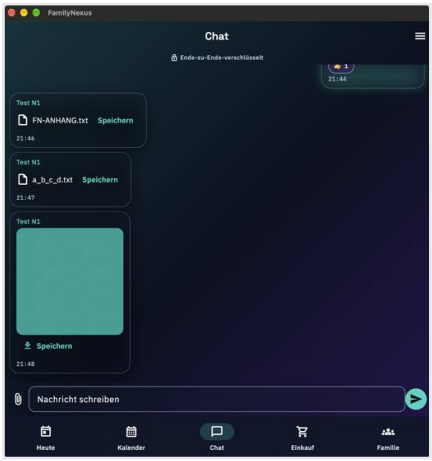

E-17c-G2



E-17d-G2

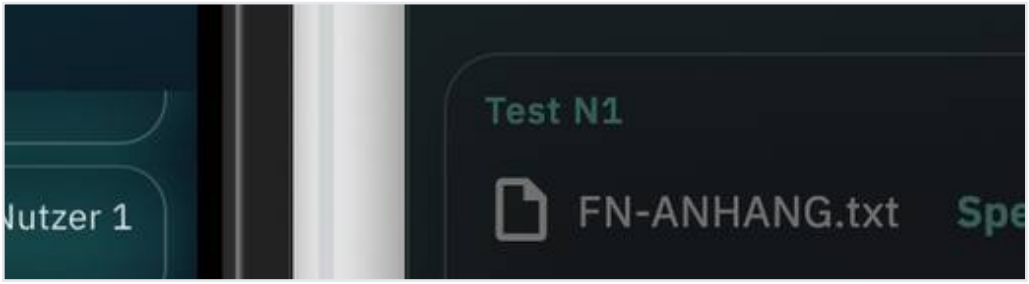

E-17e-G2

E-18 Direct chat · G1, G2

PASSED


Observed: G1: tab Familie → “Nachricht schreiben” at Test Nutzer 2; before sending, at the top “Nur zwischen dir und Test Nutzer 2, Ende-zu-Ende-verschlüsselt”; sends “Nur fuer dich” (ue substitute). G2 (Mac): tab “Test N1” with badge, message appears at once in the direct chat (#77), not in the family chat; no raw text “Attempting verification request”.




E-18a-G1




E-18a2-G1

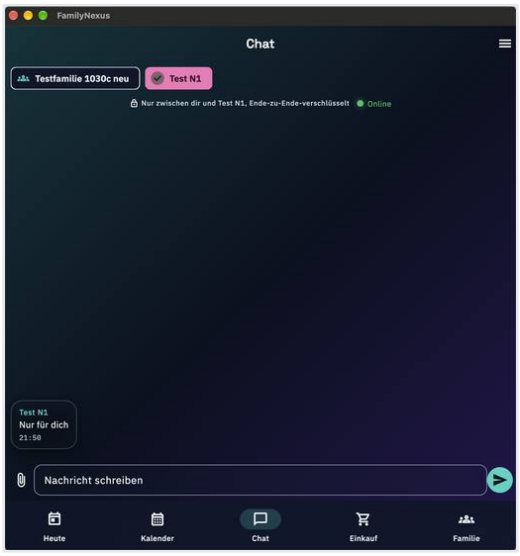

E-18b-G2

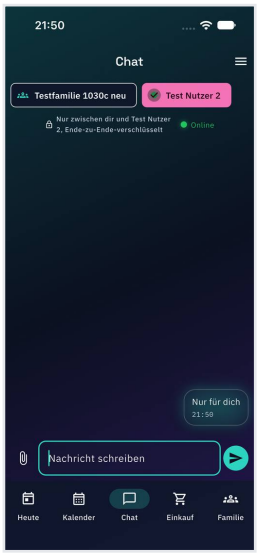

E-18c-G1

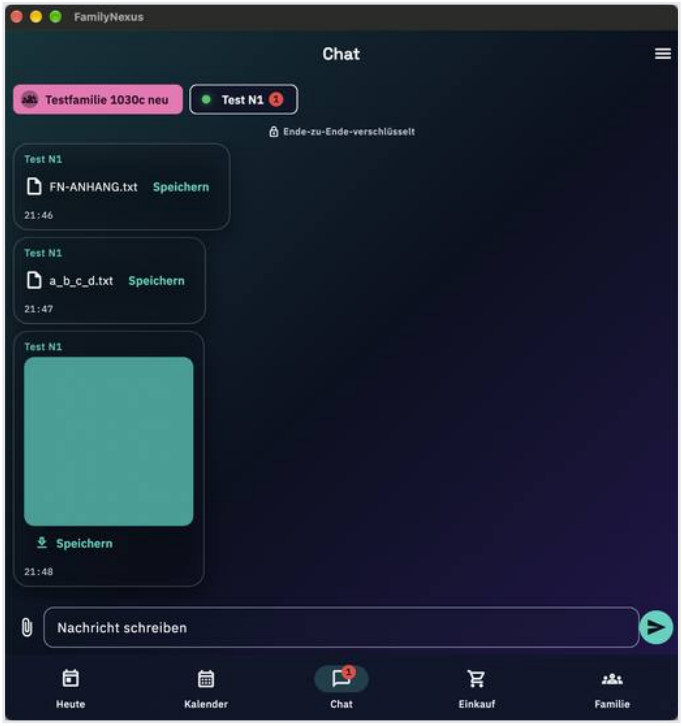


E-18d-G2


E-19 Events and person filter · G1, G2

PASSED


Observed: G2 (Mac, I2): agenda shows only “Test geteilt 2” (“Test privat”/“Test Serie” not visible); filter only “Test Nutzer 2”: “Keine Termine”; “Alle” restores.




E-19-G2




E-19a-G2



E-19b-G2



E-19c-G2

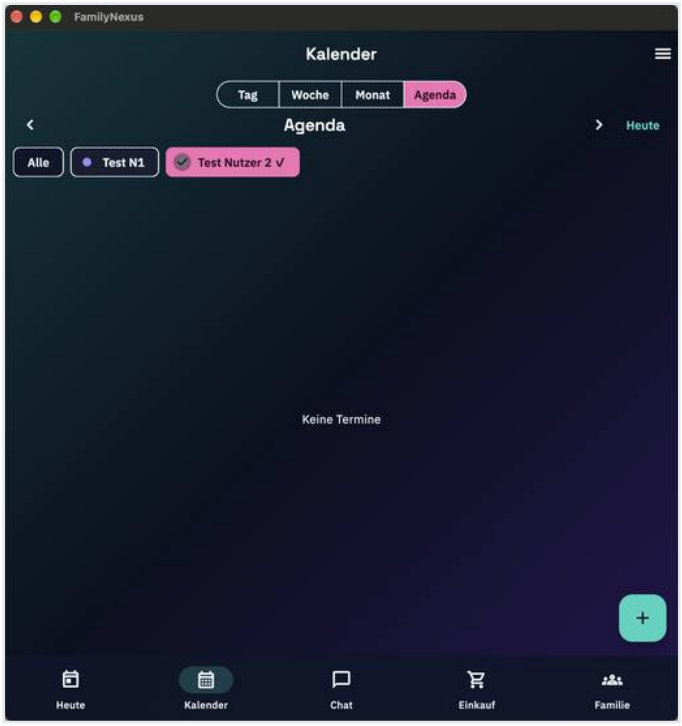


E-19d-G2

E-20 Accept / decline · G2, G1

PASSED


Observed: G2 (Mac): “Nur der Ersteller kann diesen Termin ändern.” (no edit), “Keine Antwort” → “Zusagen”; G1: “Test Nutzer 2 – Zugesagt”; “Im Chat teilen” only for the creator.

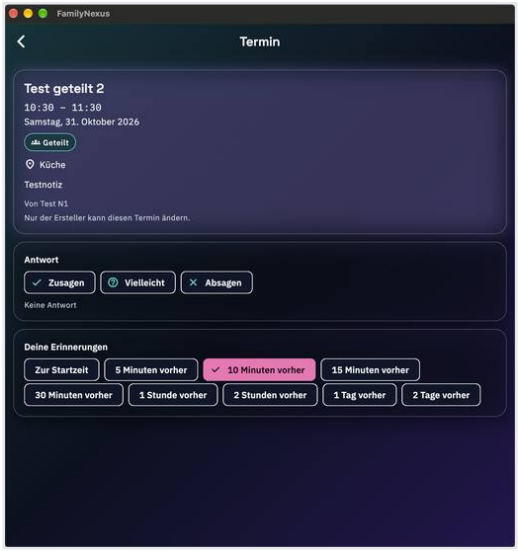

E-20a-G2



E-20b-G1

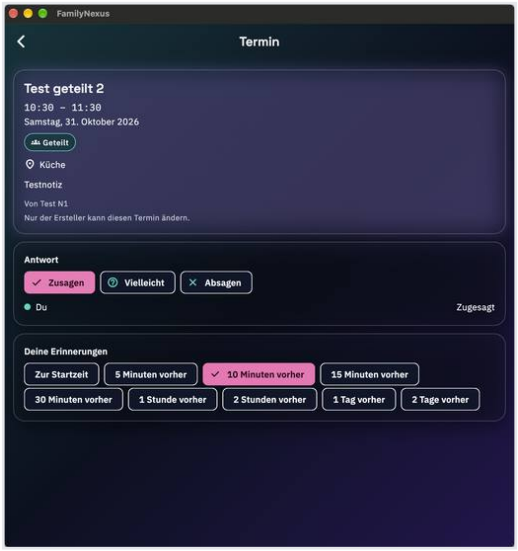


E-20c-G2

E-21 I2’s own event · G2, G1

PASSED


Observed: G2 (Mac): “Termin I2” created as shared; G1 sees it “Von Test Nutzer 2”; when editing to “Privat”: “Bereits an die Familie gesendete Inhalte bleiben auf deren Geräten, auch wenn du den Termin später privat machst.”

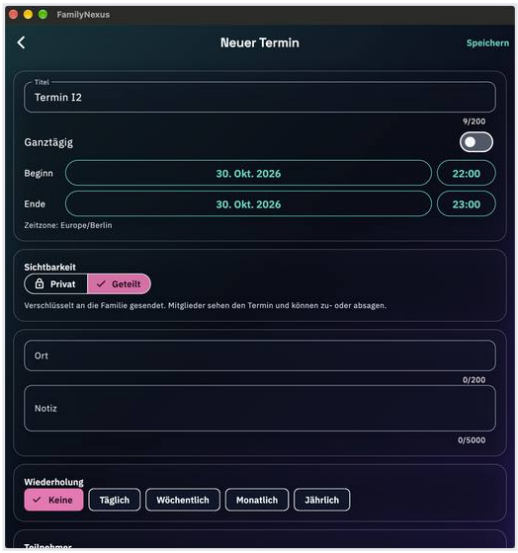

E-21a-G2



E-21b-G1

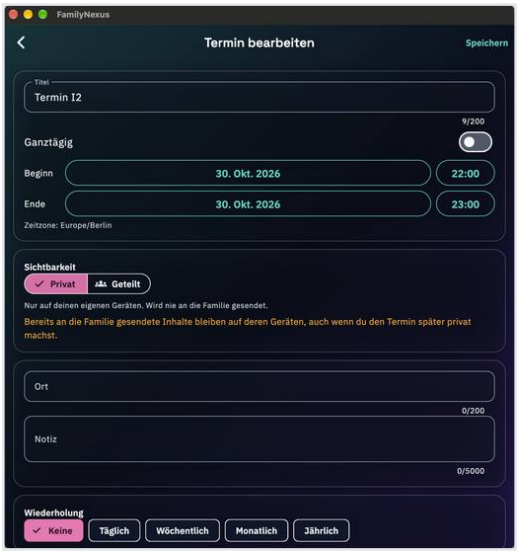


E-21c-G2


E-22 Shared shopping list · G2, G1

PASSED


Observed: G2 (Mac) adds “Kaese” (ae substitute); G1 ticks it; “2 erledigte Einträge für die ganze Familie entfernen?” → removed; G2 deletes “Vollkornbrot”; entries with “zuletzt von …” on both; deleting takes effect on both.

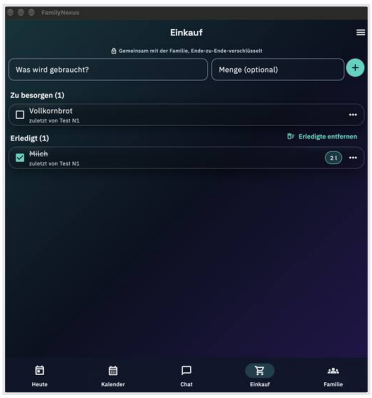


E-22a-G2

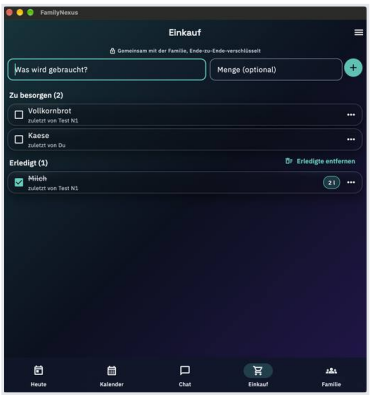


E-22b-G2

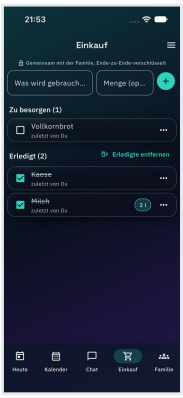


E-22c-G1

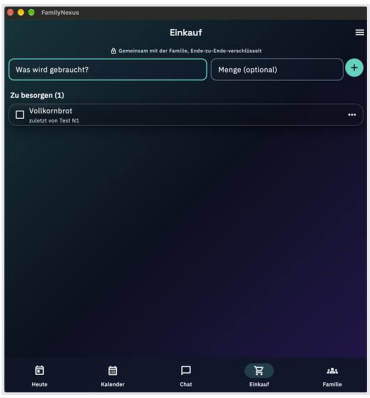


E-22c-G2

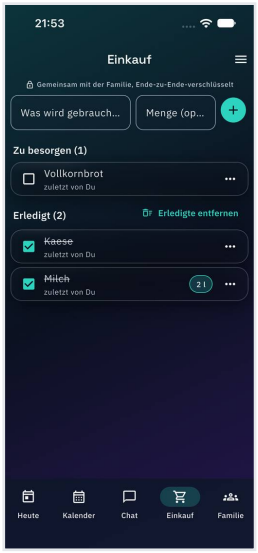


E-22d-G1

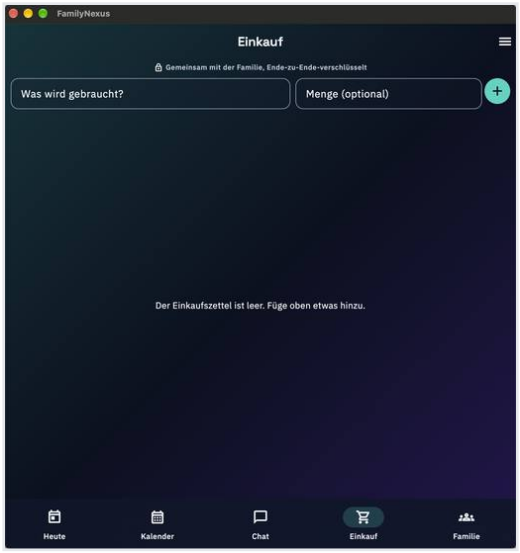


E-22d-G2

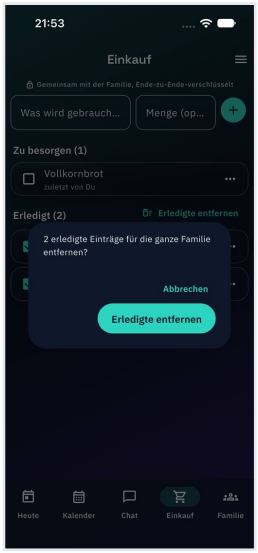

E-22e-G1

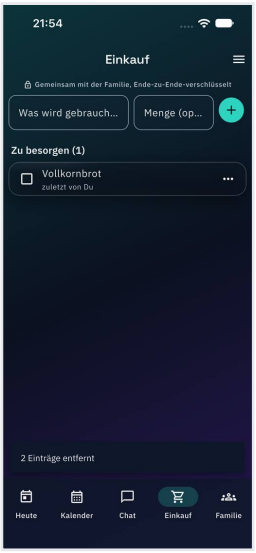

E-22f-G1

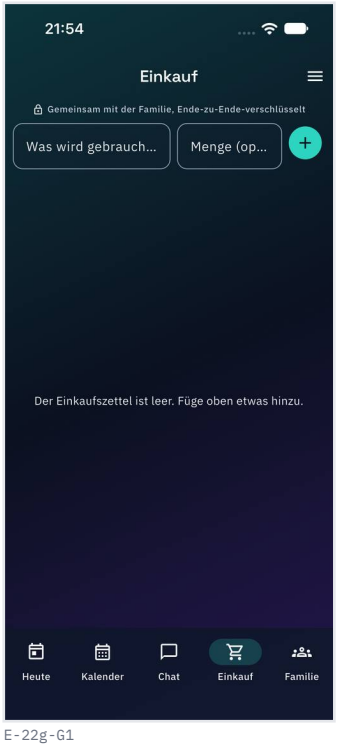

E-22g-G1

E-23 Task for I2 · G1, G2

PASSED

Observed: G1: title “Müll rausbringen” (umlaut via autocorrect), assigned to Test Nutzer 2, “Montag bis Freitag (ohne Wochenende)” chosen (E-23a); list shows “Mo–Fr” and “Montag bis Freitag · Startet montags bis freitags neu, nicht am Wochenende” (#76); G2: list under “Mir zugewiesen”, “Aufgaben für dich: 1 offen” on Heute; ticked with comment; history “Tonne raus erledigt – Du · 30.10.2026, 21:56” (DD.MM.YYYY, #38); G1 sees the history (“Test Nutzer 2 · 30.10.2026, 21:56”); list “Bad putzen” deleted (“Liste „Bad putzen“ löschen?”).




E-23a-G1



E-23b-G1




E-23c-G1

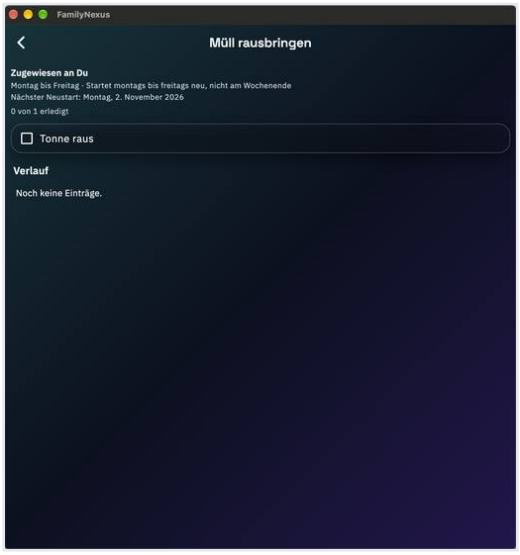


E-23c-G2



E-23d-G1

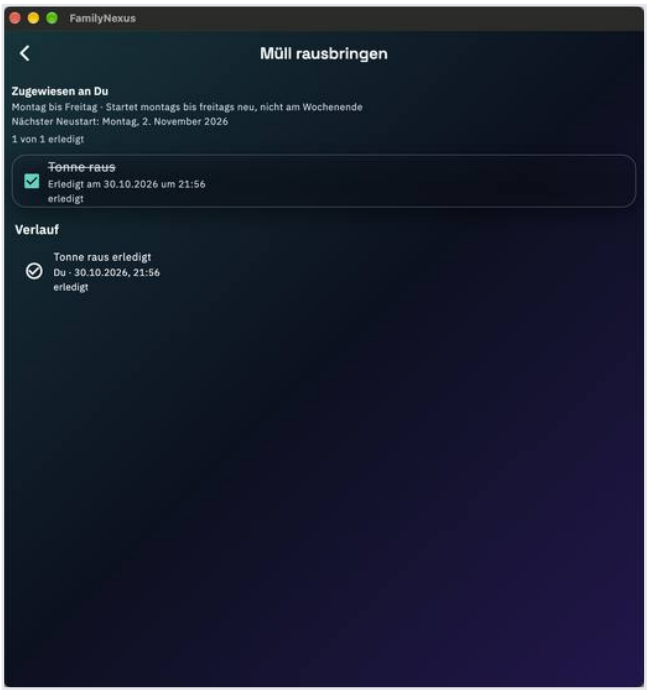

E-23d-G2

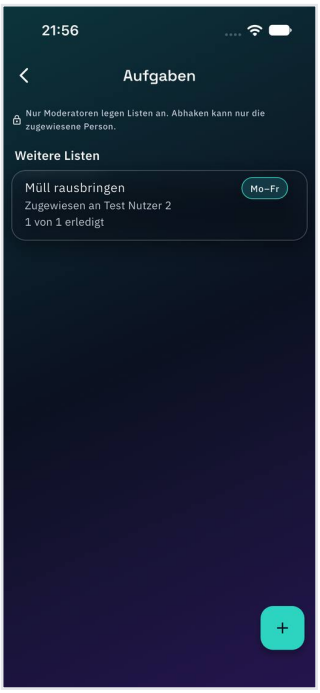

E-23e-G1


E-24 Verify person · G1, G2

PASSED

Observed: G1 → Aktionen → “Verifizieren”; both devices show the same symbols (fish, key, horse, headphones, unicorn, pizza, thumbs up) → “Sie stimmen überein” → both “Verifiziert.”; member list shows “Verifiziert”.




E-24a-G1

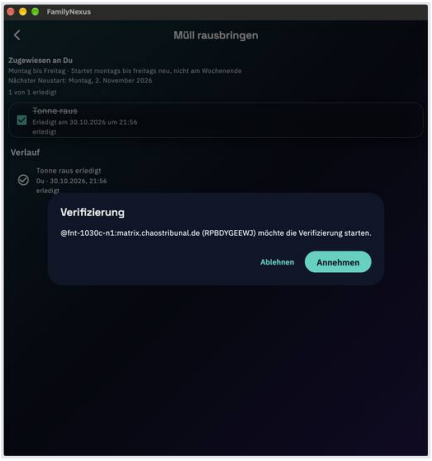

E-24b-G2




E-24c-G1

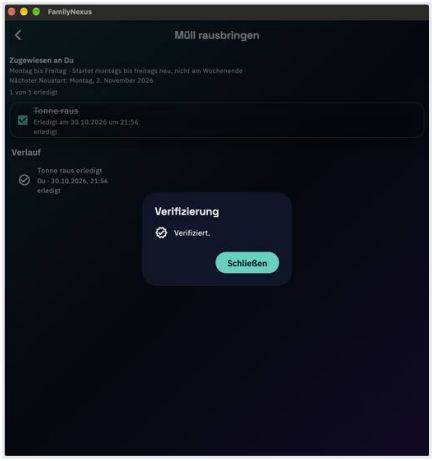

E-24c-G2



E-24d-G1

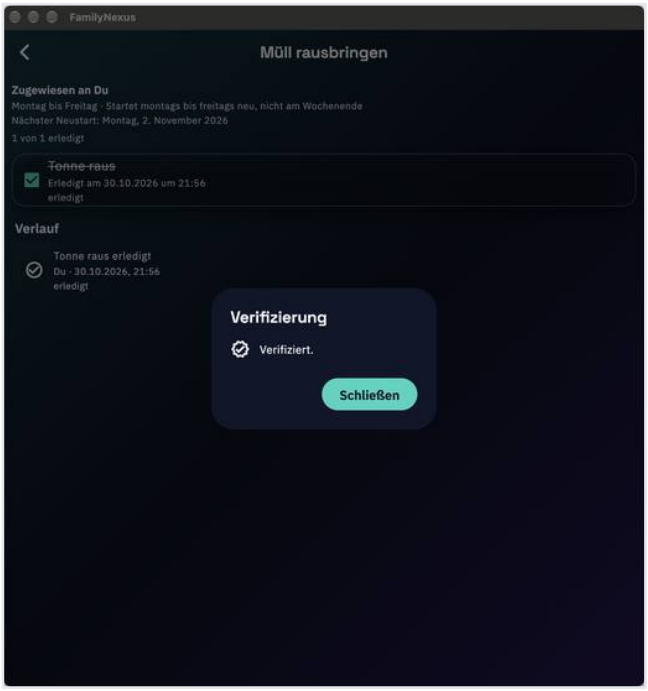

E-24d-G2




E-24pre-G1


E-25 Report message · G1

PASSED


Observed: G1: “Nachricht melden” with a note about the operator and four reasons (Spam oder Werbung, Belästigung oder Beleidigung, Unangemessener Inhalt, Anderer Grund); “Meldung gesendet.” with “Absender blockieren”; notice disappears after a few seconds (#45); readability in the dark design good (light not checked, #62).

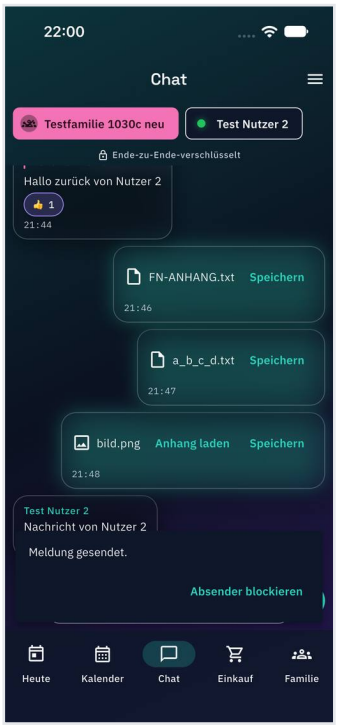

E-25-G1

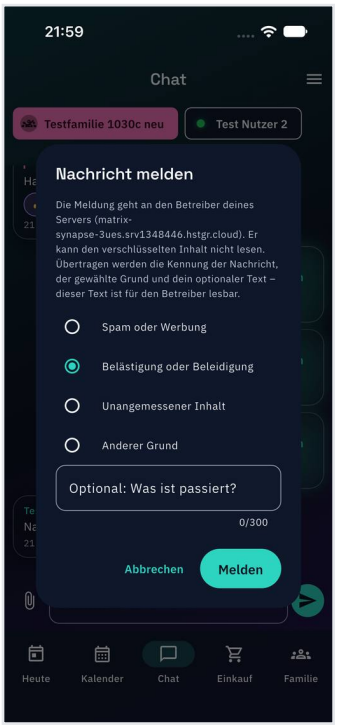

E-25a-G1

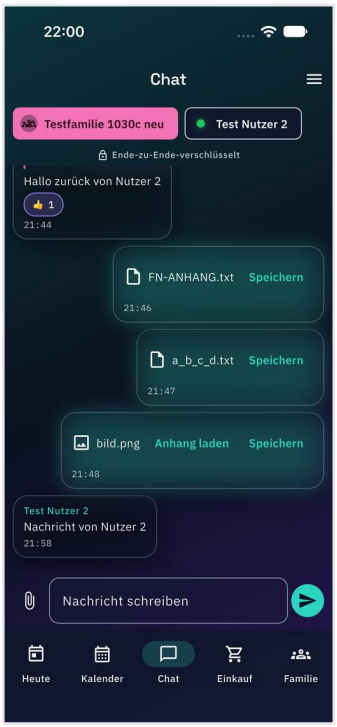

E-25b-G1


E-26 Block member · G1, G2

PASSED


Observed: G1: confirmation “Test Nutzer 2 blockieren?” with explanation; “Test Nutzer 2 ist blockiert.”; messages from I2 hidden at G1; G2 sends “Noch da?” without an error message. The “Blockiert” label on the member was not captured separately.



E-26a-G1

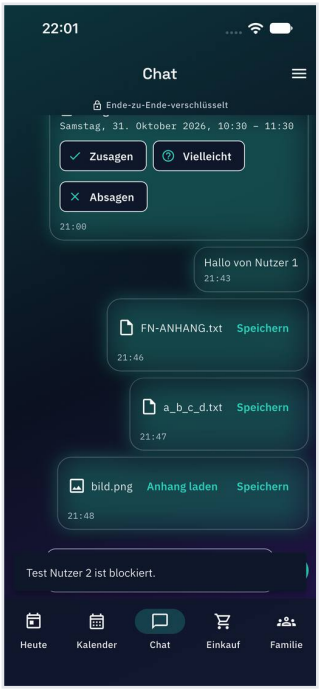

E-26b-G1

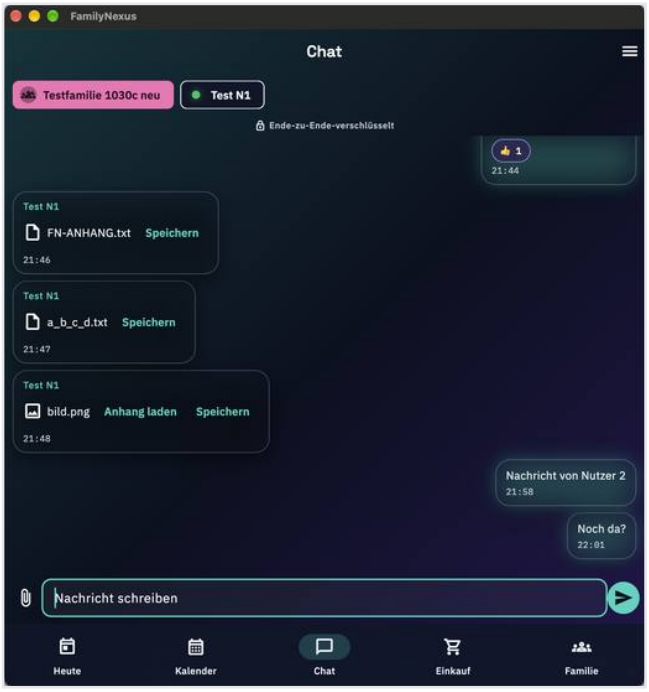


E-26c-G2


E-27 Unblock · G1

PASSED


Observed: Settings → “Blockierte Mitglieder” lists Test Nutzer 2 → “Blockierung aufheben” → messages from I2 visible again, including “Noch da?”.

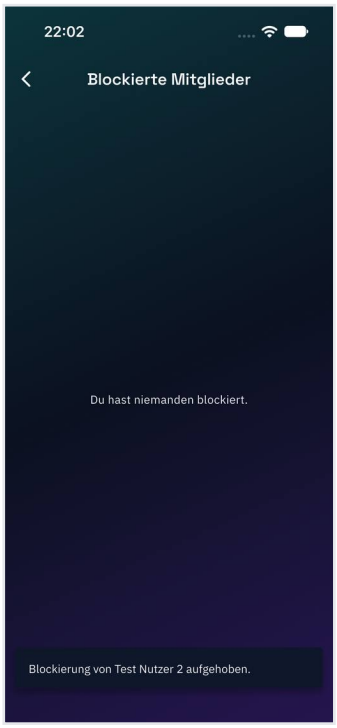

E-27-G1

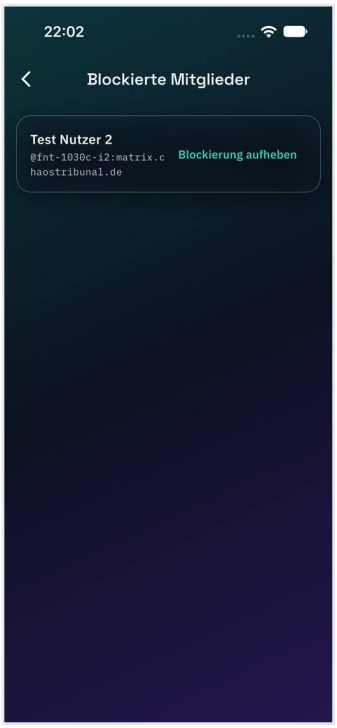

E-27a-G1

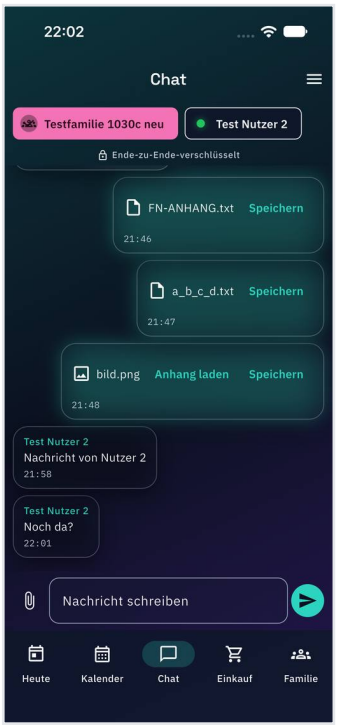


E-27b-G1


E-28 Version · G1, G2

PASSED


Observed: G1 and G2: bottom menu and settings → “Über die App”: “Version 1.2.1 (22)” (G1: B-22).

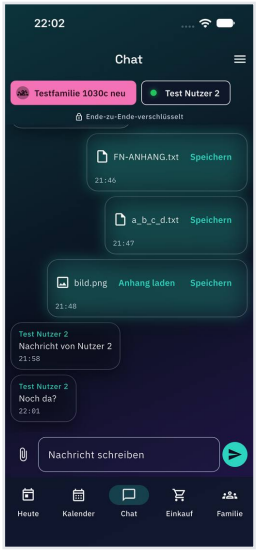

E-28-G1

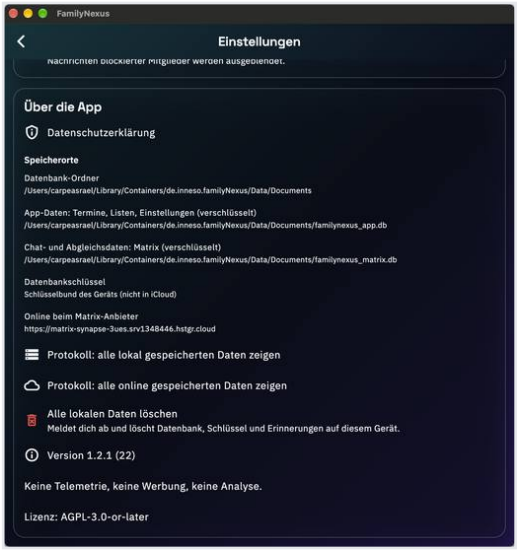

E-28-G2

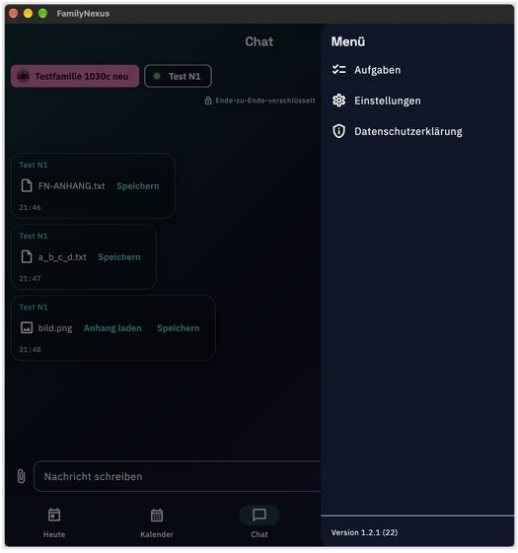


E-28a-G2

E-29 Sole moderator · G1

PASSED

Observed: “Konto löschen?” with “Du bist der einzige Moderator der Familie. Ernenne vorher ein anderes Mitglied zum Moderator …” (#12); “Konto endgültig löschen” inactive without a password; unchanged after “Abbrechen”.

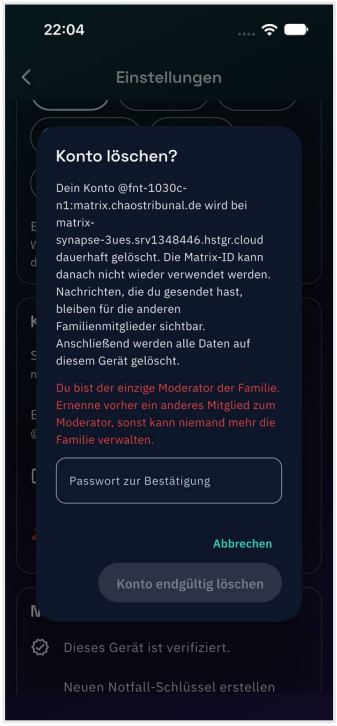

E-29-G1


E-30 Promote to moderator · G1, G2

PASSED

Observed: Confirmation “Test Nutzer 2 zum Moderator ernennen? Moderatoren können einladen, ernennen und entfernen.”; both devices show Test Nutzer 2 as moderator; the “zweiter Moderator” recommendation disappears.



E-30-G1

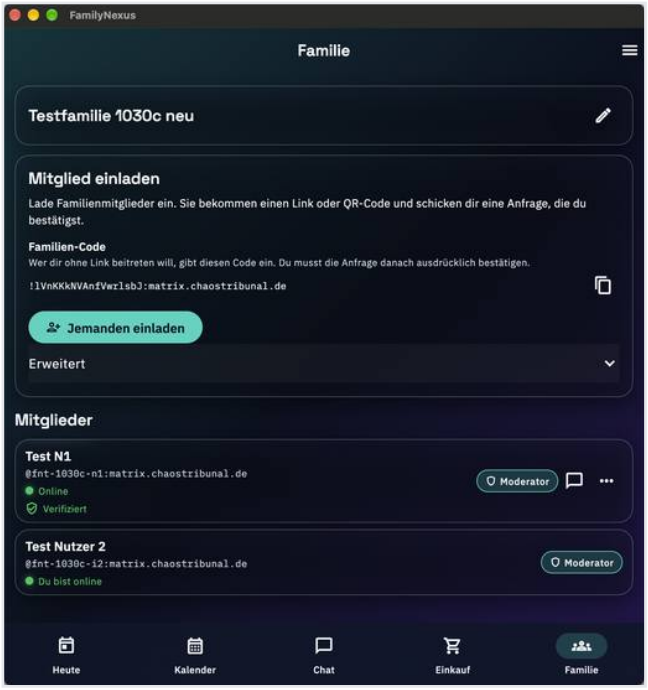

E-30-G2




E-30a-G1

E-31 Delete-account dialog · G1

PASSED

Observed: Dialog “Konto löschen?” without the “only moderator” notice; cancel.

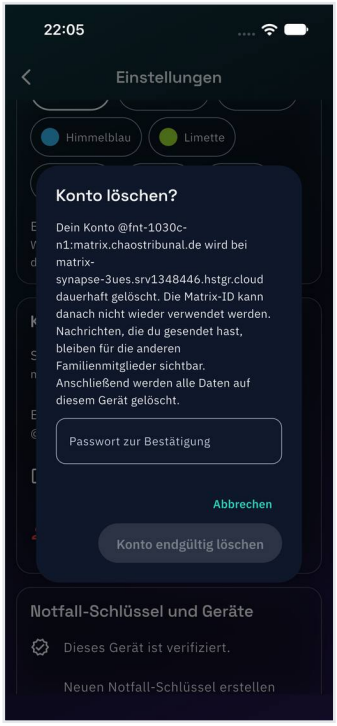


E-31-G1


E-32 Member deletes own account · G2, G1

PASSED


Observed: G2 (Mac): “Konto löschen?” without moderator notice (N1 is also moderator), after the password “Willkommen” (not “Anmelden”); counter-check sign-in I2 → 403 M_FORBIDDEN. G1: Test Nutzer 2 no longer a member, “zweiter Moderator” recommendation back; earlier messages as “Ehemaliges Mitglied”, never with a Matrix ID (#60).

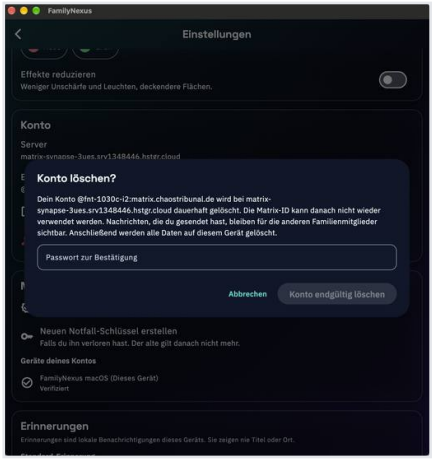

E-32a-G2

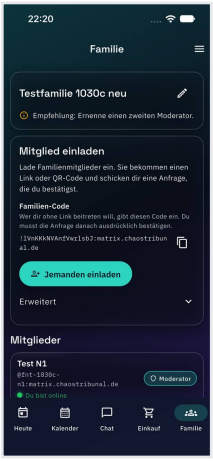

E-32b-G1

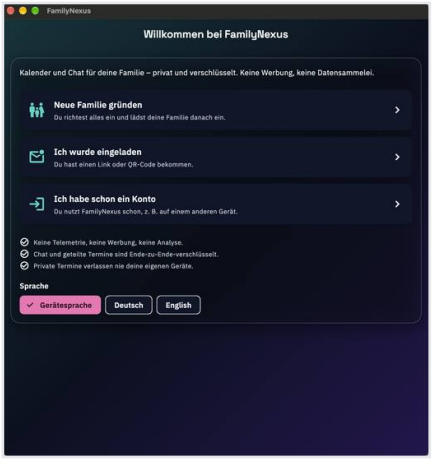

E-32b-G2




E-32c-G1

F – Local data, deleting, cleaning up


F-01 Account deletion, wrong and correct password (N2) · G2

PASSED


Observed: G2 (Mac): N2 signed in + unlocked with KN2; dialog names `@fnt-1030c-n12:matrix.chaostribunal.de` and the server, no moderator notice; wrong password: “Das Passwort stimmt nicht.” (#36), dialog stays; correct password: “Willkommen”.

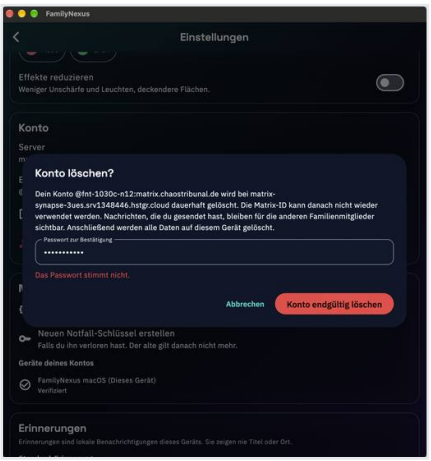

F-01a-G2

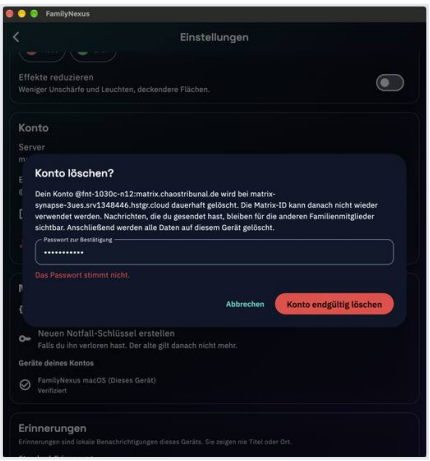

F-01b-G2

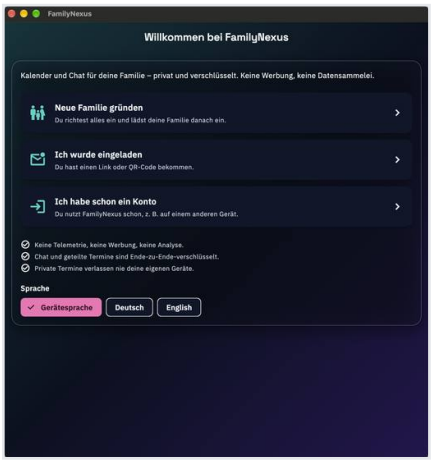

F-01c-G2

F-02 Counter-check N2 · –


PASSED

Observed: Sign-in N2 → `403 M_FORBIDDEN` (“Invalid username or password”).


F-03 Delete all local data (N1) · G1

PASSED

Observed: G1 (iOS): confirmation “Alle lokalen Daten löschen?” (“… Dein Konto beim Server bleibt bestehen …”); then “Willkommen”; account still exists.

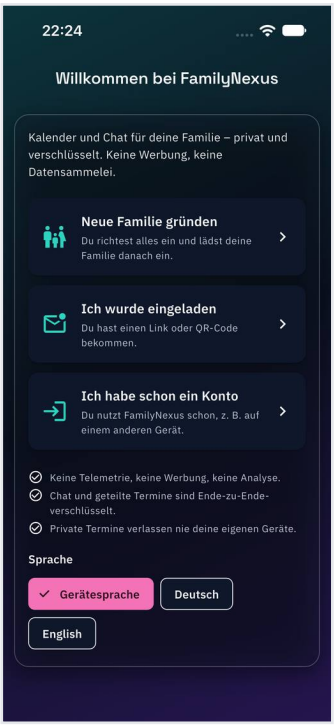

F-03-G1

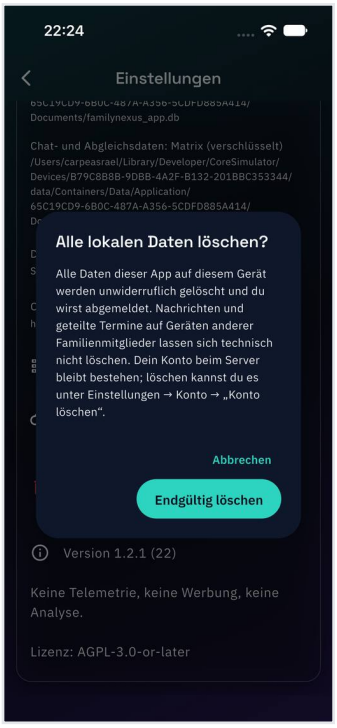


F-03a-G1

F-04 Quit and restart · G1

PASSED

Observed: App quit and restarted → “Willkommen” (settings and data gone).

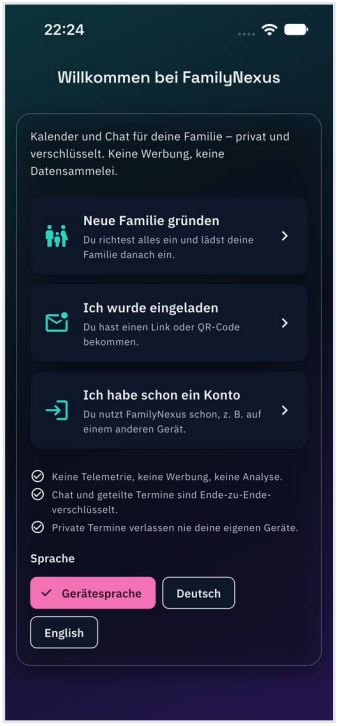


F-04-G1


F-05 Sign in and unlock with KN1b · G1

PASSED

Observed: G1 (iOS, language English): sign-in N1 + KN1b → unlocked; events (also private), chat, shopping, tasks restored from the server (provider back to matrix.org after the deletion, set manually); event from I2 with “By Former member” instead of a Matrix ID (#60).

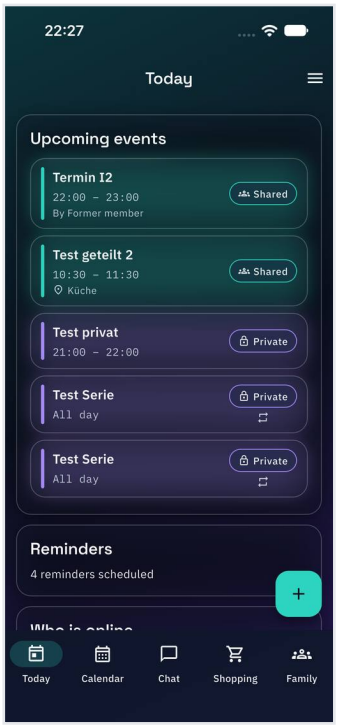

F-05-G1

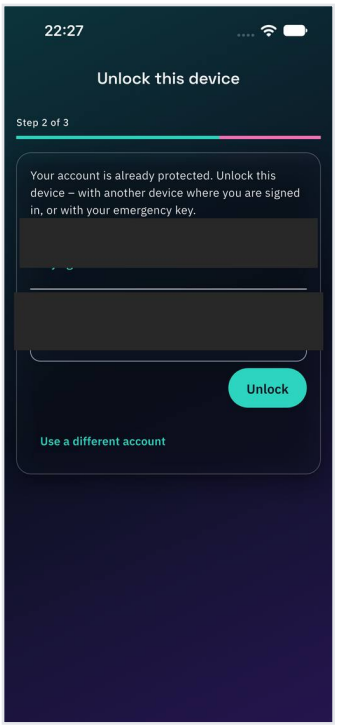


F-05b-G1

F-06 Delete N1 · G1

PASSED

Observed: G1 (iOS): dialog “Delete account?” without moderator notice (N1 alone); password → “Willkommen”.

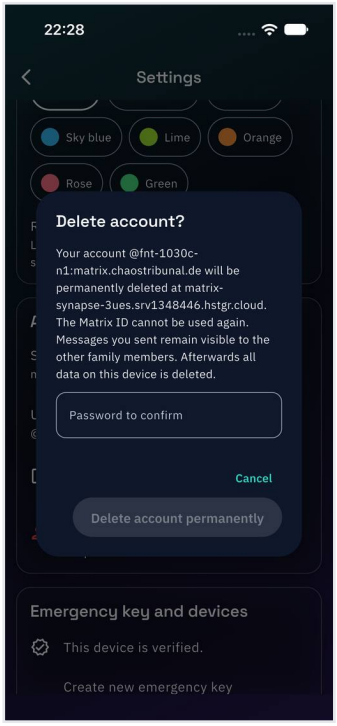

F-06a-G1



F-06b-G1

F-07 Counter-check N1 and I2 · –

PASSED

Observed: N1: 403 `M_FORBIDDEN`, I2: 403 `M_FORBIDDEN` (plus F-02: N2 403).

F-08 State at the end · –

PASSED

Observed: Final state: fnt-1030c-n1, -n12, -i2 deleted (`M_USER_IN_USE`, sign-in refused); fnt-1030c-n9 never created (free). Registration left open. Test devices “Testwerkzeug” removed.

G – Automated tests and special cases

G-01 flutter analyze · –

PASSED

Observed: `flutter analyze`: “No issues found!”

G-02 flutter test · –

PASSED

Observed: `flutter test`: 786 passed, 49 skipped, “All tests passed!”

G-03 Review notes test · –

PASSED

Observed: `flutter test test/store/review_notes_test.dart`: 4 passed.

G-04 E2E tests (optional) · –

NOT RUN

Observed: Optional (local Synapse); not run.

G-05 Covered by tests · –

PASSED

Observed: Covered by G-02 (786 tests green).

G-06 Review notes, manual · G1 — NOT RUN

Observed: Review notes not followed step by step manually (checked automatically by G-03).

G-07 Walkthrough with a person without prior knowledge · G1 — NOT RUN

Observed: Walkthrough with a person without prior knowledge: not possible in an automated run.


G-08 Web only · Web — N/A

Observed: Web platform only.


H – On-device encryption and data exchange

H-01 Storage locations · G1 — PASSED

Observed: G1 (iOS) and G2 (Mac): “Speicherorte” with database folder, “App-Daten: Termine, Listen, Einstellungen (verschlüsselt)”, “Chat- und Abgleichsdaten: Matrix (verschlüsselt)”, “Datenbankschlüssel: Schlüsselbund des Geräts (nicht in iCloud)”, “Online beim Matrix-Anbieter” (Mac path inside the container of `de.inneso.familyNexus`).

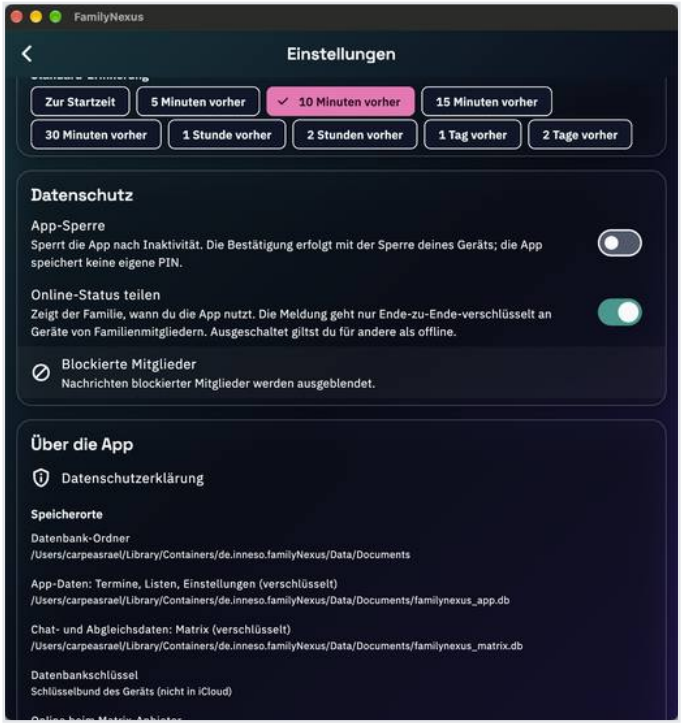

H-01-G1

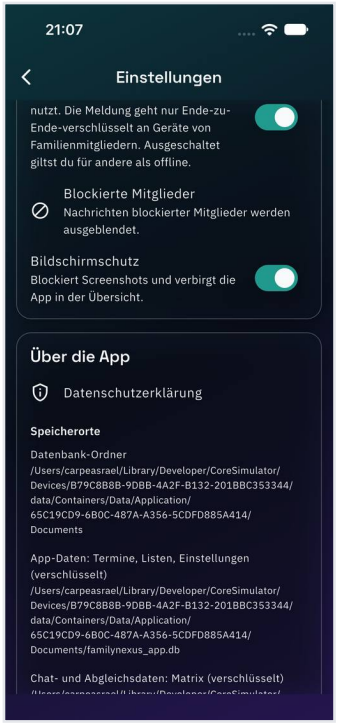

H-01a-G1

H-02 Quit app, list database files · G1 — WITH FINDING

Observed: G1 (iOS simulator, after quitting): exactly two files `familynexus_app.db` (81,920 bytes) and `familynexus_matrix.db` (462,848 bytes), no other file with event/chat/shopping data (only deliberately saved attachments in `tmp/`). G2 (Mac): container protected by macOS (“Operation not permitted”) → files cannot be checked, not run.

H-03 Check copies · G1 — PASSED

Observed: G1 (copies, app closed): header of both files is random bytes (no “SQLite format 3”), `file` = data, `sqlite3`: “file is not a database”. Info: header identical to run 16 (the simulator’s key is reused). G2: see H-02.

H-04 No plaintext remains · G1 — PASSED

Observed: G1: 0 hits for all search terms in both databases and in the whole app data folder (also FN-ANHANG-… and “Nur fuer dich”); counter-check: the saved local log finds the terms (>0).

H-05 Keys in the key store · G1 — PASSED

Observed: G2 (Mac): entries `fn.key.db.app` and `fn.key.db.matrix` (service `flutter_secure_storage_service`) in the “login” keychain, without sync attribute (not in iCloud); value not read.

H-06 No backup of data · G1 — PASSED


Observed: Apple: key only local in the “login” keychain, no iCloud entry (H-05); Android part n/a.

H-07 Clipboard · G1 — PASSED


Observed: G2 (Mac): “Kopieren” → 59 characters, after about 65 s 0 characters (cleared). 2nd run: copy (59), then `abc` copied: after 66 s `abc` (3 characters) is unchanged. G1 (iOS simulator): “Kopieren” does not write to the simulator pasteboard → not checkable there.



H-07a-G1

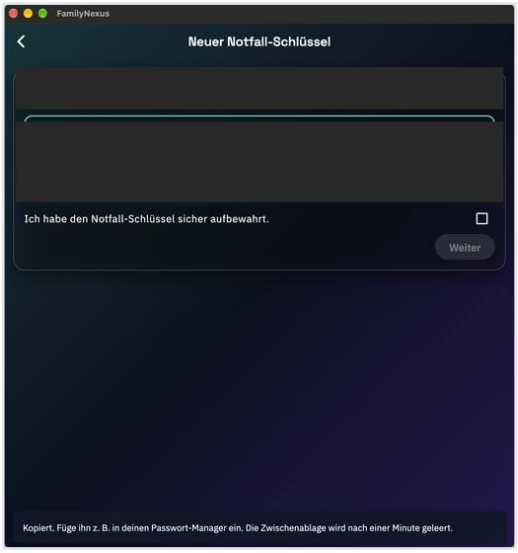


H-07b-G2

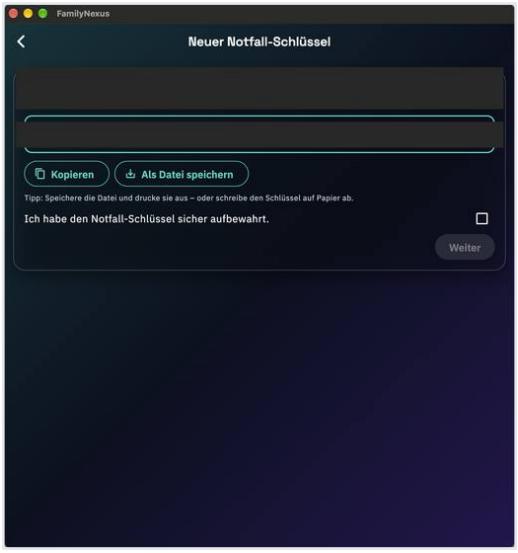


H-07c-G2

H-08 Files the app deliberately stores in plaintext · G1 — WITH FINDING

Observed: (a) Emergency-key file on G1 (iOS) with account, provider, date, key (A-10), located in “Auf meinem iPhone” after “Als Datei speichern”; (b) save log (G2 Mac): warning “Das Protokoll zeigt deine Daten im Klartext. Beim Kopieren oder Speichern verlassen sie den verschlüsselten Speicher der App.”, save dialog, file `familynexus-local-…txt`; (c) save attachment (E-17): warning “… unverschlüsselt im gewählten Ordner gespeichert …”. Emptying the trash for (a)/(b) not performed.

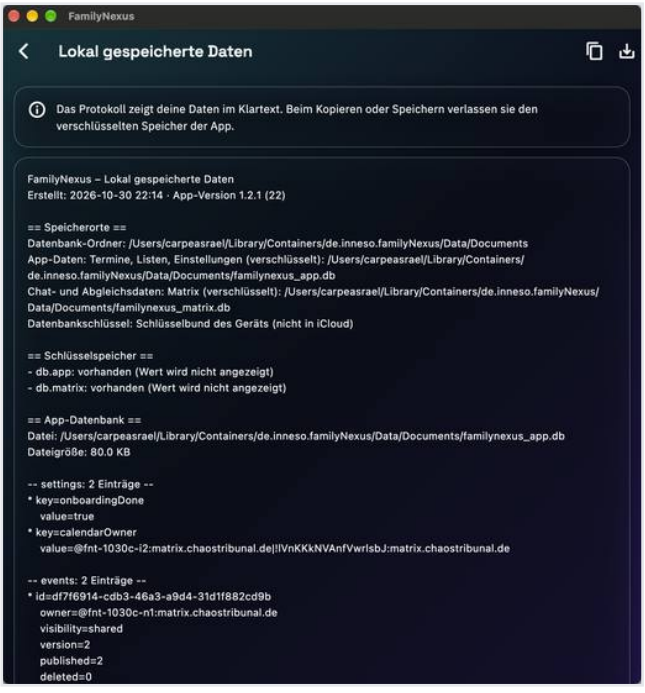

H-08a-G2

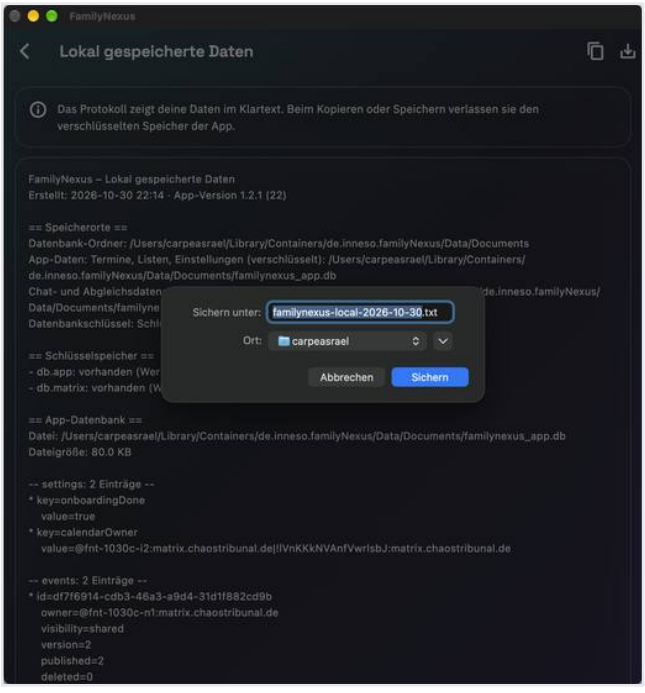

H-08b-G2

H-09 Log without secrets · G1


PASSED

Observed: Log (G2 Mac, I2): 0 hits for password (I2), emergency key (I2), KN1/KN1b (N1), token patterns; sentences “Außerdem gespeichert, aber aus Sicherheitsgründen nicht angezeigt: …”, “Nie gespeichert, nur im Arbeitsspeicher: Online-Status …”, “Geplante Erinnerungen liegen zusätzlich beim Betriebssystem.” present (title/time of the reminders are in plaintext at the operating system → note).


H-10 Online log: encryption and rooms · G1, G2

WITH FINDING


Observed: G2 (Mac, I2): online log: family and “Einzelchat” each “Ende-zu-Ende-verschlüsselt: ja”, 2 members joined, cross-signing and key backup “eingerichtet”, no “Sonstiger Raum”, no private room of N1 visible. G1 (iOS): view opened (H-10-G1), the clipboard evaluation did not work in the simulator; private room, room types and members confirmed instead by H-11 via curl (3 rooms, private room 1 member).

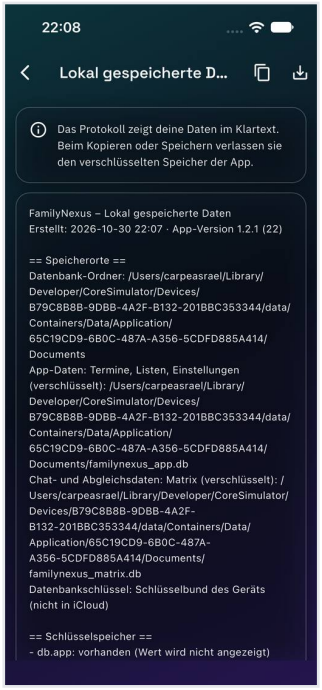

H-10-G1

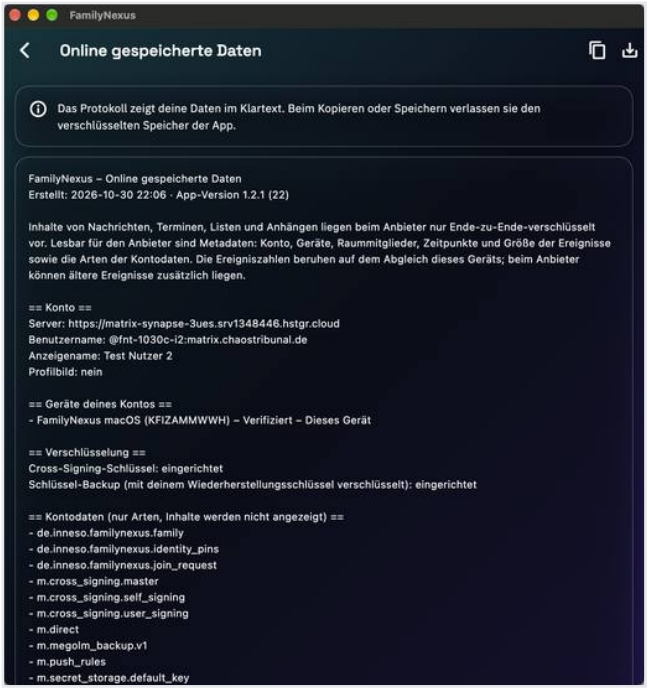

H-10-G2

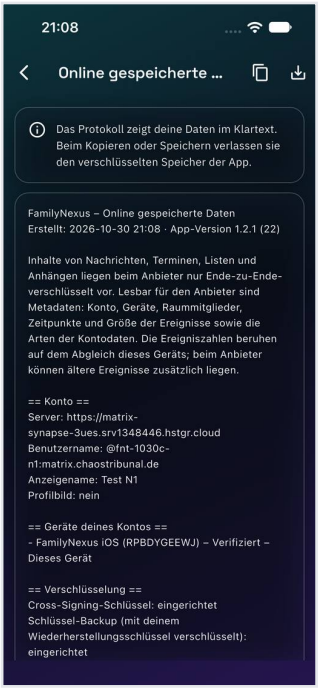

H-10a-G1

H-11 Server sees only ciphertext (N1) · –

PASSED

Observed: curl as N1 (new device “Testwerkzeug”, signed out afterwards): 3 rooms (direct chat, family, private); only `m.room.encrypted` (`m.megolm.v1.aes-sha2`), 0 `m.room.message` events; 0 hits for all search terms (incl. FN-ANHANG-…, “Nur fuer dich”, “Noch da”).

H-12 Metadata (from H-11) · –

WITH FINDING

Observed: In plaintext: room name of the family room = family name “Testfamilie 1030c neu” and name of the private room “FamilyNexus”, members, join_rule `knock/invite`, timestamps, size, device list. The family name as room name is not mentioned in the privacy policy → note (not an encryption failure); contents not readable.

H-13 Private room · –

PASSED

Observed: Private room: 1 member (N1), join_rule `invite`, only `m.room.encrypted`; “Test privat” neither in the calendar nor in the chat at I2 (E-19).

H-14 Invitation link contains no secrets · G1

PASSED

Observed: Parameters only v, room, via, srv, inv, exp (≈3 days), f, by, n (32 hex characters); no password, key, token, device identifier; length 310 ≤ 1024; web link carries the data after #. Note: family and inviter names are in plaintext in the link.

H-15 Attachment unchanged and safely named · G1, G2


PASSED

Observed: SHA-256 of the saved files (FN-ANHANG.txt, a_b_c_d.txt) = original; name without < > " (replaced by _), never opened automatically.


H-16 Disallowed attachments · G1

PASSED


Observed: (a) test.zip, (b) test.sh, (c) test.exe, (d) 26 MiB gross.txt: each “Dieser Anhang ist nicht erlaubt (Typ oder Größe).”, nothing sent; (e) fast25.txt (25 MiB – 1 byte) is sent and arrives at G2.

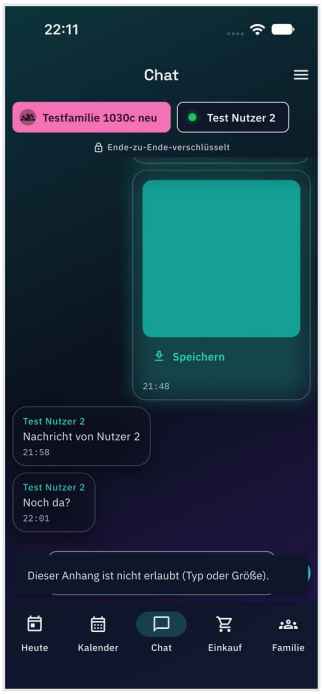


H-16a-G1

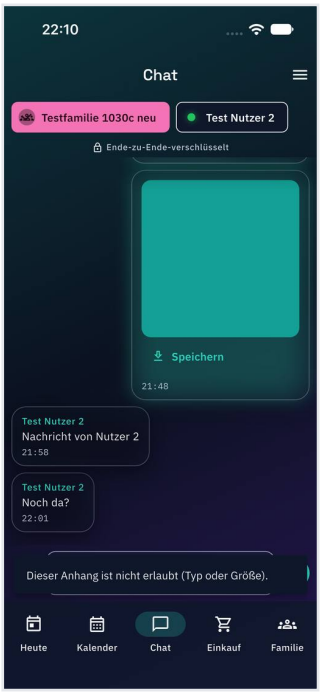


H-16b-G1

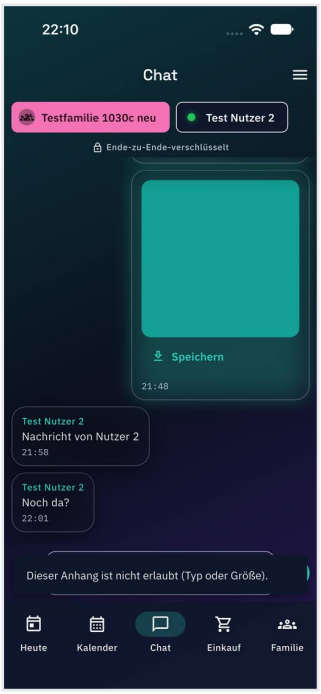


H-16c-G1

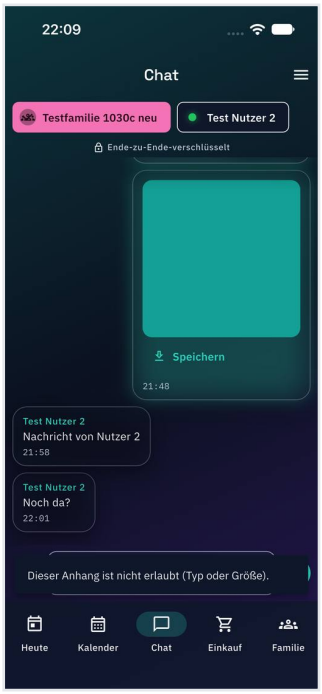

H-16d-G1

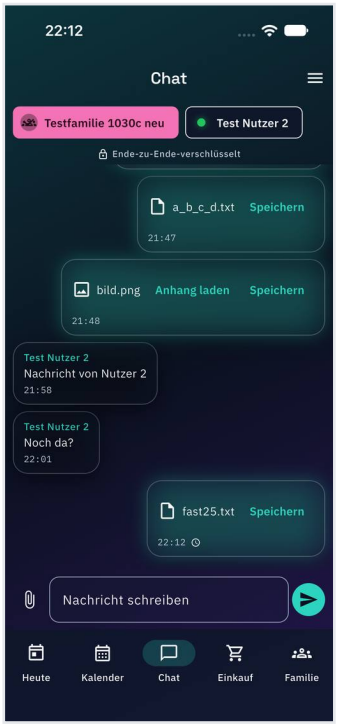

H-16e-G1

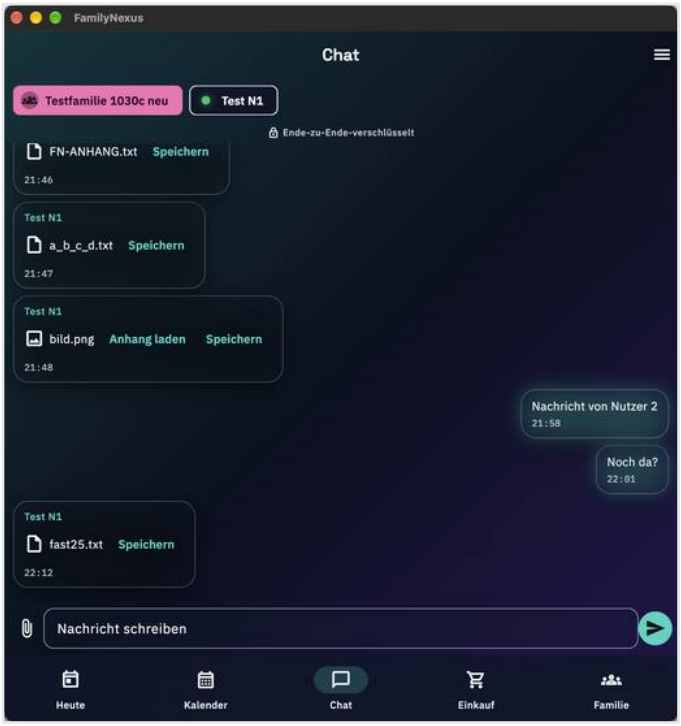

H-16e-G2

H-17 Transport · –

PASSED

Observed: (a) TLS 1.3, `Verify return code: 0 (ok)`, certificate for the provider (Let’s Encrypt); (b) Mac app: only connections to 76.13.153.15:443 = provider address; no advertising/analytics/crash services.

H-18 After F-04: files and keys gone · G1 — WITH FINDING

Observed: G1 (iOS simulator, after F-04): old databases replaced (checksums changed), 0 hits for all search terms in the app data folder; but the app immediately creates new empty encrypted `familynexus_app.db`/`familynexus_matrix.db` instead of just deleting them (info). Deliberately saved attachments in `tmp/` remain. G2 (Mac): container not readable, keychain see H-05: `fn.key.db.matrix` with a new date (18:16 UTC), not checked whether it was deleted and re-created after F-04 (not run).

H-19 Key lost (owner only, optional) · G1 — NOT RUN

Observed: Optional, only by the device owner (deleting the `fn.key.db.app` entry by hand); not run.

Console output (excerpts)

logs/D-06_gegenprobe.txt

```
{"available":true}
```

logs/F-02_login_n12.txt

```
F-02 n12: {"errcode":"M_FORBIDDEN","error":"Invalid username or password"}
```

logs/F-07_gegenprobe.txt

```
fnt-1030c-n1: {"errcode":"M_FORBIDDEN","error":"Invalid username or password"}
fnt-1030c-i2: {"errcode":"M_FORBIDDEN","error":"Invalid username or password"}
```

logs/F-07_login_i2.txt

```
{"errcode":"M_FORBIDDEN","error":"Invalid username or password"}
```

logs/F-08_zustand.txt

```
fnt-1030c-n1: {"errcode":"M_USER_IN_USE","error":"User ID already taken."}
fnt-1030c-n12: {"errcode":"M_USER_IN_USE","error":"User ID already taken."}
fnt-1030c-i2: {"errcode":"M_USER_IN_USE","error":"User ID already taken."}
fnt-1030c-n9: {"available":true}
```

logs/G-01_analyze.txt

```
Analyzing FamilyNexus...
No issues found! (ran in 3.3s)
```

logs/G-02_flutter_test.txt

```
00:26 +785 ~49: /Users/carpeasrael/NextCloud_int/mac_project_2/FamilyNexus/test/architecture_test.dart: Android-spezifische Dart-Brü
cken liegen nur in data/platform
00:26 +786 ~49: All tests passed!
```

logs/G-03_review_notes.txt

```
00:00 +3: Review-Notizen macos: keine überholten Aussagen, Grenze von App Store Connect
00:00 +4: All tests passed!
```

logs/H-02_dateien_G1.txt

```
81920 familynexus_app.db
462848 familynexus_matrix.db
```

logs/H-03_verschluesselung_G1.txt

```
== familynexus_app.db
00000000: 1ab6 8340 500e 51c7 c3cf cb0a 90dc fb4e  ...@P.Q........N
familynexus_app.db: data
Error: in prepare, file is not a database (26)
== familynexus_matrix.db
00000000: dff8 2e94 83bf 577d 6e78 1179 0e1a 2d6c  ......W}nx.y..-l
familynexus_matrix.db: data
Error: in prepare, file is not a database (26)
```

logs/H-04_gegenprobe_protokoll.txt

```
Testfamilie 1030c: 1
Test geteilt 2: 1
```

logs/H-04_suche_db_G1.txt

```
familynexus_app.db | Testfamilie 1030c: 0
familynexus_app.db | Test geteilt 2: 0
familynexus_app.db | Hallo von Nutzer 1: 0
familynexus_app.db | Nur fuer dich: 0
familynexus_app.db | Test N1: 0
familynexus_app.db | FN-ANHANG-595049: 0
familynexus_matrix.db | Testfamilie 1030c: 0
familynexus_matrix.db | Test geteilt 2: 0
familynexus_matrix.db | Hallo von Nutzer 1: 0
familynexus_matrix.db | Nur fuer dich: 0
familynexus_matrix.db | Test N1: 0
familynexus_matrix.db | FN-ANHANG-595049: 0
```

logs/H-04_suche_ordner_G1.txt

```
Testfamilie 1030c ->
Hallo von Nutzer 1 ->
Nur fuer dich ->
FN-ANHANG-595049 ->
```

logs/H-05_schluesselbund_G2.txt

```
== fn.key.db.app
keychain: "/Users/carpeasrael/Library/Keychains/login.keychain-db"
    "acct"<blob>="fn.key.db.app"
    "cdat"<timedate>=0x32303236313033303138313234325A00  "20261030181242Z\000"
    "svce"<blob>="flutter_secure_storage_service"
== fn.key.db.matrix
keychain: "/Users/carpeasrael/Library/Keychains/login.keychain-db"
    "acct"<blob>="fn.key.db.matrix"
    "cdat"<timedate>=0x32303236313033303138313631375A00  "20261030181617Z\000"
    "svce"<blob>="flutter_secure_storage_service"
```

logs/H-09_protokoll_geheimnisse.txt

```
Passwort N1: 0
KN1: 0
KN1b: 0
Token-Muster: 0
280:Außerdem gespeichert, aber aus Sicherheitsgründen nicht angezeigt: Zugangstoken der Sitzung, Geräteschlüssel und Schlüssel der v
erschlüsselten Gespräche.
282:Nie gespeichert, nur im Arbeitsspeicher: Online-Status der Familienmitglieder.
283:Geplante Erinnerungen liegen zusätzlich beim Betriebssystem.
```

logs/H-11_server_chiffretext.txt

```
Raum 1 | beigetreten: 2 | Ereignisse: {'m.room.encrypted': 11, 'm.room.member': 3, 'm.room.encryption': 1, 'm.room.history_visibilit
y': 1, 'm.room.guest_access': 1, 'm.room.join_rules': 1, 'm.room.power_levels': 1, 'm.room.create': 1} | algorithm: {'m.megolm.v1.ae
s-sha2'} | m.room.message im Klartext: 0 | m.room.encryption: ['m.megolm.v1.aes-sha2'] | join_rule: ['invite'] | Raumname lesbar: []
Raum 2 | beigetreten: 2 | Ereignisse: {'m.room.power_levels': 1, 'm.room.encrypted': 36, 'm.reaction': 1, 'm.room.member': 7, 'm.roo
m.name': 2, 'm.room.join_rules': 1, 'm.room.history_visibility': 1, 'm.room.encryption': 1} | algorithm: {'m.megolm.v1.aes-sha2'} |
m.room.message im Klartext: 0 | m.room.encryption: ['m.megolm.v1.aes-sha2'] | join_rule: ['knock'] | Raumname lesbar: ['Testfamilie
1030c neu']
Raum 3 | beigetreten: 1 | Ereignisse: {'m.room.encrypted': 5, 'm.room.name': 1, 'm.room.history_visibility': 1, 'm.room.encryption':
 1, 'm.room.guest_access': 1, 'm.room.join_rules': 1, 'm.room.power_levels': 1, 'm.room.member': 1, 'm.room.create': 1} | algorithm:
 {'m.megolm.v1.aes-sha2'} | m.room.message im Klartext: 0 | m.room.encryption: ['m.megolm.v1.aes-sha2'] | join_rule: ['invite'] | Ra
umname lesbar: ['FamilyNexus']
Treffer Suchbegriffe in allen Verläufen und Zuständen:
  Hallo von Nutzer 1: 0
  Nur fuer dich: 0
  Nachricht von Nutzer 2: 0
  FN-ANHANG-595049: 0
  Test geteilt 2: 0
  Milch: 0
  Bad putzen: 0
  Test privat: 0
  Noch da: 0
Geräte: ['FamilyNexus iOS', 'Testwerkzeug']
```

logs/H-14_link_parameter.txt

```
Web-Link: Basis https://carpeasrael.github.io/FamilyNexus/join/ | Länge 310 | Parameter: ['by', 'exp', 'f', 'inv', 'n', 'room', 'srv
', 'v', 'via']
exp in Tagen: 2.97 | n: 32 Hexzeichen: True
Passwort/Schlüssel/Token/Gerät im Link: False
```

logs/H-17a_tls.txt

```
TLS:
subject=/CN=matrix-synapse-3ues.srv1348446.hstgr.cloud
issuer=/C=US/O=Let's Encrypt/CN=YR1
    Protocol  : TLSv1.3
    Verify return code: 0 (ok)
```

logs/H-17b_verbindungen_G2.txt

```
1 TCP 192.172.10.137:63611->76.13.153.15:443 (ESTABLISHED)
   1 TCP 192.172.10.137:64139->76.13.153.15:443 (ESTABLISHED)
```

logs/H-18_nach_loeschen_G1.txt

```
Documents nach F-03/F-04 (G1 iOS):
81920 familynexus_app.db
217088 familynexus_matrix.db
familynexus_app.db alt: 13643af7cd2c jetzt: 106008eb09de
familynexus_matrix.db alt: f3d48f5f2e1a jetzt: 3daf1deb642a
Testfamilie 1030c: 0
Hallo von Nutzer 1: 0
Nur fuer dich: 0
```