
Entity relationships

Architecture overview. Readable node and connection sheets follow.

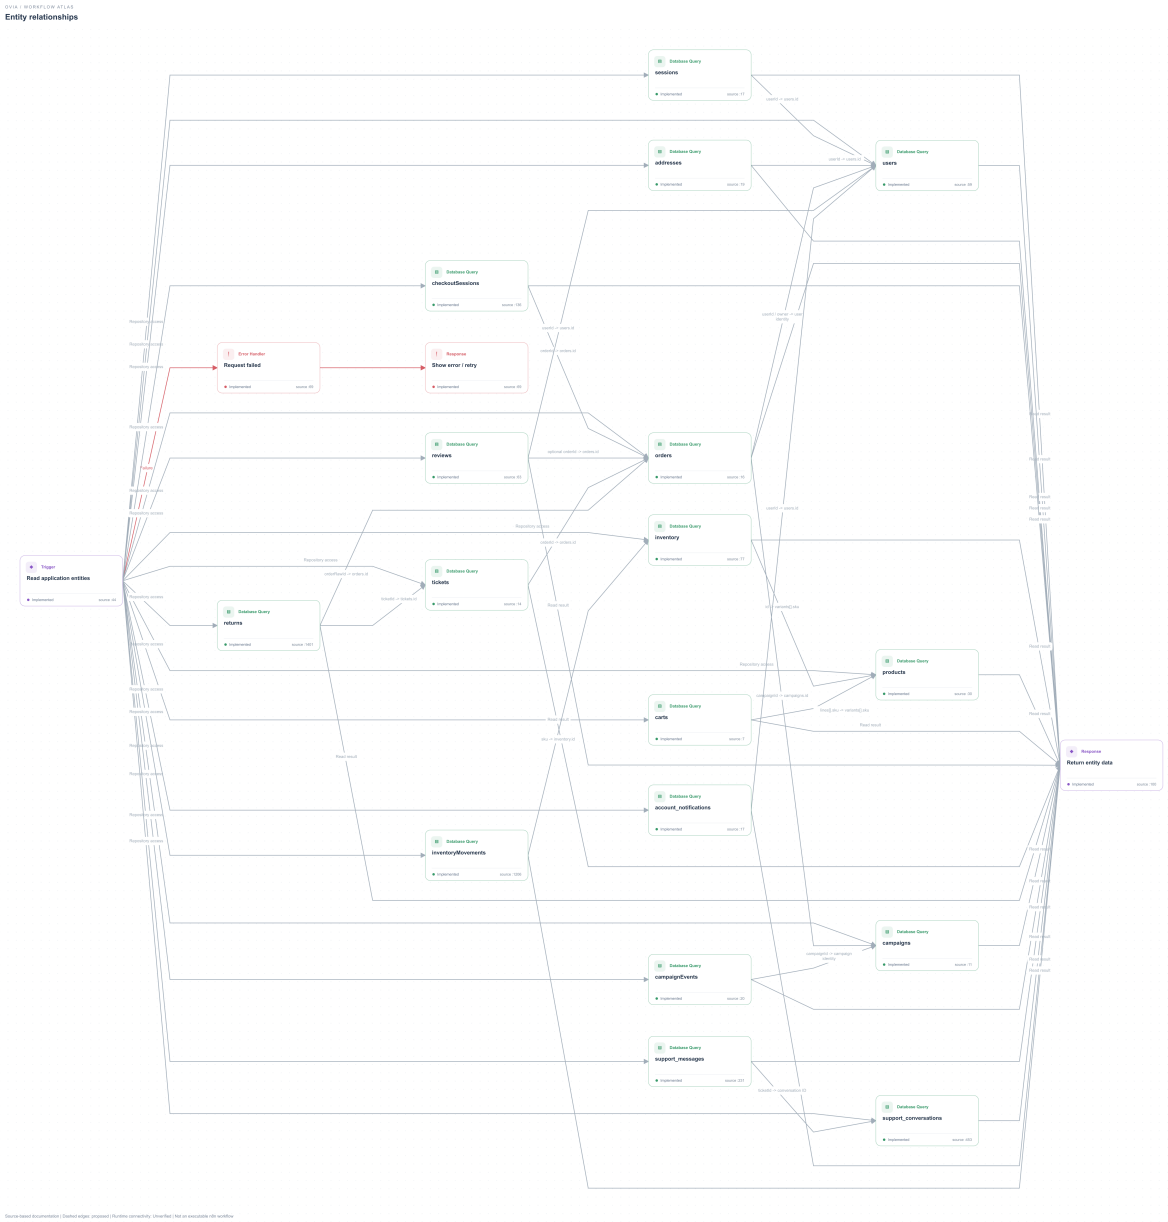

Entity relationships

Readable detail sheet 1/6. Node numbers and page references preserve every directed connection.

#01 / Trigger / Implemented

Read application entities

Entity and reference view derived from actual collection access and reference fields.

src/server/db.ts:44

Failure -> #20 (p6); Repository access -> #2 (p2); Repository access -> #3 (p2); Repository access -> #4 (p2); Repository access -> #5 (p3); Repository access -> #6 (p3); Repository access -> #7 (p3); Repository access -> #8 (p3); Repository...

#02 / Database Query / Implemented

sessions

Application entity stored in sessions. Relationship edges identify actual reference fields and imply no MongoDB foreign-key constraint.

src/app/api/admin/security/route.ts:17

Read result -> #19 (p6); userId -> users.id -> #3 (p2)

#03 / Database Query / Implemented

users

Application entity stored in users. Relationship edges identify actual reference fields and imply no MongoDB foreign-key constraint.

src/app/api/admin/customers/route.ts:59

Read result -> #19 (p6)

#04 / Database Query / Implemented

addresses

Application entity stored in addresses. Relationship edges identify actual reference fields and imply no MongoDB foreign-key constraint.

src/app/api/v1/account/addresses/[[...id]]/route.ts:19

Read result -> #19 (p6); userId -> users.id -> #3 (p2)

Entity relationships

Readable detail sheet 2/6. Node numbers and page references preserve every directed connection.

#05 / Database Query / Implemented

orders

Application entity stored in orders. Relationship edges identify actual reference fields and imply no MongoDB foreign-key constraint.

src/app/api/admin/orders/[id]/document/route.ts:16

Read result -> #19 (p6); userId / owner -> user identity -> #3 (p2); campaignId -> campaigns.id -> #13 (p5)

#06 / Database Query / Implemented

checkoutSessions

Application entity stored in checkoutSessions. Relationship edges identify actual reference fields and imply no MongoDB foreign-key constraint.

src/server/commerce.ts:136

Read result -> #19 (p6); orderId -> orders.id -> #5 (p3)

#07 / Database Query / Implemented

inventory

Application entity stored in inventory. Relationship edges identify actual reference fields and imply no MongoDB foreign-key constraint.

src/app/api/v1/orders/[id]/return/route.ts:77

Read result -> #19 (p6); id -> variants[].sku -> #8 (p3)

#08 / Database Query / Implemented

products

Application entity stored in products. Relationship edges identify actual reference fields and imply no MongoDB foreign-key constraint.

src/app/api/admin/product-taxonomy/route.ts:30

Read result -> #19 (p6)

Entity relationships

Readable detail sheet 3/6. Node numbers and page references preserve every directed connection.

#09 / Database Query / Implemented

carts

Application entity stored in carts. Relationship edges identify actual reference fields and imply no MongoDB foreign-key constraint.

src/server/account-sign-in.ts:7

Read result -> #19 (p6); lines[].sku -> variants[].sku -> #8 (p3)

#10 / Database Query / Implemented

reviews

Application entity stored in reviews. Relationship edges identify actual reference fields and imply no MongoDB foreign-key constraint.

src/app/api/v1/reviews/route.ts:63

Read result -> #19 (p6); userId -> users.id -> #3 (p2); optional orderId -> orders.id -> #5 (p3)

#11 / Database Query / Implemented

tickets

Application entity stored in tickets. Relationship edges identify actual reference fields and imply no MongoDB foreign-key constraint.

src/app/api/v1/account/activity/route.ts:14

Read result -> #19 (p6); orderId -> orders.id -> #5 (p3)

#12 / Database Query / Implemented

returns

Application entity stored in returns. Relationship edges identify actual reference fields and imply no MongoDB foreign-key constraint.

src/server/admin-service.ts:1401

Read result -> #19 (p6); ticketId -> tickets.id -> #11 (p4); orderRawId -> orders.id -> #5 (p3)

Entity relationships

Readable detail sheet 4/6. Node numbers and page references preserve every directed connection.

#13 / Database Query / Implemented

campaigns

Application entity stored in campaigns. Relationship edges identify actual reference fields and imply no MongoDB foreign-key constraint.

src/server/campaigns.ts:11

Read result -> #19 (p6)

#14 / Database Query / Implemented

campaignEvents

Application entity stored in campaignEvents. Relationship edges identify actual reference fields and imply no MongoDB foreign-key constraint.

src/server/campaigns.ts:20

Read result -> #19 (p6); campaignId -> campaign identity -> #13 (p5)

#15 / Database Query / Implemented

support_messages

Application entity stored in support_messages. Relationship edges identify actual reference fields and imply no MongoDB foreign-key constraint.

src/app/api/v1/care/[[...path]]/route.ts:231

Read result -> #19 (p6); ticketId -> conversation ID -> #16 (p5)

#16 / Database Query / Implemented

support_conversations

Application entity stored in support_conversations. Relationship edges identify actual reference fields and imply no MongoDB foreign-key constraint.

src/app/api/v1/care/[[...path]]/route.ts:453

Read result -> #19 (p6)

Entity relationships

Readable detail sheet 5/6. Node numbers and page references preserve every directed connection.

#17 / Database Query / Implemented

account_notifications

Application entity stored in account_notifications. Relationship edges identify actual reference fields and imply no MongoDB foreign-key constraint.

src/app/api/v1/account/activity/route.ts:17

Read result -> #19 (p6); userId -> users.id -> #3 (p2)

#18 / Database Query / Implemented

inventoryMovements

Application entity stored in inventoryMovements. Relationship edges identify actual reference fields and imply no MongoDB foreign-key constraint.

src/server/admin-service.ts:1206

Read result -> #19 (p6); sku -> inventory.id -> #7 (p3)

#19 / Response / Implemented

Return entity data

Read results return to the application.

src/server/db.ts:100

END: no outgoing connection

#20 / Error Handler / Implemented

Request failed

Validation, access, conflict or service errors are returned to the caller. Status and error shape depend on the specific route.

src/server/http.ts:69

Next -> #21 (p7)

Entity relationships

Readable detail sheet 6/6. Node numbers and page references preserve every directed connection.

#21 / Response / Implemented

Show error / retry

Failure end state. Caller receives the actual error; a retry may be offered by the UI.

src/server/http.ts:69

END: no outgoing connection

Entity relationships

Complete directed connection register / no omitted success, failure or proposed edges

#01 Read application entities -> #20 Request failed | Failure | FAILURE

#20 Request failed -> #21 Show error / retry | Next | FAILURE

#01 Read application entities -> #02 sessions | Repository access

#02 sessions -> #19 Return entity data | Read result

#01 Read application entities -> #03 users | Repository access

#03 users -> #19 Return entity data | Read result

#01 Read application entities -> #04 addresses | Repository access

#04 addresses -> #19 Return entity data | Read result

#01 Read application entities -> #05 orders | Repository access

#05 orders -> #19 Return entity data | Read result

#01 Read application entities -> #06 checkoutSessions | Repository access

#06 checkoutSessions -> #19 Return entity data | Read result

#01 Read application entities -> #07 inventory | Repository access

#07 inventory -> #19 Return entity data | Read result

#01 Read application entities -> #08 products | Repository access

#08 products -> #19 Return entity data | Read result

#01 Read application entities -> #09 carts | Repository access

#09 carts -> #19 Return entity data | Read result

#01 Read application entities -> #10 reviews | Repository access

#10 reviews -> #19 Return entity data | Read result

#01 Read application entities -> #11 tickets | Repository access

#11 tickets -> #19 Return entity data | Read result

Entity relationships

Directed connection register continued

#01 Read application entities -> #12 returns | Repository access

#12 returns -> #19 Return entity data | Read result

#01 Read application entities -> #13 campaigns | Repository access

#13 campaigns -> #19 Return entity data | Read result

#01 Read application entities -> #14 campaignEvents | Repository access

#14 campaignEvents -> #19 Return entity data | Read result

#01 Read application entities -> #15 support_messages | Repository access

#15 support_messages -> #19 Return entity data | Read result

#01 Read application entities -> #16 support_conversations | Repository access

#16 support_conversations -> #19 Return entity data | Read result

#01 Read application entities -> #17 account_notifications | Repository access

#17 account_notifications -> #19 Return entity data | Read result

#01 Read application entities -> #18 inventoryMovements | Repository access

#18 inventoryMovements -> #19 Return entity data | Read result

#02 sessions -> #03 users | userId -> users.id

#04 addresses -> #03 users | userId -> users.id

#05 orders -> #03 users | userId / owner -> user identity

#06 checkoutSessions -> #05 orders | orderId -> orders.id

#07 inventory -> #08 products | id -> variants[].sku

#09 carts -> #08 products | lines[].sku -> variants[].sku

#10 reviews -> #03 users | userId -> users.id

#10 reviews -> #05 orders | optional orderId -> orders.id

Entity relationships

Directed connection register continued

#11 tickets -> #05 orders | orderId -> orders.id

#12 returns -> #11 tickets | ticketId -> tickets.id

#12 returns -> #05 orders | orderRawId -> orders.id

#05 orders -> #13 campaigns | campaignId -> campaigns.id

#14 campaignEvents -> #13 campaigns | campaignId -> campaign identity

#15 support_messages -> #16 support_conversations | ticketId -> conversation ID

#17 account_notifications -> #03 users | userId -> users.id

#18 inventoryMovements -> #07 inventory | sku -> inventory.id

Note: Source implementation is documented; deployed configuration and provider connectivity are not verified.

Note: Reference edges represent application-level lookup relationships. Repository access/result edges preserve diagram entry and exit, not additional entity relationships.

Note: orders embeds paymentInfo, refunds[], shipping and logisticsOperations; users embeds accountWishlist. No nonexistent separate entity is introduced.