
Marketing & editorial data

Architecture overview. Readable node and connection sheets follow.

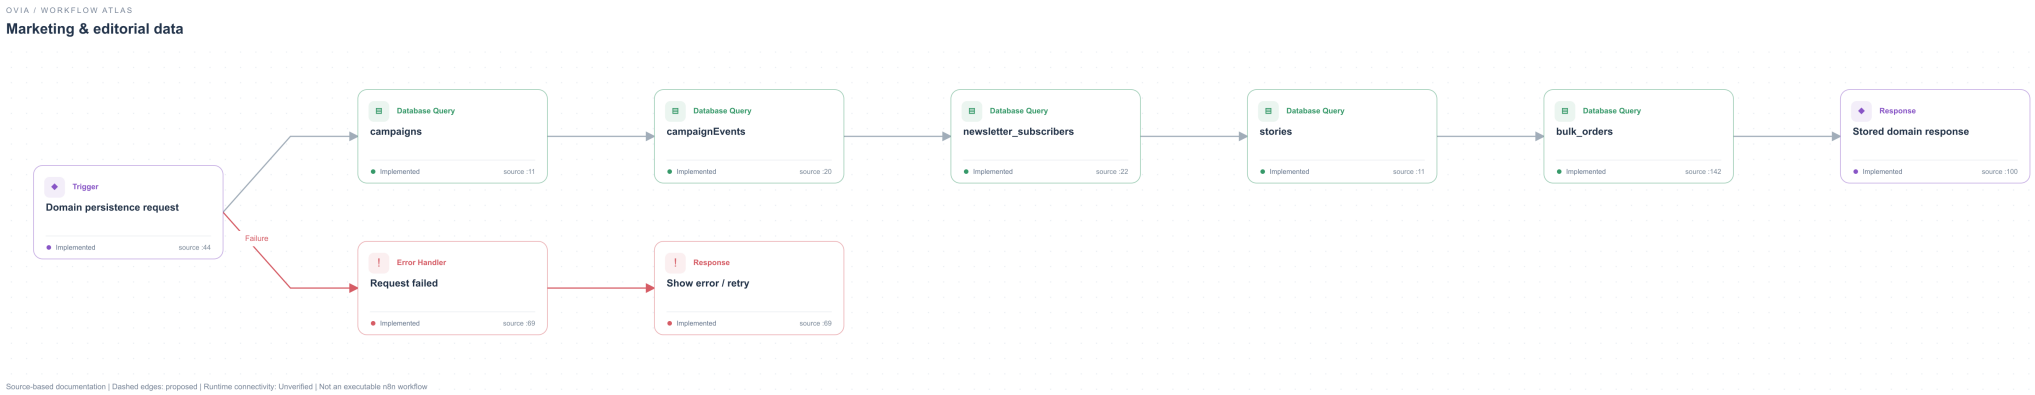

Marketing & editorial data

Readable detail sheet 1/3. Node numbers and page references preserve every directed connection.

#01 / Trigger / Implemented

Domain persistence request

Application services query the collections listed in this domain.

src/server/db.ts:44

Next -> #2 (p2); Failure -> #8 (p3)

#02 / Database Query / Implemented

campaigns

Code-backed collection campaigns; view reference fields in the model inventory.

src/server/campaigns.ts:11

Next -> #3 (p2)

#03 / Database Query / Implemented

campaignEvents

Code-backed collection campaignEvents; view reference fields in the model inventory.

src/server/campaigns.ts:20

Next -> #4 (p2)

#04 / Database Query / Implemented

newsletter_subscribers

Code-backed collection newsletter_subscribers; view reference fields in the model inventory.

src/app/api/v1/account/newsletter/route.ts:22

Next -> #5 (p3)

Marketing & editorial data

Readable detail sheet 2/3. Node numbers and page references preserve every directed connection.

#05 / Database Query / Implemented

stories

Code-backed collection stories; view reference fields in the model inventory.

src/app/api/admin/articles/route.ts:11

Next -> #6 (p3)

#06 / Database Query / Implemented

bulk_orders

Code-backed collection bulk_orders; view reference fields in the model inventory.

src/app/api/v1/bulk-orders/route.ts:142

Next -> #7 (p3)

#07 / Response / Implemented

Stored domain response

Return persisted domain data to the service.

src/server/db.ts:100

END: no outgoing connection

#08 / Error Handler / Implemented

Request failed

Validation, access, conflict or service errors are returned to the caller. Status and error shape depend on the specific route.

src/server/http.ts:69

Next -> #9 (p4)

Marketing & editorial data

Readable detail sheet 3/3. Node numbers and page references preserve every directed connection.

#09 / Response / Implemented

Show error / retry

Failure end state. Caller receives the actual error; a retry may be offered by the UI.

src/server/http.ts:69

END: no outgoing connection

Marketing & editorial data

Complete directed connection register / no omitted success, failure or proposed edges

#01 Domain persistence request -> #02 campaigns | Next

#02 campaigns -> #03 campaignEvents | Next

#03 campaignEvents -> #04 newsletter_subscribers | Next

#04 newsletter_subscribers -> #05 stories | Next

#05 stories -> #06 bulk_orders | Next

#06 bulk_orders -> #07 Stored domain response | Next

#01 Domain persistence request -> #08 Request failed | Failure | FAILURE

#08 Request failed -> #09 Show error / retry | Next | FAILURE

Note: Source implementation is documented; deployed configuration and provider connectivity are not verified.

Note: orders.campaignId -> campaigns.id (src/server/commerce.ts:178)

Note: campaignEvents.campaignId -> campaign identity (src/server/campaigns.ts:17)